O'REILLY®

Third Edition
Covers Java 8–17

Head First Java

A Learner's Guide to Real-World Programming

Kathy Sierra,
Bert Bates &
Trisha Gee

A Brain-Friendly Guide

O'REILLY®

Third Edition
Covers Java 8–17

Head First Java

A Learner's Guide to Real-World Programming

Kathy Sierra,
Bert Bates &
Trisha Gee

A Brain-Friendly Guide

Praise for *Head First Java*, 3rd Edition

"What a fun and quirky book! I've taught Java for many years and can honestly say this is the most engaging resource I've ever seen for learning to program. It makes me want to learn Java all over again!"

—Angie Jones, Java Champion

"HFJ has the clearest explanation of Java Streams and Lambdas I have ever read—without the hype! It teaches important functional programming concepts with humor and style. And it was so fun I wanted to learn Java all over again. If only everyone programmed Java like they teach in this book."

—Eric Normand, Clojure instructor and author of Grokking Simplicity

"Oh how I wish I had had this book when I was learning Java! It is such fun to read, one forgets that it is a serious Java learning book. The third edition is a great step forward. It covers everything that a Java programmer needs to know in 2022+ to become proficient in the Java language. To me the best though are the illustrations, which made me chuckle quite a few times. Very well done to the Java Champion authors: Kathy, Bert, and Trisha!"

—Dr. Heinz M. Kabutz (The Java Specialists' Newsletter, www.javaspecialists.eu)

"I love Head First Java's style of teaching. It is a 'technical' book but feels like fiction—hard to stop reading once you start with any chapter. It has fun and unconventional images, great analogies, fireside chats between a developer and compiler/runtime and so many more such features. It has a completely different and great way of teaching concepts that makes readers question their assumptions and beliefs, which I believe is crucial to letting any learner realize the power of their own curiosity. The authors of this book are no less than magicians. This is a must-read book for all Java developers to get started learning Java or to level up their existing skills in a fun way."

—Mala Gupta, Developer Advocate @ JetBrains, Author and Java Champion

"I often get asked by folks new to the Java programming ecosystem, 'What book should I start with?' I always tell them Head First Java! The original editions by Kathy Sierra and Bert Bates flipped the old way of learning a programming language on its head, with a learner-centric way of teaching. It was simply revolutionary. Trisha Gee is one of the finest Java engineers and educators on the planet, and my go to person when I need something gnarly about the language explained in clear detail! The third edition brought a huge smile to my face, not only for the trip down memory lane but because once more I learned new things about Java despite having spent over 20 years with it :-)."

—Maritjn Verburg aka "The Diabolical Developer"; Java Champion and Principal Group Manager for Java @ Microsoft

"The Head First Java book is legendary, and I can't think of a better person than Trisha Gee to update it. I already knew Trisha was awesome, but I didn't know she was funny. Now I do! The third edition is authoritative, entertaining, clear, and current. If there's a better way to learn Java, I don't know it."

—Holly Cummins, Senior Principal Quarkus Software Engineer, Red Hat

"This book is a riot! It's got curly braces, humor, objects, metaphors, syntax, fun, code, and a proper acknowledgment that the reader is human. It takes the process of learning seriously, but does so playfully and memorably. I love the metacognitive tips, the invitations to play the role of compiler, the stories, the visuals, and the sense that learning a programming language—like any learning—is something that is open to anyone."

—Kevlin Henney, co-editor of 97 Things Every Java Programmer Should Know

"I wish I'd known about this book when I'd been learning Java! For those looking to learn Java in a fun, humorous and captivating way (who knew that was possible?), and especially those who have not come from a traditional computer science background like myself, this is definitely the book for you. Never before have I laughed out loud at a programming book. It's brilliantly written, witty, engaging, interactive, easy to follow and highly educational."

—Grace Jansen, Developer Advocate, IBM

"If you're just starting your journey learning how to program in Java, you're faced with an overwhelming choice of books and courses ready to get you to your destination. The problem is most focus purely on the technical information, making you frequently ask, "are we there yet?" Head First Java takes an altogether different approach making the adventure of learning both entertaining and educational. Using arrays of dogs, pool puzzles, five-minute mysteries and sharpen your pencil (who'd have thought you need a pencil to program?), this book makes learning fun, yet making sure you absorb all the essential details you'll need. I wish this had been available when I started learning Java!"

—Simon Ritter, Deputy CTO at Azul and Java Champion

"This book never disappoints. I still remember it from my early days at university and I am quite pleased to see this new improved version. Head First Java is very well put together with simple to understand English and coding examples. I highly recommend it to every Java developer."

—Nelson Djalo, Tech Entrepreneur, founder of Amigoscode.com learning platform and Amigoscode YouTube channel

"Head First Java was the first book I had my son read when he wanted to learn Java. And there's a reason: I knew the fun cartoons would captivate his attention like no other Java book I have seen before. Reading Head First Java was more like being on the playground than stuck in the classroom."

—Kevin Nilson, Google Software Engineer and Leader of the Silicon Valley Java User

"I can only envy programmers who want to learn Java today, as they have this great book. I learned Java twenty years ago, and it was quite boring. But you'll never be bored with this book. I've never seen a Java book that has a battle between Java compiler and virtual machine. This is mind-blowing!"

—Tagir Valeev, Java Champion and Technical Lead in IntelliJ IDEA, JetBrains

"Nearly 20 years ago after I read Head First Java, 1st edition, as a junior developer entering the Java world, the third edition still amazes me. Much has changed since then, including how people present tutorials. Head First Java, 3rd edition, is a valid alternative to today's excellent video materials: It allows learners—junior and senior alike—to quickly grasp concepts without losing them in details, but also without dumbing down the material, and with enough of the correct references for further reading. I especially enjoyed the material on Java streams, concurrency and NIO."

—Michael Simons, Java Champion and engineer at Neo4j, author of the German Spring Boot Buch reference

"If you want to develop software using Java, this book is for you. Head First Java designs lots of straightforward and elegant examples to help the readers understand and learn how to use Java to create software. This is a great first book for anyone who wants to be a Java programmer."

—Sanhong Li, Alibaba Cloud

"Head First Java is a technical book that doesn't feel like a technical book: it's fun, casual, and full of worldly analogies that introduce complex concepts in a very smooth way. It's the perfect introduction to the rich and vast Java ecosystem."

—Abraham Marin-Perez, Principal Consultant, Cosota Team

"For those who like a little whimsy and humor with their "work", I can think of no better book for learning Java than Head First Java, 3rd edition. Practical and playful, educational and engaging, it's the perfect guide for new developers looking to hit the ground running."

—Marc Loy, trainer, author of Smaller C, and co-author of Learning Java and Java Swing

Praise for earlier editions of *Head First Java*, and for other books coauthored by Kathy and Bert

"Kathy and Bert's Head First Java transforms the printed page into the closest thing to a GUI you've ever seen. In a wry, hip manner, the authors make learning Java an engaging 'what're they gonna do next?' experience."

—Warren Keuffel, Software Development Magazine

"...the only way to decide the worth of a tutorial is to decide how well it teaches. Head First Java excels at teaching. OK, I thought it was silly...then I realized that I was thoroughly learning the topics as I went through the book.... The style of Head First Java made learning, well, easier."

—slashdot (honestpuck's review)

"Beyond the engaging style that drags you forward from know-nothing into exalted Java warrior status, Head First Java covers a huge amount of practical matters that other texts leave as the dreaded "exercise for the reader..." It's clever, wry, hip and practical—there aren't a lot of textbooks that can make that claim and live up to it while also teaching you about object serialization and network launch protocols."

—Dr. Dan Russell, Director of User Sciences and Experience Research IBM Almaden Research Center (and teaches Artificial Intelligence at Stanford University)

"It's fast, irreverent, fun, and engaging. Be careful—you might actually learn something!"

—Ken Arnold, former Senior Engineer at Sun Microsystems and coauthor (with James Gosling, creator of Java) of The Java Programming Language

“Java technology is everywhere. If you develop software and haven’t learned Java, it’s definitely time to dive in—Head First.”

—Scott McNealy, former Sun Microsystems Chairman, President, and CEO

“Head First Java is like Monty Python meets the gang of four...the text is broken up so well by puzzles and stories, quizzes and examples, that you cover ground like no computer book before.”

—Douglas Rowe, Columbia Java Users Group

“Read Head First Java and you will once again experience fun in learning...For people who like to learn new programming languages, and do not come from a computer science or programming background, this book is a gem...This is one book that makes learning a complex computer language fun.”

—Judith Taylor, Southeast Ohio Macromedia User Group

“If you want to learn Java, look no further: welcome to the first GUI-based technical book! This perfectly-executed, ground-breaking format delivers benefits other Java texts simply can’t...Prepare yourself for a truly remarkable ride through Java land.”

—Neil R. Bauman, Captain and CEO, Geek Cruises

“I was ADDICTED to the book’s short stories, annotated code, mock interviews, and brain exercises.”

—Michael Yuan, author of Enterprise J2ME

"Head First Java gives new meaning to their marketing phrase 'There's an O'Reilly for that.' I picked this up because several others I respect had described it in terms like 'revolutionary' and described a radically different approach to the textbook. They were (are) right...In typical O'Reilly fashion, they've taken a scientific and well considered approach. The result is funny, irreverent, topical, interactive, and brilliant... Reading this book is like sitting in the speakers lounge at a conference, learning from—and laughing with—peers...If you want to UNDERSTAND Java, go buy this book."

—Andrew Pollack, www.thenorth.com

"This stuff is so fricking good it makes me wanna WEEP! I'm stunned."

—Floyd Jones, Senior Technical Writer/Poolboy, BEA

"I feel like a thousand pounds of books have just been lifted off of my head."

—Ward Cunningham, inventor of the Wiki and founder of the Hillside Group

"I laughed, I cried, it moved me."

—Dan Steinberg, Editor-in-Chief, java.net

"My first reaction was to roll on the floor laughing. After I picked myself up, I realized that not only is the book technically accurate, it is the easiest to understand introduction to design patterns that I have seen."

—Dr. Timothy A. Budd, Associate Professor of Computer Science at Oregon State University; author of more than a dozen books including C++ for Java Programmers

"Just the right tone for the geeked-out, casual-cool guru coder in all of us. The right reference for practical development strategies—gets my brain going without having to slog through a bunch of tired stale professor-speak."

—Travis Kalanick, founder of Scour and Red Swoosh, member of the MIT TR100

Other books in O’Reilly’s Head First series

- *Head First Android Development*
- *Head First C#*
- *Head First Design Patterns*
- *Head First Git*
- *Head First Go*
- *Head First HTML and CSS*
- *Head First JavaScript Programming*
- *Head First Kotlin*
- *Head First Learn to Code*
- *Head First Object-Oriented Analysis and Design*
- *Head First PMP*
- *Head First Programming*
- *Head First Python*
- *Head First Software Development*
- *Head First SQL*
- *Head First Swift*
- *Head First Web Design*

Head First Java

A Brain-Friendly Guide

Kathy Sierra, Bert Bates, and Trisha Gee

Head First Java

by Kathy Sierra, Bert Bates, and Trisha Gee

Copyright © 2022 Kathy Sierra and Bert Bates. All rights reserved.

Printed in the United States of America.

Published by O'Reilly Media, Inc., 1005 Gravenstein Highway North, Sebastopol, CA 95472.

O'Reilly books may be purchased for educational, business, or sales promotional use. Online editions are also available for most titles (http://oreilly.com). For more information, contact our corporate/institutional sales department: 800-998-9938 or *corporate@oreilly.com*.

Editor for 1st and 2nd Editions: Mike Loukides

Editors for 3rd Edition: Nicole Taché and Suzanne McQuade

Cover Design: Susan Thompson, based on a series design by Ellie Volckhausen

Cover Illustration: José Marzan, Jr.

Original Interior Designers: Kathy Sierra and Bert Bates

Production Editor: Kristen Brown

3rd Edition Design Support: Ron Bilodeau

Java Whisperer: Trisha Gee

Series Advisors: Eric Freeman and Elisabeth Robson

May 2003: First Edition

February 2005: Second Edition

May 2022: Third Edition

(You might want to pick up a copy of *all* the editions...for your kids. Think eBay™)

Revision History for the Third Edition

- 2022-05-11: First Release

See http://oreilly.com/catalog/errata.csp?isbn=9781491910771 for release details.

The O'Reilly logo is a registered trademark of O'Reilly Media, Inc. Head First Java, the cover image, and related trade dress are trademarks of O'Reilly Media, Inc.

The views expressed in this work are those of the authors, and do not represent the publisher's views. While the publisher and the authors have used good faith efforts to ensure that the information and instructions contained in this work are accurate, the publisher and the authors disclaim all responsibility for errors or omissions, including without limitation responsibility for damages resulting from the use of or reliance on this work. Use of the information and instructions contained in this work is at your own risk. If any code samples or other technology this work contains or describes is subject to open source licenses or the intellectual property rights of others, it is your responsibility to ensure that your use thereof complies with such licenses and/or rights.

In other words, if you use anything in *Head First Java*™ to, say, run a nuclear power plant or air traffic control system, you're on your own.

978-1-491-91077-1

[LSI]

Dedication

From Kathy and Bert:

To our brains, for always being there

(despite shaky evidence)

From Trisha:

To Isra, for always being there

(with a surfeit of evidence)

Table of Contents (the real thing)

1. How to Use This Book: Intro

   Your brain on Java. Here *you are* trying to *learn* something, while here your *brain* is doing you a favor by making sure the learning doesn't *stick*. Your brain's thinking, "Better leave room for more important things, like which wild animals to avoid and whether naked snowboarding is a bad idea." So how do you trick your brain into thinking that your life depends on knowing Java?

   a. "Who is this book for?"

   b. "We know what you're thinking"

   c. "Metacognition: thinking about thinking"

   d. "Here's what WE did:"

   e. "Here's what YOU can do to bend your brain into submission"

   f. "What you need for this book:"

   g. "Last-minute things you need to know:"

2. Chapter 1

   Java takes you to new places. From its humble release to the public as the (wimpy) version 1.02, Java seduced programmers with its friendly syntax, object-oriented features, memory management, and best of all—the promise of portability. We'll take a quick dip and write some code, compile it, and run it. We're talking syntax, loops, branching, and what makes Java so cool. Dive in.

   a. "The way Java works"

   b. "What you'll do in Java"

c. “A very brief history of Java”

d. “Code structure in Java”

e. “Writing a class with a `main()`”

f. “Simple boolean tests”

g. “Conditional branching”

h. “Coding a serious business application”

i. “Phrase-O-Matic”

j. “Exercise”

k. “Exercise Solutions”

3. Chapter 2

I was told there would be objects. In Chapter 1, we put all of our code in the main() method. That’s not exactly object-oriented. So now we’ve got to leave that procedural world behind and start making some objects of our own. We’ll look at what makes object-oriented (OO) development in Java so much fun. We’ll look at the difference between a class and an object. We’ll look at how objects can improve your life.

a. “Chair Wars”

b. “Making your first object”

c. “Making and testing Movie objects”

d. “Quick! Get out of main!”

e. “Running the Guessing Game”

f. “Exercise”

g. “Exercise Solutions”

4. Chapter 3

Variables come in two flavors: primitive and reference. There's gotta be more to life than integers, Strings, and arrays. What if you have a PetOwner object with a Dog instance variable? Or a Car with an Engine? In this chapter we'll unwrap the mysteries of Java types and look at what you can *declare* as a variable, what you can *put* in a variable, and what you can *do* with a variable. And we'll finally see what life is truly like on the garbage-collectible heap.

a. "Declaring a variable"

b. ""I'd like a double mocha, no, make it an int.""

c. "Back away from that keyword!"

d. "Controlling your Dog object"

e. "An object reference is just another variable value"

f. "Life on the garbage-collectible heap"

g. "An array is like a tray of cups"

h. "A Dog example"

i. "Exercise"

j. "Exercise Solutions"

5. Chapter 4

State affects behavior, behavior affects state. We know that objects have **state** and **behavior**, represented by **instance variables** and **methods**. Now we'll look at how state and behavior are *related*. An object's behavior uses an object's unique state. In other words, ***methods use instance variable values.*** Like, "if dog weight is less than 14 pounds, make yippy sound, else..." ***Let's go change some state!***

a. "Remember: a class describes what an object knows and what an object does"

b. “The size affects the bark”

c. “You can send things to a method”

d. “You can get things back from a method”

e. “You can send more than one thing to a method”

f. “Cool things you can do with parameters and return types”

g. “Encapsulation”

h. “How do objects in an array behave?”

i. “Declaring and initializing instance variables”

j. “Comparing variables (primitives or references)”

k. “Exercise”

l. “Exercise Solutions”

6. Chapter 5

Let’s put some muscle in our methods. You dabbled with variables, played with a few objects, and wrote a little code. But you need more tools. Like **operators.** And **loops.** Might be useful to **generate random numbers.** And **turn a String into an int**, yeah, that would be cool. And why don’t we learn it all by *building* something real, to see what it’s like to write (and test) a program from scratch. **Maybe a game**, like Sink a Startup (similar to Battleship).

a. “Let’s build a Battleship-style game: “Sink a Startup””

b. “Developing a Class”

c. “Writing the method implementations”

d. “Writing test code for the SimpleStartup class”

e. “The checkYourself() method”

f. “Prep code for the SimpleStartupGame class Everything happens in main()”

g. “The game’s main() method”

h. “Let’s play”

i. “More about for loops”

j. “The enhanced for loop”

k. “Casting primitives”

l. “Exercise”

m. “Exercise Solutions”

7. Chapter 6

Java ships with hundreds of prebuilt classes. You don’t have to reinvent the wheel if you know how to find what you need from the Java library, commonly known as the **Java API.** *You’ve got better things to do.* If you’re going to write code, you might as well write *only* the parts that are custom for your application. The core Java library is a giant pile of classes just waiting for you to use like building blocks.

a. “In our last chapter, we left you with the cliff-hanger: a bug”

b. “Wake up and smell the library”

c. “Some things you can do with ArrayList”

d. “Comparing ArrayList to a regular array”

e. “Let’s build the REAL game: “Sink a Startup””

f. “Prep code for the real StartupBust class”

g. “The final version of the Startup class”

h. “Super powerful Boolean expressions”

i. “Using the Library (the Java API)”

j. “Exercise”

k. “Exercise Solutions”

8. Chapter 7

Plan your programs with the future in mind. What if you could write code that someone *else* could extend, **easily?** What if you could write code that was flexible, for those pesky last-minute spec changes? When you get on the Polymorphism Plan, you’ll learn the 5 steps to better class design, the 3 tricks to polymorphism, the 8 ways to make flexible code, and if you act now—a bonus lesson on the 4 tips for exploiting inheritance.

a. “Chair Wars Revisited...”

b. “Understanding Inheritance”

c. “Let’s design the inheritance tree for an Animal simulation program”

d. “Looking for more inheritance opportunities”

e. “Using IS-A and HAS-A”

f. “How do you know if you’ve got your inheritance right?”

g. “When designing with inheritance, are you using or abusing?”

h. “Keeping the contract: rules for overriding”

i. “Overloading a method”

j. “Exercise”

k. “Exercise Solutions”

9. Chapter 8

Inheritance is just the beginning. To exploit polymorphism, we need interfaces. We need to go beyond simple inheritance to flexibility you can get only by designing and coding to interfaces. What’s an interface?

A 100% abstract class. What's an abstract class? A class that can't be instantiated. What's that good for? Read the chapter...

a. "Did we forget about something when we designed this?"

b. "The compiler won't let you instantiate an abstract class"

c. "Abstract vs. Concrete"

d. "You MUST implement all abstract methods"

e. "Polymorphism in action"

f. "What about non-Animals? Why not make a class generic enough to take anything?"

g. "When a Dog won't act like a Dog"

h. "Let's explore some design options for reusing some of our existing classes in a PetShop program"

i. "Making and implementing the Pet interface"

j. "Invoking the superclass version of a method"

k. "Exercise"

l. "Exercise Solutions"

10. Chapter 9

Objects are born and objects die. You're in charge. You decide when and how to *construct* them. You decide when to *abandon* them. The **Garbage Collector (gc)** reclaims the memory. We'll look at how objects are created, where they live, and how to keep or abandon them efficiently. That means we'll talk about the heap, the stack, scope, constructors, super constructors, null references, and gc eligibility.

a. "The Stack and the Heap: where things live"

b. "Methods are stacked"

c. "What about local variables that are objects?"

d. "The miracle of object creation"

e. "Construct a Duck"

f. "Doesn't the compiler always make a no-arg constructor for you? No!"

g. "Nanoreview: four things to remember about constructors"

h. "The role of superclass constructors in an object's life"

i. "Can the child exist before the parents?"

j. "What about reference variables?"

k. Figure

l. "Exercise"

m. "Exercise Solutions"

11. Chapter 10

Do the Math. The Java API has methods for absolute value, rounding, min/max, etc. But what about formatting? You might want numbers to print exactly two decimal points, or with commas in all the right places. And you might want to print and manipulate dates, too. And what about parsing a String into a number? Or turning a number into a String? We'll start by learning what it means for a variable or method to be *static*.

a. "MATH methods: as close as you'll ever get to a *global* method"

b. "The difference between regular (non-static) and static methods"

c. "Initializing a static variable"

d. "Math methods"

e. "Wrapping a primitive"

f. "Autoboxing works almost everywhere"

g. “And now in reverse...turning a primitive number into a String”

h. “Number formatting”

i. “The format specifier”

j. “Exercise”

k. “Exercise Solution”

12. Chapter 11

Sorting is a snap in Java. You have all the tools for collecting and manipulating your data without having to write your own sort algorithms. The Java Collections Framework has a data structure that should work for virtually anything you’ll ever need to do. Want to keep a list that you can easily keep adding to? Want to find something by name? Want to create a list that automatically takes out all the duplicates? Sort your coworkers by the number of times they’ve stabbed you in the back?

a. “Exploring the java.util API, List and Collections”

b. “Generics means more type-safety”

c. “Revisiting the sort() method”

d. “The new, improved, comparable Song class”

e. “Sorting using only Comparators”

f. “Updating the Jukebox code with lambdas”

g. “Using a HashSet instead of ArrayList”

h. “What you MUST know about TreeSet...”

i. “We’ve seen Lists and Sets, now we’ll use a Map”

j. “Finally, back to generics”

k. “Exercise Solution”

13. Chapter 12

    What if...you didn't need to tell the computer HOW to do something? In this chapter we'll look at the Streams API. You'll see how helpful lambda expressions can be when you're using streams, and you'll learn how to use the Streams API to query and transform the data in a collection.

    a. "Tell the computer WHAT you want"

    b. "When for loops go wrong"

    c. "Introducing the Streams API"

    d. "Getting a result from a Stream"

    e. "Guidelines for working with streams"

    f. "Hello Lambda, my (not so) old friend"

    g. "Spotting Functional Interfaces"

    h. "Lou's Challenge #1: Find all the "rock" songs"

    i. "Lou's Challenge #2: List all the genres"

    j. "Exercise"

    k. "Exercise Solutions"

14. Chapter 13

    Stuff happens. The file isn't there. The server is down. No matter how good a programmer you are, you can't control *everything*. When you write a risky method, you need code to handle the bad things that might happen. But how do you *know* when a method is risky? Where do you put the code to *handle* the ***exceptional*** situation? In *this* chapter, we're going to build a MIDI Music Player that uses the risky JavaSound API, so we better find out.

    a. "Let's make a Music Machine"

b. “First we need a Sequencer”

c. “An exception is an object... of type Exception”

d. “Flow control in try/catch blocks”

e. “Did we mention that a method can throw more than one exception?”

f. “Multiple catch blocks must be ordered from smallest to biggest”

g. “Ducking (by declaring) only delays the inevitable”

h. “Code Kitchen”

i. “Version 1: Your very first sound player app”

j. “Version 2: Using command-line args to experiment with sounds”

k. “Exercise”

l. “Exercise Solution”

15. Chapter 14

Face it, you need to make GUIs. Even if you believe that for the rest of your life you’ll write only server-side code, sooner or later you’ll need to write tools, and you’ll want a graphical interface. We’ll spend two chapters on GUIs and learn more language features including **Event Handling** and **Inner Classes.** We’ll put a button on the screen, we’ll paint on the screen, we’ll display a JPEG image, and we’ll even do some animation.

a. “It all starts with a window”

b. “Getting a user event”

c. “Listeners, Sources, and Events”

d. “Make your own drawing widget”

e. “Fun things to do in paintComponent()”

f. “GUI layouts: putting more than one widget on a frame”

g. “Inner class to the rescue!”

h. “Lambdas to the rescue! (again)”

i. “Using an inner class for animation”

j. “An easier way to make messages/events”

k. “Exercise”

l. “Exercise Solutions”

16. Chapter 15

Swing is easy. Unless you actually care where everything goes. Swing code *looks* easy, but then compile it, run it, look at it, and think, “hey, *that’s* not supposed to go *there.”* The thing that makes it *easy* to *code* is the thing that makes it *hard* to *control*—the **Layout Manager.** But with a little work, you can get layout managers to submit to your will. In this chapter, we’ll work on our Swing and learn more about widgets.

a. “Swing components”

b. “Layout Managers”

c. “The Big Three layout managers: border, flow, and box”

d. “Playing with Swing components”

e. “Code Kitchen”

f. “Making the BeatBox”

g. “Exercise”

h. “Exercise Solutions”

17. Chapter 16

Objects can be flattened and inflated. Objects have state and behavior. Behavior lives in the class, but *state* lives within each

individual *object*. If your program needs to save state, *you can do it the hard way*, interrogating each object, painstakingly writing the value of each instance variable. Or, **you can do it the easy OO way**—you simply freeze-dry the object (serialize it) and reconstitute (deserialize) it to get it back.

a. "Writing a serialized object to a file"

b. "If you want your class to be serializable, implement Serializable"

c. "Deserialization: restoring an object"

d. "Version ID: A big serialization gotcha"

e. "Writing a String to a Text File"

f. "Reading from a text file"

g. "Quiz Card Player (code outline)"

h. "Path, Paths, and Files (messing with directories)"

i. "Finally, a closer look at `finally`"

j. "Saving a BeatBox pattern"

k. "Exercise"

l. "Exercise Solutions"

18. Chapter 17

Connect with the outside world. It's easy. All the low-level networking details are taken care of by classes in the java.net library. One of Java's best features is that sending and receiving data over a network is really just I/O with a slightly different connection stream at the end of the chain. In this chapter we'll make client sockets. We'll make server sockets. We'll make clients and servers. Before the chapter's done, you'll have a fully functional, multithreaded chat client. Did we just say *multithreaded?*

a. “Connecting, sending, and receiving”

b. “The DailyAdviceClient”

c. “Writing a simple server application”

d. “Java has multiple threads but only one Thread class”

e. “The three states of a new thread”

f. “Putting a thread to sleep”

g. “Making and starting two threads (or more!)”

h. “Closing time at the thread pool”

i. “New and improved SimpleChatClient”

j. “Exercise”

k. “Exercise Solutions”

19. Chapter 18

Doing two or more things at once is hard. Writing multithreaded code is easy. Writing multithreaded code that works the way you expect can be much harder. In this final chapter, we’re going to show you some of the things that can go wrong when two or more threads are working at the same time. You’ll learn about some of the tools in java.util.concurrent that can help you to write multithreaded code that works correctly. You’ll learn how to create immutable objects (objects that don’t change) that are safe for multiple threads to use. By the end of the chapter, you’ll have a lot of different tools in your toolkit for working with concurrency.

a. “The Ryan and Monica problem, in code”

b. “Using an object’s lock”

c. “The dreaded “Lost Update” problem”

d. “Make the increment() method atomic. Synchronize it!”

e. “Deadlock, a deadly side of synchronization”

f. “Compare-and-swap with atomic variables”

g. “Using immutable objects”

h. “More problems with shared data”

i. “Use a thread-safe data structure”

j. “Exercise”

k. “Exercise Solution”

20. Appendix A

Final Code Kitchen. All the code for the full client-server chat beat box. Your chance to be a rock star.

a. “Final BeatBox client program”

b. “Final BeatBox server program”

21. Appendix B

The top ten-ish topics that didn’t make it into the rest of the book. We can’t send you out into the world just yet. We have a few more things for you, but this *is* the end of the book. And this time we really mean it.

a. “#11 JShell (Java REPL)”

b. “#10 Packages”

c. “#9 Immutability in Strings and Wrappers”

d. “#8 Access levels and access modifiers (who sees what)”

e. “#7 Varargs”

f. “#6 Annotations”

g. “#5 Lambdas and Maps”

h. “#4 Parallel Streams”

i. “#3 Enumerations (also called enumerated types or enums)”

j. “#2 Local Variable Type Inference (var)”

k. “#1 Records”

How to Use This Book: Intro

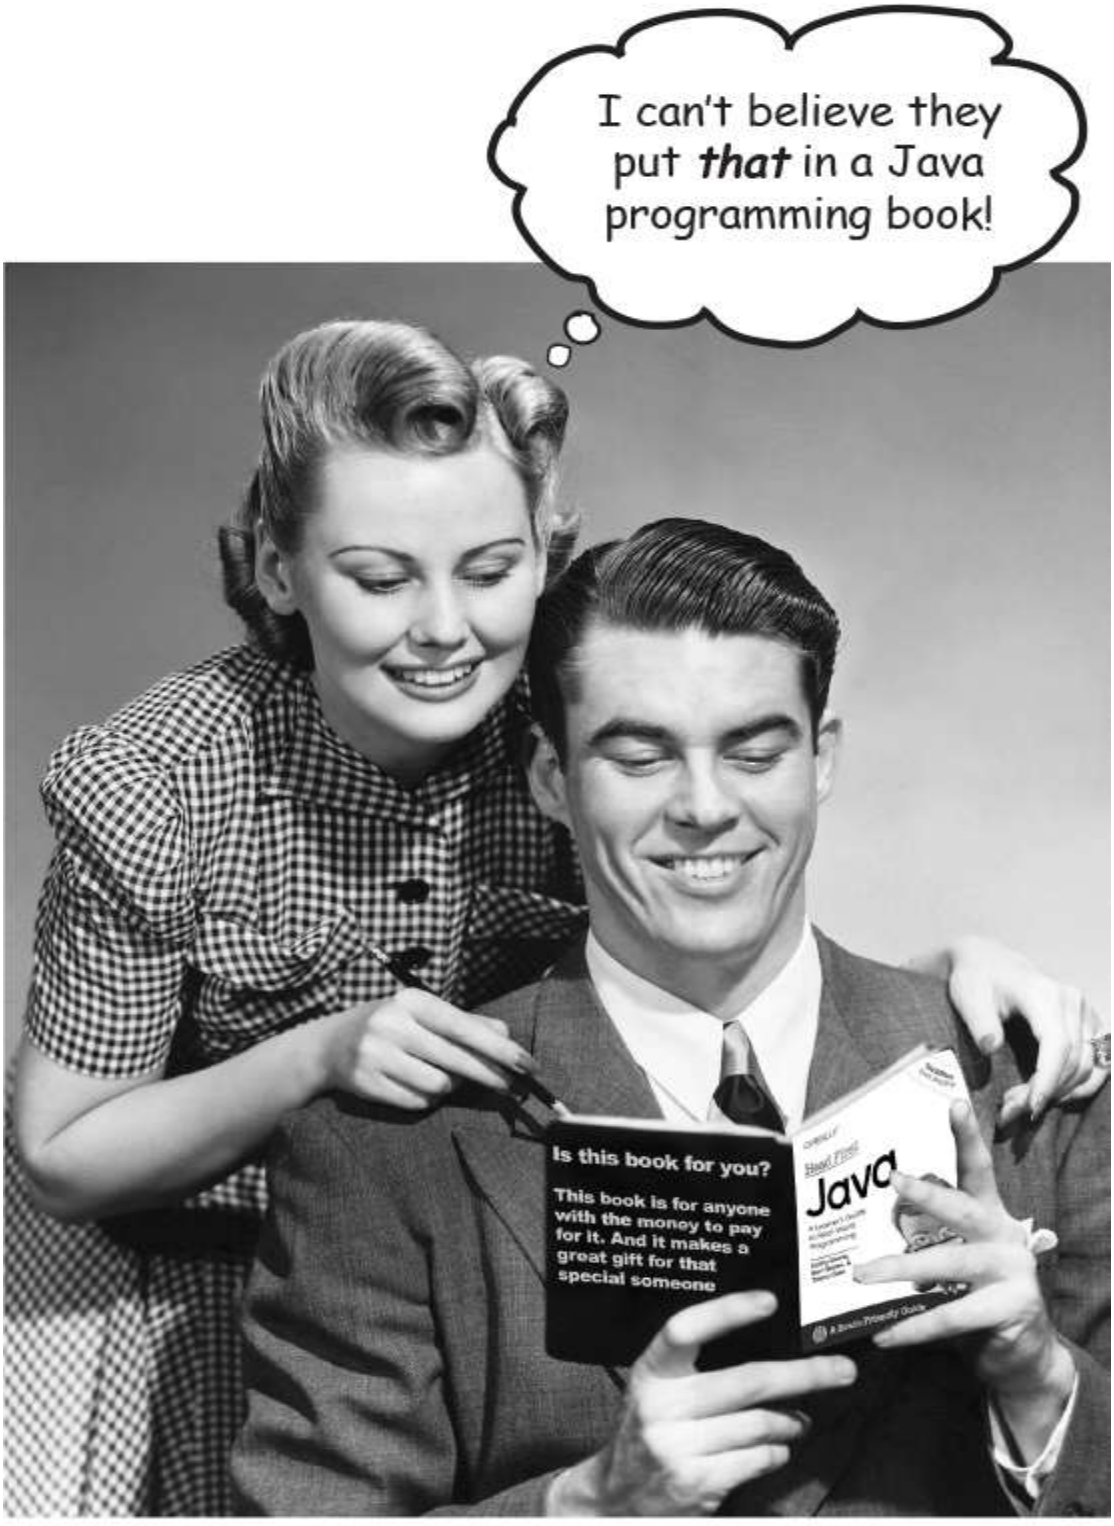

In this section, we answer the burning question:
"So, why DID they put that in a Java programming book?"

Who is this book for?

If you can answer "yes" to ***all*** of these:

- ① **Have you done some programming?**
- ② **Do you want to learn Java?**
- ③ **Do you prefer stimulating dinner party conversation to dry, dull, technical lectures?**

this book is for you.

> **NOTE**
>
> **This is NOT a reference book. *Head First Java* is a book designed for *learning*, not an encyclopedia of Java facts.**

Who should probably back away from this book?

If you can answer "yes" to any ***one*** of these:

- ① **Is your programming background limited to HTML only, with no scripting language experience?**

  (If you've done anything with looping or if/then logic, you'll do fine with this book, but HTML tagging alone might not be enough.)

- ② **Are you a kick-butt C++ programmer looking for a *reference* book?**
- ③ **Are you afraid to try something different? Would you rather have a root canal than mix stripes with plaid? Do you believe that a technical book can't be serious if there's a picture of a duck in the memory management section?**

this book is ***not*** for you.

NOTE

[note from marketing: who took out the part about how this book is for anyone with a valid credit card? And what about that "Give the Gift of Java" holiday promotion we discussed... -Fred]

We know what you're thinking

"How can *this* be a serious Java programming book?"

"What's with all the graphics?"

"Can I actually *learn* it this way?"

"Do I smell pizza?"

And we know what your brain is thinking

Your brain craves novelty. It's always searching, scanning, *waiting* for something unusual. It was built that way, and it helps you stay alive.

Today, you're less likely to be a tiger snack. But your brain's still looking. You just never know.

So what does your brain do with all the routine, ordinary, normal things you encounter? Everything it *can* to stop them from interfering with the brain's *real* job—recording things that *matter*. It doesn't bother saving the boring things; they never make it past the "this is obviously not important" filter.

How does your brain *know* what's important? Suppose you're out for a day hike and a tiger jumps in front of you, what happens inside your head?

Neurons fire. Emotions crank up. *Chemicals surge* .

And that's how your brain knows...

This must be important! Don't forget it!

But imagine you're at home, or in a library. It's a safe, warm, tiger-free zone. You're studying. Getting ready for an exam. Or trying to learn some tough

technical topic your boss thinks will take a week, ten days at the most.

Just one problem. Your brain's trying to do you a big favor. It's trying to make sure that this *obviously* non-important content doesn't clutter up scarce resources. Resources that are better spent storing the really *big* things. Like tigers. Like the danger of fire. Like how you should never again snowboard in shorts.

And there's no simple way to tell your brain, "Hey, brain, thank you very much, but no matter how dull this book is, and how little I'm registering on the emotional richter scale right now, I really *do* want you to keep this stuff around."

WE THINK OF A HEAD FIRST JAVA READER AS A LEARNER.

So what does it take to *learn* something? First, you have to *get* it, then make sure you don't *forget* it. It's not about pushing facts into your head. Based on the latest research in cognitive science, neurobiology, and educational psychology, *learning* takes a lot more than text on a page. We know what turns your brain on.

Some of the Head First learning principles:

Make it visual. Images are far more memorable than words alone, and make learning much more effective (up to 89% improvement in recall and transfer studies). It also makes things more understandable. **Put the words within or near the graphics** they relate to, rather than on the bottom or on another page, and learners will be up to *twice* as likely to solve problems related to the content.

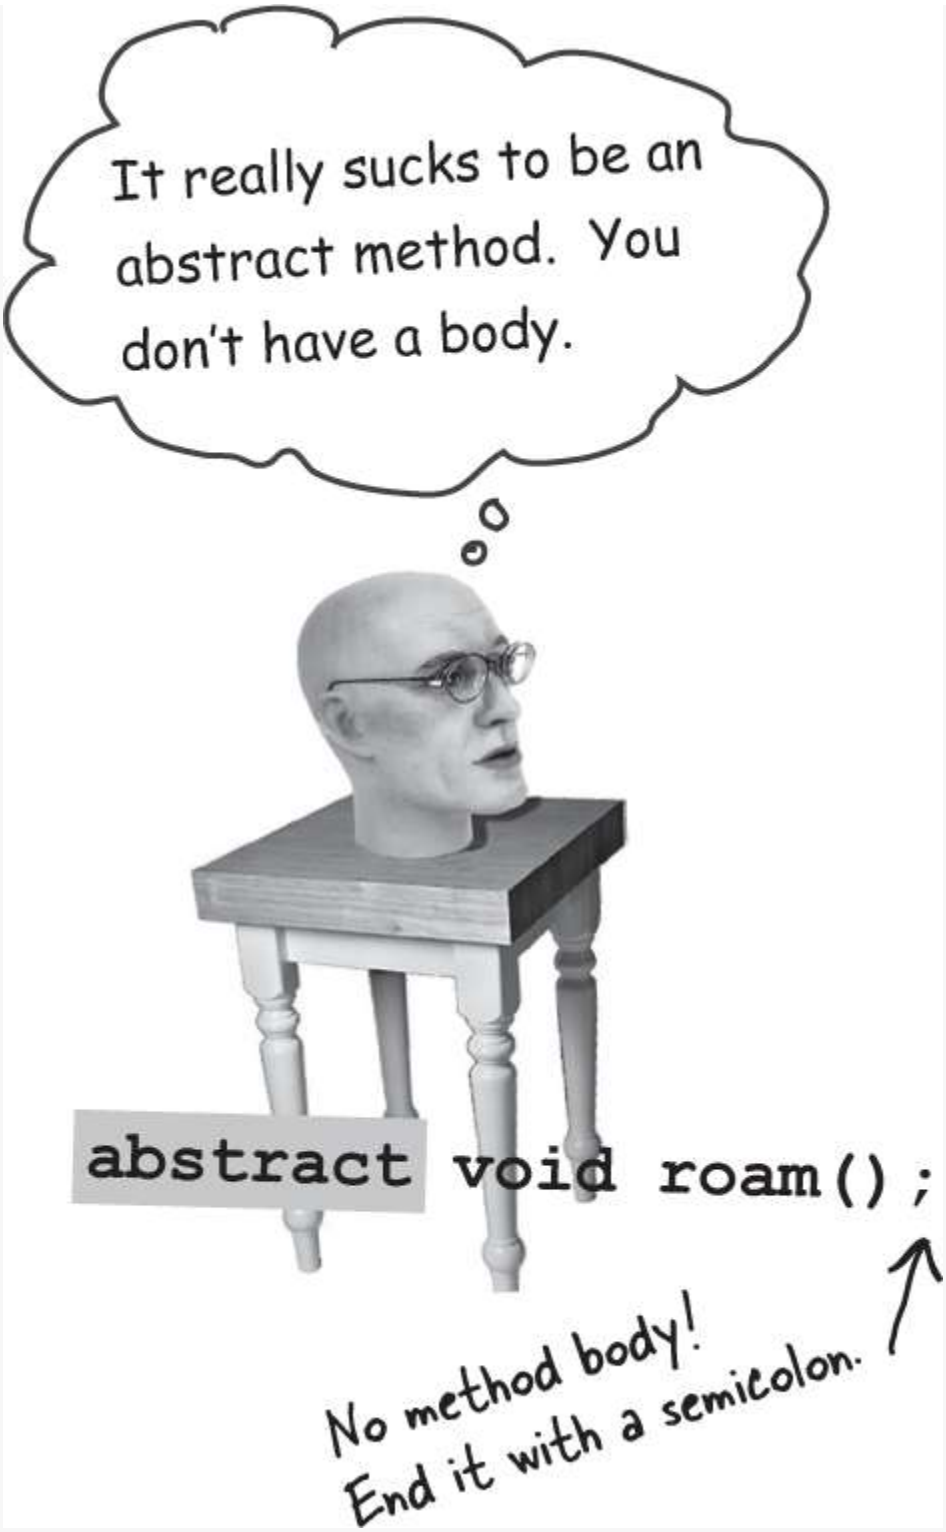

Use a conversational and personalized style. In recent studies, students performed up to 40% better on post-learning tests if the content spoke directly to the reader, using a first-person, conversational style rather

than taking a formal tone. Tell stories instead of lecturing. Use casual language. Don't take yourself too seriously. Which would *you* pay more attention to: a stimulating dinner party companion, or a lecture?

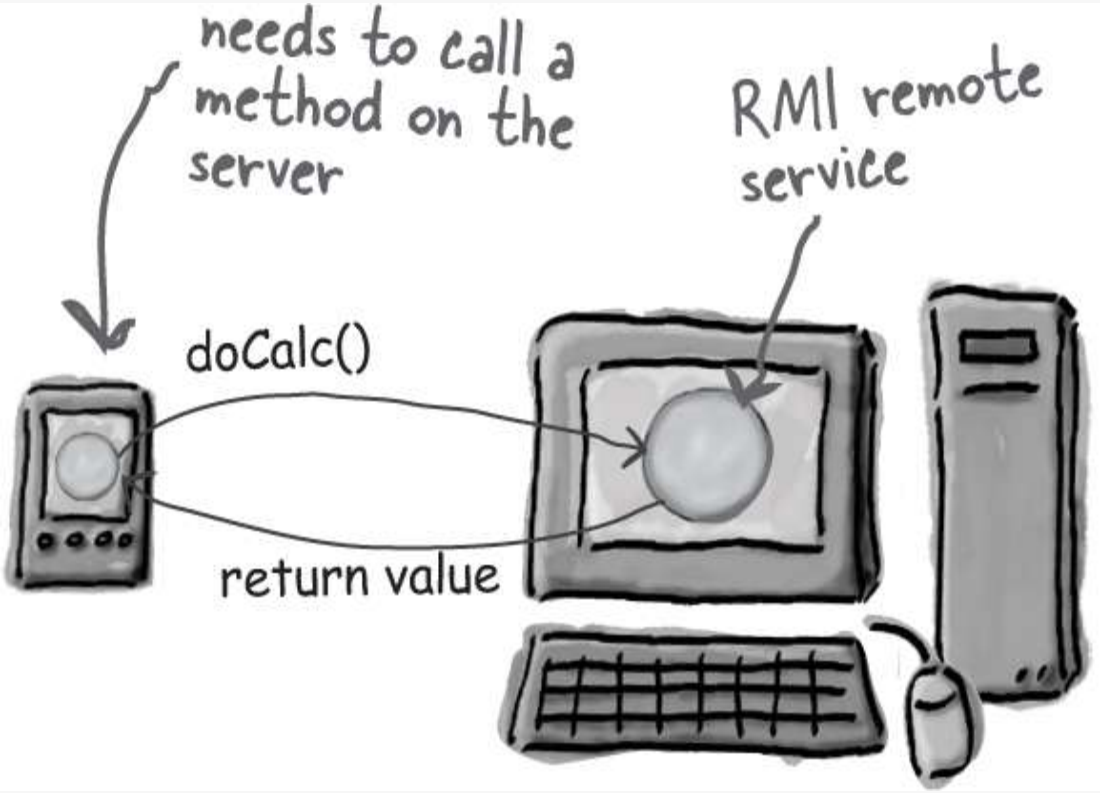

Get the learner to think more deeply. In other words, unless you actively flex your neurons, nothing much happens in your head. A reader has to be motivated, engaged, curious, and inspired to solve problems, draw conclusions, and generate new knowledge. And for that, you need challenges, exercises, thought-provoking questions, and activities that involve both sides of the brain and multiple senses.

Get—and keep—the reader's attention. We've all had the "I really want to learn this but I can't stay awake past page one" experience. Your brain pays attention to things that are out of the ordinary, interesting, strange, eye-catching, unexpected. Learning a new, tough, technical topic doesn't have to be boring. Your brain will learn much more quickly if it's not.

Touch their emotions. We now know that your ability to remember something is largely dependent on its emotional content. You remember what you care about. You remember when you feel something. No we're not talking heart-wrenching stories about a boy and his dog. We're talking emotions like surprise, curiosity, fun, "what the...?" , and the feeling of "I Rule!" that comes when you solve a puzzle, learn something everybody else thinks is hard, or realize you know something that "I'm more technical than thou" Bob from engineering *doesn't*.

Metacognition: thinking about thinking

If you really want to learn, and you want to learn more quickly and more deeply, pay attention to how you pay attention. Think about how you think. Learn how you learn.

Most of us did not take courses on metacognition or learning theory when we were growing up. We were *expected* to learn, but rarely *taught* to learn.

But we assume that if you're holding this book, you want to learn Java. And you probably don't want to spend a lot of time.

To get the most from this book, or *any* book or learning experience, take responsibility for your brain. Your brain on *that* content.

The trick is to get your brain to see the new material you're learning as Really Important. Crucial to your well-being. As important as a tiger. Otherwise, you're in for a constant battle, with your brain doing its best to keep the new content from sticking.

So just how *DO* you get your brain to treat Java like it was a hungry tiger?

There's the slow, tedious way, or the faster, more effective way. The slow way is about sheer repetition. You obviously know that you *are* able to learn and remember even the dullest of topics, if you keep pounding on the same thing. With enough repetition, your brain says, "This doesn't *feel* important to him, but he keeps looking at the same thing *over* and *over* and *over* , so I suppose it must be."

The faster way is to do ***anything that increases brain activity,*** especially different *types* of brain activity. The things on the previous page are a big part of the solution, and they're all things that have been proven to help your brain work in your favor. For example, studies show that putting words *within* the pictures they describe (as opposed to somewhere else in the page, like a caption or in the body text) causes your brain to try to makes sense of how the words and picture relate, and this causes more neurons to fire. More neurons firing = more chances for your brain to *get* that this is something worth paying attention to, and possibly recording.

A conversational style helps because people tend to pay more attention when they perceive that they're in a conversation, since they're expected to follow along and hold up their end. The amazing thing is, your brain doesn't necessarily *care* that the "conversation" is between you and a book! On the other hand, if the writing style is formal and dry, your brain perceives it the same way you experience being lectured to while sitting in a roomful of passive attendees. No need to stay awake.

But pictures and conversational style are just the beginning.

Here's what WE did:

We used ***pictures***, because your brain is tuned for visuals, not text. As far as your brain's concerned, a picture really *is* worth 1024 words. And when text and pictures work together, we embedded the text *in* the pictures because your brain works more effectively when the text is *within* the thing the text refers to, as opposed to in a caption or buried in the text somewhere.



We used ***repetition***, saying the same thing in different ways and with different media types, and *multiple senses* , to increase the chance that the content gets coded into more than one area of your brain.

We used concepts and pictures in ***unexpected*** ways because your brain is tuned for novelty, and we used pictures and ideas with at least *some* ***emotional content***, because your brain is tuned to pay attention to the biochemistry of emotions. That which causes you to *feel* something is more likely to be remembered, even if that feeling is nothing more than a little ***humor***, ***surprise***, or ***interest.***

We used a personalized, ***conversational style***, because your brain is tuned to pay more attention when it believes you're in a conversation than if it thinks you're passively listening to a presentation. Your brain does this even when you're *reading* .

We included more than 50 ***exercises*** because your brain is tuned to learn and remember more when you ***do*** things than when you *read* about things. And we made the exercises challenging-yet-do-able, because that's what most *people* prefer.

BULLET POINTS

We used ***multiple learning styles***, because *you* might prefer step-by-step procedures, while someone else wants to understand the big picture first, while someone else just wants to see a code example. But regardless of your own learning preference, *everyone* benefits from seeing the same content represented in multiple ways.

We include content for ***both sides of your brain***, because the more of your brain you engage, the more likely you are to learn and remember, and the longer you can stay focused. Since working one side of the brain often means

giving the other side a chance to rest, you can be more productive at learning for a longer period of time.

And we included ***stories*** and exercises that present ***more than one point of view,*** because your brain is tuned to learn more deeply when it's forced to make evaluations and judgments.

We included ***challenges***, with exercises, and by asking ***questions*** that don't always have a straight answer, because your brain is tuned to learn and remember when it has to *work* at something (just as you can't get your *body* in shape by watching people at the gym). But we did our best to make sure that when you're working hard, it's on the *right* things. That ***you're not spending one extra dendrite*** processing a hard-to-understand example, or parsing difficult, jargon-laden, or extremely terse text.

We used an ***80/20*** approach. We assume that if you're going for a PhD in Java, this won't be your only book. So we don't talk about *everything* . Just the stuff you'll actually *use* .

Here's what YOU can do to bend your brain into submission

So, we did our part. The rest is up to you. These tips are a starting point; Listen to your brain and figure out what works for you and what doesn't. Try new things.

NOTE

Cut this out and stick it on your refrigerator.

- ① **Slow down. The more you understand, the less you have to memorize.**

  Don't just *read*. Stop and think. When the book asks you a question, don't just skip to the answer. Imagine that someone really *is* asking the question. The more deeply you force your brain to think, the better chance you have of learning and remembering.

- ② **Do the exercises. Write your own notes.**

  We put them in, but if we did them for you, that would be like having someone else do your workouts for you. And don't just *look* at the exercises. **Use a pencil.** There's plenty of evidence that physical activity while learning can increase the learning.

- ③ **Read the "There are No Dumb Questions"**

That means all of them. They're not optional sidebars—they're part of the core content! Sometimes the questions are more useful than the answers.

- ④ **Don't do all your reading in one place.**

  Stand up, stretch, move around, change chairs, change rooms. It'll help your brain *feel* something, and it keeps your learning from being too connected to a particular place.

- ⑤ **Make this the last thing you read before bed. Or at least the last *challenging* thing.**

  Part of the learning (especially the transfer to long-term memory) happens after you put the book down. Your brain needs time on its own, to do more processing. If you put in something new during that processing time, some of what you just learned will be lost.

- ⑥ **Drink water. Lots of it.**

  Your brain works best in a nice bath of fluid. Dehydration (which can happen before you ever feel thirsty) decreases cognitive function.

- ⑦ **Talk about it. Out loud.**

  Speaking activates a different part of the brain. If you're trying to understand something or increase your chance of remembering it later, say it out loud. Better still, try to explain it out loud to someone else. You'll learn more quickly, and you might uncover ideas you hadn't known were there when you were reading about it.

- ⑧ **Listen to your brain.**

  Pay attention to whether your brain is getting overloaded. If you find yourself starting to skim the surface or forget what you just read, it's time for a break. Once you go past a certain point, you won't learn faster by trying to shove more in, and you might even hurt the process.

- ⑨ **Feel something!**

Your brain needs to know that this *matters*. Get involved with the stories. Make up your own captions for the photos. Groaning over a bad joke is *still* better than feeling nothing at all.

- ⑩ **Type and run the code.**

  Type and run the code examples. Then you can experiment with changing and improving the code (or breaking it, which is sometimes the best way to figure out what's really happening). Most of the code, expecially long examples and Ready-Bake Code, are at *https://oreil.ly/hfJava_3e_examples*.

What you need for this book:

You do *not* need any other development tool, such as an Integrated Development Environment (IDE). We strongly recommend that you *not* use anything but a basic text editor until you complete this book. An IDE can protect you from some of the details that really matter, so you're much better off learning from the command line and then, once you really understand what's happening, move to a tool that automates some of the process.

NOTE

This book assumes you're using Java 11 (with the exception of Appendix B). However, if you're using Java 8, you will find most of the code still works.

If there's discussion of a feature from a version of Java higher than Java 8, the required version will be mentioned.

SETTING UP JAVA

- Because versions are moving quickly and advice on the right JDK to use may change, we've put detailed instructions on how to install Java into the code samples project online:

  https://oreil.ly/hfJava_install

  This is a simplified version.

- If you don't know which version of Java to download, we recommend using Java 17.

- There are many free builds of OpenJDK available (the open source version of Java). We suggest the community-supported Eclipse Adoptium JDK at *https://adoptium.net*.

- The JDK includes everything you need to compile and run Java. The JDK does not include the API documentation, and you need that! Download the Java SE API documentation. You can also access the API docs online without downloading them, but trust us, it's worth the download.

- You need a text editor. Virtually any text editor will do (vi, emacs), including the GUI ones that come with most operating systems. Notepad, Wordpad, TextEdit, etc., all work, as long as you're using plain text (not rich text) and make sure they don't append a ".txt" on to the end of your source code (".java") file.

- Once you've downloaded and unpacked/installed/whatever (depends on which version and for which OS), you need to add an entry to your PATH environment variable that points to the *bin* directory inside the main Java directory. The *bin* directory is the one you need a PATH to, so that when you type:

  ```
  % javac
  ```

at the command line, your terminal will know how to find the javac compiler.

- Note: if you have trouble with your installation, we recommend you go to javaranch.com and join the Java-Beginning forum! Actually, you should do that whether you have trouble or not.

The code from this book is available at https://oreil.ly/hfJava_3e_examples.

Last-minute things you need to know:

This is a learning experience, not a reference book. We deliberately stripped out everything that might get in the way of *learning* whatever it is we're working on at that point in the book. And the first time through, you need to begin at the beginning, because the book makes assumptions about what you've already seen and learned.

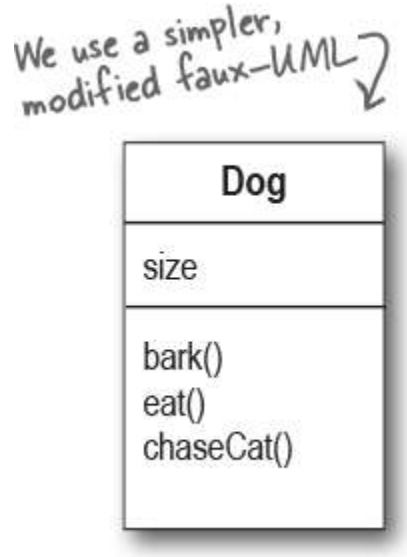

We use simple UML-*like* diagrams.

If we'd used *pure* UML, you'd be seeing something that *looks* like Java, but with syntax that's just plain *wrong*. So we use a simplified version of UML that doesn't conflict with Java syntax. If you don't already know UML, you won't have to worry about learning Java *and* UML at the same time.

We don't worry about organizing and packaging your own code.

In this book, you can get on with the business of learning Java, without stressing over some of the organizational or administrative details of developing Java programs. You *will* , in the real world, need to know—and use—these details, but since building and deploying Java applications generally relies on third-party build tools like Maven and Gradle, we have assumed you'll learn those tools separately.

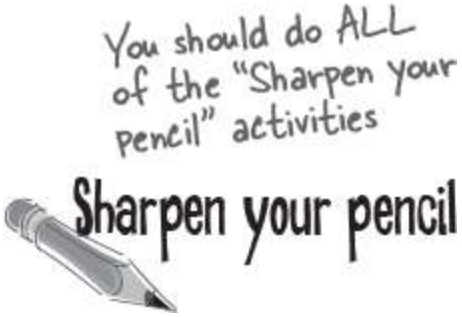

The end-of-chapter exercises are mandatory; puzzles are optional. Answers for both are at the end of each chapter.

One thing you need to know about the puzzles—*they're puzzles*. As in logic puzzles, brain teasers, crossword puzzles, etc. The *exercises* are here to help you practice what you've learned, and you should do them all. The puzzles are a different story, and some of them are quite challenging in a *puzzle* way. These puzzles are meant for *puzzlers* , and you probably already know if you are one. If you're not sure, we suggest you give some of them a try, but whatever happens, don't be discouraged if you *can't* solve a puzzle or if you simply can't be bothered to take the time to work them out.

The "Sharpen Your Pencil" exercises don't all have answers.

Not printed in the book, anyway. For some of them, there *is* no right answer, and for the others, part of the learning experience for the Sharpen activities is for *you* to decide if and when your answers are right.

The code examples are as lean as possible.

It's frustrating to wade through 200 lines of code looking for the two lines you need to understand. Most examples in this book are shown within the smallest possible context, so that the part you're trying to learn is clear and simple. So don't expect the code to be robust, or even complete. That's *your* assignment for after you finish the book. The book examples are written specifically for *learning* and aren't always fully functional.

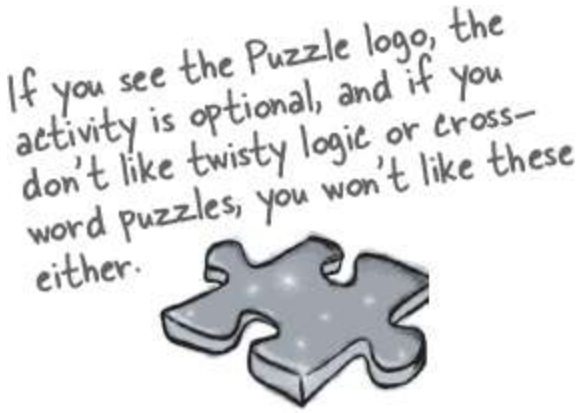

Technical Reviewers for the 3rd Edition

Marc Loy

Marc started with Java training at Sun Microsystems in the early days (shout-out to HotJava!) and never looked back. He authored a number of early Java books and training courses, working with a wide variety of companies across the US, Europe, and Asia along the way. Most recently for O'Reilly, Marc authored *Smaller C* and co-authored the fifth edition of

Learning Java. Currently in Ohio, Marc is a software developer and maker specializing in microcontrollers.

Abraham Marin-Perez

Abraham is a Java programmer, consultant, author, and public speaker with more than ten years of experience in a variety of industries. Originally from Valencia, Spain, Abraham has built most of his career in London, UK, working with entities like JP Morgan or the United Kingdom's Home Office, frequently in collaboration with Equal Experts. Thinking his experiences could be useful to others, Abraham became a Java news editor at InfoQ, authored *Real-World Maintainable Software*, and co-authored *Continuous Delivery in Java*. He also helps run the London Java Community. Always the learner, Abraham is pursuing a degree in physics.

Other people to acknowledge for the 3rd Edition

At O'Reilly:

Huge thanks to **Zan McQuade** and **Nicole Taché** for enabling us to finally get this edition out! Zan, thanks for connecting Trisha back up to the Head First world, and Nicole, fantastic work driving us to get this done. Thanks to **Meghan Blanchette**, who left O'Reilly a hundred years ago, but it was she who introduced Bert and Trisha back in 2014.

Trisha would like to thank:

Helen Scott, for providing frequent feedback on the new topics covered. She consistently stopped me from going too deep or assuming too much knowledge, and is a true champion of the learner. I can't wait to start working even more closely with her on our next project.

My team at JetBrains for their patience and encouragement: **Dalia Abo Sheasha**, for test-driving the lambdas and streams chapter, and **Mala Gupta**, for giving me exactly the information I needed about modern Java certifications. Extra special thanks to **Hadi Hariri** for all his support, always.

The Friday Pub Lunch *informaticos* , for tolerating lunchtime conversations on whatever aspect of Java I was trying to explain that day or week, and **Alys**, **Jen**, and **Clare** for helping me to figure out when to prioritize this book over family. Thanks to **Holly Cummins** for finding a last minute bug.

Evie and **Amy** for the suggestions on how to improve the ice cream examples for Java's Optional type. Thank you both for being genuinely interested in my progress, and for the spontaneous high-fives when you heard I'd finished.

None of this would have been possible without **Israel Boza Rodriguez**. You put up with me derailing important conversations like "what should we have for dinner?" with questions like "do you think CountDownLatch is too niche to teach beginner developers?" Crucially, you helped me to create space and time to work on the book, and regularly reminded me why I wanted to take on the project in the first place.

Thank you to **Bert** and **Kathy** for bringing me on this journey. It was an honor to learn how to be a Head First author from the horse's mouth, so to speak.

Bert and Kathy would like to thank:

Beth Robson and **Eric Freeman**, for their overall, ongoing, badass support of the Head First series. A special thanks to Beth for the many conversations we had discussing what new Java topics to teach and how to teach them.

Paul Wheaton and the amazing moderators at CodeRanch.com (a.k.a. JavaRanch), for keeping CodeRanch a friendly place for Java beginners. A special thanks to **Campbell Ritchie**, **Jeanne Boyarsky**, **Stephan van Hulst**, **Rob Spoor**, **Tim Cooke**, **Fred Rosenberger**, **and Frits Walraven** for their invaluable input concerning what have been the truly important additions to Java since the 2nd edition.

Dave Gustafson, for teaching me so much about software development and rock climbing, AND for great discussions concerning the state of programming. **Eric Normand**, for teaching us a little FP, and helping us figure out how to slip a few of the best ideas from FP into an OO book. **Simon Roberts**, for his ongoing and passionate teaching of Java to students all over the world. Thanks to **Heinz Kabutz** and **Venkat Subramaniam** for helping us explore the nooks and crannies of Java Streams.

Laura Baldwin and **Mike Loukides**, for their tireless support of Head First for all these years. **Ron Bilodeau** and **Kristen Brown**, for their outstanding, always patient and friendly support.

Technical Editors for the 2nd Edition

Endless thanks to Jessica and Val for their hard work editing the 2nd edition.

Jess works at Hewlett-Packard on the Self-Healing Services Team. She has a bachelor's in computer engineering from Villanova University, has her SCJP 1.4 and SCWCD certifications, and is literally months away from receiving her master's in software engineering at Drexel University (whew!).

When she's not working, studying, or motoring in her MINI Cooper S, Jess can be found fighting her cat for yarn as she completes her latest knitting or crochet project (anybody want a hat?). She is originally from Salt Lake City, Utah (no, she's not Mormon...yes, you were too going to ask) and is currently living near Philadelphia with her husband, Mendra, and two cats: Chai and Sake.

You can catch her moderating technical forums at *javaranch.com* .

Valentin has a master's degree in information and computer science from the Swiss Federal Institute of Technology in Lausanne (EPFL). He has worked as a software engineer with SRI International (Menlo Park, CA) and as a principal engineer in the Software Engineering Laboratory of EPFL.

Valentin is the cofounder and CTO of Condris Technologies, a company specializing in the development of software architecture solutions.

His research and development interests include aspect-oriented technologies, design and architectural patterns, web services, and software architecture. Besides taking care of his wife, gardening, reading, and doing some sport, Valentin moderates the SCBCD and SCDJWS forums at Javaranch.com. He holds the SCJP, SCJD, SCBCD, SCWCD, and SCDJWS certifications. He has also had the opportunity to serve as a co-author for Whizlabs SCBCD Exam Simulator.

(We're still in shock from seeing him in a *tie* .)

Other people to credit, for the 2nd Edition

At O'Reilly:

Our biggest thanks to **Mike Loukides** at O'Reilly, for taking a chance on this, and helping to shape the Head First concept into a book (and *series*). As this second edition goes to print there are now five Head First books, and he's been with us all the way. To **Tim O'Reilly**, for his willingness to launch into something *completely* new and different. Thanks to the clever **Kyle Hart** for figuring out how Head First fits into the world and for launching the series. Finally, to **Edie Freedman** for designing the Head First "emphasize the *head* " cover.

Some of our Java expert reviewers...

Jef Cumps

Corey McGlone

Johannes de Jong

Jason Menard

Thomas Paul

Our intrepid beta testers and reviewer team:

Our top honors and thanks go to the director of our javaranch tech review team, **Johannes de Jong**. This is your fifth time around with us on a Head First book, and we're thrilled you're still speaking to us. **Jeff Cumps** is on his third book with us now and relentless about finding areas where we needed to be more clear or correct.

Corey McGlone, you rock. And we think you give the clearest explanations on JavaRanch. You'll probably notice we stole one or two of them. **Jason Menard** saved our technical butts on more than a few details, and **Thomas Paul**, as always, gave us expert feedback and found the subtle Java issues the rest of us missed. **Jane Griscti** has her Java chops (and knows a thing or two about writing), and it was great to have her helping on the new edition along with long-time javarancher **Barry Gaunt**.

Marilyn de Queiroz gave us excellent help on *both* editions of the book. **Chris Jones**, **John Nyquist**, **James Cubeta**, **Terri Cubeta**, and **Ira Becker** gave us a ton of help on the first edition.

Special thanks to a few of the Head Firsters who've been helping us from the beginning: **Angelo Celeste**, **Mikalai Zaikin**, and **Thomas Duff** (twduff.com). And thanks to our terrific agent, **David Rogelberg** of StudioB (but seriously, what about the *movie* rights?)

Just when you thought there wouldn't be any more acknowledgments*

More Java technical experts who helped out on the first edition (in pseudo-random order):

Emiko Hori, Michael Taupitz, Mike Gallihugh, Manish Hatwalne, James Chegwidden, Shweta Mathur, Mohamed Mazahim, John Paverd, Joseph Bih, Skulrat Patanavanich, Sunil Palicha, Suddhasatwa Ghosh, Ramki Srinivasan, Alfred Raouf, Angelo Celeste, Mikalai Zaikin, John Zoetebier, Jim Pleger, Barry Gaunt, and Mark Dielen.

The first edition puzzle team:

Dirk Schreckmann, Mary "JavaCross Champion" Leners, Rodney J. Woodruff, Gavin Bong, and Jason Menard. Javaranch is lucky to have you all helping out.

Other co-conspirators to thank:

Paul Wheaton, the javaranch Trail Boss for supporting thousands of Java learners. **Solveig Haugland**, mistress of J2EE and author of *Dating Design Patterns*. Authors **Dori Smith** and **Tom Negrino (backupbrain.com)**, for helping us navigate the tech book world.

Our Head First partners in crime, **Eric Freeman and Beth Freeman** (authors of Head First Design Patterns), for giving us the Bawls™ to finish this on time.

Sherry Dorris, for the things that really matter.

Brave early adopters of the Head First series:

Joe Litton, Ross P. Goldberg, Dominic Da Silva, honestpuck, Danny Bromberg, Stephen Lepp, Elton Hughes, Eric Christensen, Vulinh Nguyen, Mark Rau, Abdulhaf, Nathan Oliphant, Michael Bradly, Alex Darrow, Michael Fischer, Sarah Nottingham, Tim Allen, Bob Thomas, and Mike Bibby (the first).

*The large number of acknowledgments is because we're testing the theory that everyone mentioned in a book acknowledgment will buy at least one copy, probably more, what with relatives and everything. If you'd like to be in the acknowledgment of our *next* book, and you have a large family, write to us.

Chapter 1. Breaking the Surface: Dive In: A Quick Dip

Java takes you to new places. From its humble release to the public as the (wimpy) version 1.02, Java seduced programmers with its friendly syntax, object-oriented features, memory management, and best of all—the promise of portability. The lure of **write-once/run-anywhere** is just too strong. A

devoted following exploded, as programmers fought against bugs, limitations, and, oh yeah, the fact that it was dog slow. But that was ages ago. If you're just starting in Java, **you're lucky**. Some of us had to walk five miles in the snow, uphill both ways (barefoot), to get even the most trivial application to work. But *you*, why, *you* get to ride the **sleeker, faster, easier-to-read-and-write** Java of today.

The way Java works

The goal is to write one application (in this example, an interactive party invitation) and have it work on whatever device your friends have.

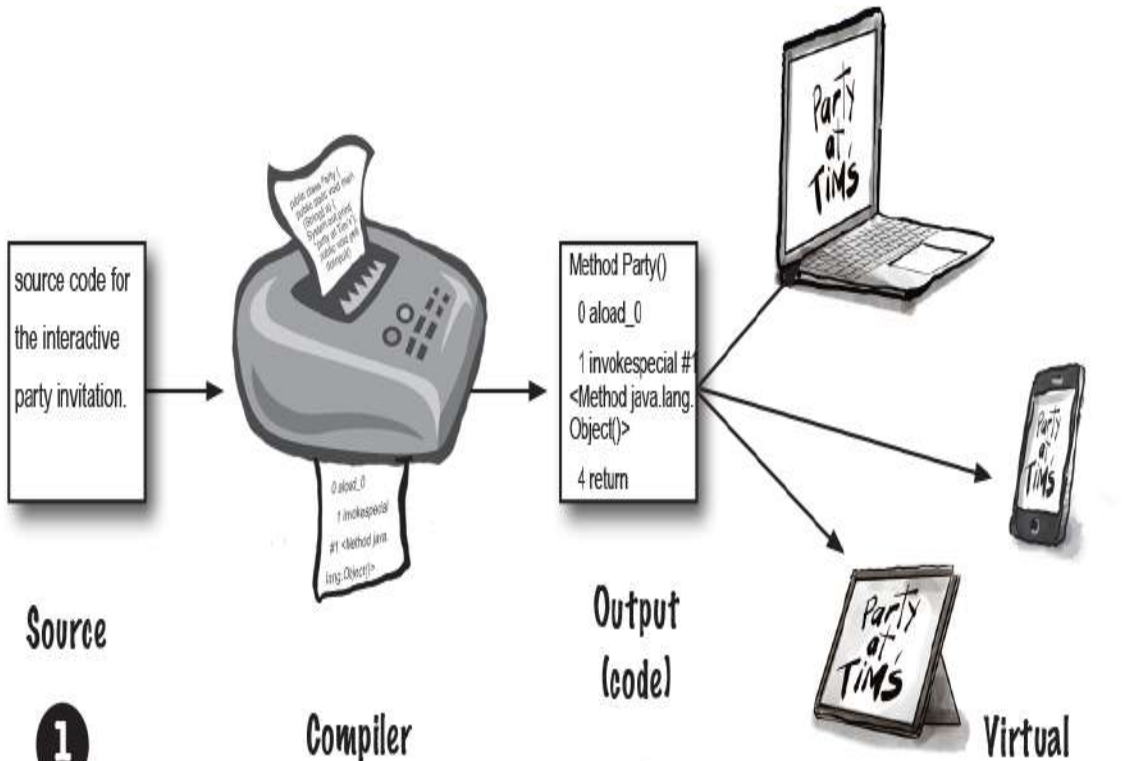

Create a source document. Use an established protocol (in this case, the Java language).

Run your document through a source code compiler. The compiler checks for errors and won't let you compile until it's satisfied that everything will run correctly.

The compiler creates a new document, coded into Java ***bytecode***. Any device capable of running Java will be able to interpret/translate this file into something it can run. The compiled bytecode is platform-independent.

Your friends all have a Java ***virtual*** machine (JVM), implemented in software, running inside their electronic gadgets. When your friends run your program, the virtual machine reads and runs the bytecode.

What you'll do in Java

You'll type a source code file, compile it using the javac compiler, and then run the compiled bytecode on a Java virtual machine.

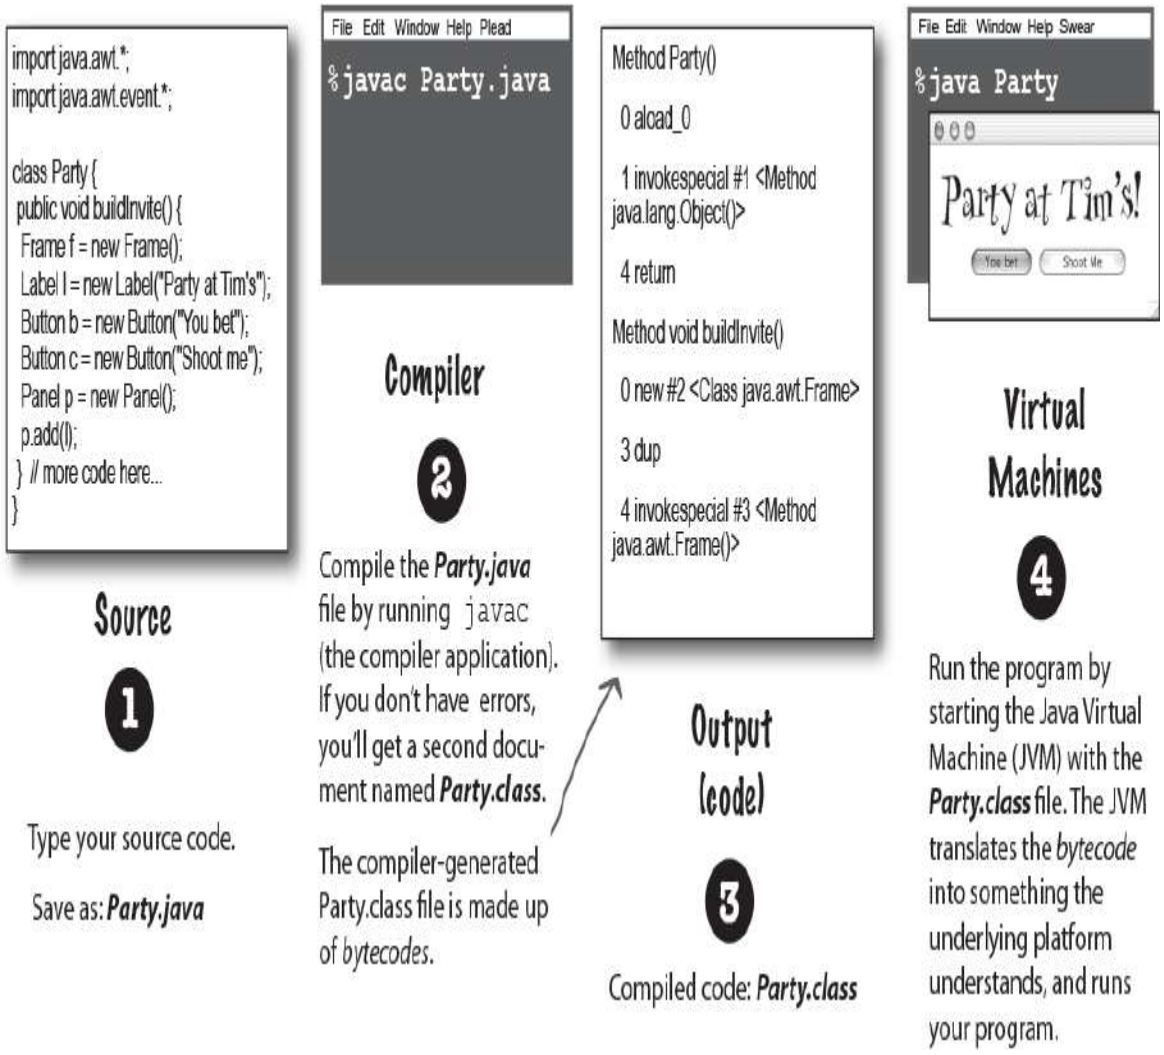

NOTE

(Note: this is **NOT** meant to be a tutorial... you'll be writing real code in a moment, but for now, we just want you to get a feel for how it all fits together.

In other words, the code on this page isn't quite real; don't try to compile it .)

A very brief history of Java

Java was initially released (some would say "escaped", on January 23, 1996. It's over 25 years old! In the first 25 years, Java as a language evolved, and the Java API grew enormously. The best estimate we have is

that over 17 gazillion lines of Java code have been written in the last 25 years. As you spend time programming in Java, you will most certainly come across Java code that's quite old, and some that's much newer. Java is famous for its backward compatibility, so old code can run quite happily on new JVMs.

In this book we'll generally start off by using older coding styles (remember, you're likely to encounter such code in the "real world", and then we'll introduce newer-style code.

In a similar fashion, we will sometimes show you older classes in the Java API, and then show you newer alternatives.

Speed and memory usage

When Java was first released, it was slow. But soon after, the HotSpot VM was created, as were other performance enhancers. While it's true that Java isn't the fastest language out there, it's considered to be a very fast language —almost as fast as languages like C and Rust, and ***much*** faster than most other languages out there.

Java has a magic super-power—the JVM. The Java Virtual Machine can optimize your code *while it's running*, so it's possible to create very fast applications without having to write specialized high-performance code.

But—full disclosure—compared to C and Rust, Java uses a lot of memory.

SHARPEN YOUR PENCIL

→ **Answers in "Sharpen your pencil answers".**

Try to guess what each line of code is doing... (answers are on the next page).

Look how easy it is to write Java

```
int size = 27;
String name = "Fido";
Dog myDog = new Dog(name, size);
x = size - 5;
if (x < 15) myDog.bark(8);

while (x > 3) {
  myDog.play();
}

int[] numList = {2, 4, 6, 8};
System.out.print("Hello");
System.out.print("Dog: " + name);
String num = "8";
int z = Integer.parseInt(num);

try {
  readTheFile("myFile.txt");
}
catch (FileNotFoundException ex) {
  System.out.print("File not found.");
}
```

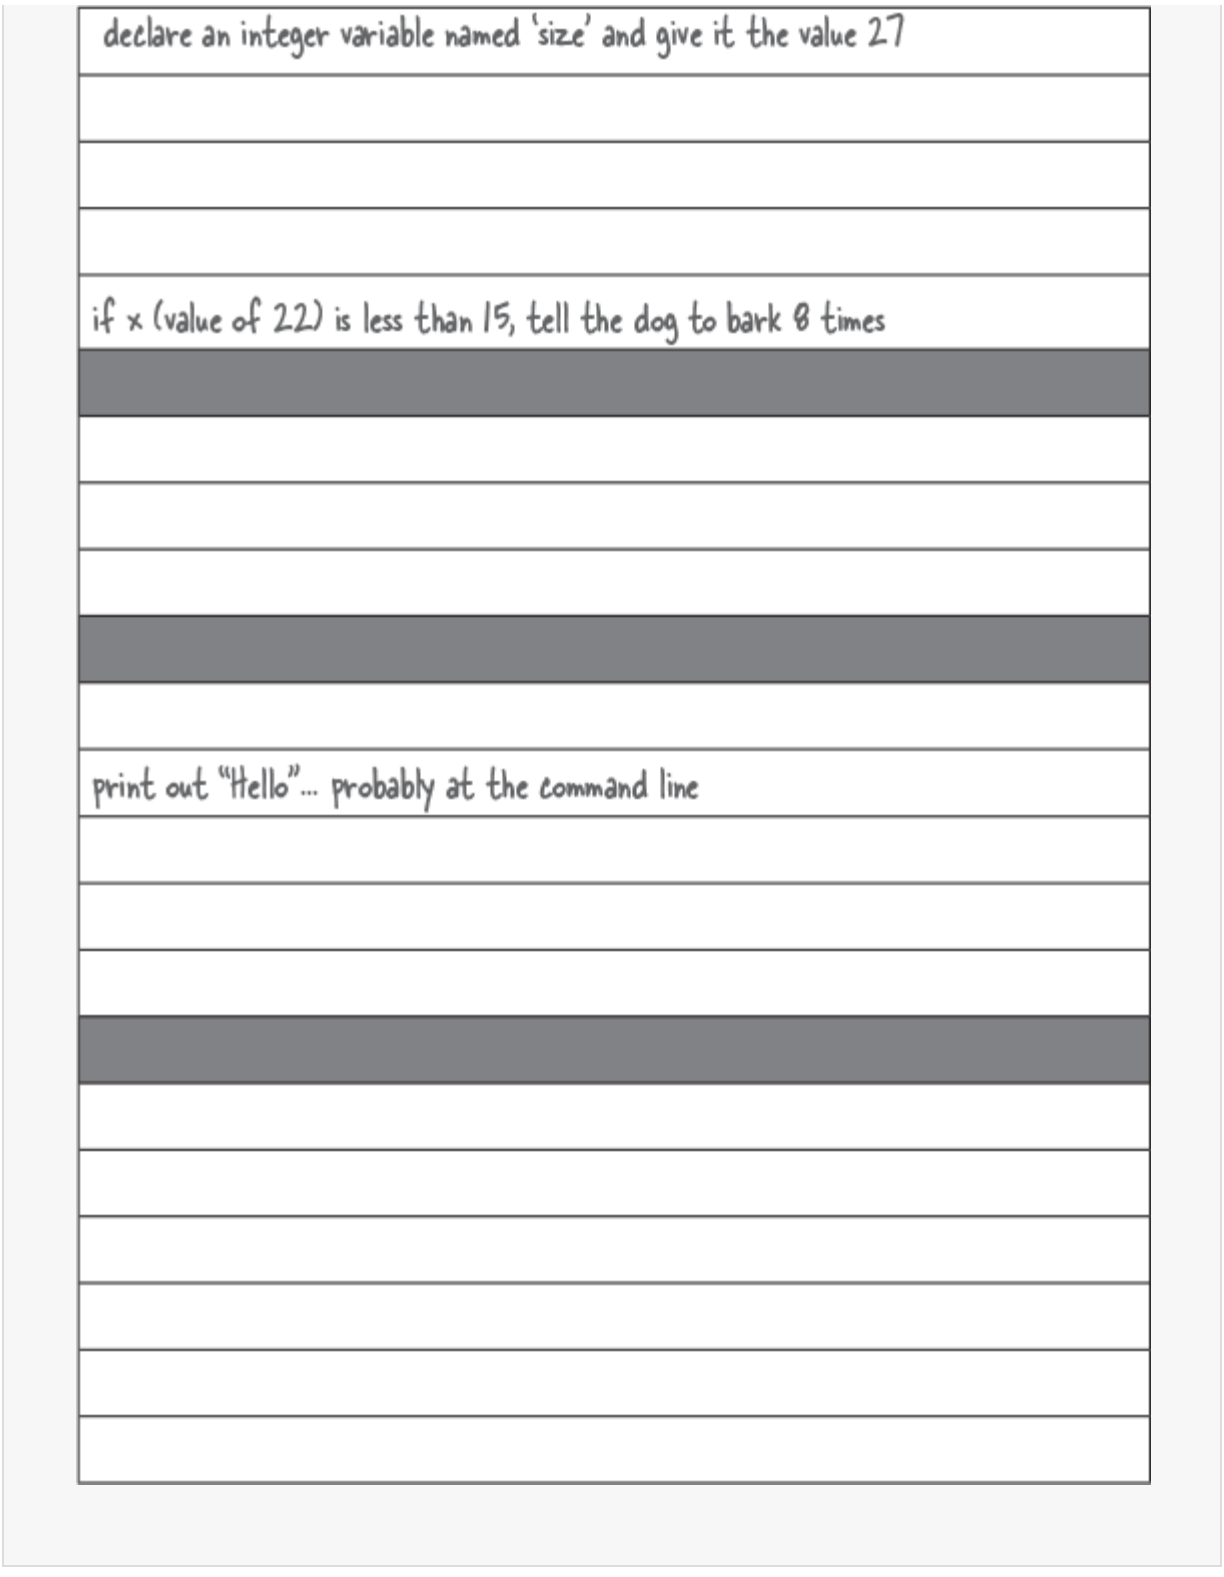

Q: The naming conventions for Java's versions are confusing. There was JDK 1.0, and 1.2, 1.3, 1.4, then a jump to J2SE 5.0, then it changed to

Java 6, Java 7, and last time I checked, Java was up to Java 18. What's going on?

A: The version numbers have varied a lot over the last 25+ years! We can ignore the letters (J2SE/SE) since these are not really used now. The numbers are a little more involved.

Technically Java SE 5.0 was actually Java 1.5. Same for 6 (1.6), 7 (1.7), and 8 (1.8). In theory, Java is still on version 1.x because new versions are backward compatible, all the way back to 1.0.

However, it was a bit confusing having a version number that was different to the name everyone used, so the official version number from Java 9 onward is just the number, without the "1" prefix; i.e., Java 9 really is version 9, not version 1.9.

In this book we'll use the common convention of 1.0–1.4, then from 5 onward we'll drop the "1" prefix.

Also, since Java 9 was released in September 2017, there's been a release of Java every six months, each with a new "major" version number, so we moved very quickly from 9 to 18!

SHARPEN YOUR PENCIL ANSWERS

Look how easy it is to write Java

Don't worry about whether you understand any of this yet! Everything here is explained in great detail in the book (most within the first 40 pages). If Java resembles a language you've used in the past, some of this will be simple. If not, don't worry about it. *We'll get there...*

```
int size = 27;
String name = "Fido";
Dog myDog = new Dog(name, size);
x = size - 5;
if (x < 15) myDog.bark(8);

while (x > 3) {
  myDog.play();
}

int[] numList = {2, 4, 6, 8};
System.out.print("Hello");
System.out.print("Dog: " + name);
String num = "8";
int z = Integer.parseInt(num);

try {
  readTheFile("myFile.txt");
}
catch (FileNotFoundException ex) {
  System.out.print("File not found.");
}
```

declare an integer variable named 'size' and give it the value 27
declare a string of characters variable named 'name' and give it the value "Fido"
declare a new Dog variable 'myDog' and make the new Dog using 'name' and 'size'
subtract 5 from 27 (value of 'size') and assign it to a variable named 'x'
if x (value of 22) is less than 15, tell the dog to bark 8 times
keep looping as long as x is greater than 3...
tell the dog to play (whatever THAT means to a dog...)
this looks like the end of the loop -- everything in { } is done in the loop
declare a list of integers variable 'numList', and put 2,4,6,8 into the list
print out "Hello"... probably at the command line
print out "Dog: Fido" (the value of 'name' is "Fido") at the command line
declare a character string variable 'num' and give it the value of "8"
convert the string of characters "8" into an actual numeric value 8
try to do something...maybe the thing we're trying isn't guaranteed to work...
read a text file named "myFile.txt" (or at least TRY to read the file...)
must be the end of the "things to try", so I guess you could try many things...
this must be where you find out if the thing you tried didn't work...
if the thing we tried failed, print "File not found" out at the command line
looks like everything in the { } is what to do if the 'try' didn't work...

Code structure in Java

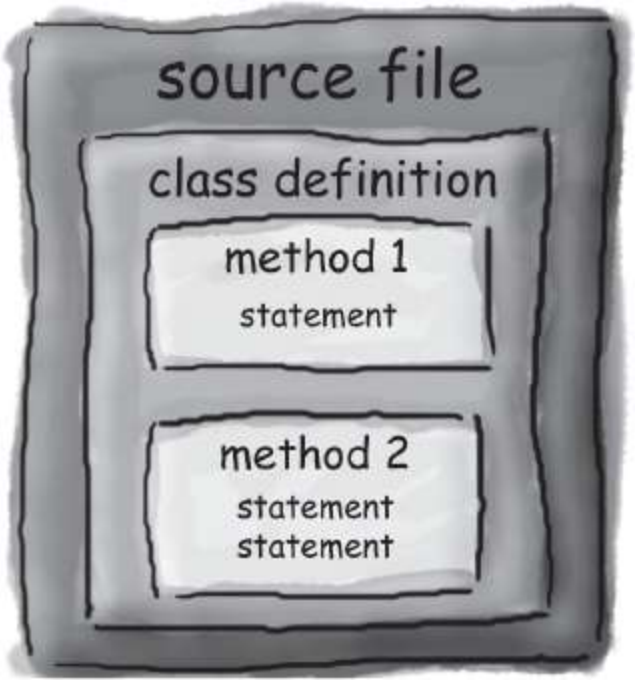

In a source file, put a class.

In a class, put methods.

In a method, put statements.

What goes in a source file?

A source code file (with the *.java* extension) typically holds one class definition. The ***class*** represents a *piece* of your program, although a very tiny application might need just a single class. The class must go within a pair of curly braces.

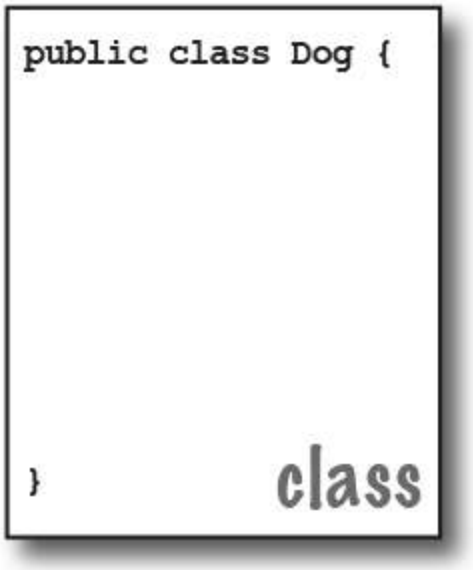

What goes in a class?

A class has one or more ***methods.*** In the Dog class, the ***bark*** method will hold instructions for how the Dog should bark. Your methods must be declared *inside* a class (in other words, within the curly braces of the class).

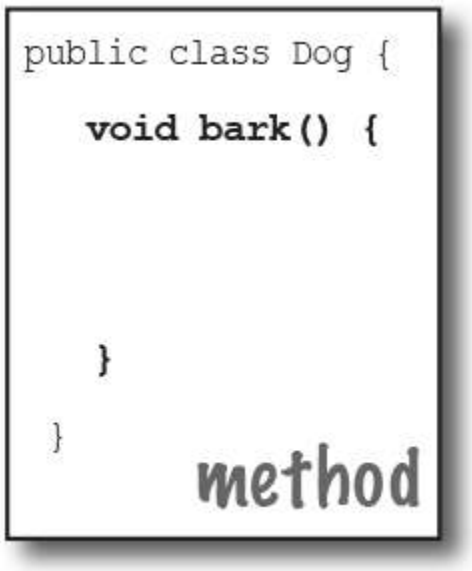

What goes in a method?

Within the curly braces of a method, write your instructions for how that method should be performed. Method *code* is basically a set of statements, and for now you can think of a method kind of like a function or procedure.

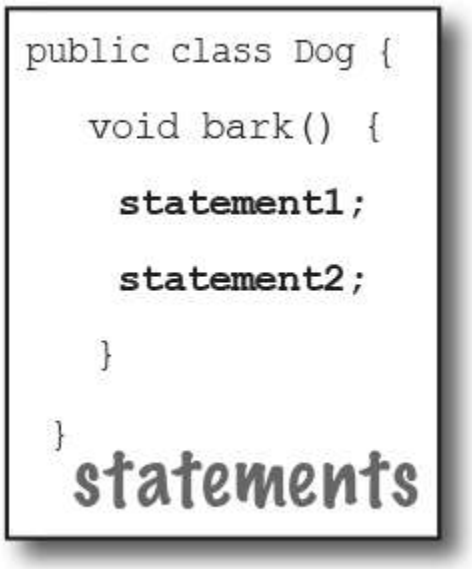

Anatomy of a class

When the JVM starts running, it looks for the class you give it at the command line. Then it starts looking for a specially written method that looks exactly like:

```
public static void main (String[] args) {
   // your code goes here
}
```

Next, the JVM runs everything between the curly braces { } of your main method. Every Java application has to have at least one **class**, and at least one **main** method (not one main per *class*; just one main per *application*).

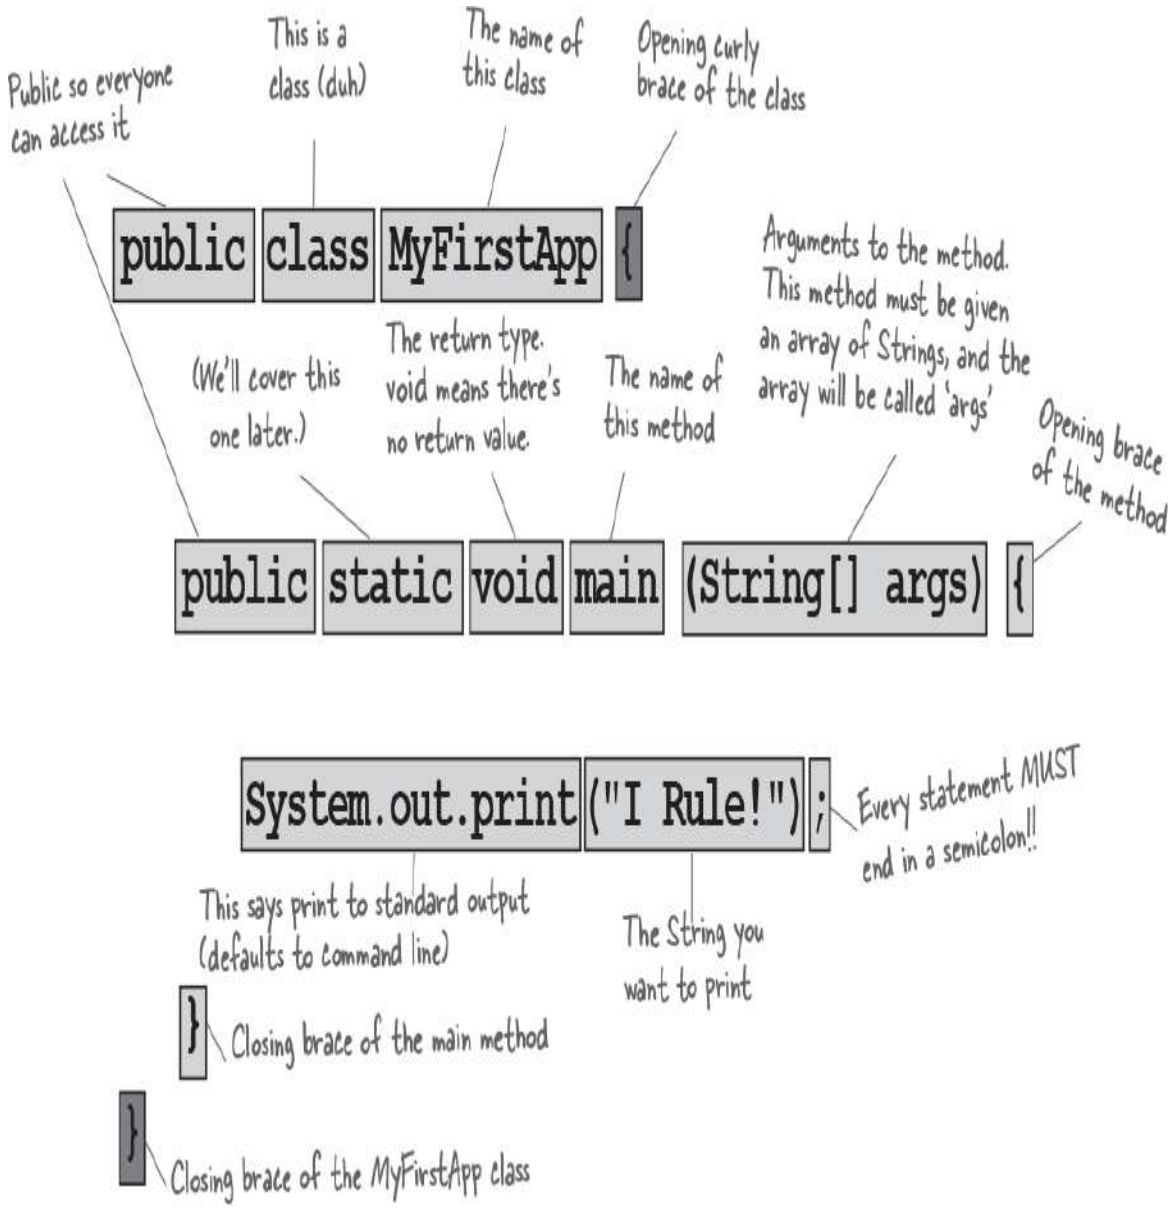

Don't worry about memorizing anything right now... this chapter is just to get you started.

Writing a class with a `main()`

In Java, everything goes in a **class**. You'll type your source code file (with a *.java* extension), then compile it into a new class file (with a *.class* extension). When you run your program, you're really running a class.

Running a program means telling the Java Virtual Machine (JVM) to "Load the **`MyFirstApp`** class, then start executing its **`main()`** method. Keep running 'til all the code in main is finished."

In Chapter 2, *A Trip to Objectville*, we go deeper into the whole *class* thing, but for now, the only question you need to ask is, ***how do I write Java code so that it will run?*** And it all begins with **main()**.

The **main()** method is where your program starts running.

No matter how big your program is (in other words, no matter how many *classes* your program uses), there's got to be a **main()** method to get the ball rolling.

```
public class MyFirstApp {
  public static void main (String[] args) {
    System.out.print("I Rule!");
    System.out.println("The World");
  }
}
```

1 Save

`MyFirstApp.java`

MyFirstApp.java

2 Compile

`javac MyFirstApp.java`

```
Compiled from "MyFirstApp.java"
public class ch1.MyFirstApp {
  public ch1.MyFirstApp();
    Code:
       0: aload_0
       1: invokespecial #1
// Method java/lang/Object."<init>":()V
       4: return
  public static void main(java.lang.
String[]);
```

MyFirstApp.class

3 Run

`java MyFirstApp`

```
File Edit Window Help Scream
%java MyFirstApp
I Rule!
The World
```

```
public class MyFirstApp {

   public static void main (String[] args) {
     System.out.println("I Rule!");
     System.out.println("The World");
   }

}
```

Fireside Chats

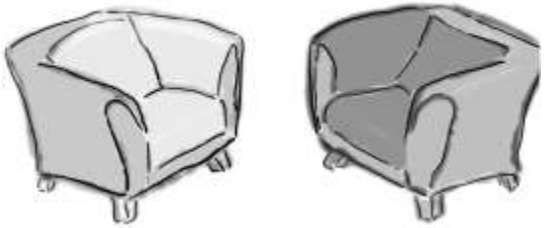

Tonight's Talk: **The compiler and the JVM battle over the question, "Who's more important?"**

The Java Virtual Machine	The Compiler
What, are you kidding? ***HELLO***. I am Java. I'm the one who actually makes a program run. The compiler just gives you a file. That's it. Just a file. You can print it out and use it for wallpaper, kindling, lining the bird cage, whatever, but the file doesn't do anything unless I'm there to run it.	
	I don't appreciate that tone.
And that's another thing, the compiler has no sense of humor. Then again, if you had to spend all day checking nitpicky little syntax violations...	
	Excuse me, but without *me*, what exactly would you run? There's a *reason* Java was designed to use a bytecode compiler, for your information. If Java were a purely interpreted language, where—at runtime—the virtual machine had to translate straight-from-a-text-editor source code, a Java program would run at a ludicrously glacial pace.
I'm not saying you're, like, *completely* useless. But really, what is it that you do? Seriously. I have no idea. A programmer could just write bytecode by hand, and I'd take it. You might be out of a job soon, buddy.	
	Excuse me, but that's quite an ignorant (not to mention *arrogant*) perspective. While it *is* true that—*theoretically*—you can run any properly formatted bytecode even if it didn't come out of a Java compiler, in practice that's absurd. A programmer writing bytecode by hand is like painting pictures of your vacation instead of taking photos—sure, it's an art, but most people prefer to use their time differently. And I would appreciate it if you would *not* refer to me as "buddy."

The Java Virtual Machine	The Compiler
(I rest my case on the humor thing.) But you still didn't answer my question, what *do* you actually do?	
	Remember that Java is a strongly typed language, and that means I can't allow variables to hold data of the wrong type. This is a crucial safety feature, and I'm able to stop the vast majority of violations before they ever get to you. And I also—
But some still get through! I can throw ClassCastExceptions and sometimes I get people trying to put the wrong type of thing in an array that was declared to hold something else, and—	
	Excuse me, but I wasn't done. And yes, there *are* some datatype exceptions that can emerge at runtime, but some of those have to be allowed to support one of Java's other important features—dynamic binding. At runtime, a Java program can include new objects that weren't even *known* to the original programmer, so I have to allow a certain amount of flexibility. But my job is to stop anything that would never—*could* never—succeed at runtime. Usually I can tell when something won't work, for example, if a programmer accidentally tried to use a Button object as a Socket connection, I would detect that and thus protect them from causing harm at runtime.
OK. Sure. But what about *security*? Look at all the security stuff I do, and you're like, what, checking for *semicolons*? Oooohhh big security risk! Thank goodness for you!	
	Excuse me, but I am the first line of defense, as they say. The datatype violations I previously described could wreak havoc in a program if they were allowed to manifest. I am also the one who prevents access violations, such as code trying to invoke a private method, or change a method that—for security reasons—must never be changed. I stop people from touching code they're not meant to see, including code trying to access another class' critical data. It would take hours, perhaps days even, to describe the significance of my work.

The Java Virtual Machine	The Compiler
Whatever. I have to do that same stuff *too*, though, just to make sure nobody snuck in after you and changed the bytecode before running it.	
	Of course, but as I indicated previously, if I didn't prevent what amounts to perhaps 99% of the potential problems, you would grind to a halt. And it looks like we're out of time, so we'll have to revisit this in a later chat.
Oh, you can count on it. *Buddy*.	

What can you say in the main method?

Once you're inside main (or *any* method), the fun begins. You can say all the normal things that you say in most programming languages to ***make the computer do something.***

Your code can tell the JVM to:

statements
loops
branching

SYNTAX FUN

- Each statement must end in a semicolon.

```
x = x + 1;
```

- A single-line comment begins with two forward slashes.

```
x = 22;
// this line disturbs me
```

- Most white space doesn't matter.

```
x    =   3   ;
```

- Variables are declared with a **name** and a **type** (you'll learn about all the Java types in Chapter 3).

```
int weight;
//type: int, name: weight
```

- Classes and methods must be defined within a pair of curly braces.

```
public void go() {
   // amazing code here
}
```

❶ do something

Statements: declarations, assignments, method calls, etc.

```
int x = 3;
String name = "Dirk";
x = x * 17;
System.out.print("x is " + x);
double d = Math.random();
// this is a comment
```

❷ do something again and again

Loops: *for* and *while*

```
while (x > 12) {
  x = x - 1;
}

for (int i = 0; i < 10; i = i + 1) {
  System.out.print("i is now " + i);
}
```

❸ do something under this condition

Branching: *if/else* tests

```
if (x == 10) {
  System.out.print("x must be 10");
} else {
  System.out.print("x isn't 10");
}
if ((x < 3) && (name.equals("Dirk"))) {
  System.out.println("Gently");
}
System.out.print("this line runs no matter what");
```

Looping and looping and...

Java has a lot of looping constructs: while, do-while, and *for*, being the oldest. You'll get the full loop scoop later in the book, but not right now. Let's start with while.

The syntax (not to mention logic) is so simple you're probably asleep already. As long as some condition is true, you do everything inside the loop

block. The loop block is bounded by a pair of curly braces, so whatever you want to repeat needs to be inside that block.

The key to a loop is the *conditional test*. In Java, a conditional test is an expression that results in a *boolean* value—in other words, something that is either ***true*** or ***false***.

If you say something like, "While *iceCreamInTheTub is true*, keep scooping," you have a clear boolean test. There either *is* ice cream in the tub or there *isn't*. But if you were to say, "While *Bob* keep scooping," you don't have a real test. To make that work, you'd have to change it to something like, "While Bob is snoring..." or "While Bob is *not* wearing plaid..."

Simple boolean tests

You can do a simple boolean test by checking the value of a variable, using a comparison operator like:

< (less than)

> (greater than)

== (equality) (yes, that's *two* equals signs)

Notice the difference between the *assignment* operator (a *single* equals sign) and the *equals* operator (*two* equals signs). Lots of programmers accidentally type = when they *want* ==. (But not you.)

```
int x = 4; // assign 4 to x
while (x > 3) {
  // loop code will run because
  // x is greater than 3
  x = x - 1; // or we'd loop forever
}
int z = 27; //
while (z == 17) {
  // loop code will not run because
  // z is not equal to 17
}
```

THERE ARE NO DUMB QUESTIONS

Q: Why does everything have to be in a class?

A: Java is an object-oriented (OO) language. It's not like the old days when you had steam-driven compilers and wrote one monolithic source file with a pile of procedures. In Chapter 2, *A Trip to Objectville*, you'll learn that a class is a blueprint for an object, and that nearly everything in Java is an object.

Q: Do I have to put a main in every class I write?

A: Nope. A Java program might use dozens of classes (even hundreds), but you might only have *one* with a main method—the one that starts the program running.

Q: In my other language I can do a boolean test on an integer. In Java, can I say something like:

```
int x = 1;
while (x){ }
```

A: No. A *boolean* and an *integer* are not compatible types in Java. Since the result of a conditional test *must* be a boolean, the only variable you can directly test (without using a comparison operator) is a ***boolean.*** For example, you can say:

```
boolean isHot = true;
while(isHot) { }
```

Example of a while loop

```
public class Loopy {
  public static void main(String[] args) {
    int x = 1;
    System.out.println("Before the Loop");
    while (x < 4) {
      System.out.println("In the loop");
      System.out.println("Value of x is " + x);
      x = x + 1;
    }
    System.out.println("This is after the loop");
  }
}
```

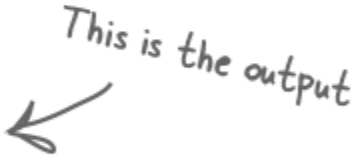


```
% java Loopy
Before the Loop
In the loop
Value of x is 1
In the loop
Value of x is 2
In the loop
Value of x is 3
This is after the loop
```

BULLET POINTS

- Statements end in a semicolon ;
- Code blocks are defined by a pair of curly braces `{ }`
- Declare an *int* variable with a name and a type: `int x;`
- The **assignment** operator is *one* equals sign `=`
- The **equals** operator uses *two* equals signs `==`
- A *while* loop runs everything within its block (defined by curly braces) as long as the *conditional* test is ***true.***
- If the conditional test is ***false,*** the while loop code block won't run, and execution will move down to the code immediately after the loop block.
- Put a boolean test inside parentheses: `while (x == 4) { }`

Conditional branching

In Java, an *if* test is basically the same as the boolean test in a *while* loop—except instead of saying, "***while*** there's still chocolate," you'll say, "***if*** there's still chocolate..."

```
class IfTest {
  public static void main (String[] args) {
    int x = 3;
    if (x == 3) {
      System.out.println("x must be 3");
    }
    System.out.println("This runs no matter what");
  }
}
```

```
% java IfTest
x must be 3
This runs no matter what
```



The preceding code executes the line that prints "x must be 3" only if the condition (*x* is equal to 3) is true. Regardless of whether it's true, though, the line that prints "This runs no matter what" will run. So depending on the value of *x*, either one statement or two will print out.

But we can add an *else* to the condition so that we can say something like, "*If* there's still chocolate, keep coding, *else* (otherwise) get more chocolate, and then continue on..."

```
class IfTest2 {
  public static void main(String[] args) {
    int x = 2;
    if (x == 3) {
      System.out.println("x must be 3");
    } else {
      System.out.println("x is NOT 3");
    }
    System.out.println("This runs no matter what");
  }
}
```

```
% java IfTest2
x is NOT 3
This runs no matter what
```

System.out.print vs.

System.out.println

If you've been paying attention (of course you have), then you've noticed us switching between **print** and **println.**

Did you spot the difference?

System.out.***println*** inserts a newline (think of println as **print*new*line**), while System.out.***print*** keeps printing to the same line. If you want each thing you print out to be on its own line, use print**ln.** If you want everything to stick together on one line, use print.

SHARPEN YOUR PENCIL

Given the output:

```
% java DooBee
DooBeeDooBeeDo
```

Fill in the missing code:

```
public class DooBee {
  public static void main(String[] args) {
    int x = 1;
    while (x < _____ ) {
      System.out._________("Doo");
      System.out._________("Bee");
      x = x + 1;
    }
    if (x == ______  ) {
      System.out.print("Do");
    }
  }
}
```

→ **Answers in "Exercise Solutions".**

Coding a serious business application

Let's put all your new Java skills to good use with something practical. We need a class with a *main()*, an *int* and a *String* variable, a *while* loop, and an *if* test. A little more polish, and you'll be building that business back-end in no time. But *before* you look at the code on this page, think for a moment about how *you* would code that classic children's favorite, "10 green bottles."

```
public class BottleSong {
  public static void main(String[] args) {
    int bottlesNum = 10;
    String word = "bottles";

    while (bottlesNum > 0) {

      if (bottlesNum == 1) {
        word = "bottle"; // singular, as in ONE bottle.
      }

      System.out.println(bottlesNum + " green " + word + ",
hanging on the wall");
      System.out.println(bottlesNum + " green " + word + ",
```

```
hanging on the wall");
     System.out.println("And if one green bottle should
accidentally fall,");
     bottlesNum = bottlesNum - 1;

     if   (bottlesNum > 0) {
        System.out.println("There'll be " + bottlesNum +
                        " green " + word + ", hanging on the
wall");
     } else {
       System.out.println("There'll be no green bottles, hanging
on the wall");
     } // end else
    } // end while loop
  } // end main method
} // end class
```

There's still one little flaw in our code. It compiles and runs, but the output isn't 100% perfect. See if you can spot the flaw and fix it.

THERE ARE NO DUMB QUESTIONS

Q: Didn't this use to be "99 Bottles of Beer"?

A: Yes, but Trisha wanted us to use the UK version of the song. If you'd prefer the 99 bottles version, take that as a fun exercise.

Monday morning at Bob's Java-enabled house

Bob's alarm clock rings at 8:30 Monday morning, just like every other weekday. But Bob had a wild weekend and reaches for the SNOOZE button. And that's when the action starts, and the Java-enabled appliances come to life...

First, the alarm clock sends a message to the coffee maker "Hey, the geek's sleeping in again, delay the coffee 12 minutes."

The coffee maker sends a message to the Motorola™ toaster, "Hold the toast, Bob's snoozing."

The alarm clock then sends a message to Bob's Android, "Call Bob's 9 o'clock and tell him we're running a little late."

Finally, the alarm clock sends a message to Sam's (Sam is the dog) wireless collar, with the too-familiar signal that means, "Get the paper, but don't expect a walk."

A few minutes later, the alarm goes off again. And *again* Bob hits SNOOZE and the appliances start chattering. Finally, the alarm rings a third time. But just as Bob reaches for the snooze button, the clock sends the "jump and bark" signal to Sam's collar. Shocked to full consciousness, Bob rises, grateful that his Java skills, and spontaneous internet shopping purchases, have enhanced the daily routines of his life.

His toast is toasted.

His coffee steams.

His paper awaits.

Just another wonderful morning in ***The Java-Enabled House***.

Could this story be true? Mostly, yes! There *are* versions of Java running in devices including cell phones (*especially* cell phones), ATMs, credit cards, home security systems, parking meters, game consoles and more—but you might not find a Java dog collar...yet.

Java has multiple ways to use just a tiny part of the Java platform to run on smaller devices (depending upon the version of Java you're using). It's very popular for IoT (Internet of Things) development. And, of course, lots of Android development is done with Java and JVM languages.

OK, so the bottle song wasn't *really* a serious business application. Still need something practical to show the boss? Check out the Phrase-O-Matic code.

NOTE

Note: when you type this into an editor, let the code do its own word/line-wrapping! Never hit the return key when you're typing a String (a thing between "quotes" or it won't compile. So the hyphens you see on this page are real, and you can type them, but don't hit the return key until AFTER you've closed a String.

```
public class PhraseOMatic {
  public static void main (String[] args) {

    // make three sets of words to choose from. Add your own!
     String[] wordListOne = {"agnostic", "opinionated",
   "voice activated", "haptically driven", "extensible",
   "reactive", "agent based", "functional", "AI enabled",
   "strongly typed"};

      String[] wordListTwo = {"loosely coupled", "six sigma",
   "asynchronous", "event driven", "pub-sub", "IoT", "cloud
   native", "service oriented", "containerized", "serverless",
   "microservices", "distributed ledger"};

      String[] wordListThree = {"framework", "library",
    "DSL", "REST API", "repository", "pipeline", "service
    mesh", "architecture", "perspective", "design",
    "orientation"};

    // find out how many words are in each list
    int oneLength = wordListOne.length;
    int twoLength = wordListTwo.length;
    int threeLength = wordListThree.length;

    // generate three random numbers
    java.util.Random randomGenerator = new java.util.Random();
    int rand1 = randomGenerator.nextInt(oneLength);
    int rand2 = randomGenerator.nextInt(twoLength);
    int rand3 = randomGenerator.nextInt(threeLength);

    // now build a phrase
    String phrase = wordListOne[rand1] + " " +
    wordListTwo[rand2] + " " + wordListThree[rand3];

    // print out the phrase
    System.out.println("What we need is a " + phrase);
  }
}
```

Phrase-O-Matic

How it works

In a nutshell, the program makes three lists of words, then randomly picks one word from each of the three lists, and prints out the result. Don't worry if you don't understand *exactly* what's happening in each line. For goodness sake, you've got the whole book ahead of you, so relax. This is just a quick look from a 30,000-foot outside-the-box targeted leveraged paradigm.

1. The first step is to create three String arrays—the containers that will hold all the words. Declaring and creating an array is easy; here's a small one:

```
String[] pets = {"Fido", "Zeus", "Bin"};
```

Each word is in quotes (as all good Strings must be) and separated by commas.

2. For each of the three lists (arrays), the goal is to pick a random word, so we have to know how many words are in each list. If there are 14 words in a list, then we need a random number between 0 and 13 (Java arrays are zero-based, so the first word is at position 0, the second word position 1, and the last word is position 13 in a 14-element array). Quite handily, a Java array is more than happy to tell you its length. You just have to ask. In the pets array, we'd say:

```
int x = pets.length;
```

and **x** would now hold the value 3.

3. We need three random numbers. Java ships out of the box with several ways to generate random numbers, including java.util.Random (we will see later why this class name is prefixed with java.util). The **`nextInt()`** method returns a random number between 0 and some-number-we-give-it, *not including* the number that we give it. So we'll give it the number of elements (the array length) in the list we're using. Then we assign each result to a new variable. We could just as easily have asked for a random number between 0 and 5, not including 5:

```
int x = randomGenerator.nextInt(5);
```

4. Now we get to build the phrase, by picking a word from each of the three lists and smooshing them together (also inserting spaces between words). We use the "+" operator, which *concatenates* (we prefer the more technical *smooshes*) the String objects together. To get an element from an array, you give the array the index number (position) of the thing you want by using:

```
String s = pets[0]; // s is now the String "Fido"
s = s + " " + "is a dog"; // s is now "Fido is a dog"
```

5. Finally, we print the phrase to the command line and...voil...! *We're in marketing*.

what we need here is a...

extensible microservices pipeline

opinionated loosely coupled REST API

agent-based microservices library

AI-enabled service oriented orientation

agnostic pub-sub DSL

functional IoT perspective

Exercise

Code Magnets

A working Java program is all scrambled up on the fridge. Can you rearrange the code snippets to make a working Java program that produces the output listed below? Some of the curly braces fell on the floor and they were too small to pick up, so feel free to add as many of those as you need!



```
if (x == 1) {
   System.out.print("d");
   x = x - 1;
}
```

```
if (x == 2) {
   System.out.print("b c");
}
```

```
class Shuffle1 {
  public static void main(String [] args) {
```

```
if (x > 2) {
   System.out.print("a");
}
```

```
int x = 3;
```

```
x = x - 1;
System.out.print("-");
```

```
while (x > 0) {
```

Output:

```
File Edit Window Help Sleep
% java Shuffle1
a-b c-d
```

→ **Answers in "Exercise Solutions".**

BE the Compiler

Each of the Java files on this page represents a complete source file. Your job is to play compiler and determine whether each of these files will compile. If they won't compile, how would you fix them?

→ **Answers in "Exercise Solutions".**

A

```
class Exercise1a {
  public static void main(String[] args) {
    int x = 1;
    while (x < 10) {
      if (x > 3) {
```

```
        System.out.println("big x");
      }
    }
  }
}
```

B

```
public static void main(String [] args) {
  int x = 5;
  while ( x > 1 ) {
    x = x - 1;
    if ( x < 3) {
      System.out.println("small x");
    }
  }
}
```

C

```
class Exercise1c {
  int x = 5;
  while (x > 1) {
    x = x - 1;
    if (x < 3) {
      System.out.println("small x");
    }
  }
}
```

JavaCross

Let's give your right brain something to do.

It's your standard crossword, but almost all of the solution words are from Chapter 1. Just to keep you awake, we also threw in a few (non-Java) words

from the high-tech world.

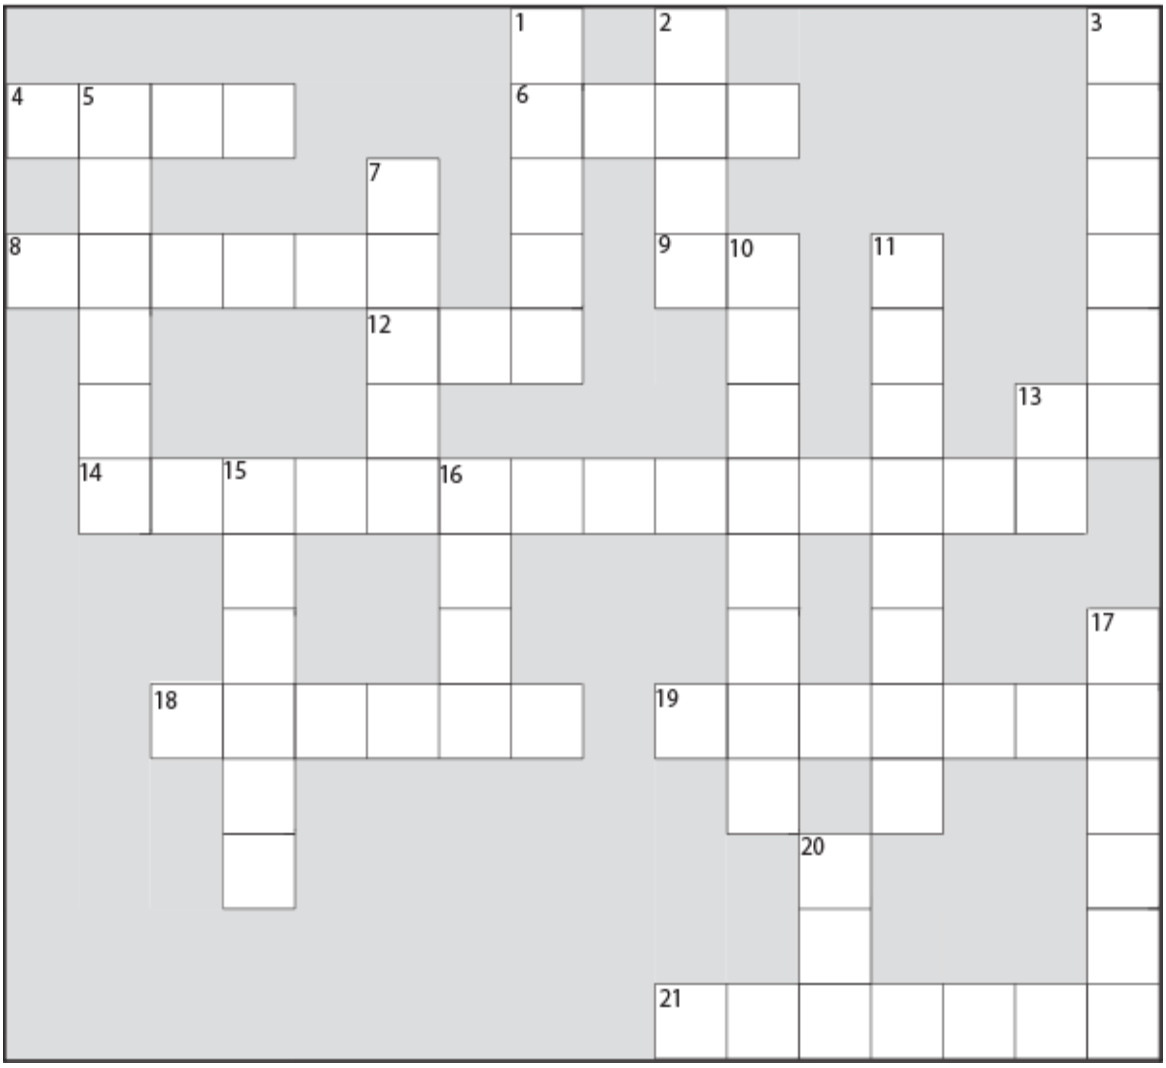

Across

4. Command line invoker

6. Back again?

8. Can’t go both ways

9. Acronym for your laptop’s power

12. Number variable type

13. Acronym for a chip

14. Say something

18. Quite a crew of characters

19. Announce a new class or method

21. What's a prompt good for?

Down

1. Not an integer (or _____ your boat)

2. Come back empty-handed

3. Open house

5. 'Things' holders

7. Until attitudes improve

10. Source code consumer

11. Can't pin it down

13. Department for programmers and operations

15. Shocking modifier

16. Just gotta have one

17. How to get things done

20. Bytecode consumer

→ **Answers in "JavaCross".**

Mixed Messages

A short Java program is listed below. One block of the program is missing. Your challenge is to **match the candidate block of code** (on the left) **with**

the output that you'd see if the block were inserted. Not all the lines of output will be used, and some of the lines of output might be used more than once. Draw lines connecting the candidate blocks of code with their matching command-line output.

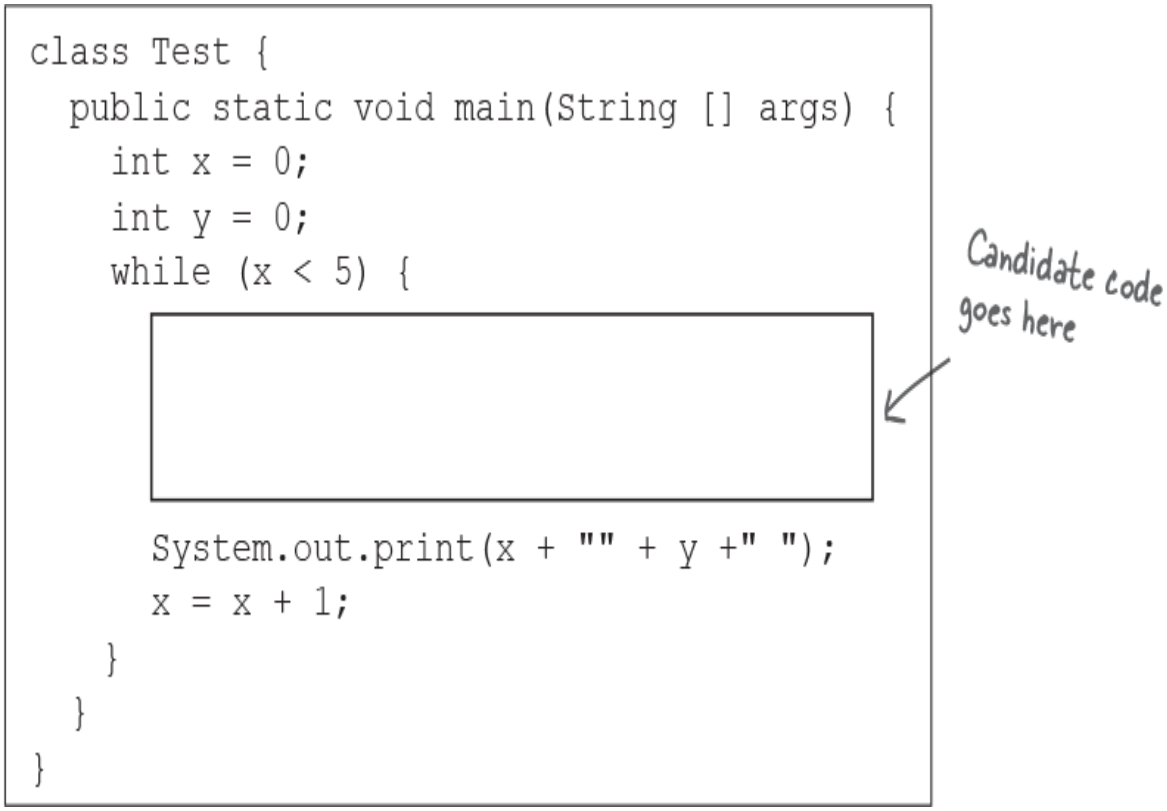

Candidates:

```
y = x - y;
```

```
y = y + x;
```

```
y = y + 2;
if( y > 4 ) {
  y = y - 1;
}
```

```
x = x + 1;
y = y + x;
```

```
if ( y < 5 ) {
  x = x + 1;
  if ( y < 3 ) {
    x = x - 1;
  }
}
y = y + 2;
```

Possible output:

```
22 46
```

```
11 34 59
```

```
02 14 26 38
```

```
02 14 36 48
```

```
00 11 21 32 42
```

```
11 21 32 42 53
```

```
00 11 23 36 410
```

```
02 14 25 36 47
```

NOTE

Match each candidate with one of the possible outputs

→ **Answers in "Mixed Messages".**

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You may **not** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make a class that will compile and run and produce the output listed. Don't be fooled—this one's harder than it looks.

→ **Answers in "Pool Puzzle".**

Output

```
File  Edit  Window  Help  Cheat
%java PoolPuzzleOne
a noise
annoys
an oyster
```

NOTE

Note: Each snippet from the pool can be used only once!

```
class PoolPuzzleOne {
  public static void main(String [] args) {
    int x = 0;

    while ( __________ ) {

       _____________________________
       if ( x < 1 ) {
         _____________________________
       }
       _____________________________

       if ( __________ ) {
         _____________________________

         __________
       }
       if ( x == 1 ) {

        _____________________________
       }
       if ( ___________ ) {

         _____________________________
       }
       System.out.println();

       ____________
    }
  }
}
```

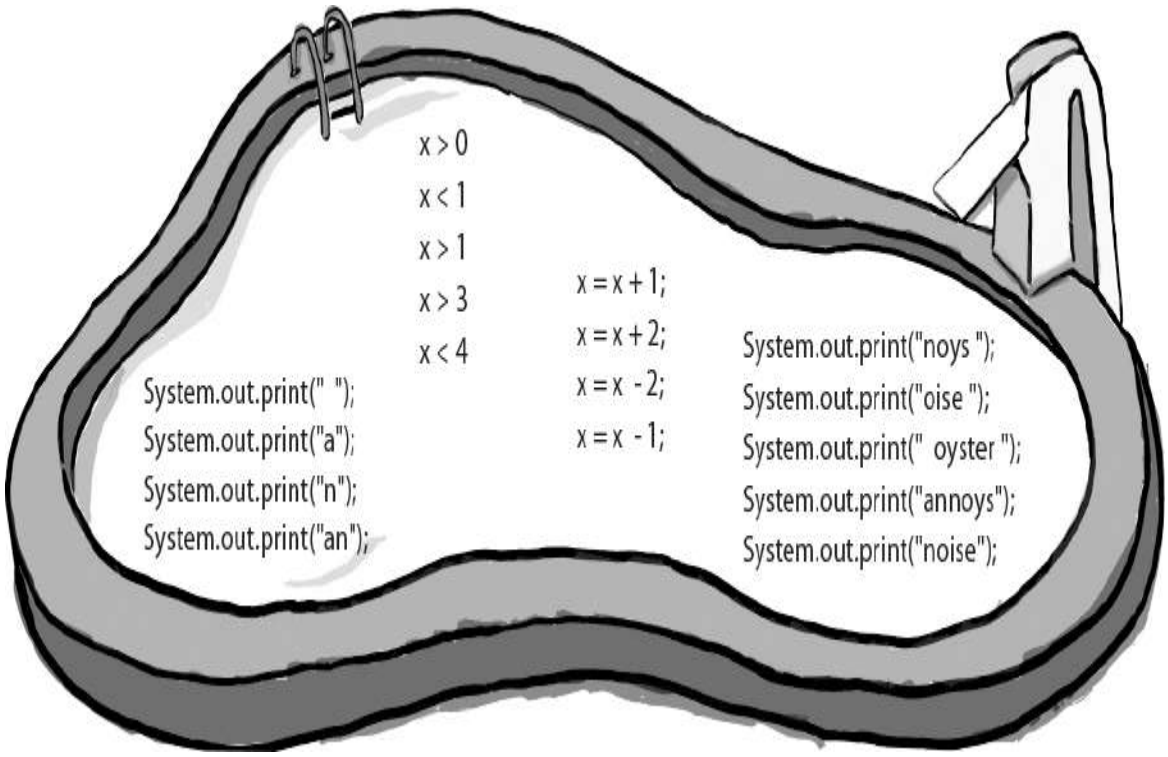

Exercise Solutions

Sharpen your pencil

(from "there are no Dumb Questions")

```
public class DooBee {
  public static void main(String[] args) {
    int x = 1;
    while (x < 3) {
      System.out.print("Doo");
      System.out.print("Bee");
      x = x + 1;
    }
    if (x == 3) {
      System.out.print("Do");
```

```
    }
  }
}
```

Code Magnets

(from "Code Magnets")

```
class Shuffle1 {
  public static void main(String[] args) {

    int x = 3;
    while (x > 0) {

      if (x > 2) {
        System.out.print("a");
      }

      x = x - 1;
      System.out.print("-");

      if (x == 2) {
       System.out.print("b c");
      }

      if (x == 1) {
        System.out.print("d");
        x = x - 1;
      }
    }
  }
}
```

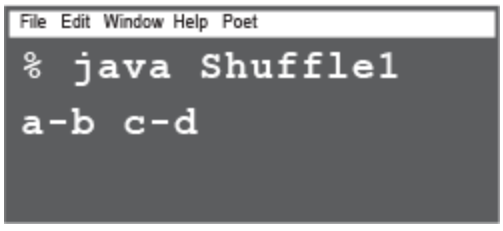

BE the Compiler

(from "BE the Compiler")

A

```
class Exercise1a {
  public static void main(String [] args) {
    int x = 1;
    while ( x < 10 ) {
      x = x + 1;
      if ( x > 3) {
        System.out.println("big x");
      }
    }
  }
}
```

Add this line to prevent it running forever...

This will compile and run (no output), but without a line added to the program, it would run forever in an infinite while loop!

B

```
class Exercise1b {
  public static void main(String [] args) {
    int x = 5;
    while ( x > 1 ) {
      x = x - 1;
      if ( x < 3) {
        System.out.println("small x");
      }
    }
  }
}
```

Needs a class declaration

This file won't compile without a class declaration, and don't forget the matching curly brace!

C

```
class Exercise1c {                    Needs a "main"
  public static void main(String [] args) {
    int x = 5;
    while ( x > 1 ) {
      x = x - 1;
      if ( x < 3) {
        System.out.println("small x");
      }
    }
  }
}
```

The while loop code must be inside a method. It can't just be hanging out inside the class.

Pool Puzzle

(from "Pool Puzzle")

```
class PoolPuzzleOne {
  public static void main(String [] args) {
    int x = 0;

  while ( x < 4 ) {

    System.out.print("a");
    if ( x < 1 ) {
       System.out.print(" ");
    }
    System.out.print("n");

    if ( x > 1 ) {
       System.out.print(" oyster");
       x = x + 2;
    }
```

```
    if ( x == 1 ) {
       System.out.print("noys");
    }
    if ( x < 1 ) {
       System.out.print("oise");
   }
   System.out.println();

   x = x + 1;
   }
 }
}
```

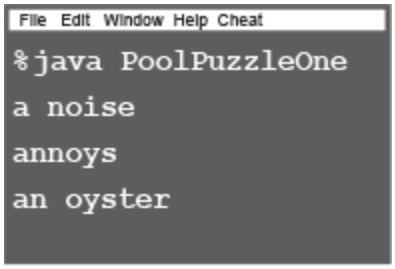

JavaCross

(from "JavaCross")

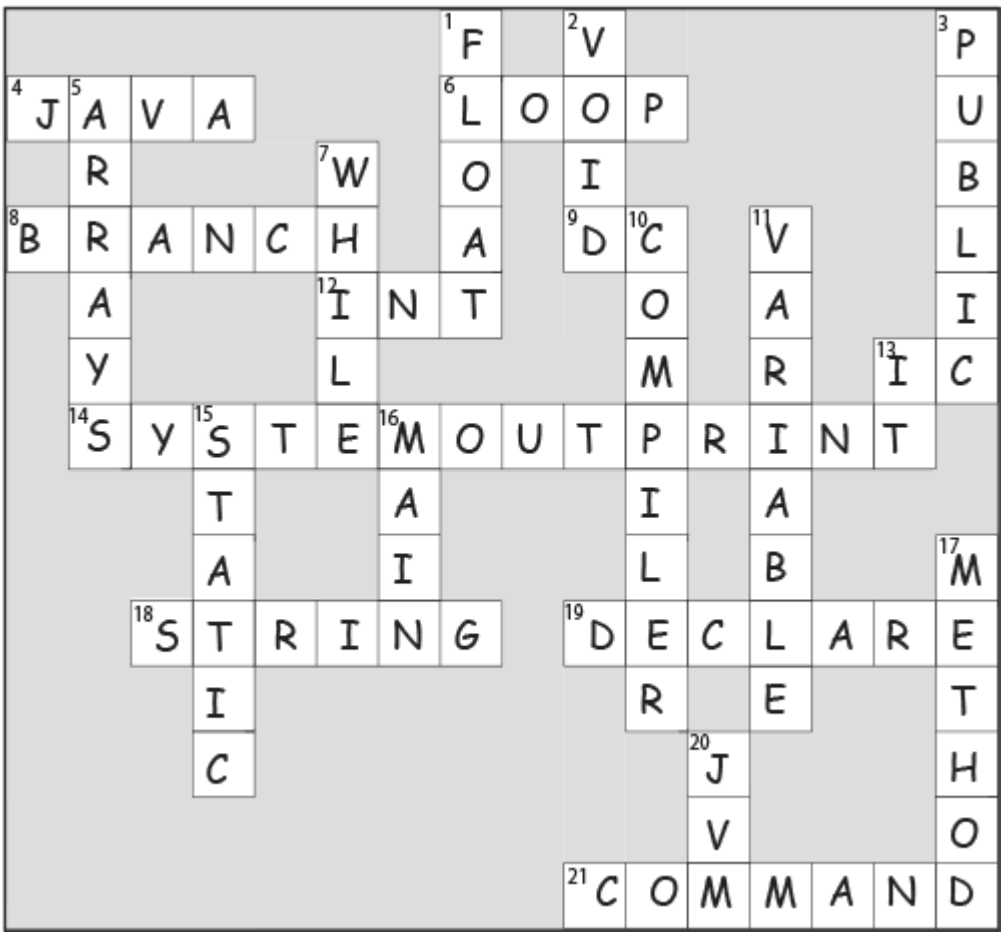

Mixed Messages

(from "Mixed Messages")

```
class Test {
  public static void main(String [] args) {
    int x = 0;
    int y = 0;
    while ( x < 5 ) {
      [                                    ]
       System.out.print(x + "" + y +" ");
       x = x + 1;
    }
  }
}
```

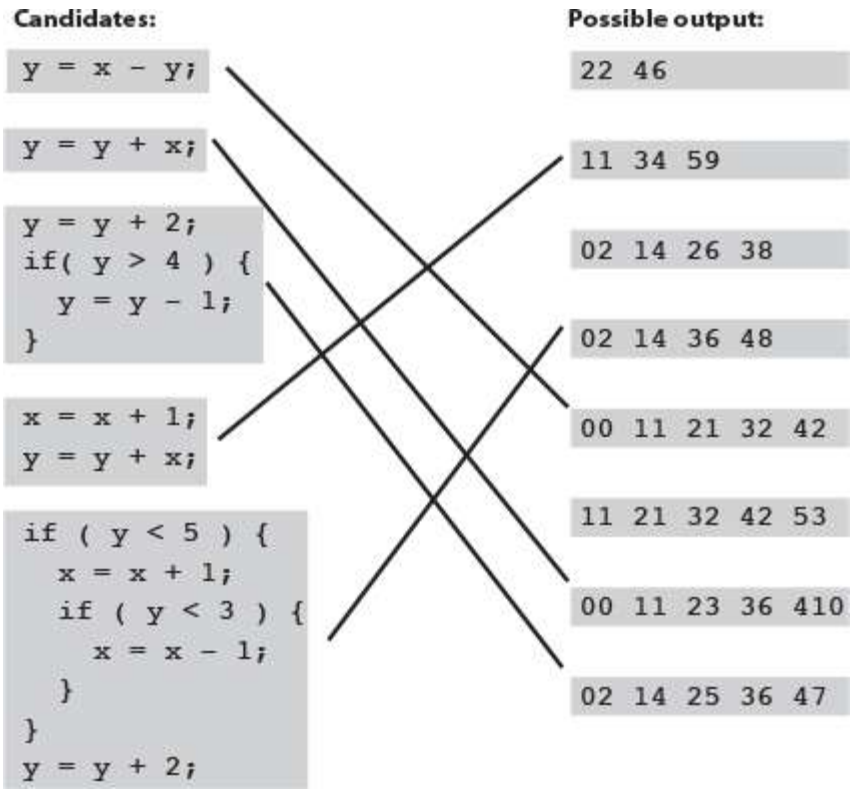
Candidates:
y = x - y;
y = y + x;
y = y + 2;
if(y > 4) {
y = y - 1;
}
x = x + 1;
y = y + x;
if (y < 5) {
x = x + 1;
if (y < 3) {
x = x - 1;
}
}
y = y + 2;
Possible output:
22 46
11 34 59
02 14 26 38
02 14 36 48
00 11 21 32 42
11 21 32 42 53
00 11 23 36 410
02 14 25 36 47

Chapter 2. A Trip to Objectville: Classes and Objects

I was told there would be objects. In Chapter 1, we put all of our code in the main () method. That's not exactly object-oriented. In fact, that's not object-oriented at all. Well, we did use a few objects, like the String arrays for the Phrase-O-Matic, but we didn't actually develop any of our own object types. So now we've got to leave that procedural world behind, get

the heck out of main(), and start making some objects of our own. We'll look at what makes object-oriented (OO) development in Java so much fun. We'll look at the difference between a class and an object. We'll look at how objects can give you a better life (at least the programming part of your life. Not much we can do about your fashion sense). Warning: once you get to Objectville, you might never go back. Send us a postcard.

Chair Wars

(or How Objects Can Change Your Life)

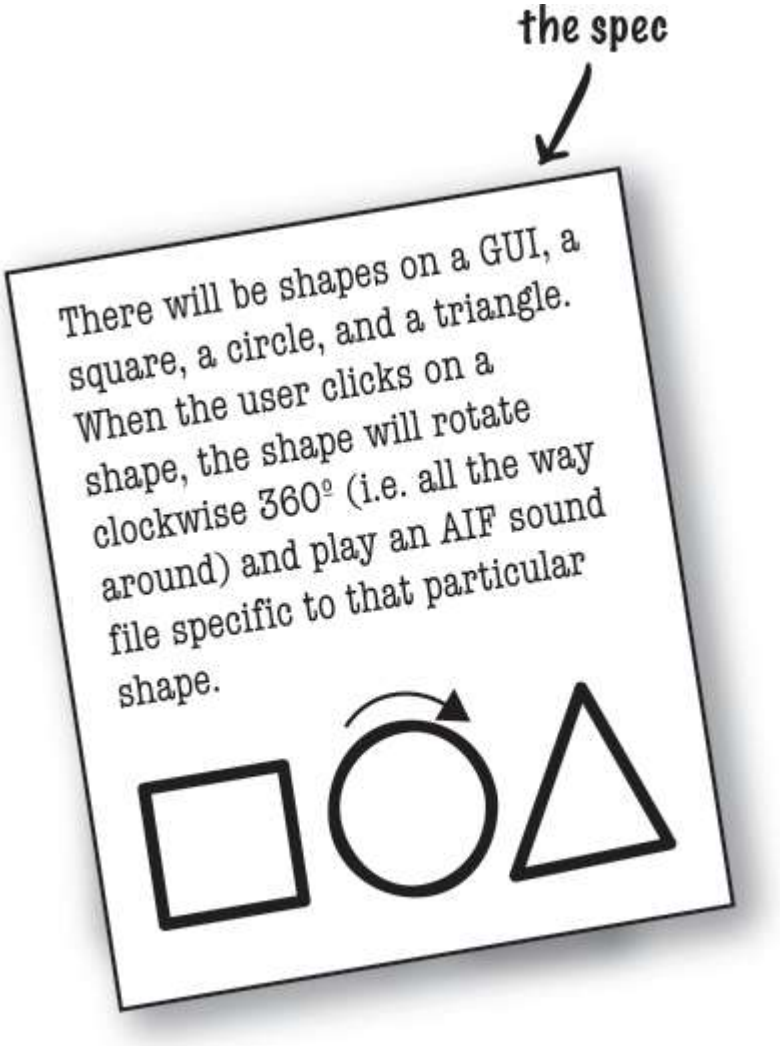

Once upon a time in a software shop, two programmers were given the same spec and told to "build it." The Really Annoying Project Manager forced the two coders to compete, by promising that whoever delivers first gets a cool Aeron™ chair and adjustable height standing desk like all the Silicon Valley techies have. Laura, the procedural programmer, and Brad, the OO developer, both knew this would be a piece of cake.

Laura, sitting at her (non-adjustable) desk, thought to herself, "What are the things this program has to *do*? What ***procedures*** do we need?" And she answered herself, "**rotate** and **playSound**." So off she went to build the procedures. After all, what *is* a program if not a pile of procedures?

Brad, meanwhile, kicked back at the coffee shop and thought to himself, "What are the ***things*** in this program...who are the key *players*?" He first thought of **The Shapes**. Of course, there were other things he thought of like the User, the Sound, and the Clicking Event. But he already had a library of code for those pieces, so he focused on building Shapes. Read on to see how Brad and Laura built their programs, and for the answer to your burning question, ***"So, who got the Aeron and the desk?"***

At Laura's desk

As she had done a gazillion times before, Laura set about writing her **Important Procedures**. She wrote **rotate** and **playSound** in no time.

```
rotate(shapeNum) {
  // make the shape rotate 360°
}
```

```
playSound(shapeNum) {
  // use shapeNum to lookup which
  // AIF sound to play, and play it
}
```

At Brad's laptop at the cafe

Brad wrote a ***class*** for each of the three shapes.

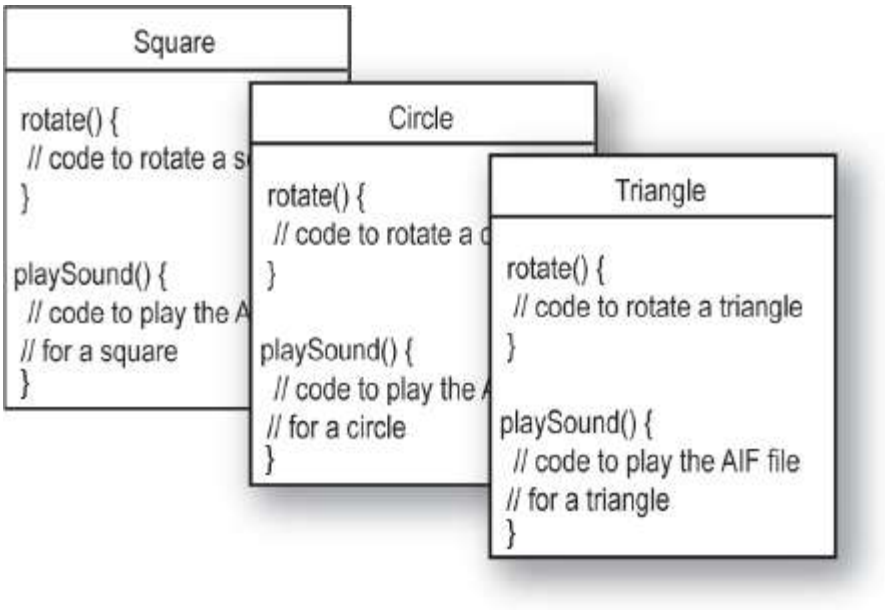

Laura thought she'd nailed it. She could almost feel the rolled steel of the Aeron beneath her...

But wait! There's been a spec change.

"OK, *technically* you were first, Laura," said the Manager, "but we have to add just one tiny thing to the program. It'll be no problem for crack programmers like you two."

"If I had a dime for every time I've heard that one," thought Laura, knowing that spec-change-no-problem was a fantasy. *"And yet Brad looks strangely serene. What's up with that?"* Still, Laura held tight to her core belief that the OO way, while cute, was just slow. And that if you wanted to change her mind, you'd have to pry it from her cold, dead, carpal-tunnelled hands.

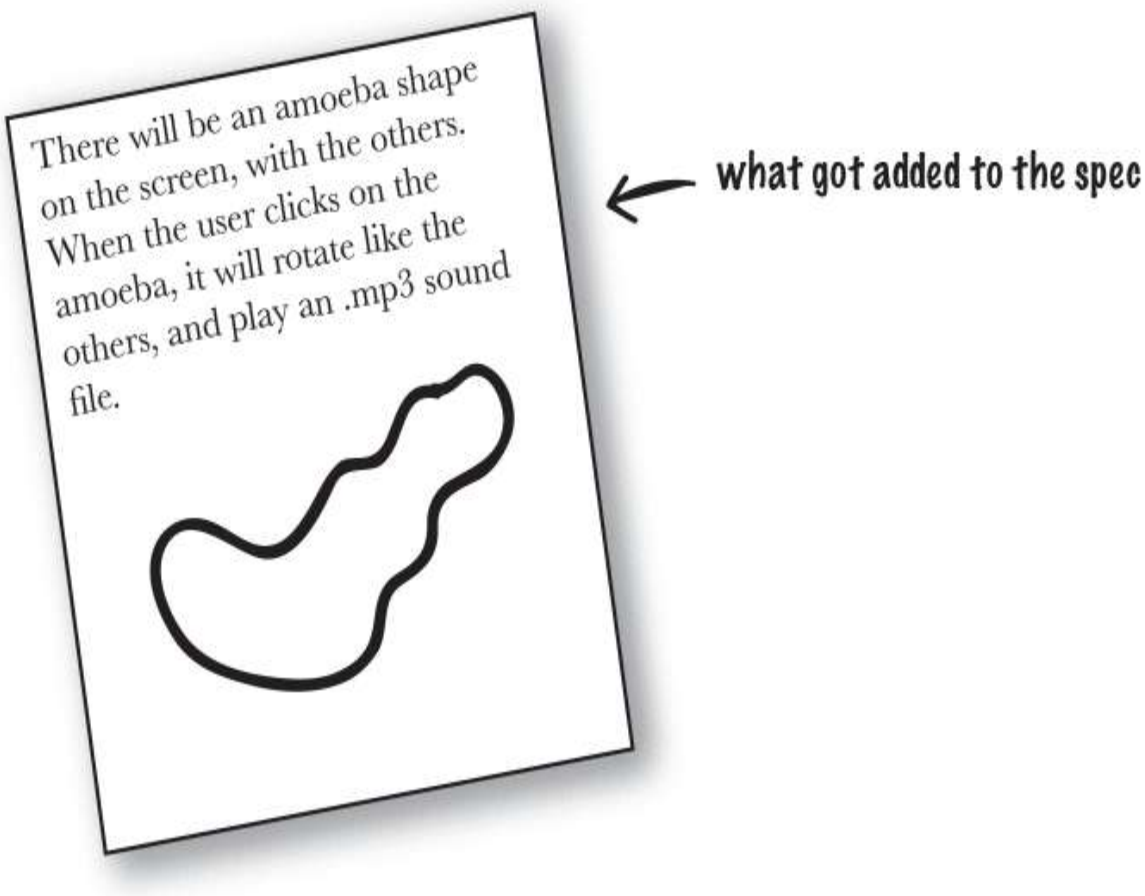

Back at Laura's desk

The rotate procedure would still work; the code used a lookup table to match a shapeNum to an actual shape graphic. But ***playSound would have to change.***

```
playSound(shapeNum) {
  // if the shape is not an amoeba,
    // use shapeNum to lookup which
    // AIF sound to play, and play it
  // else
    // play amoeba .mp3 sound
}
```

It turned out not to be such a big deal, but ***it still made her queasy to touch previously tested code***. Of *all* people, *she* should know that no matter what

the project manager says, ***the spec always changes***.

At Brad's laptop at the beach

Brad smiled, sipped his fruit frappe, and *wrote one new class*. Sometimes the thing he loved most about OO was that he didn't have to touch code he'd already tested and delivered. "Flexibility, extensibility, ..." he mused, reflecting on the benefits of OO.

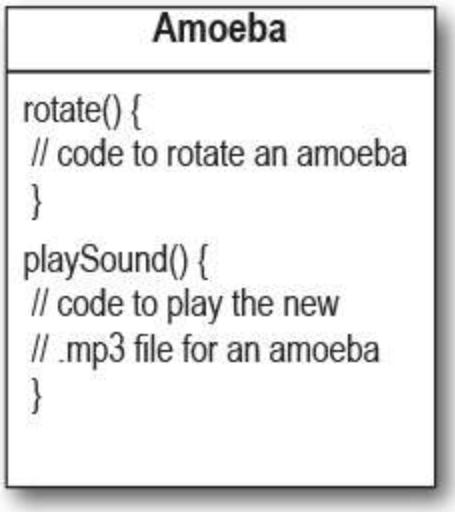

Laura delivered just moments ahead of Brad

(Hah! So much for that foofy OO nonsense.) But the smirk on Laura's face melted when the Really Annoying Project Manager said (with that tone of disappointment), "Oh, no, *that's* not how the amoeba is supposed to rotate..."

Turns out, both programmers had written their rotate code like this:

1. determine the rectangle that surrounds the shape.

2. calculate the center of that rectangle, and rotate the shape around that point.

But the amoeba shape was supposed to rotate around a point on one *end*, like a clock hand.

"I'm toast," thought Laura, visualizing charred Wonderbread™. "Although, hmmmm. I could just add another if/else to the rotate procedure and then just hard-code the rotation point code for the amoeba. That probably won't break anything." But the little voice at the back of her head said, *"Big Mistake. Do you honestly think the spec won't change again?"*

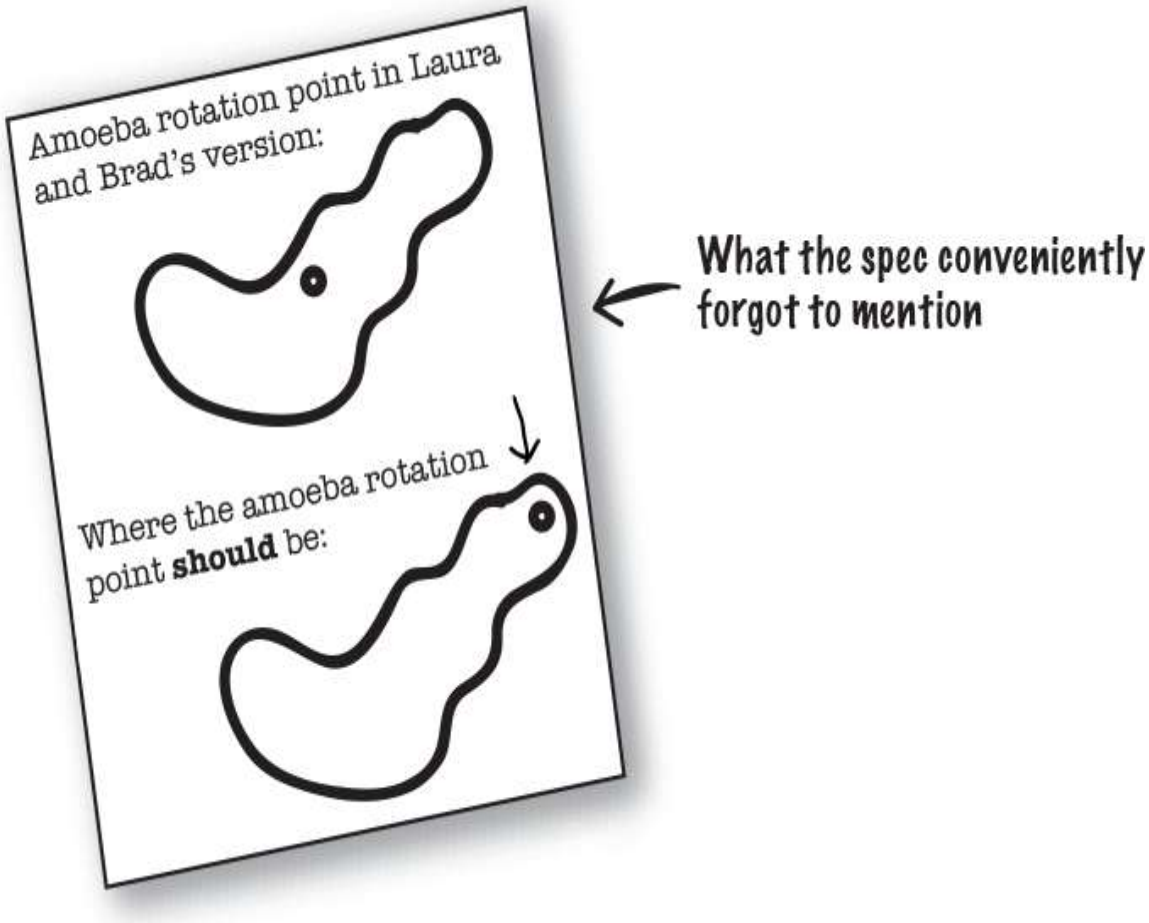

Back at Laura's desk

She figured she better add rotation point arguments to the rotate procedure. ***A lot of code was affected***. Testing, recompiling, the whole nine yards all over again. Things that used to work, didn't.

```
rotate(shapeNum, xPt, yPt) {
  // if the shape is not an amoeba,
    // calculate the center point
    // based on a rectangle,
    // then rotate
  // else
    // use the xPt and yPt as
    // the rotation point offset
    // and then rotate
}
```

At Brad's laptop on his lawn chair at the Telluride Bluegrass Festival

Without missing a beat, Brad modified the rotate **method**, but only in the Amoeba class. ***He never touched the tested, working, compiled code*** for the other parts of the program. To give the Amoeba a rotation point, he added an **attribute** that all Amoebas would have. He modified, tested, and delivered (via free festival WiFi) the revised program during a single Bela Fleck set.

Amoeba

```
int xPoint
int yPoint
rotate() {
  // code to rotate an amoeba
  // using amoeba's x and y
  }
playSound() {
  // code to play the new
  // .mp3 file for an amoeba
  }
```

So, Brad the OO guy got the chair and desk, right?

What Laura really wanted

(figured the chair was a step closer to that promotion and the big bucks)

Not so fast. Laura found a flaw in Brad's approach. And, since she was sure that if she got the chair and desk, she'd also be next in line for a promotion, she had to turn this thing around.

LAURA: You've got duplicated code! The rotate procedure is in all four Shape things.

BRAD: It's a ***method***, not a *procedure*. And they're ***classes***, not *things*.

LAURA: Whatever. It's a stupid design. You have to maintain *four* different rotate "methods." How can that ever be good?

BRAD: Oh, I guess you didn't see the final design. Let me show you how OO **inheritance** works, Laura.

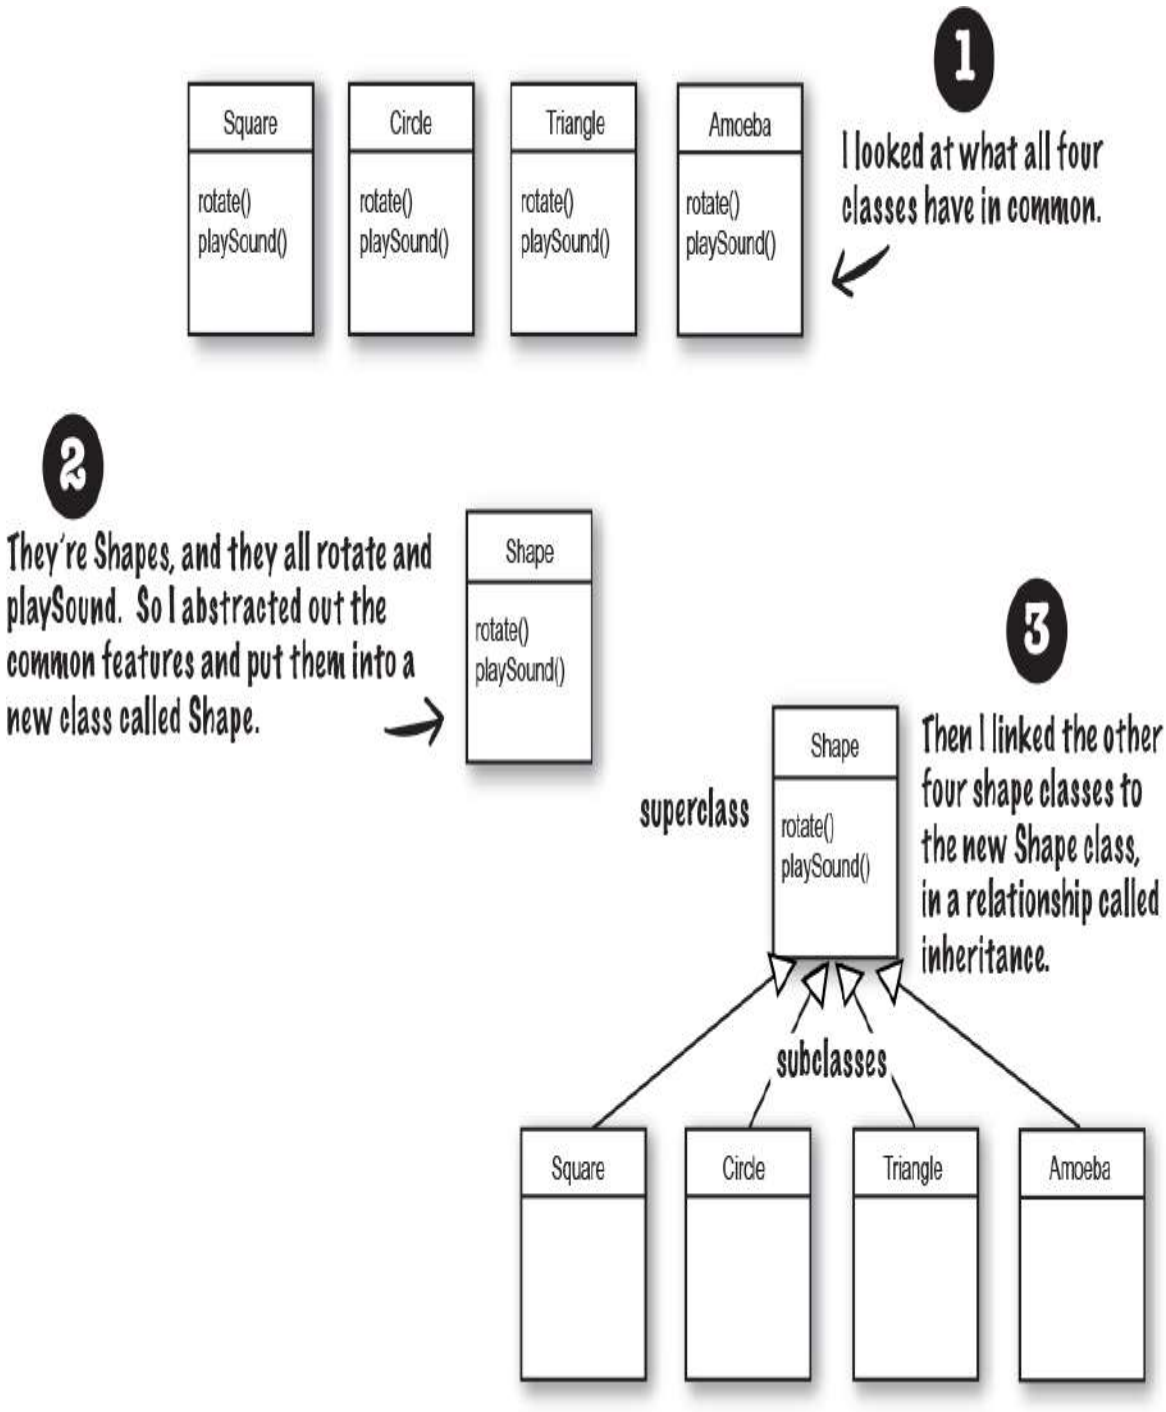

You can read this as, **"Square inherits from Shape," "Circle inherits from Shape**," and so on. I removed rotate() and playSound() from the other shapes, so now there's only one copy to maintain.

The Shape class is called the **superclass** of the other four classes. The other four are the **subclasses** of Shape. The subclasses inherit the methods of the superclass. In other words, *if the Shape class has the functionality, then the subclasses automatically get that same functionality.*

What about the Amoeba rotate()?

LAURA: Wasn't that the whole problem here—that the amoeba shape had a completely different rotate and playSound procedure?

BRAD: Method.

LAURA: Whatever. How can Amoeba do something different if it "inherits" its functionality from the Shape class?

BRAD: That's the last step. The Amoeba class **overrides** the methods of the Shape class. Then at runtime, the JVM knows exactly which rotate() method to run when someone tells the Amoeba to rotate.

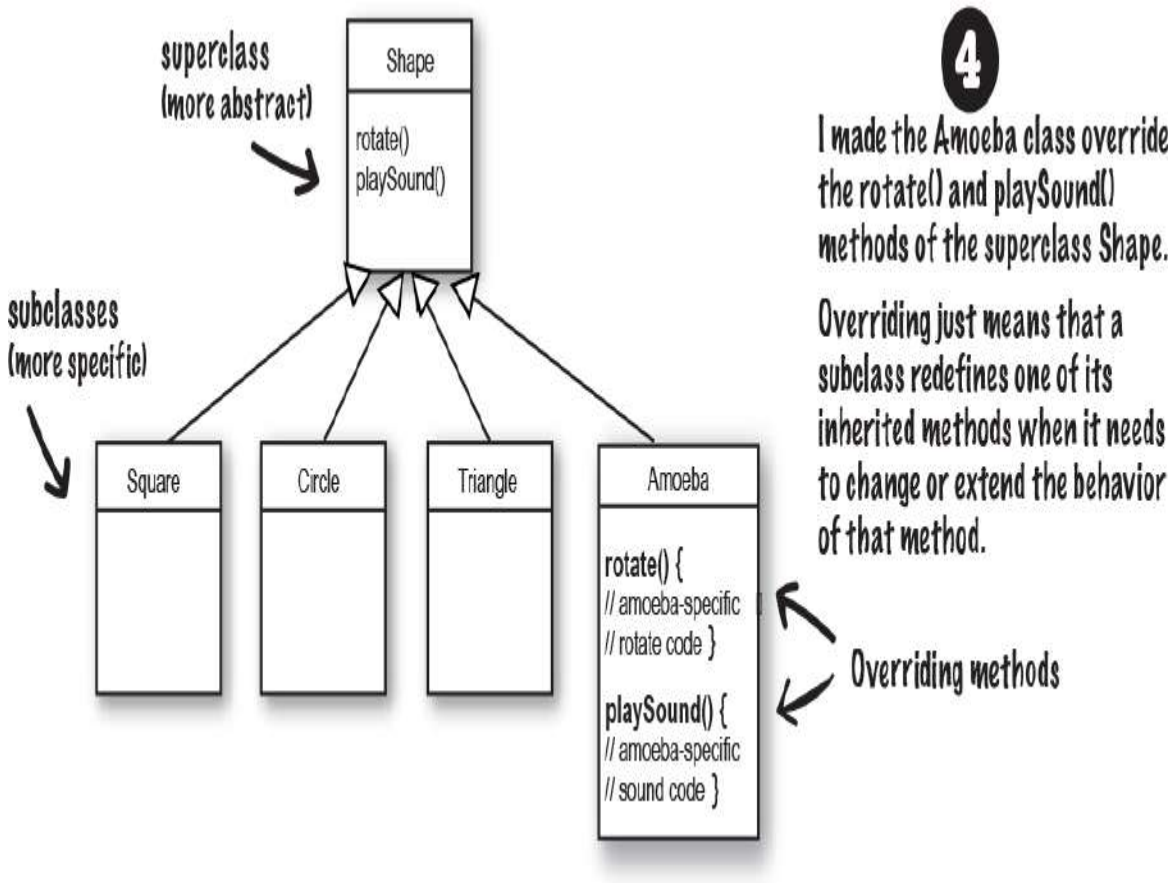

LAURA: How do you "tell" an Amoeba to do something? Don't you have to call the procedure, sorry—*method*, and then tell it *which* thing to rotate?

BRAD: That's the really cool thing about OO. When it's time for, say, the triangle to rotate, the program code invokes (calls) the rotate() method *on the triangle object*. The rest of the program really doesn't know or care *how* the triangle does it. And when you need to add something new to the program, you just write a new class for the new object type, so the **new objects will have their own behavior.**

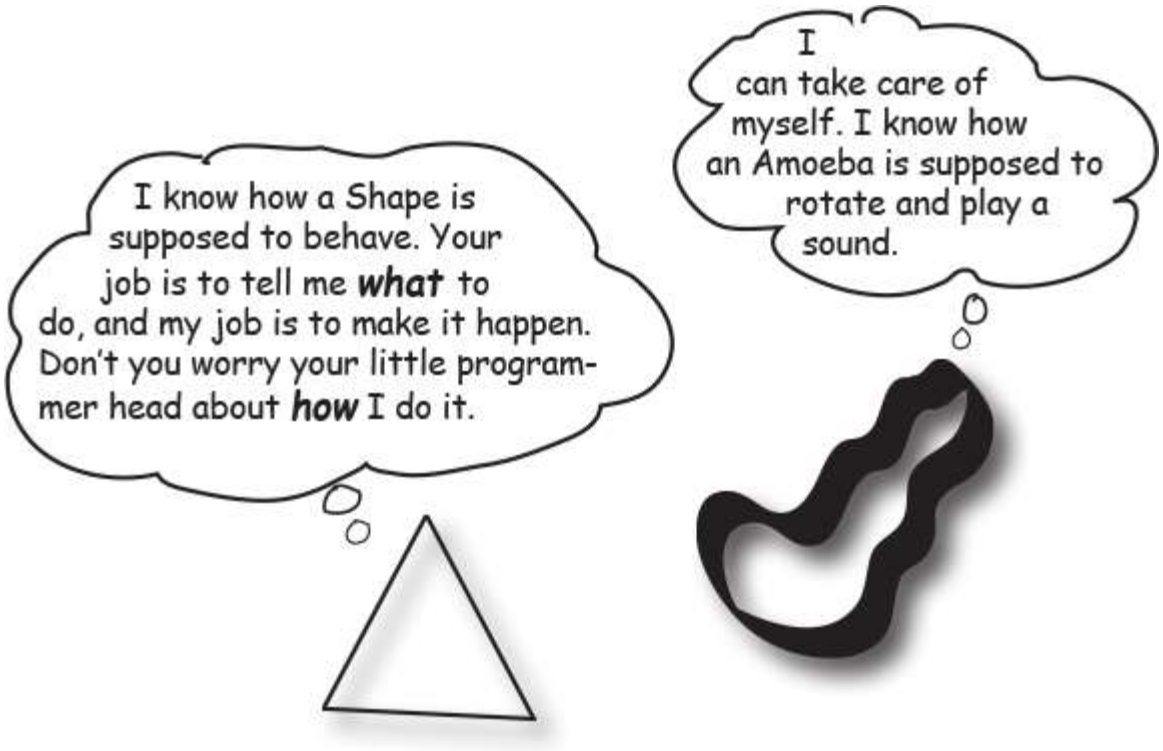

The suspense is killing me. Who got the chair and desk?

Amy from the second floor.

(Unbeknownst to all, the Project Manager had given the spec to *three* programmers. Amy completed the project faster since she got on with OO programming without arguing with her co-workers).

WHAT DO YOU LIKE ABOUT OO?

“It helps me design in a more natural way. Things have a way of evolving.”

-Joy, 27, software architect

“Not messing around with code I’ve already tested, just to add a new feature.”

-Brad, 32, programmer

“I like that the data and the methods that operate on that data are together in one class.”

-Jess, 22, foosball champion

“Reusing code in other applications. When I write a new class, I can make it flexible enough to be used in something new, later.”

-Chris, 39, project manager

“I can’t believe Chris, who hasn’t written a line of code in 5 years, just said that.”

-Daryl, 44, works for Chris

“Besides the chair?”

-Amy, 34, programmer

BRAIN POWER



Time to pump some neurons.

You just read a story about a procedural programmer going head-to-head with an OO programmer. You got a quick overview of some key OO concepts including classes, methods, and attributes. We'll spend the rest of the chapter looking at classes and objects (we'll return to inheritance and overriding in later chapters).

Based on what you've seen so far (and what you may know from a previous OO language you've worked with), take a moment to think about these questions:

What are the fundamental things you need to think about when you design a Java class? What are the questions you need to ask yourself? If you could design a checklist to use when you're designing a class, what would be on the checklist?

METACOGNITIVE TIP

If you're stuck on an exercise, try talking about it out loud. Speaking (and hearing) activates a different part of your brain. Although it works best if you have another person to discuss it with, pets work too. That's how our dog learned polymorphism.

When you design a class, think about the objects that will be created from that class type. Think about:

- things the object knows
- things the object does

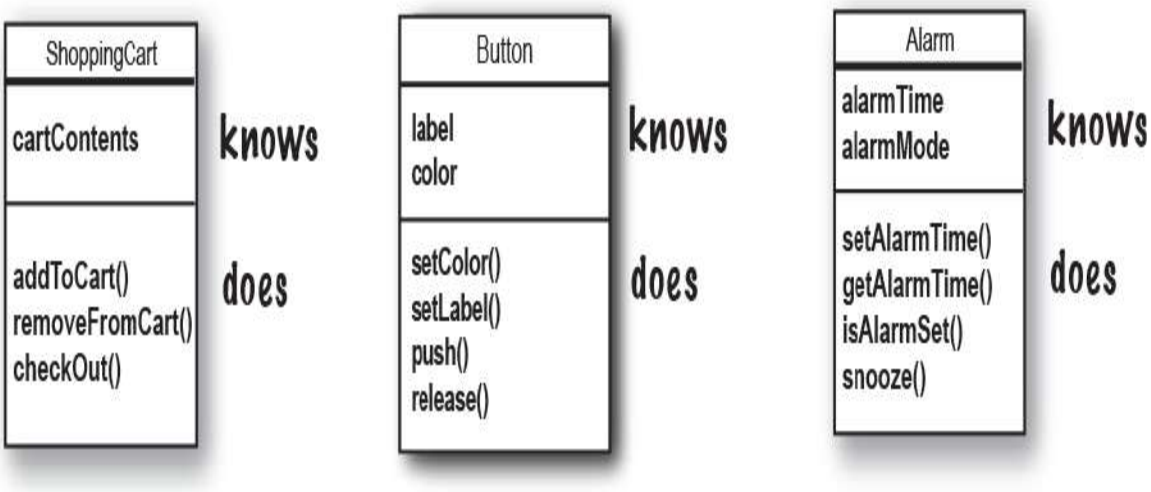

Things an object *knows* about itself are called

- instance variables

Things an object can do are called

- methods

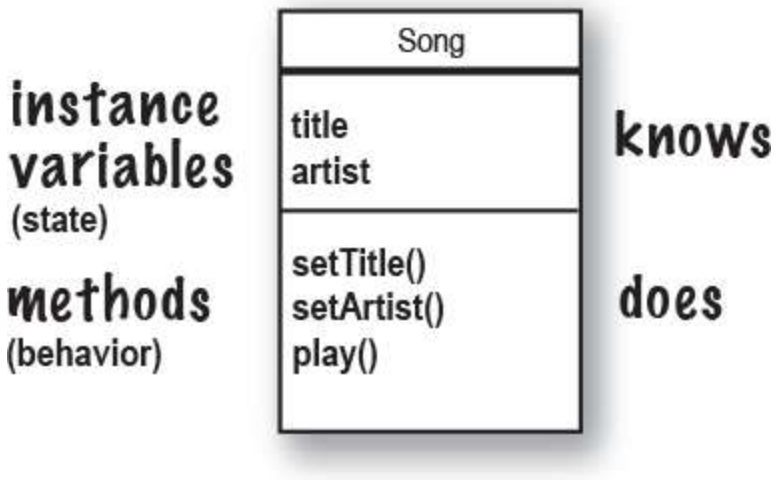

Things an object ***knows*** about itself are called **instance variables.** They represent an object's state (the data) and can have unique values for each object of that type.

Think of instance as another way of saying object.

Things an object can ***do*** are called **methods**. When you design a class, you think about the data an object will need to know about itself, and you also design the methods that operate on that data. It's common for an object to have methods that read or write the values of the instance variables. For example, Alarm objects have an instance variable to hold the alarmTime, and two methods for getting and setting the alarmTime.

So objects have instance variables and methods, but those instance variables and methods are designed as part of the class.

SHARPEN YOUR PENCIL

Fill in what a television object might need to know and do.

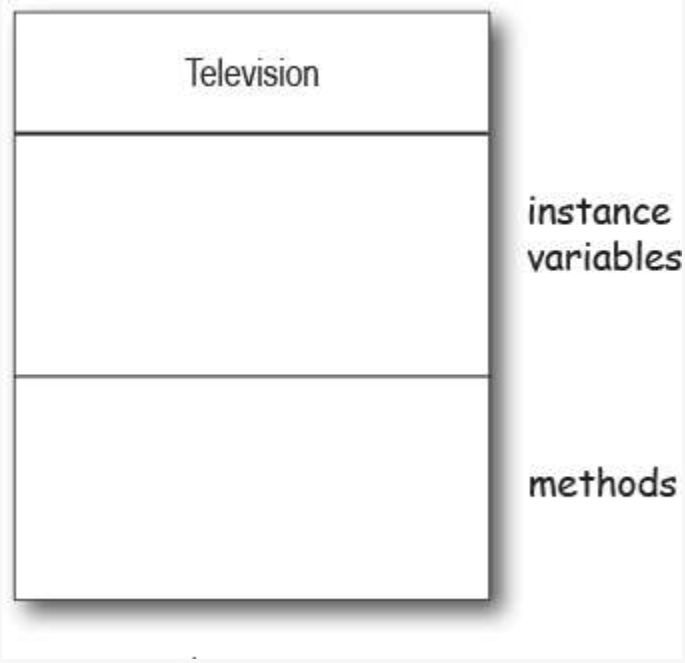

Yours to solve.

What's the difference between a class and an object?

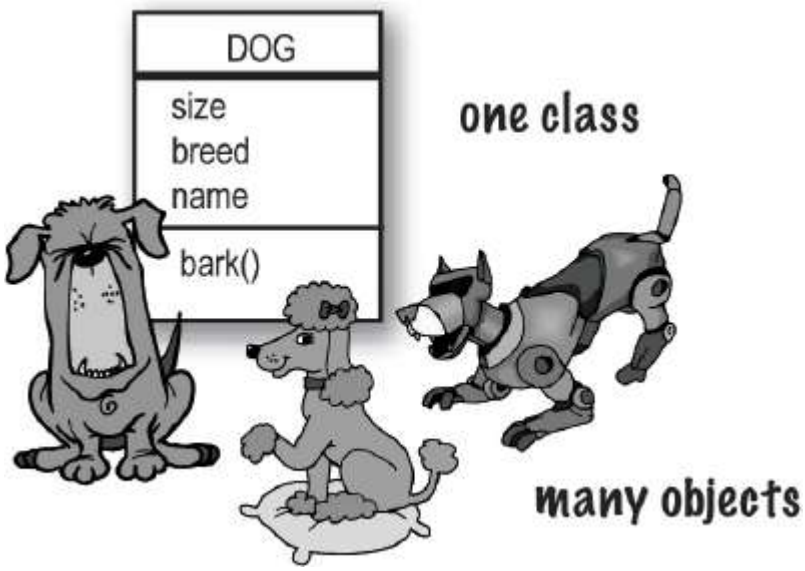

A class is not an object (but it's used to construct them)

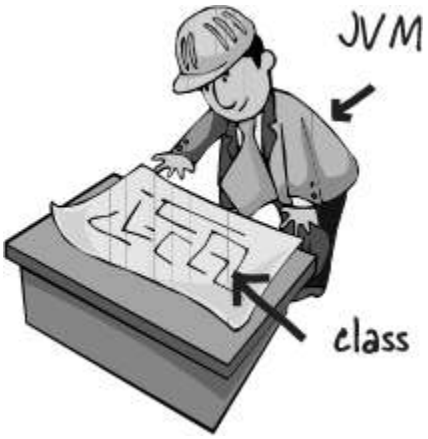

A class is a *blueprint* for an object. It tells the virtual machine *how* to make an object of that particular type. Each object made from that class can have its own values for the instance variables of that class. For example, you might use the Button class to make dozens of different buttons, and each

button might have its own color, size, shape, label, and so on. Each one of these different buttons would be a button *object*.

LOOK AT IT THIS WAY...

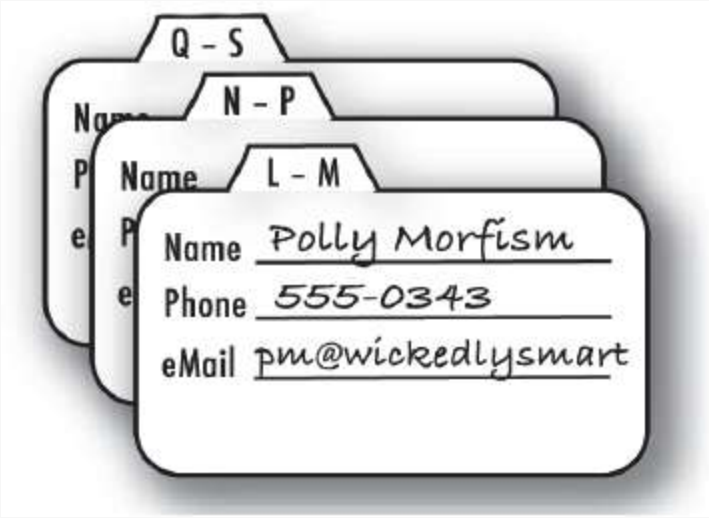

An object is like one entry in your contacts list.

One analogy for classes and objects is your phone's contact list. Each contact has the same blank fields (the instance variables). When you create a new contact, you are creating an instance (object), and the entries you make for that contact represent its state.

The methods of the class are the things you do to a particular contact; getName( ), changeName( ), setName( ) could all be methods for class Contact.

So, each contact can do the same things (getName( ), changeName( ), etc.), but each individual contact *knows* things unique to that particular contact.

Making your first object

So what does it take to create and use an object? You need *two* classes. One class for the type of object you want to use (Dog, AlarmClock, Television,

etc.) and another class to *test* your new class. The *tester* class is where you put the main method, and in that main() method you create and access objects of your new class type. The tester class has only one job: to *try out* the methods and variables of your new object.

From this point forward in the book, you'll see two classes in many of our examples. One will be the *real* class—the class whose objects we really want to use, and the other class will be the *tester* class, which we call *<WhateverYourClassNameIs>* **`TestDrive`**. For example, if we make a **`Bungee`** class, we'll need a **`BungeeTestDrive`** class as well. Only the *<SomeClassName>***`TestDrive`** class will have a main() method, and its sole purpose is to create objects of your new class (the not-the-tester class), and then use the dot operator (.) to access the methods and variables of the new objects. This will all be made stunningly clear by the following examples. No, *really.*

1 Write your class

```
class Dog {
  int size;
  String breed;
  String name;

  void bark() {
    System.out.println("Ruff! Ruff!");
  }
}
```

Instance variables

A method

2 Write a tester (TestDrive) class

```
class DogTestDrive {
  public static void main(String[] args) {
    // Dog test code goes  here
  }
}
```

Just a main method (we're gonna put code in it in the next step)

3 In your tester, make an object and access the object's variables and methods

```
class DogTestDrive {
  public static void main(String[] args) {
    Dog d = new Dog();
    d.size = 40;
    d.bark();
  }
}
```

Make a Dog object

Use the dot operator (.) to set the size of the Dog

and to call its bark() method

Dot operator

The Dot Operator (.)

The dot operator (.) gives you access to an object's state and behavior (instance variables and methods).

```
// make a new object
Dog d = new Dog();
// tell it to bark by using the
// dot operator on the
// variable d to call bark()
d.bark();
// set its size using the
// dot operator
d.size = 40;
```

If you already have some OO savvy, you'll know we're not using encapsulation. We'll get there in Chapter 4, How Objects Behave.

Making and testing Movie objects

```
class Movie {
  String title;
  String genre;
  int rating;

  void playIt() {
    System.out.println("Playing the movie");
  }
}

public class MovieTestDrive {
  public static void main(String[] args) {
    Movie one = new Movie();
    one.title = "Gone with the Stock";
    one.genre = "Tragic";
    one.rating = -2;
    Movie two = new Movie();
```

```
    two.title = "Lost in Cubicle Space";
    two.genre = "Comedy";
    two.rating = 5;
    two.playIt();
    Movie three = new Movie();
    three.title = "Byte Club";
    three.genre = "Tragic but ultimately uplifting";
    three.rating = 127;
  }
}
```

SHARPEN YOUR PENCIL

The MovieTestDrive class creates objects (instances) of the Movie class and uses the dot operator (.) to set the instance variables to a specific value. The MovieTest-Drive class also invokes (calls) a method on one of the objects. Fill in the chart to the right with the values the three objects have at the end of main().

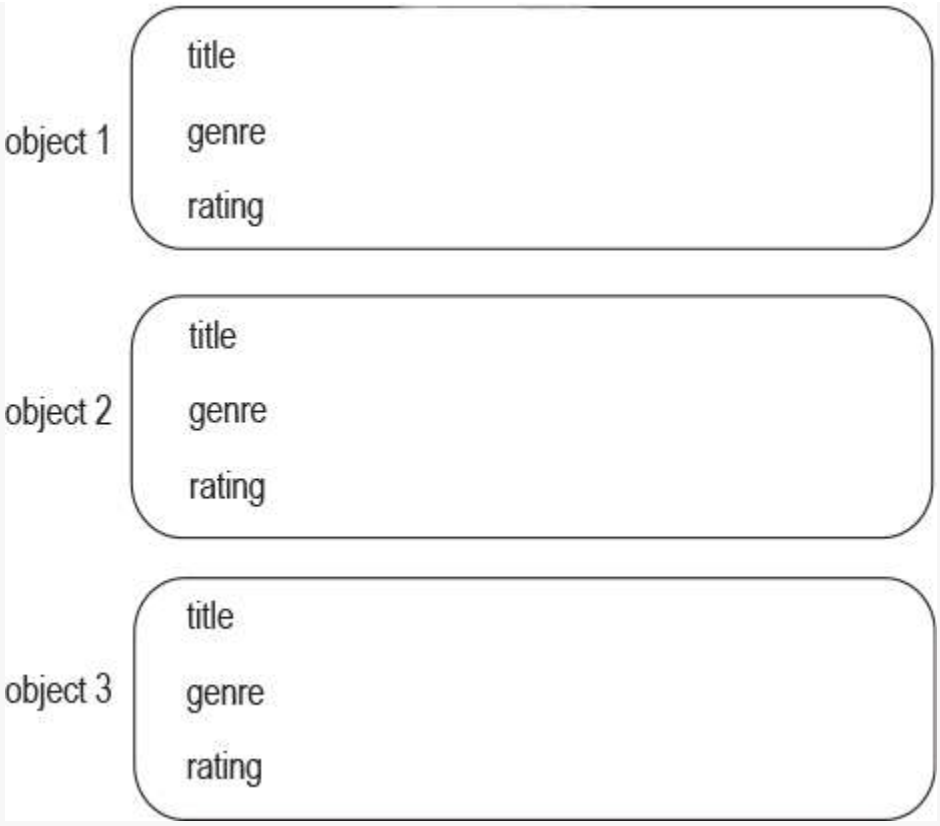

→ **Yours to solve.**

Quick! Get out of main!

As long as you're in main(), you're not really in Objectville. It's fine for a test program to run within the main method, but in a true OO application, you need objects talking to other objects, as opposed to a static main() method creating and testing objects.

The two uses of main:

- to **test** your real class
- to **launch/start** your **Java application**

A real Java application is nothing but objects talking to other objects. In this case, *talking* means objects calling methods on one another. On the previous

page, and in Chapter 4, *How Objects Behave*, we look at using a main() method from a separate TestDrive class to create and test the methods and variables of another class. In Chapter 6, *Using the Java Library*, we look at using a class with a main() method to start the ball rolling on a *real* Java application (by making objects and then turning those objects loose to interact with other objects, etc.)

As a "sneak preview," though, of how a real Java application might behave, here's a little example. Because we're still at the earliest stages of learning Java, we're working with a small toolkit, so you'll find this program a little clunky and inefficient. You might want to think about what you could do to improve it, and in later chapters that's exactly what we'll do. Don't worry if some of the code is confusing; the key point of this example is that objects talk to objects.

The Guessing Game

Summary:

The Guessing Game involves a game object and three player objects. The game generates a random number between 0 and 9, and the three player objects try to guess it. (We didn't say it was a really *exciting* game.)

Classes:

```
GuessGame.class   Player.class   GameLauncher.class
```

The Logic:

1. The GameLauncher class is where the application starts; it has the main() method.

2. In the main() method, a GuessGame object is created, and its startGame() method is called.

3. The GuessGame object's startGame() method is where the entire game plays out. It creates three players and then "thinks" of a random number (the target for the players to guess). It then asks each player to guess, checks the

result, and either prints out information about the winning player(s) or asks them to guess again.

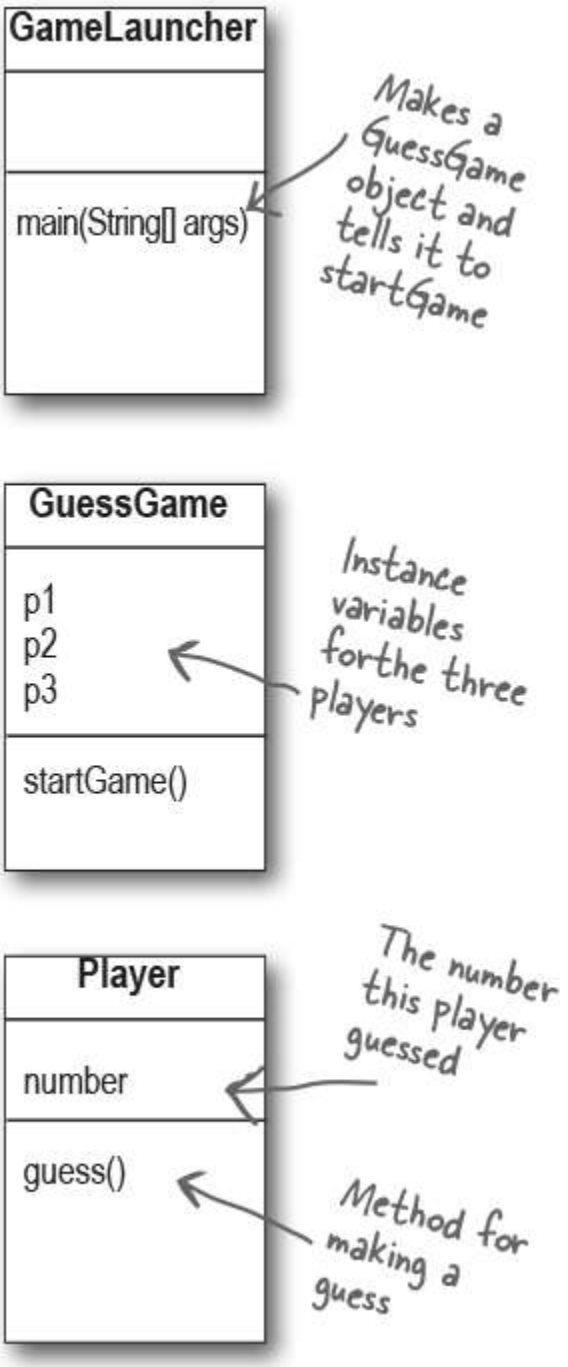

```
public class GuessGame {
  Player p1;
  Player p2;
  Player p3;

  public void startGame() {
    p1 = new Player();
    p2 = new Player();
    p3 = new Player();

    int guessp1 = 0;
    int guessp2 = 0;
    int guessp3 = 0;

    boolean p1isRight = false;
    boolean p2isRight = false;
    boolean p3isRight = false;

    int targetNumber = (int) (Math.random() * 10);
    System.out.println("I'm thinking of a number between 0 and 9...");

    while (true) {
      System.out.println("Number to guess is " + targetNumber);

      p1.guess();
      p2.guess();
      p3.guess();

      guessp1 = p1.number;
      System.out.println("Player one guessed " + guessp1);

      guessp2 = p2.number;
      System.out.println("Player two guessed " + guessp2);

      guessp3 = p3.number;
      System.out.println("Player three guessed " + guessp3);

      if (guessp1 == targetNumber) {
        p1isRight = true;
      }
      if (guessp2 == targetNumber) {
        p2isRight = true;
      }
      if (guessp3 == targetNumber) {
        p3isRight = true;
      }

      if (p1isRight || p2isRight || p3isRight) {

        System.out.println("We have a winner!");
        System.out.println("Player one got it right? " + p1isRight);
        System.out.println("Player two got it right? " + p2isRight);
        System.out.println("Player three got it right? " + p3isRight);
        System.out.println("Game is over.");
        break; // game over, so break out of the loop
      } else {
        // we must keep going because nobody got it right!
        System.out.println("Players will have to try again.");
      } // end if/else
    } // end loop
  } // end method
} // end class
```

GuessGame has three instance variables for the three Player objects.

Create three Player objects and assign them to the three Player instance variables.

Declare three variables to hold the three guesses the Players make.

Declare three variables to hold a true or false based on the player's answer.

Make a 'target' number that the players have to guess.

Call each player's guess() method.

Get each player's guess (the result of their guess() method running) by accessing the number variable of each player.

Check each player's guess to see if it matches the target number. If a player is right, then set that player's variable to be true (remember, we set it false by default).

If player one OR player two OR player three is right (the || operator means OR).

Otherwise, stay in the loop and ask the players for another guess.

Running the Guessing Game

JAVA TAKES OUT THE GARBAGE

Each time an object is created in Java, it goes into an area of memory known as **The Heap**. All objects—no matter when, where, or how they're created—live on the heap. But it's not just any old memory heap; the Java heap is actually called the **Garbage-Collectible Heap**. When you create an object, Java allocates memory space on the heap according to how much that particular object needs. An object with, say, 15 instance variables, will probably need more space than an object with only two instance variables. But what happens when you need to reclaim that space? How do you get an object out of the heap when you're done with it? Java manages that memory for you! When the JVM can "see" that an object can never be used again, that object becomes *eligible for garbage collection.* And if you're running low on memory, the Garbage Collector will run, throw out the unreachable objects, and free up the space so that the space can be reused. In later chapters you'll learn more about how this works.

Output (it will be different each time you run it)

```
File  Edit  Window  Help  Explode
%java GameLauncher
I'm thinking of a number between 0 and 9...
Number to guess is 7
I'm guessing 1
I'm guessing 9
I'm guessing 9
Player one guessed 1
Player two guessed 9
Player three guessed 9
Players will have to try again.
Number to guess is 7
I'm guessing 3
I'm guessing 0
I'm guessing 9
Player one guessed 3
Player two guessed 0
Player three guessed 9
Players will have to try again.
Number to guess is 7
I'm guessing 7
I'm guessing 5
I'm guessing 0
Player one guessed 7
Player two guessed 5
Player three guessed 0
We have a winner!
Player one got it right? true
Player two got it right? false
Player three got it right? false
Game is over.
```

THERE ARE NO DUMB QUESTIONS

Q: What if I need global variables and methods? How do I do that if everything has to go in a class?

A: There isn't a concept of "global" variables and methods in a Java OO program. In practical use, however, there are times when you want a method (or a constant) to be available to any code running in any part of your program. Think of the `random()` method in the Phrase-O-Matic app; it's a method that should be callable from anywhere. Or what about a constant like *pi*? You'll learn in Chapter 10 that marking a method as `public` and `static` makes it behave much like a "global." Any code, in any class of your application, can access a public static method. And if you mark a variable as `public`, `static`, and `final`, you have essentially made a globally available *constant*.

Q: Then how is this object-oriented if you can still make global functions and global data?

A: First of all, everything in Java goes in a class. So the constant for *pi* and the method for `random()`, although both public and static, are defined within the `Math` class. And you must keep in mind that these static (global-like) things are the exception rather than the rule in Java. They represent a very special case, where you don't have multiple instances/objects.

Q: What *is* a Java program? What do you actually *deliver?*

A: A Java program is a pile of classes (or at least *one* class). In a Java application, *one* of the classes must have a main method, used to start up the program. So as a programmer, you write one or more classes. And those classes are what you deliver. If the end user doesn't have a JVM, then you'll also need to include that with your application's classes so that they can run your program. There are a number of programs that let you bundle your classes with a JVM and create a folder or file you can share however you want (e.g., via the internet). Then the end user can

install the correct version of the JVM (assuming they don't already have it on their machine).

Q: What if I have a hundred classes? Or a thousand? Isn't that a big pain to deliver all those individual files? Can I bundle them into one *Application Thing?*

A: Yes, it would be a big pain to deliver a huge bunch of individual files to your end users, but you won't have to. You can put all of your application files into a **J**ava **AR**chive—*a.**jar** file*—that's based on the pkzip format. In the jar file, you can include a simple text file formatted as something called a `manifest`, that defines which class in that jar holds the `main()` method that should run.

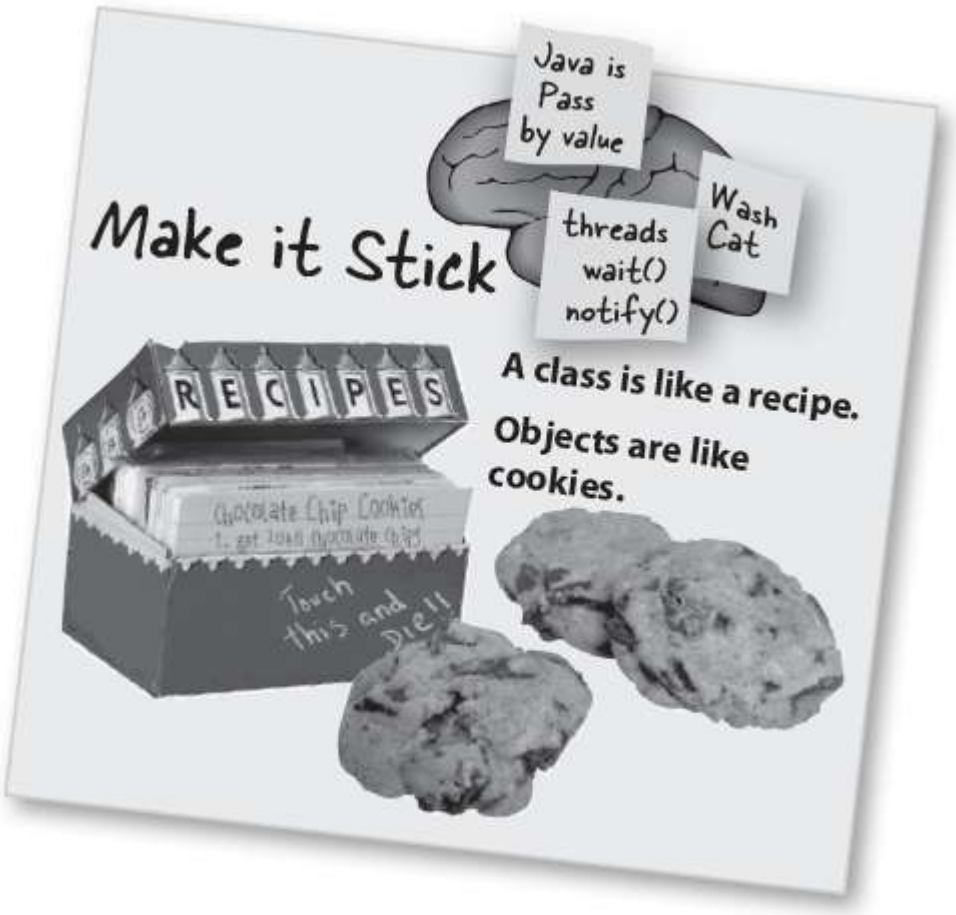

BULLET POINTS

- Object-oriented programming lets you extend a program without having to touch previously tested, working code.
- All Java code is defined in a **class**.
- A class describes how to make an object of that class type. **A class is like a blueprint.**
- An object can take care of itself; you don't have to know or care *how* the object does it.
- An object **knows** things and **does** things.
- Things an object knows about itself are called **instance variables**. They represent the *state* of an object.
- Things an object does are called **methods**. They represent the *behavior* of an object.
- When you create a class, you may also want to create a separate test class that you'll use to create objects of your new class type.
- A class can **inherit** instance variables and methods from a more abstract **superclass**.
- At runtime, a Java program is nothing more than objects "talking" to other objects.

Exercise

BE the Compiler

Each of the Java files on this page represents a complete source file. Your job is to play compiler and determine whether each of these files will compile. If they won't compile, how would you fix them, and if they do compile, what would be their output?

A

```
class StreamingSong {

  String title;
  String artist;
  int duration;

  void play() {
    System.out.println("Playing song");
  }

  void printDetails() {
    System.out.println("This is " + title +
                       " by " + artist);
  }
}

class StreamingSongTestDrive {
  public static void main(String[] args) {

    song.artist = "The Beatles";
    song.title = "Come Together";
```

```
    song.play();
    song.printDetails();
  }
}
```

B

```
class Episode {

  int seriesNumber;
  int episodeNumber;

  void skipIntro() {
    System.out.println("Skipping intro...");
  }

  void skipToNext() {
    System.out.println("Loading next episode...");
  }
}

class EpisodeTestDrive {
  public static void main(String[] args) {

    Episode episode = new Episode();
    episode.seriesNumber = 4;
    episode.play();
    episode.skipIntro();
  }
}
```

→ **Answers in "BE the Compiler".**

Code Magnets

A Java program is all scrambled up on the fridge. Can you reconstruct the code snippets to make a working Java program that produces the output listed below? Some of the curly braces fell on the floor and they were too small to pick up, so feel free to add as many of those as you need.

→ **Answers in "Code Magnets".**

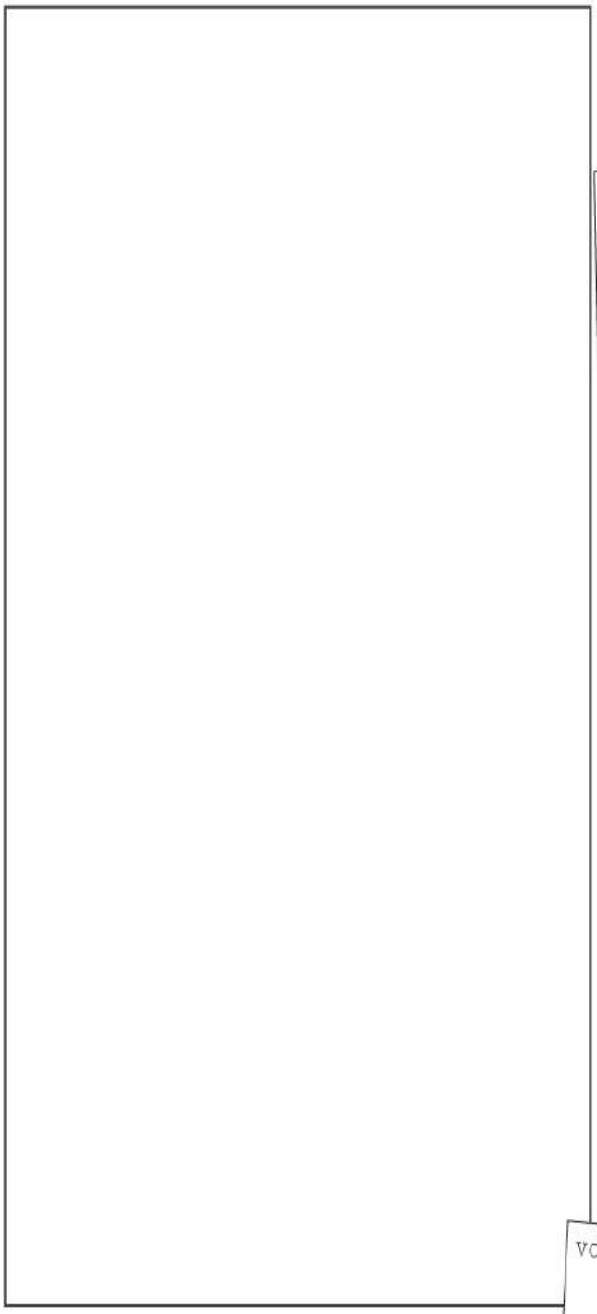

```
d.playSnare();
```

```
DrumKit d = new DrumKit();
```

```
boolean topHat = true;
boolean snare = true;
```

```
void playSnare() {
  System.out.println("bang bang ba-bang");
}
```

```
public static void main(String [] args) {
```

```
if (d.snare == true) {
  d.playSnare();
}
```

```
d.snare = false;
```

```
class DrumKitTestDrive {
```

```
d.playTopHat();
```

```
class DrumKit {
```

```
void playTopHat () {
  System.out.println("ding ding da-ding");
}
```

```
File Edit Window Help Dance
% java DrumKitTestDrive
bang bang ba-bang
ding ding da-ding
```

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You **may** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make classes that will compile and run and produce the output listed below. Some of the exercises and puzzles in this book might have more than one correct answer. If you find another correct answer, give yourself bonus points!

Output

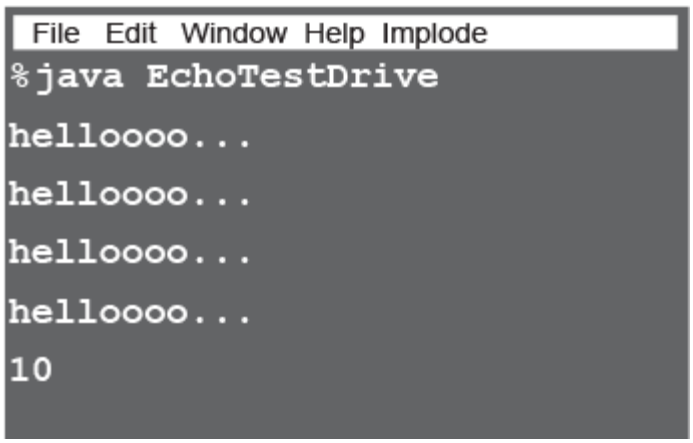

Bonus Question !

If the last line of output was **24** instead of **10**, how would you complete the puzzle?

```
public class EchoTestDrive {
  public static void main(String []
args) {
    Echo e1 = new Echo();

    _____________________________
    int x = 0;
    while ( ____________ ) {
      e1.hello();

      _____________________________
      if ( _____________ ) {
        e2.count = e2.count + 1;
      }
      if ( _____________ ) {
        e2.count = e2.count + e1.count;
      }
      x = x + 1;
    }
    System.out.println(e2.count);
  }
}
```

```
class _____________ {
  int __________ = 0;
  void ____________ {
    System.out.println("helloooo... ");
  }
}
```

NOTE

Note: Each snippet from the pool can be used more than once!

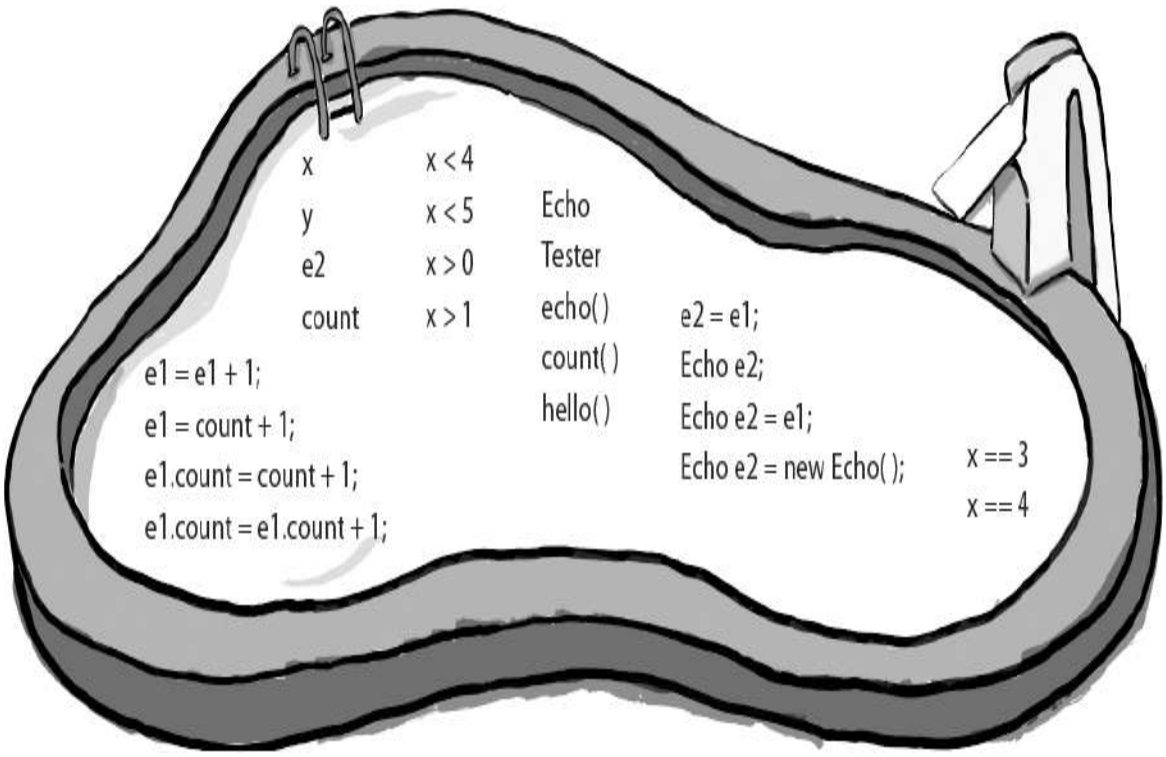

→ **Answers in "Puzzle Solutions".**

Who Am I?

A bunch of Java components, in full costume, are playing a party game, "Who am I?" They give you a clue, and you try to guess who they are, based on what they say. Assume they always tell the truth about themselves. If they happen to say something that could be true for more than one of them, choose all for whom that sentence can apply. Fill in the blanks next to the sentence with the names of one or more attendees. The first one's on us.

Tonight's attendees:

Class Method Object Instance variable

I am compiled from a .java file.	**class**
My instance variable values can be different from my buddy's values.	_____
I behave like a template.	_____
I like to do stuff.	_____
I can have many methods.	_____
I represent "state."	_____
I have behaviors.	_____
I am located in objects.	_____
I live on the heap.	_____
I am used to create object instances.	_____
My state can change.	_____
I declare methods.	_____
I can change at runtime.	_____

→ **Answers in "Who Am I?".**

Exercise Solutions

Code Magnets

(from "Code Magnets")

```
class DrumKit {
  boolean topHat = true;
  boolean snare = true;

  void playTopHat() {
    System.out.println("ding ding da-ding");
  }

  void playSnare() {
    System.out.println("bang bang ba-bang");
  }
}

class DrumKitTestDrive {
  public static void main(String[] args) {
    DrumKit d = new DrumKit();
    d.playSnare();
    d.snare = false;
    d.playTopHat();
    if (d.snare == true) {
      d.playSnare();
    }
  }
}
```

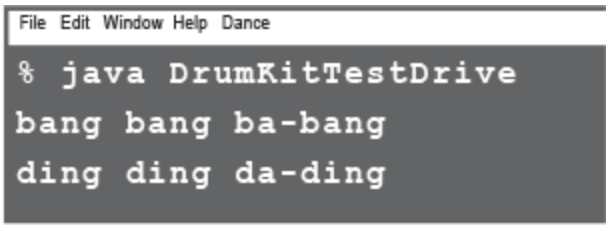

BE the Compiler

(from "BE the Compiler")

A

```
class StreamingSong {
  String title;
  String artist;
  int duration;

  void play() {
    System.out.println("Playing song");
  }

  void printDetails() {
    System.out.println("This is " + title +
                       " by " + artist);
  }
}

class StreamingSongTestDrive {
  public static void main(String[] args) {

    StreamingSong song = new StreamingSong();
    song.artist = "The Beatles";
    song.title = "Come Together";
    song.play();
    song.printDetails();
  }
}
```

We've got the template, now we have to make an object!

B

```
class Episode {
  int seriesNumber;
  int episodeNumber;

  void play() {
    System.out.println("Playing episode " + episodeNumber);
  }

  void skipIntro() {
    System.out.println("Skipping intro...");
  }

  void skipToNext() {
    System.out.println("Loading next episode...");
  }
}

class EpisodeTestDrive {
  public static void main(String[] args) {
    Episode episode = new Episode();
    episode.seriesNumber = 4;
    episode.play();
    episode.skipIntro();
  }
}
```

The line: episode.play(); wouldn't compile without a play method in the episode class!

Puzzle Solutions

Pool Puzzle

(from "Pool Puzzle")

```
public class EchoTestDrive {
  public static void main(String[]
```

```
args) {
    Echo  e1 = new Echo();
    Echo e2 = new Echo(); // correct answer
      - or -
    Echo e2 = e1;  // bonus "24" answer
    int x = 0;
    while (x < 4) {
      e1.hello();
      e1.count = e1.count + 1;
      if (x == 3) {
        e2.count = e2.count + 1;
      }
      if (x > 0) {
        e2.count = e2.count + e1.count;
      }
      x = x + 1;
    }
    System.out.println(e2.count);
  }
}
----------------------------------------
class Echo {
  int count = 0;

  void hello() {
    System.out.println("helloooo... ");
  }
}
```

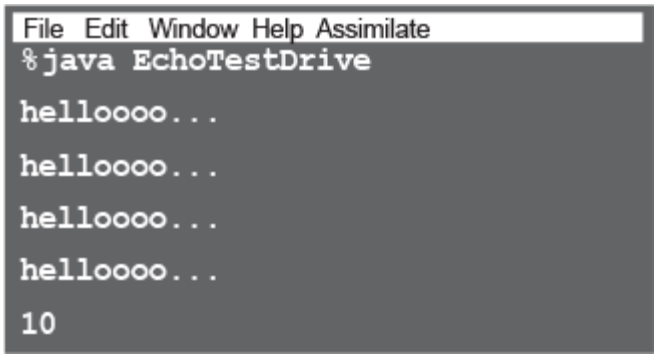

Who Am I?

(from "Who Am I?")

I am compiled from a .java file.	class
My instance variable values can be different from my buddy's values.	object
I behave like a template.	class
I like to do stuff.	object, method
I can have many methods.	class, object
I represent "state."	instance variable
I have behaviors.	object, class
I am located in objects.	method, instance variable
I live on the heap.	object
I am used to create object instances.	class
My state can change.	object, instance variable
I declare methods.	class
I can change at runtime.	object, instance variable

NOTE

Note: both classes and objects are said to have state and behavior. They're defined in the class, but the object is also said to "have" them. Right now, we don't care where they technically live.

Chapter 3. Know Your Variables: Primitives and References

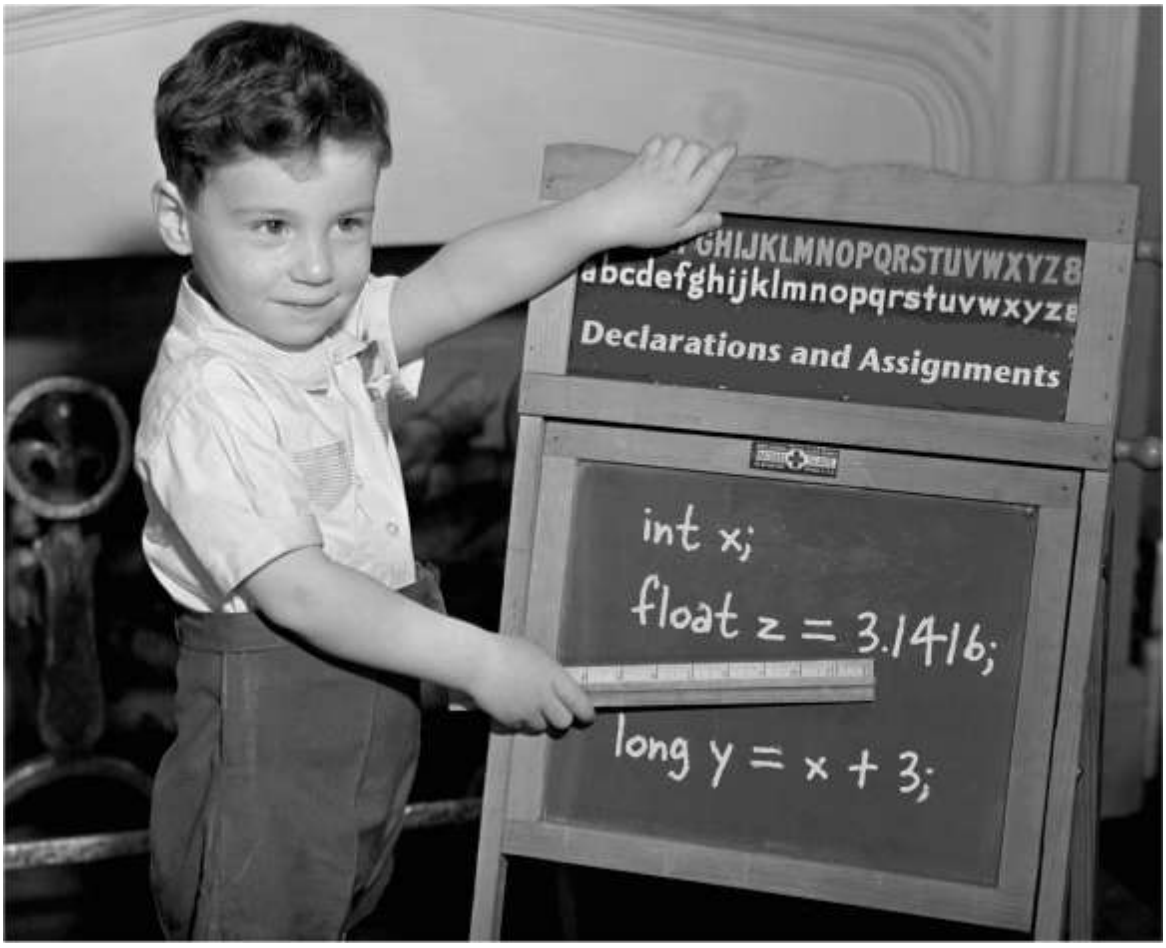

Variables can store two types of things: primitives and references. So far you've used variables in two places—as object **state** (instance variables) and as **local** variables (variables declared within a *method*). Later, we'll use variables as **arguments** (values sent to a method by the calling code), and as **return types** (values sent back to the caller of the method). You've seen variables declared as simple **primitive** integer values (type `int`). You've seen variables declared as something more **complex** like a String or an array. But **there's gotta be more to life** than integers, Strings, and arrays. What if

you have a PetOwner object with a Dog instance variable? Or a Car with an Engine? In this chapter we'll unwrap the mysteries of Java types (like the difference between primited and references) and look at what you can *declare* as a variable, what you can *put* in a variable, and what you can *do* with a variable. And we'll finally see what life is *truly* like on the garbage-collectible heap.

Declaring a variable

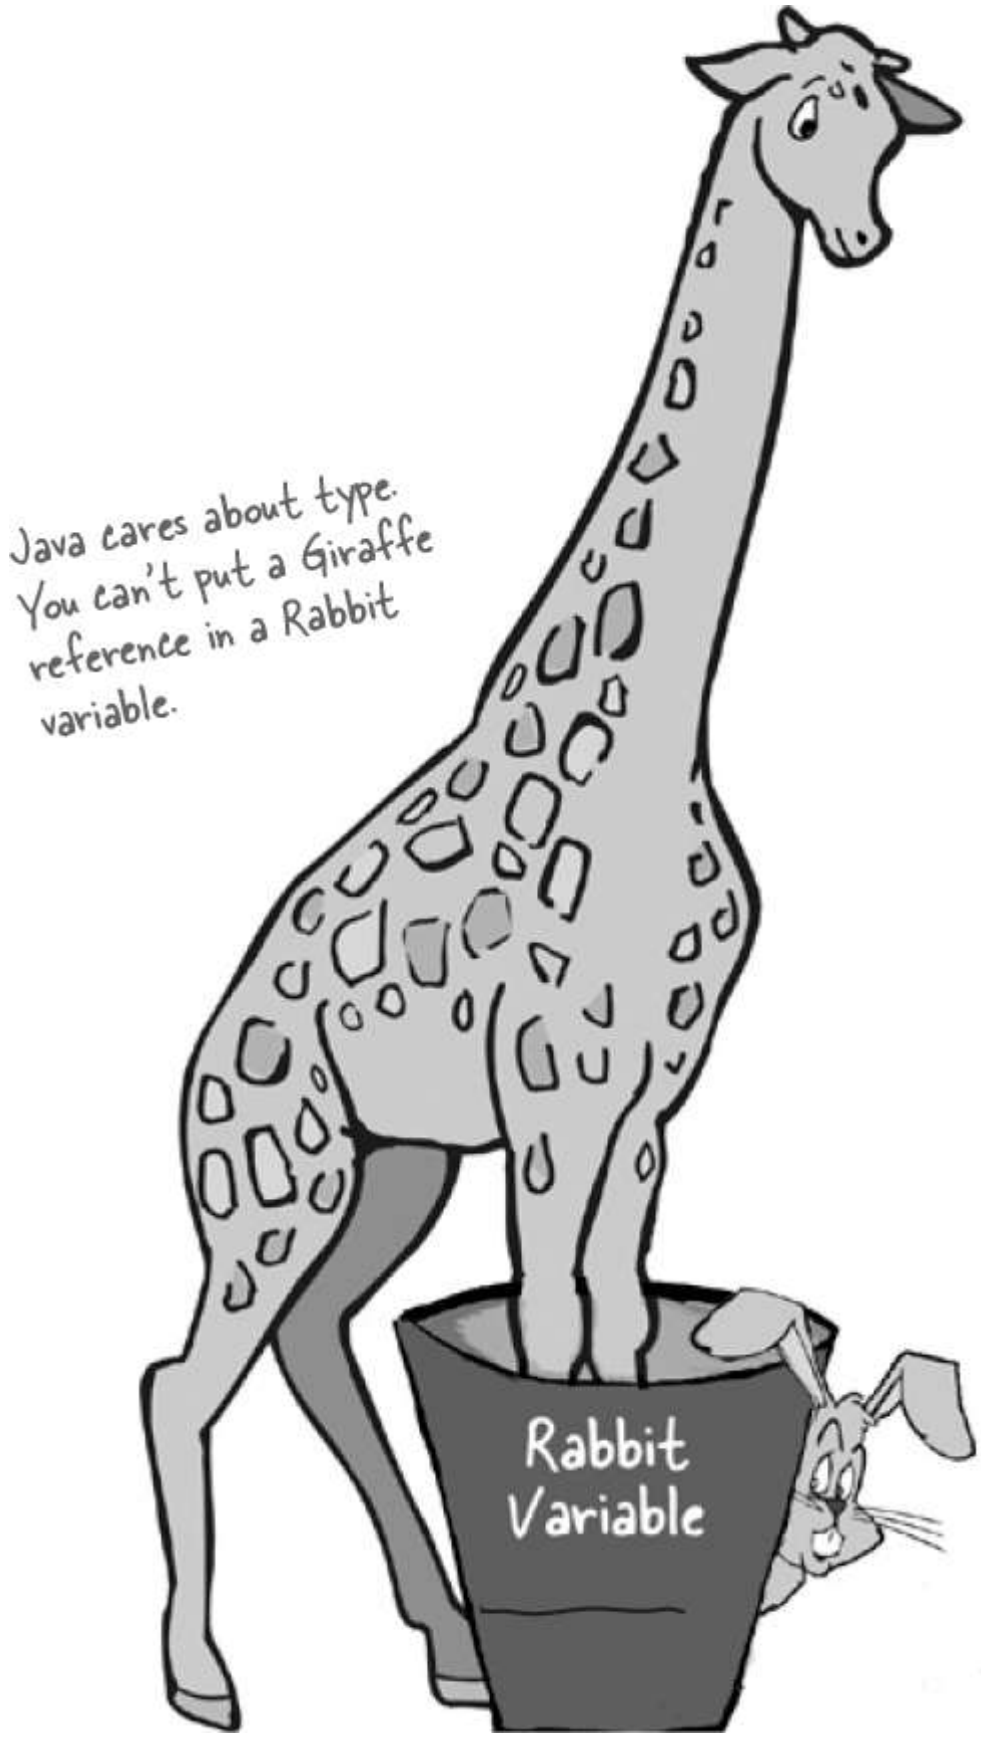
Java cares about type. You can't put a Giraffe reference in a Rabbit variable.
Rabbit Variable

Java cares about type. It won't let you do something bizarre and dangerous like stuff a Giraffe reference into a Rabbit variable—what happens when someone tries to ask the so-called *Rabbit* to `hop()`? And it won't let you put a floating-point number into an integer variable, unless you *tell the compiler* that you know you might lose precision (like, everything after the decimal point).

The compiler can spot most problems:

```
Rabbit hopper = new Giraffe();
```

Don't expect that to compile. *Thankfully*.

For all this type-safety to work, you must declare the type of your variable. Is it an integer? a Dog? A single character? Variables come in two flavors: ***primitive*** and ***object reference***. Primitives hold fundamental values (think: simple bit patterns) including integers, booleans, and floating-point numbers. Object references hold, well, *references* to *objects* (gee, didn't *that* clear it up).

We'll look at primitives first and then move on to what an object reference really means. But regardless of the type, you must follow two declaration rules:

Besides a type, a variable needs a name so that you can use that name in code.

---

variables must have a type

Besides a type, a variable needs a name so that you can use that name in code.

---

variables must have a name

Note: When you see a statement like: “an object of **type** X,” think of *type* and *class* as synonyms. (We’ll refine that a little more in later chapters.)

“I’d like a double mocha, no, make it an int.”

When you think of Java variables, think of cups. Coffee cups, tea cups, giant cups that hold lots and lots of your favorite drink, those big cups the popcorn comes in at the movies, cups with wonderful tactile handles, and cups with metallic trim that you learned can never, ever go in the microwave.

A variable is just a cup. A container. It *holds* something.

It has a size and a type. In this chapter, we’re going to look first at the variables (cups) that hold **primitives**: then a little later we’ll look at cups that hold *references to objects*. Stay with us here on the whole cup analogy—as simple as it is right now, it’ll give us a common way to look at things when the discussion gets more complex. And that’ll happen soon.

Primitives are like the cups they have at the coffee shop. If you’ve been to a Starbucks, you know what we’re talking about here. They come in different sizes, and each has a name like “short,” “tall,” and, “I’d like a ‘grande’ mocha half-caff with extra whipped cream.”

You might see the cups displayed on the counter so you can order appropriately:

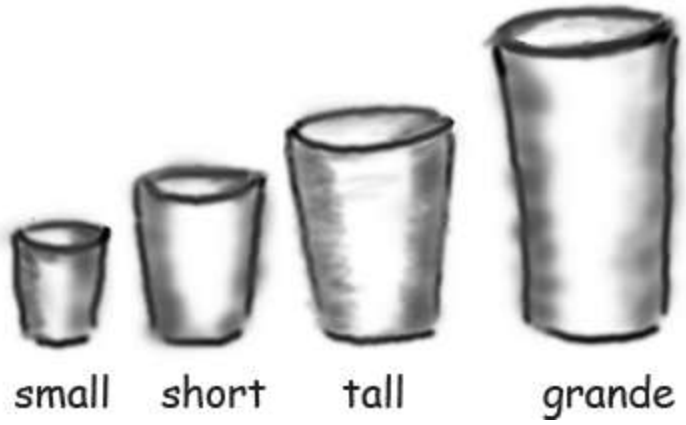

And in Java, primitives come in different sizes, and those sizes have names. When you declare any variable in Java, you must declare it with a specific type. The four containers here are for the four integer primitives in Java.

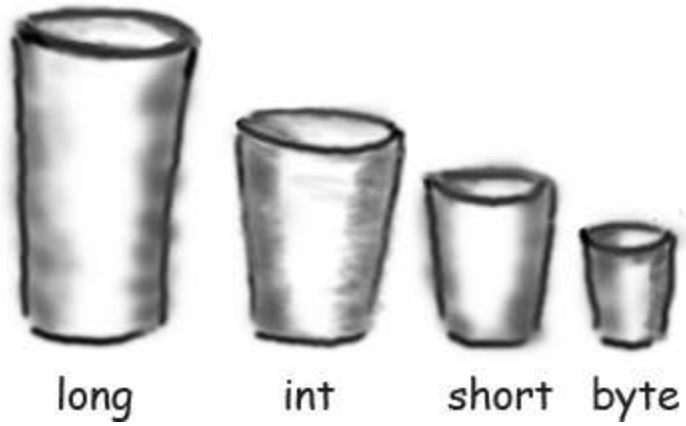

Each cup holds a value, so for Java primitives, rather than saying, "I'd like a tall french roast," you say to the compiler, "I'd like an int variable with the number 90 please." Except for one tiny difference...in Java you also have to give your cup a *name*. So it's actually, "I'd like an int please, with the value of 2486, and name the variable ***height***." Each primitive variable has a fixed number of bits (cup size). The sizes for the six numeric primitives in Java are shown below:

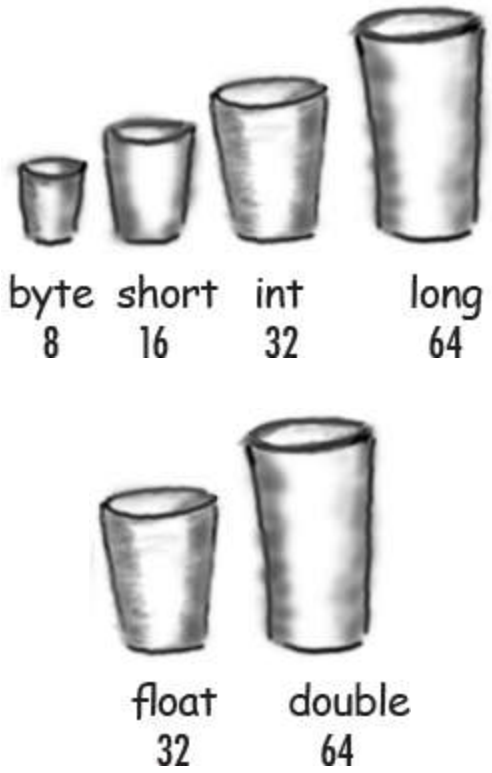

Primitive Types

Type	Bit Depth	Value Range

boolean and char

boolean	(JVM-specific)	***true*** or ***false***
char 16	bits	0 to 65535

numeric (all are signed)

integer

byte	8 bits	-128 to 127
short	16 bits	-32768 to 32767
int	32 bits	-2147483648 to 2147483647
long	64 bits	-huge to huge

floating point

float	32 bits	varies
double	64 bits	varies

Primitive declarations with assignments:

```
int x;
x = 234;
byte b = 89;
boolean isFun = true;
double d = 3456.98;
char c = 'f';
int z = x;
boolean isPunkRock;
isPunkRock = false;
boolean powerOn;
powerOn = isFun;
long big = 3456789L;
float f = 32.5f;
```

Note the 'f' and 'L'. With some number types, you have to specifically tell the compiler what you mean, or it might get confused between similar-looking number types. You can use upper or lowercase.

You really don't want to spill that...

Be sure the value can fit into the variable.

You can’t put a large value into a small cup.

Well, OK, you can, but you’ll lose some. You’ll get, as we say, *spillage*. The compiler tries to help prevent this if it can tell from your code that something’s not going to fit in the container (variable/cup) you’re using.

For example, you can’t pour an int-full of stuff into a byte-sized container, as follows:

```
int x = 24;
byte b = x;
//won’t work!!
```

Why doesn’t this work, you ask? After all, the value of *x* is 24, and 24 is definitely small enough to fit into a byte. *You* know that, and *we* know that, but all the compiler cares about is that you’re trying to put a big thing into a small thing, and there’s the *possibility* of spilling. Don’t expect the compiler

to know what the value of *x* is, even if you happen to be able to see it literally in your code.

You can assign a value to a variable in one of several ways including:

- type a *literal* value after the equals sign (x=*12*, isGood = ***true***, etc.)
- assign the value of one variable to another (x = y)
- use an expression combining the two (x = y + ***43***)

In the examples below, the literal values are in bold italics:

int size = ***32***;	declare an int named *size*, assign it the value *32*
`char initial = 'j';`	declare a char named *initial*, assign it the value *'j'*
`double d = 456.709;`	declare a double named *d*, assign it the value *456.709*
`boolean isLearning;`	declare a boolean named *isCrazy* (no assignment)
`isLearning = true;`	assign the value *true* to the previously declared *isCrazy*
`int y = x + 456;`	declare an int named *y*, assign it the value that is the sum of whatever *x* is now plus *456*

SHARPEN YOUR PENCIL

The compiler won't let you put a value from a large cup into a small one. But what about the other way—pouring a small cup into a big one? ***No problem.***

Based on what you know about the size and type of the primitive variables, see if you can figure out which of these are legal and which aren't. We haven't covered all the rules yet, so on some of these you'll have to use your best judgment. ***Tip:*** The compiler always errs on the side of safety.

From the following list, ***Circle*** the statements that would be legal if these lines were in a single method:

1. `int x = 34.5;`
2. `boolean boo = x;`
3. `int g = 17;`
4. `int y = g;`
5. `y = y + 10;`
6. `short s;`
7. `s = y;`
8. `byte b = 3;`
9. `byte v = b;`
10. `short n = 12;`

```
11. v = n;

12. byte k = 128;
```

→ **Answers in "Exercise Solutions".**

Back away from that keyword!

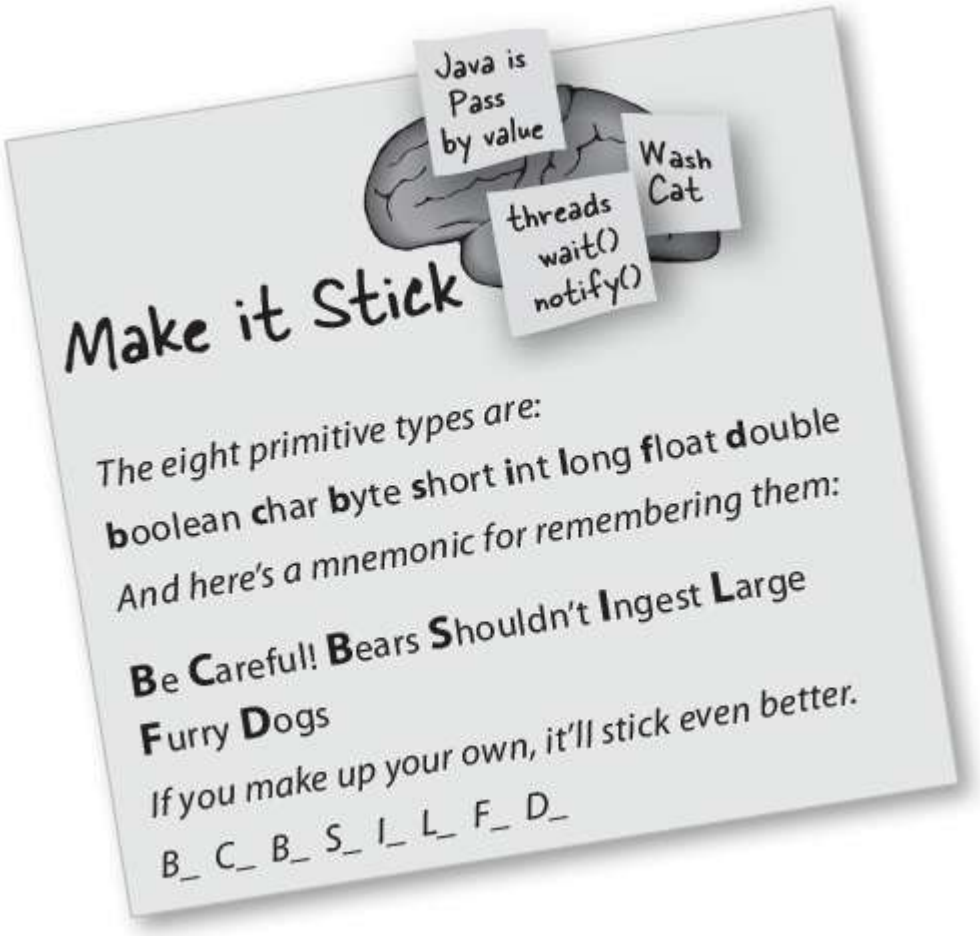

You know you need a name and a type for your variables.

You already know the primitive types.

But what can you use as names? The rules are simple. You can name a class, method, or variable according to the following rules (the real rules are slightly more flexible, but these will keep you safe):

- **It must start with a letter, underscore (_), or dollar sign ($). You can't start a name with a number.**
- **After the first character, you can use numbers as well. Just don't start it with a number.**
- **It can be anything you like, subject to those two rules, just so long as it isn't one of Java's reserved words.**

Reserved words are keywords (and other things) that the compiler recognizes. And if you really want to play confuse-a-compiler, then just *try* using a reserved word as a name.

You've already seen some reserved words:

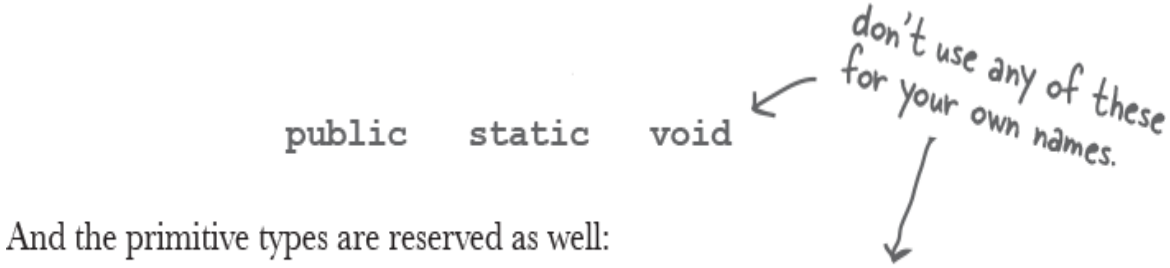

But there are a lot more we haven't discussed yet. Even if you don't need to know what they mean, you still need to know you can't use 'em yourself. ***Do not***—*under any circumstances*—***try to memorize these now.*** To make room for these in your head, you'd probably have to lose something else. Like where your car is parked. Don't worry, by the end of the book you'll have most of them down cold.

This table reserved

_	catch	double	float	int
abstract	char	else	for	interface
assert	class	enum	goto	long
boolean	const	extends	if	native
break	continue	false	implements	new
byte	default	final	import	null
case	do	finally	instanceof	package

Java’s keywords, reserved words, and special identifiers. If you use these for names, the compiler will probably be very, *very* upset.

Controlling your Dog object

```
Dog d = new Dog();
d.bark();
```

think of this

like this

Think of a Dog reference variable as a Dog remote control. You use it to get the object to do something (invoke methods).

You know how to declare a primitive variable and assign it a value. But now what about non-primitive variables? In other words, *what about objects?*

- There is actually no such thing as an object variable.
- There's only an object reference variable.
- An object reference variable holds bits that represent a way to *access* an object.
- It doesn't hold the object itself, but it holds something like a pointer. Or an address. Except, in Java we don't really know *what* is inside a reference variable. We *do* know that whatever it is, it represents one and only one object. And the JVM knows how to use the reference to get to the object.

You can't stuff an object into a variable. We often think of it that way...we say things like, "I passed the String to the System.out.println() method." Or, "The method returns a Dog" or, "I put a new Foo object into the variable named myFoo."

But that's not what happens. There aren't giant expandable cups that can grow to the size of any object. Objects live in one place and one place only —the garbage-collectible heap! (You'll learn more about that later in this chapter.)

Although a primitive variable is full of bits representing the actual ***value*** of the variable, an object reference variable is full of bits representing ***a way to get to the object.***

You use the dot operator (.) on a reference variable to say, "use the thing *before* the dot to get me the thing *after* the dot." For example:

```
myDog.bark();
```

means, “use the object referenced by the variable myDog to invoke the bark() method.” When you use the dot operator on an object reference variable, think of it like pressing a button on the remote control for that object.

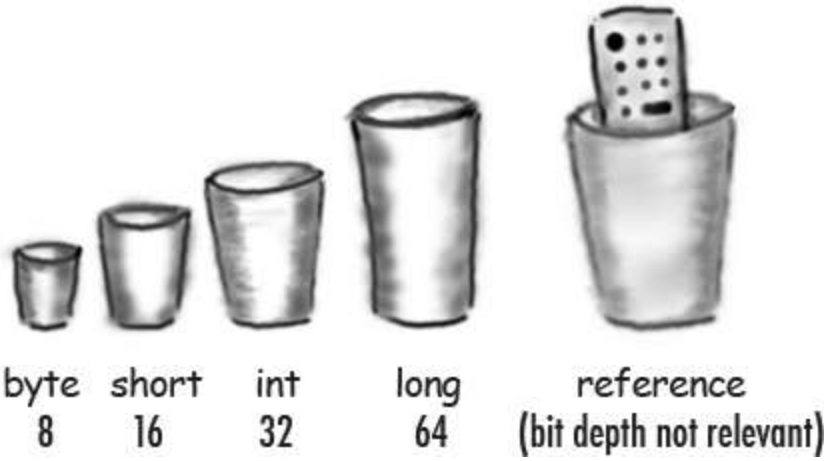

An object reference is just another variable value

Something that goes in a cup.

Only this time, the value is a remote control.

Primitive Variable

```
byte x = 7;
```

The bits representing 7 go into the variable (00000111).



Reference Variable

```
Dog myDog = new Dog();
```

The bits representing a way to get to the Dog object go into the variable.

The Dog object itself does not go into the variable!

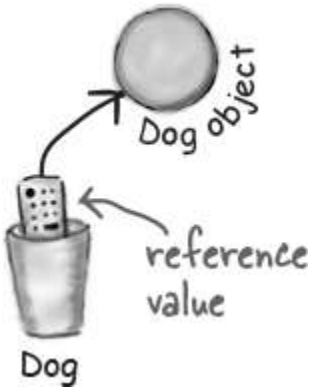

> With primitive variables, the value of the variable is...the *value* (5, -26.7, a').
>
> With reference variables, the value of the variable is...bits representing *a way to get to a specific object.*
>
> You don't know (or care) how any particular JVM implements object references. Sure, they might be a pointer to a pointer to...but even if you *know*, you still can't use the bits for anything other than accessing an object.

We don't care how many 1s and 0s there are in a reference variable. It's up to each JVM and the phase of the moon.

The 3 steps of object declaration, creation and assignment

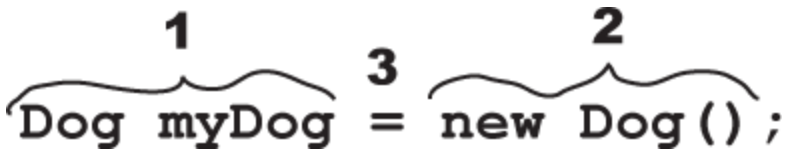

❶ Declare a reference variable

```
Dog myDog = new Dog();
```

Tells the JVM to allocate space for a reference variable, and names that variable *myDog*. The reference variable is, forever, of type Dog. In other words, a remote control that has buttons to control a Dog, but not a Cat or a Button or a Socket.

❷ Create an object

```
Dog myDog = new Dog();
```

Tells the JVM to allocate space for a new Dog object on the heap (we'll learn a lot more about that process, especially in Chapter 9, *Life and Death of an Object*).

❸ Link the object and the reference

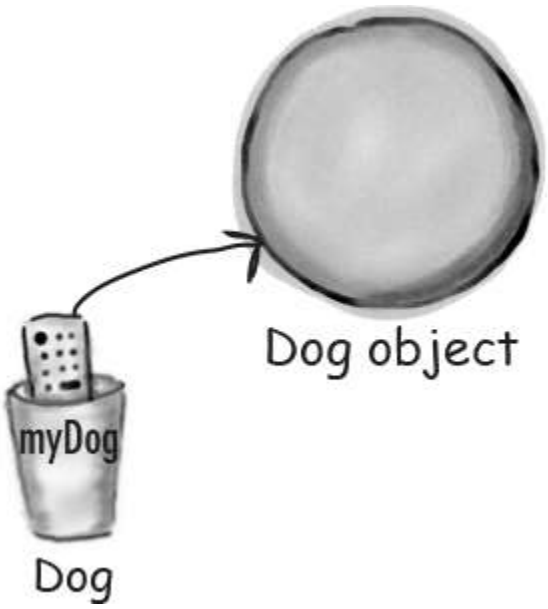


```
Dog myDog = new Dog();
```

Assigns the new Dog to the reference variable myDog. In other words, ***programs the remote control.***

THERE ARE NO DUMB QUESTIONS

Q: How big is a reference variable?

A: You don't know. Unless you're cozy with someone on the JVM's development team, you don't know how a reference is represented. There are pointers in there somewhere, but you can't access them. You won't need to. (OK, if you insist, you might as well just imagine it to be a 64-bit value.) But when you're talking about memory allocation issues, your Big Concern should be about how many *objects* (as opposed to object *references*) you're creating and how big *they* (the *objects*) really are.

Q: So, does that mean that all object references are the same size, regardless of the size of the actual objects to which they refer?

A: Yep. All references for a given JVM will be the same size regardless of the objects they reference, but each JVM might have a different way of representing references, so references on one JVM may be smaller or larger than references on another JVM.

Q: Can I do arithmetic on a reference variable, increment it, you know—C stuff?

A: Nope. Say it with me again, "Java is not C."

Java Exposed

This week's interview: Object Reference

HeadFirst: So, tell us, what's life like for an object reference?

Reference: Pretty simple, really. I'm a remote control, and I can be programmed to control different objects.

HeadFirst: Do you mean different objects even while you're running? Like, can you refer to a Dog and then five minutes later refer to a Car?

Reference: Of course not. Once I'm declared, that's it. If I'm a Dog remote control, then I'll never be able to point (oops—my bad, we're not supposed to say *point*), I mean, *refer* to anything but a Dog.

HeadFirst: Does that mean you can refer to only one Dog?

Reference: No. I can be referring to one Dog, and then five minutes later I can refer to some *other* Dog. As long as it's a Dog, I can be redirected (like reprogramming your remote to a different TV) to it. Unless...no never mind.

HeadFirst: No, tell me. What were you gonna say?

Reference: I don't think you want to get into this now, but I'll just give you the short version—if I'm marked as *final*, then once I am assigned a Dog, I can never be reprogrammed to anything else but *that* one and only Dog. In other words, no other object can be assigned to me.

HeadFirst: You're right, we don't want to talk about that now. OK, so unless you're *final*, then you can refer to one Dog and then refer to a different Dog later. Can you ever refer to *nothing at all*? Is it possible to not be programmed to anything?

Reference: Yes, but it disturbs me to talk about it.

HeadFirst: Why is that?

Reference: Because it means I'm `null`, and that's upsetting to me.

HeadFirst: You mean, because then you have no value?

Reference: Oh, `null` *is* a value. I'm still a remote control, but it's like you brought home a new universal remote control and you don't have a TV. I'm not programmed to control anything. They can press my buttons all day long,

but nothing good happens. I just feel so...useless. A waste of bits. Granted, not that many bits, but still. And that's not the worst part. If I am the only reference to a particular object and then I'm set to `null` (deprogrammed), it means that now *nobody* can get to that object I had been referring to.

HeadFirst: And that's bad because...

Reference: You have to *ask*? Here I've developed a relationship with this object, an intimate connection, and then the tie is suddenly, cruelly, severed. And I will never see that object again, because now it's eligible for [producer, cue tragic music] *garbage collection*. Sniff. But do you think programmers ever consider *that*? Snif. Why, *why* can't I be a primitive? *I hate being a reference.* The responsibility, all the broken attachments...

Life on the garbage-collectible heap

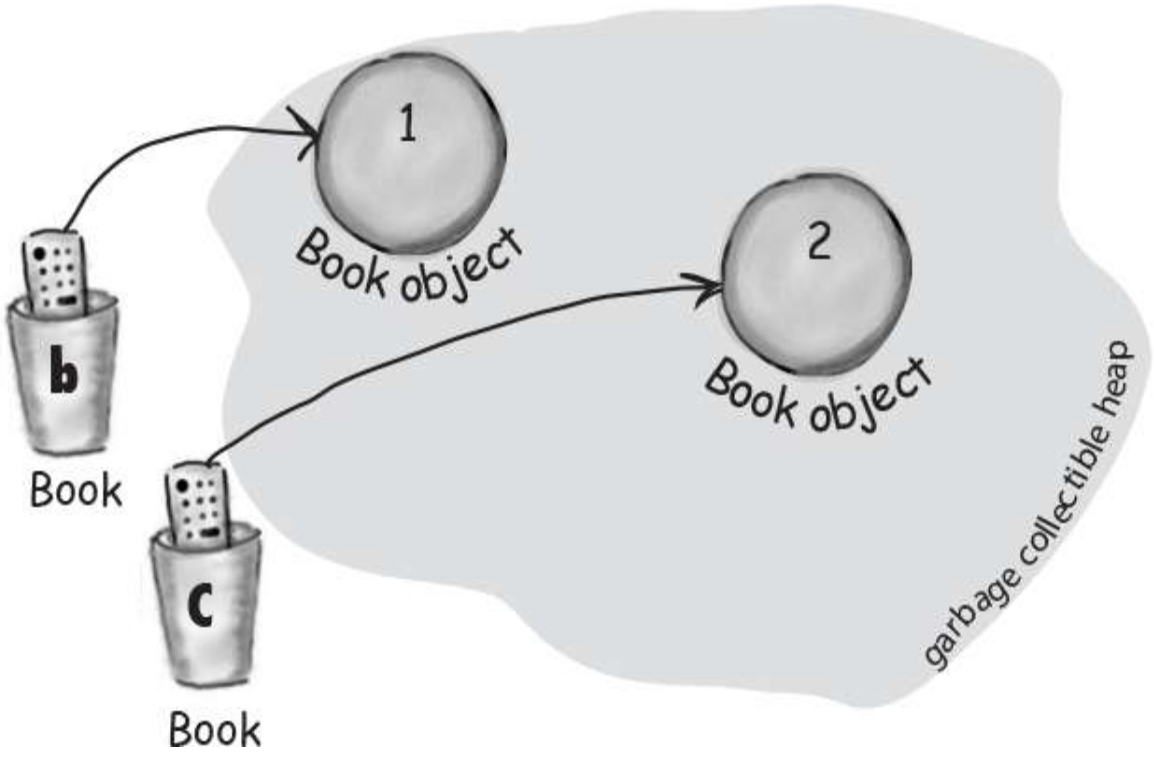


```
Book b = new Book();
Book c = new Book();
```

Declare two Book reference variables. Create two new Book objects. Assign the Book objects to the reference variables.

The two Book objects are now living on the heap.

References: 2

Objects: 2

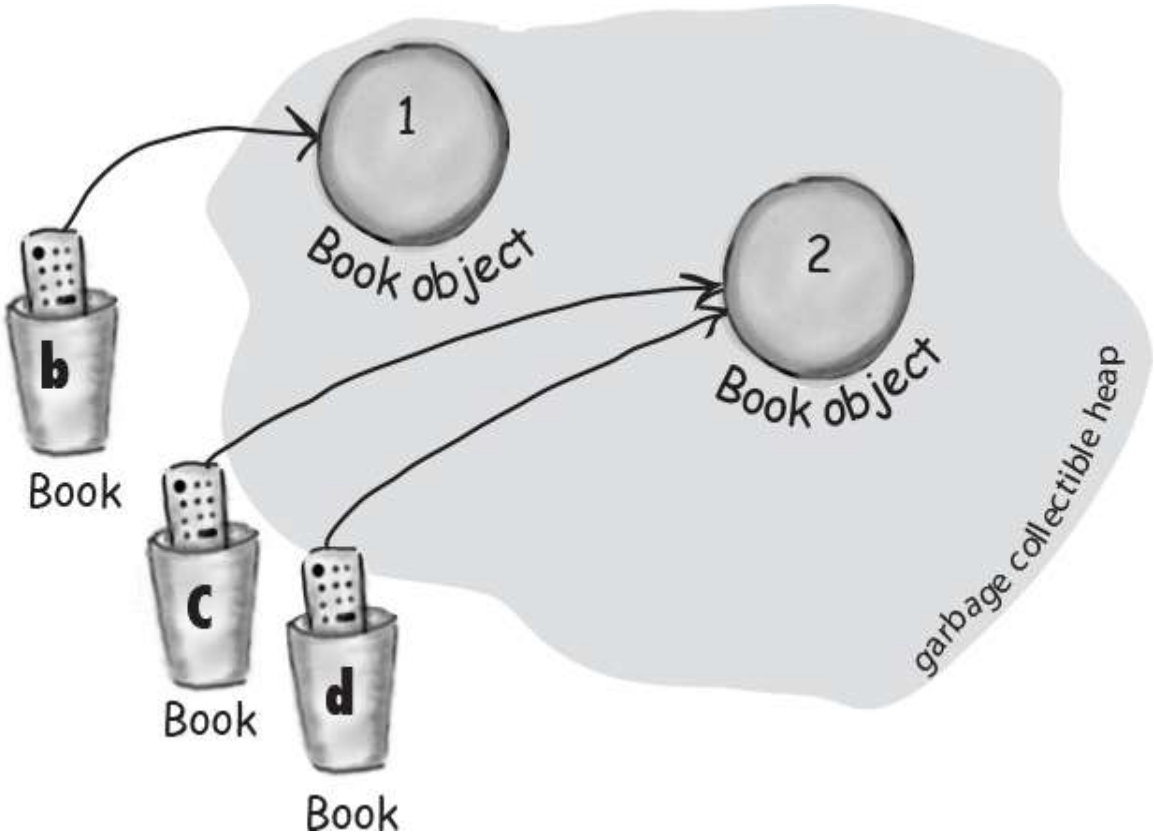

```
Book d = c;
```

Declare a new Book reference variable. Rather than creating a new, third Book object, assign the value of variable ***c*** to variable ***d.*** But what does this mean? It's like saying "Take the bits in c, make a copy of them, and stick that copy into ***d.*"**

Both *c* and *d* refer to the same object.

The *c* and *d* variables hold two different copies of the same value. Two remotes programmed to one TV.

References: 3

Objects: 2

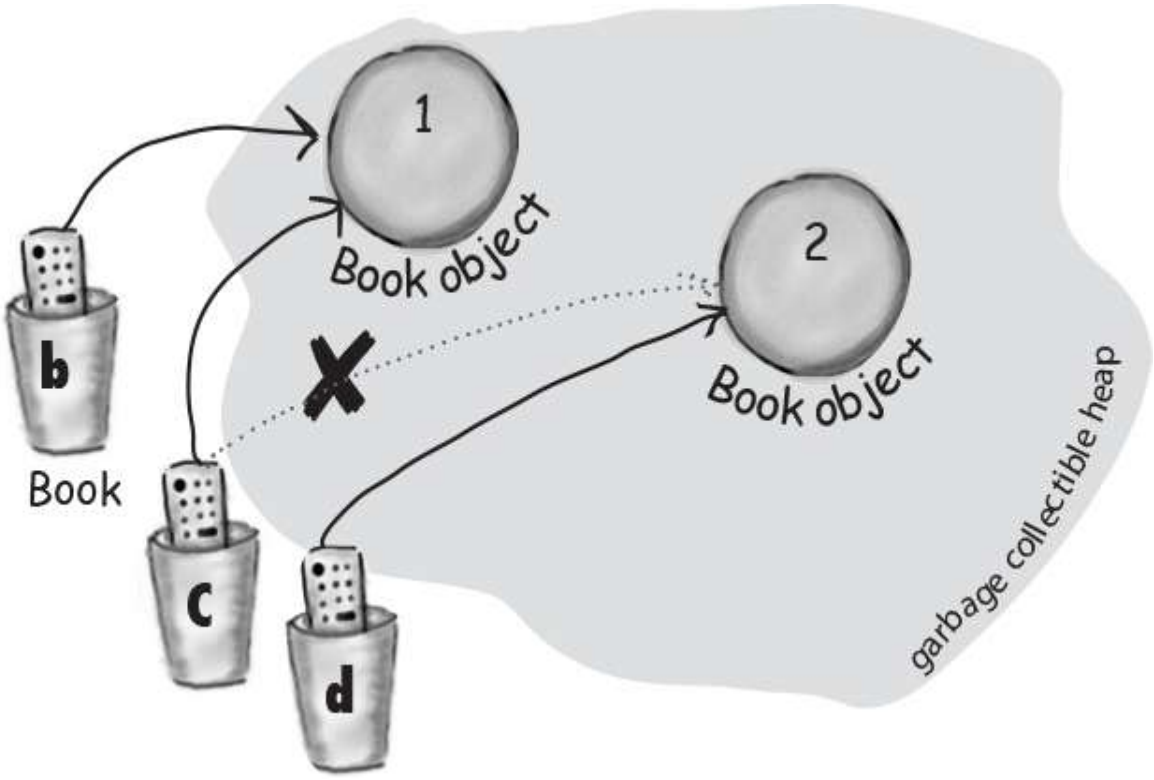


```
c = b;
```

Assign the value of variable *b* to variable *c*. By now you know what this means. The bits inside variable *b* are copied, and that new copy is stuffed into variable *c*.

Both b and c refer to the same object.

The c variable no longer refers to its old Book object.

References: 3

Objects: 2

Life and death on the heap

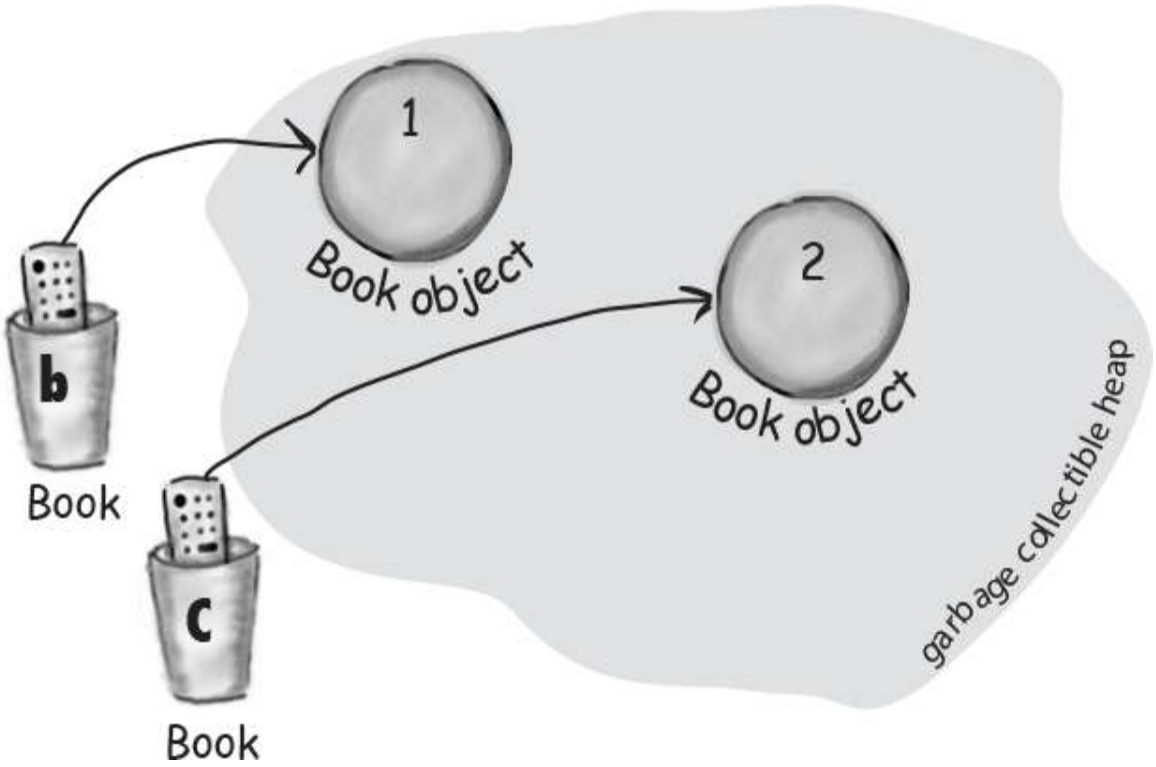


```
Book b = new Book();
Book c = new Book();
```

Declare two Book reference variables. Create two new Book objects. Assign the Book objects to the reference variables.

The two book objects are now living on the heap.

Active References: 2

Reachable Objects: 2

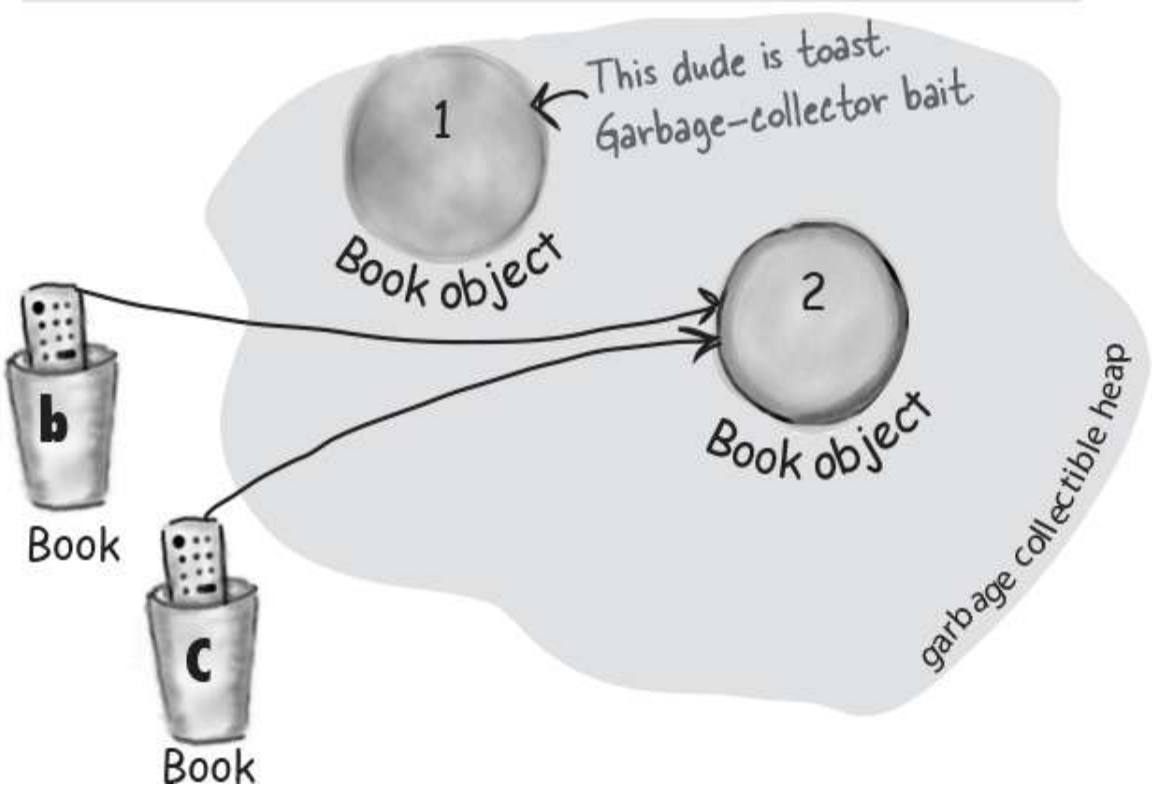


```
b = c;
```

Assign the value of variable ***c*** to variable ***b.*** The bits inside variable ***c*** are copied, and that new copy is stuffed into variable ***b.*** Both variables hold identical values.

Both b and c refer to the same object. Object 1 is abandoned and eligible for Garbage Collection (GC).

Active References: 2

Reachable Objects: 1

Abandoned Objects: 1

The first object that ***b*** referenced, Object 1, has no more references. It's *unreachable.*

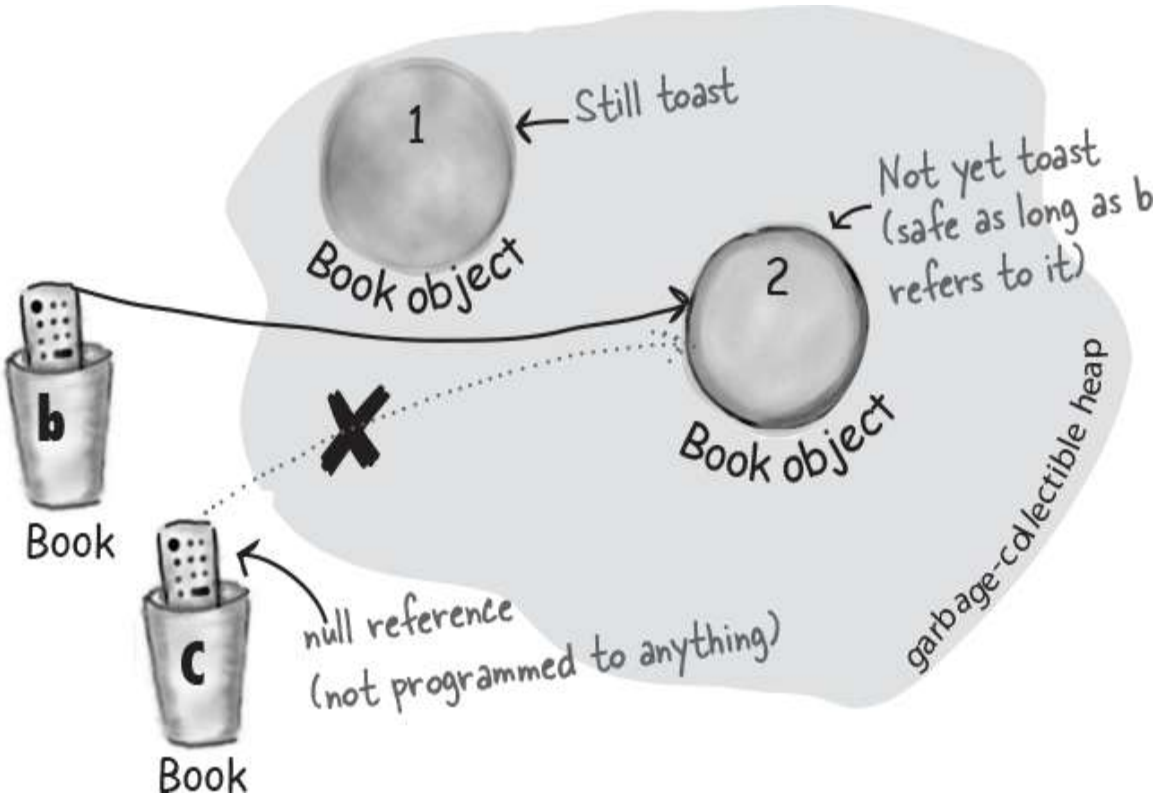

```
c = null;
```

Assign the value `null` to variable ***c***. This makes ***c*** a *null reference*, meaning it doesn't refer to anything. But it's still a reference variable, and another Book object can still be assigned to it.

Object 2 still has an active reference (b), and as long as it does, the object is not eligible for GC.

Active References: 1

null References: 1

Reachable Objects: 1

Abandoned Objects: 1

An array is like a tray of cups

The Java standard library includes lots of sophisticated data structures including maps, trees, and sets (see Appendix B), but arrays are great when you just want a quick, ordered, efficient list of things. Arrays give you fast random access by letting you use an index position to get to any element in the array.

Every element in an array is just a variable. In other words, one of the eight primitive variable types (think: Large Furry Dog) or a reference variable. Anything you would put in a *variable* of that type can be assigned to an *array element* of that type. So in an array of type int (int[]), each element can hold an int. In a Dog array (Dog[]) each element can hold...a Dog? No, remember that a reference variable just holds a reference (a remote control), not the object itself. So in a Dog array, each element can hold a *remote control* to a Dog. Of course, we still have to make the Dog objects...and you'll see all that on the next page.

Be sure to notice one key thing in the picture—***the array is an object, even though it's an array of primitives.***

1 Declare an int array variable. An array variable is a remote control to an array object.

```
int[] nums;
```

2 Create a new int array with a length of 7, and assign it to the previously declared `int[]` variable `nums`

```
nums = new int[7];
```

3 Give each element in the array some int value. Remember, elements in an int array are just int *variables*.

7 int variables

```
nums[0] = 6;
nums[1] = 19;
nums[2] = 44;
nums[3] = 42;
nums[4] = 10;
nums[5] = 20;
nums[6] = 1;
```

Arrays are always objects, whether they're declared to hold primitives or object references.

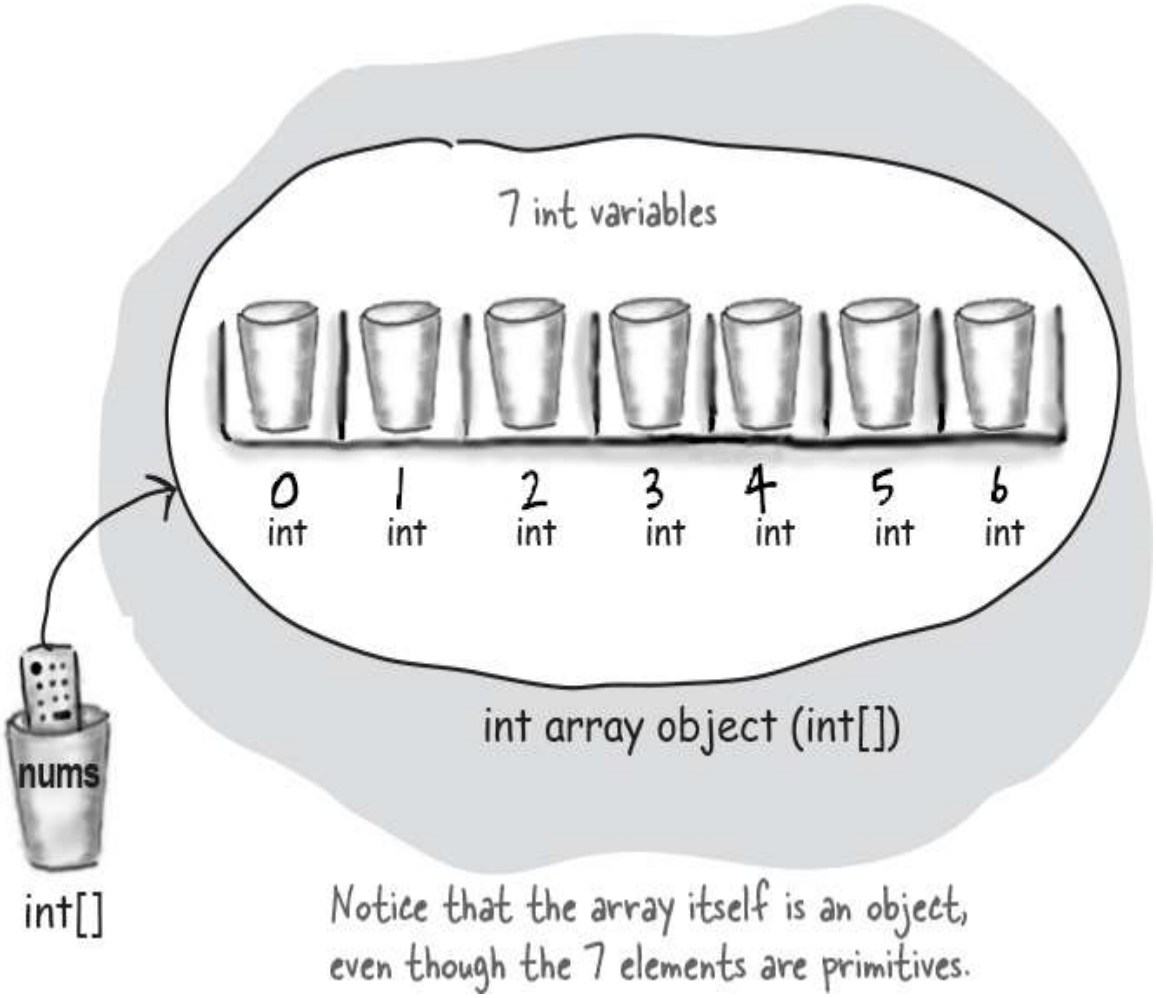

Arrays are objects too

You can have an array object that's declared to *hold* primitive values. In other words, the array object can have *elements* that are primitives, but the array itself is *never* a primitive. **Regardless of what the array holds, the array itself is always an object!**

Make an array of Dogs

1. Declare a Dog array variable

```
Dog[] pets;
```

2. Create a new Dog array with a length of 7, and assign it to the previously declared `Dog[]` variable `pets`

```
pets = new Dog[7];
```

What's missing?

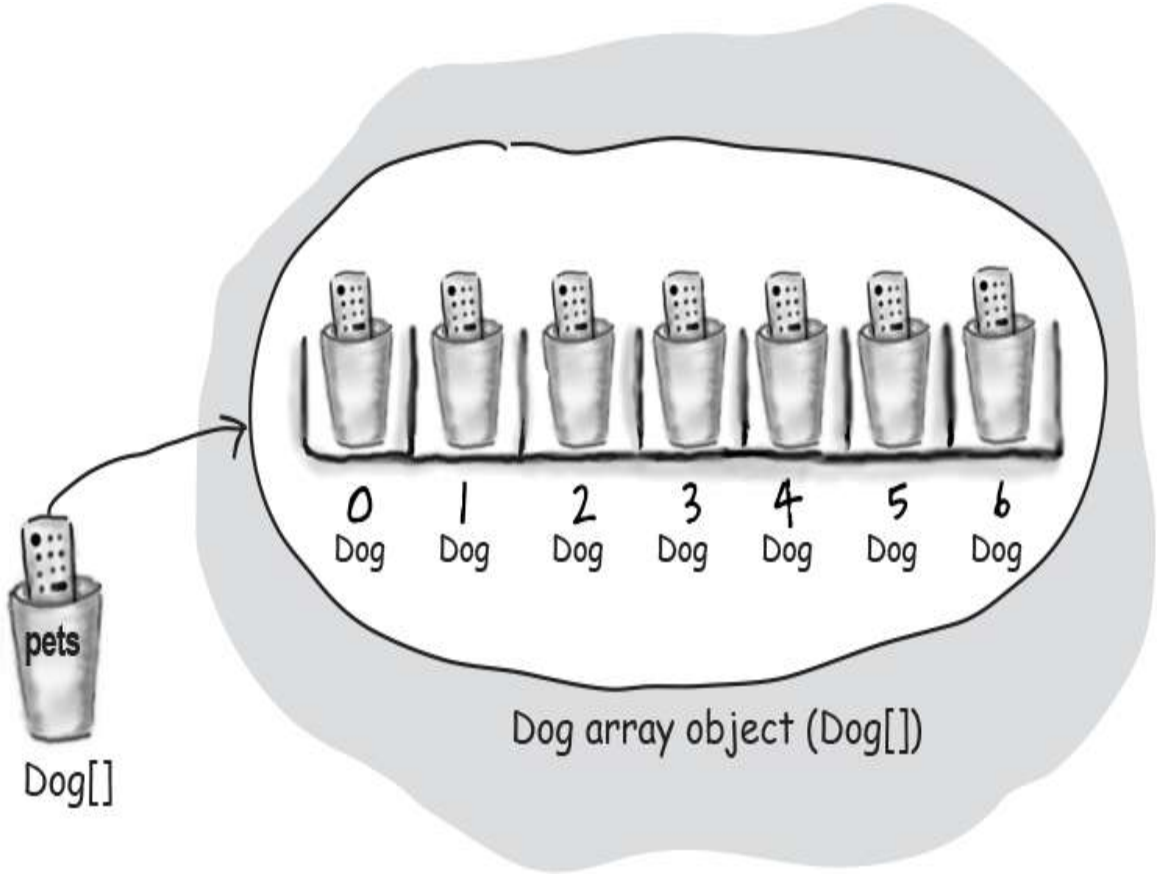

Dogs! We have an array of Dog references, but no actual Dog *objects!*

---

3 Create new Dog objects, and assign them to the array elements.

Remember, elements in a Dog array are just Dog reference *variables*. We still need Dogs!

```
pets[0] = new Dog();
pets[1] = new Dog();
```

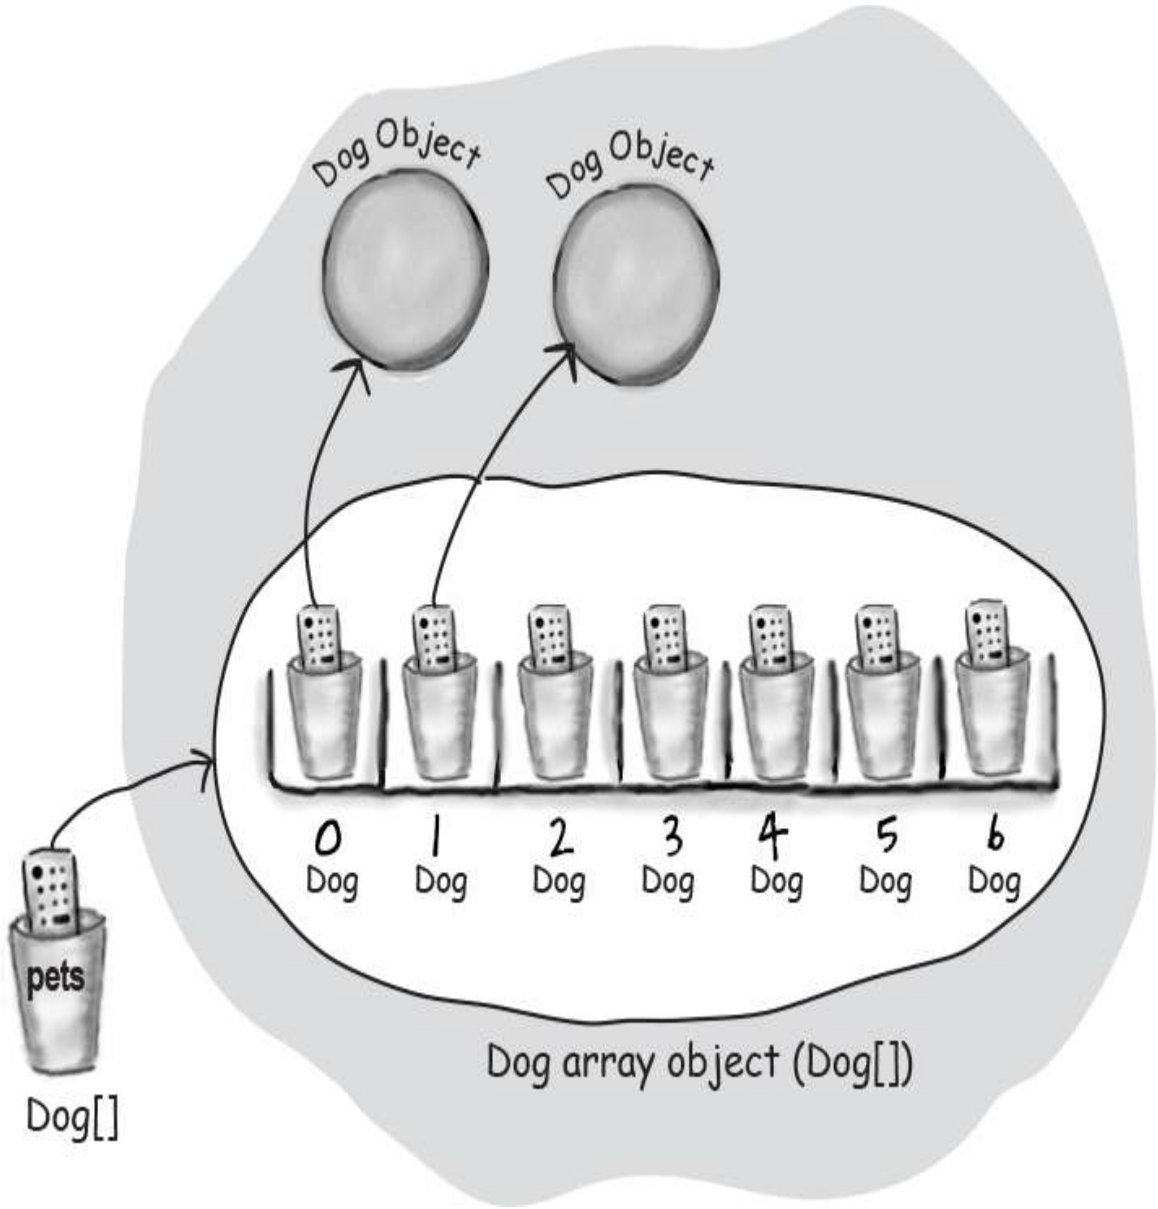
Dog Object
Dog Object
0
Dog
1
Dog
2
Dog
3
Dog
4
Dog
5
Dog
6
Dog
pets
Dog array object (Dog[])
Dog[]

SHARPEN YOUR PENCIL

What is the current value of pets[2]? _____

What code would make pets[3] refer to one of the two existing Dog objects?

_____

Control your Dog (with a reference variable)

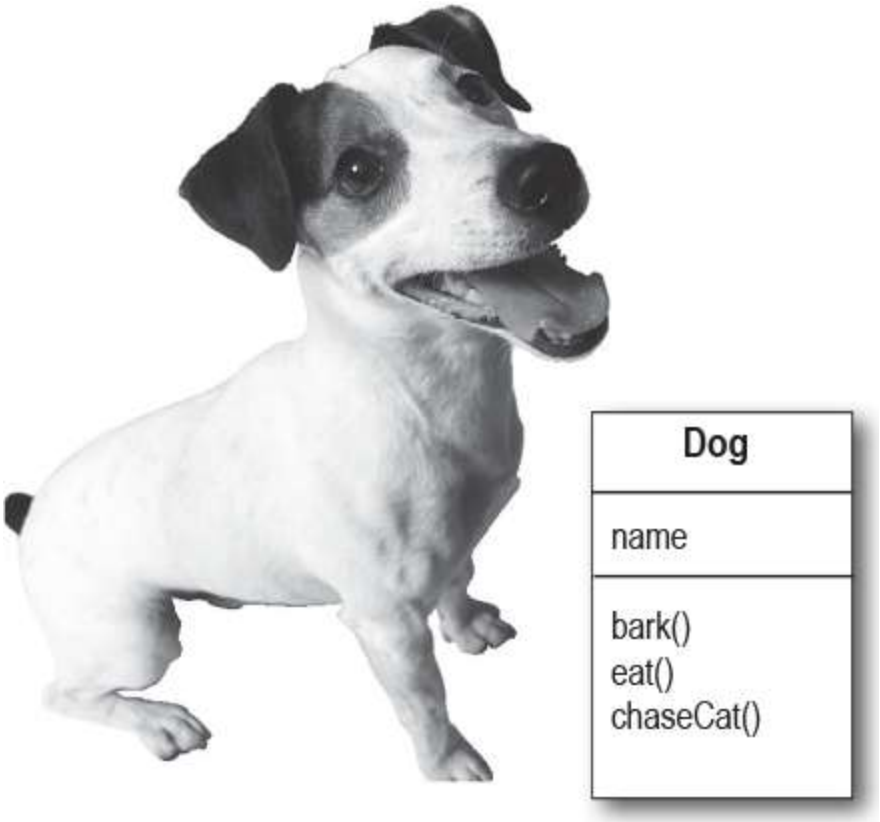

```
Dog fido = new Dog();
fido.name = "Fido";
```

We created a Dog object and used String the dot operator on the reference variable ***fido*** to access the name variable.*

We can use the ***fido*** reference to get the dog to bark() or eat() or chaseCat().

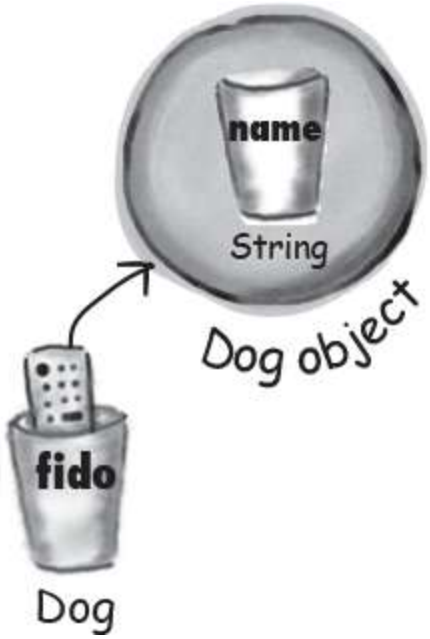


```
fido.bark();

fido.chaseCat();
```

Java cares about type.

Once you've declared an array, you can't put anything in it except things that are of a compatible ar ray type.

For example, you can't put a Cat into a Dog array (it would be pretty awful if someone thinks that only Dogs are in the array, so they ask each one to bark, and then to their horror discover there's a cat lurking.) And you can't stick a `double` into an `int` array (spillage, remember?). You can, however, put a `byte` into an `int` array, because a `byte` will always fit into an `int`-sized cup. This is known as an **implicit widening**. We'll get into the details later; for now just remember that the compiler won't let you put the wrong thing in an array, based on the array's declared type.

What happens if the Dog is in a Dog array?

We know we can access the Dog's instance variables and methods using the dot operator, but *on what?*

When the Dog is in an array, we don't have an actual variable name (like ***fido***). Instead we use array notation and push the remote control button (dot operator) on an object at a particular index (position) in the array:

```
Dog[] myDogs = new Dog[3];

myDogs[0] = new Dog();

myDogs[0].name = "Fido";

myDogs[0].bark();
```

*Yes we know we're not demonstrating encapsulation here, but we're trying to keep it simple. For now. We'll do encapsulation in Chapter 4.

A Dog example

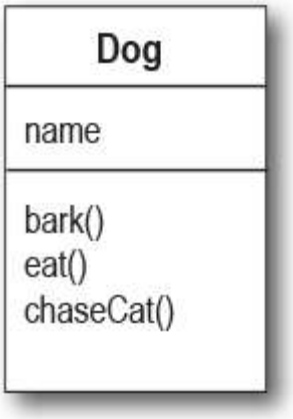

```
class Dog {
  String name;

  public static void main(String[] args) {
    // make a Dog object and access it
    Dog dog1 = new Dog();
    dog1.bark();
    dog1.name = "Bart";

    // now make a Dog array
    Dog[] myDogs = new Dog[3];
    // and put some dogs in it
    myDogs[0] = new Dog();
    myDogs[1] = new Dog();
    myDogs[2] = dog1;

    // now access the Dogs using the array
    // references
    myDogs[0].name = "Fred";
    myDogs[1].name = "Marge";

    // Hmmmm... what is myDogs[2] name?
    System.out.print("last dog's name is ");
    System.out.println(myDogs[2].name);

    // now loop through the array
    // and tell all dogs to bark
    int x = 0;
    while (x < myDogs.length) {
      myDogs[x].bark();
      x = x + 1;
    }
  }

  public void bark() {
    System.out.println(name + " says Ruff!");
  }

  public void eat() {
  }

  public void chaseCat() {
  }
}
```

Strings are a special type of object. You can create and assign them as if they were primitives (even though they're references).

Arrays have a variable 'length' that gives you the number of elements in the array.

Output

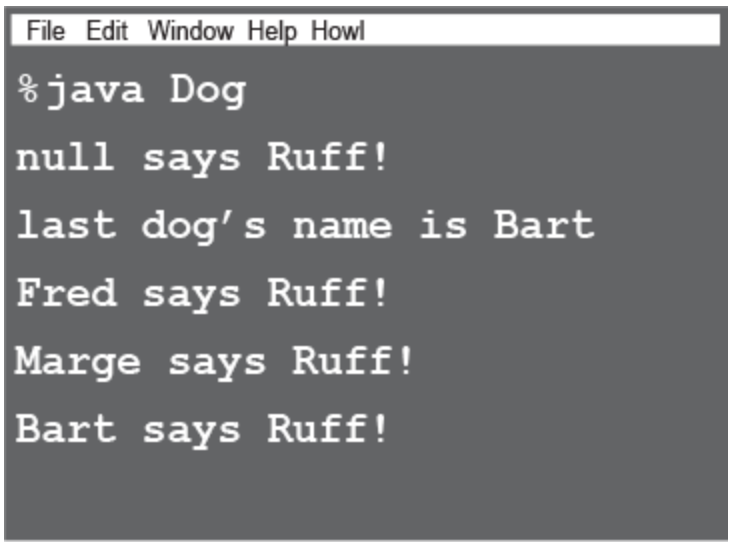
File Edit Window Help Howl
%java Dog
null says Ruff!
last dog's name is Bart
Fred says Ruff!
Marge says Ruff!
Bart says Ruff!

BULLET POINTS

- Variables come in two flavors: primitive and reference.
- Variables must always be declared with a name and a type.
- A primitive variable value is the bits representing the value (5, ‘a’, true, 3.1416, etc.).
- A reference variable value is the bits representing a way to get to an object on the heap.
- A reference variable is like a remote control. Using the dot operator (.) on a reference variable is like pressing a button on the remote control to access a method or instance variable.
- A reference variable has a value of `null` when it is not referencing any object.
- An array is always an object, even if the array is declared to hold primitives. There is no such thing as a primitive array, only an array that *holds* primitives.

Exercise

BE the Compiler

Each of the Java files on this page represents a complete source file. Your job is to play compiler and determine whether each of these files will compile and run without exception. If they won't, how would you fix them?

A

```
class Books {
  String title;
  String author;
}

class BooksTestDrive {
  public static void main(String[] args) {
    Books[] myBooks = new Books[3];
    int x = 0;
    myBooks[0].title = "The Grapes of Java";
    myBooks[1].title = "The Java Gatsby";
    myBooks[2].title = "The Java Cookbook";
    myBooks[0].author = "bob";
    myBooks[1].author = "sue";
    myBooks[2].author = "ian";

    while (x < 3) {
      System.out.print(myBooks[x].title);
      System.out.print(" by ");
      System.out.println(myBooks[x].author);
      x = x + 1;
    }
  }
}
```

B

```
class Hobbits {
  String name;

  public static void main(String[] args) {
    Hobbits[] h = new Hobbits[3];
    int z = 0;

    while (z < 4) {
      z = z + 1;
      h[z] = new Hobbits();
      h[z].name = "bilbo";
      if (z == 1) {
        h[z].name = "frodo";
      }
      if (z == 2) {
        h[z].name = "sam";
      }
      System.out.print(h[z].name + " is a ");
      System.out.println("good Hobbit name");
    }
  }
}
```

→ **Answers in "Exercise Solutions".**

Code Magnets

A working Java program is all scrambled up on the fridge. Can you reconstruct the code snippets to make a working Java program that produces the output listed below? Some of the curly braces fell on the floor and they were too small to pick up, so feel free to add as many of those as you need!



```
int y = 0;
```

```
ref = index[y];
```

```
islands[0] = "Bermuda";
islands[1] = "Fiji";
islands[2] = "Azores";
islands[3] = "Cozumel";
```

```
int ref;
while (y < 4) {
```

```
System.out.println(islands[ref]);
```

```
index[0] = 1;
index[1] = 3;
index[2] = 0;
index[3] = 2;
```

```
String [] islands = new String[4];
```

```
System.out.print("island = ");
```

```
int [] index = new int[4];
```

```
y = y + 1;
```

```
class TestArrays {

  public static void main(String [] args) {
```

```
File  Edit  Window  Help  Sunscreen
% java TestArrays
island = Fiji
island = Cozumel
island = Bermuda
island = Azores
```

→ **Answers in "Code Magnets".**

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You **may** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make a class that will compile and run and produce the output listed.

Output

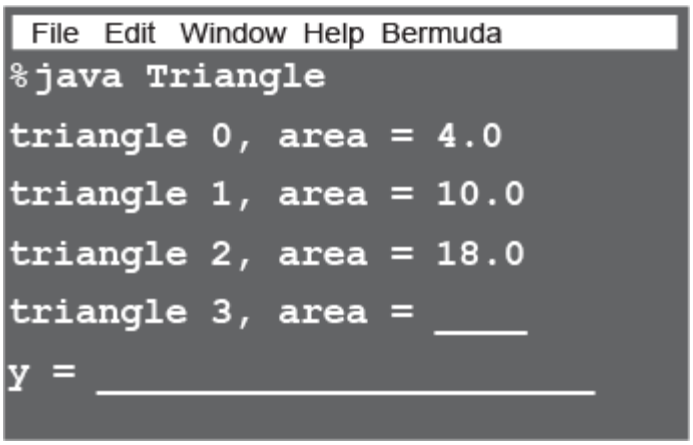

Bonus Question!

For extra bonus points, use snippets from the pool to fill in the missing output (above).

```
class Triangle {
  double area;
  int height;
  int length;

  public static void main(String[] args) {
    ____________
    ____________________________
    while ( ___________ ) {
      ____________________________
      ________.height = (x + 1) * 2;
      ________.length = x + 4;
      ____________________________
      System.out.print("triangle " + x + ", area");
      System.out.println(" = " + _______.area);
      ________________
    }
    _______________
    x = 27;
    Triangle t5 = ta[2];
    ta[2].area = 343;
    System.out.print("y = " + y);
    System.out.println(", t5 area = " + t5.area);
  }
  void setArea() {
    ____________ = (height * length) / 2;
  }
}
```

(Sometimes we don't use a separate test class, because we're trying to save space on the page.)

Note: Each snippet from the pool can be used more than once!

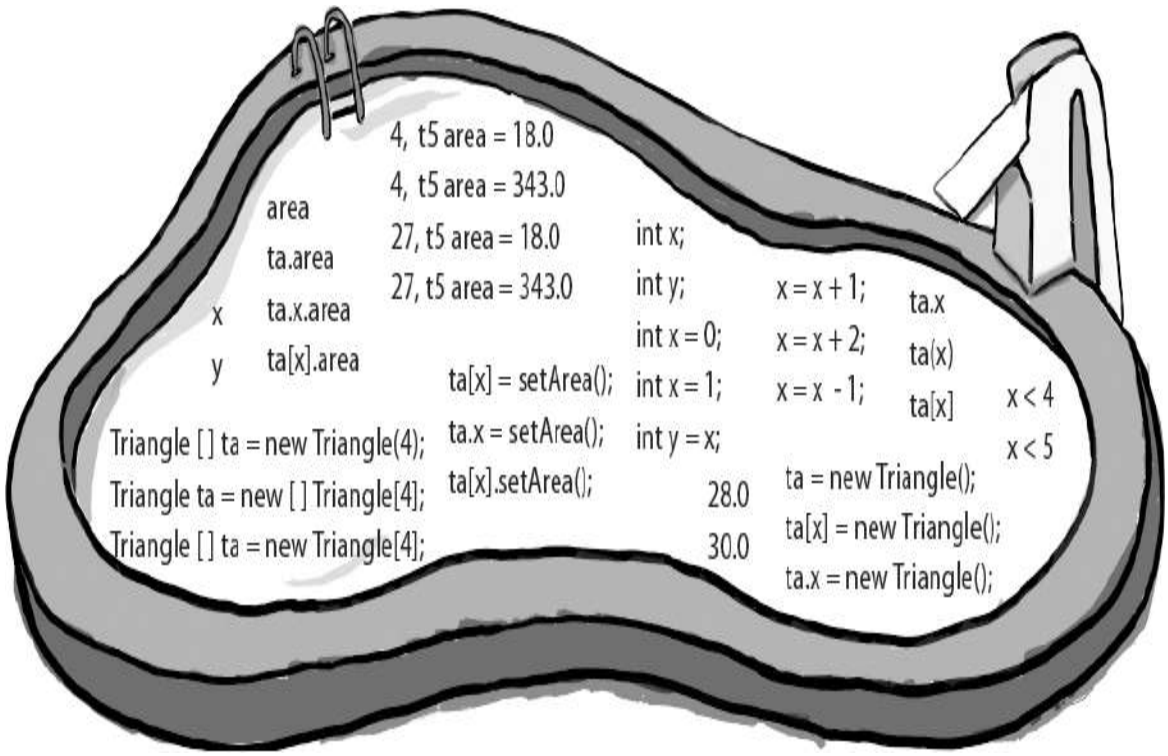

→ **Answers in "Pool Puzzle".**

A Heap o' Trouble

A short Java program is listed to the right. When "// do stuff" is reached, some objects and some reference variables will have been created. Your task is to determine which of the reference variables refer to which objects. Not all the reference variables will be used, and some objects might be referred to more than once. Draw lines connecting the reference variables with their matching objects.

Tip: Unless you're way smarter than we are, you probably need to draw diagrams like the ones in "Life on the garbage-collectible heap"–60 of this chapter. Use a pencil so you can draw and then erase reference links (the arrows going from a reference remote control to an object).

```
class HeapQuiz {
  int id = 0;

  public static void main(String[] args) {
    int x = 0;
    HeapQuiz[] hq = new HeapQuiz[5];
    while (x < 3) {
      hq[x] = new HeapQuiz();
      hq[x].id = x;
      x = x + 1;
    }
    hq[3] = hq[1];
    hq[4] = hq[1];
    hq[3] = null;
    hq[4] = hq[0];
    hq[0] = hq[3];
    hq[3] = hq[2];
    hq[2] = hq[0];
    // do stuff
  }
}
```

Reference Variables: **HeapQuiz Objects:**

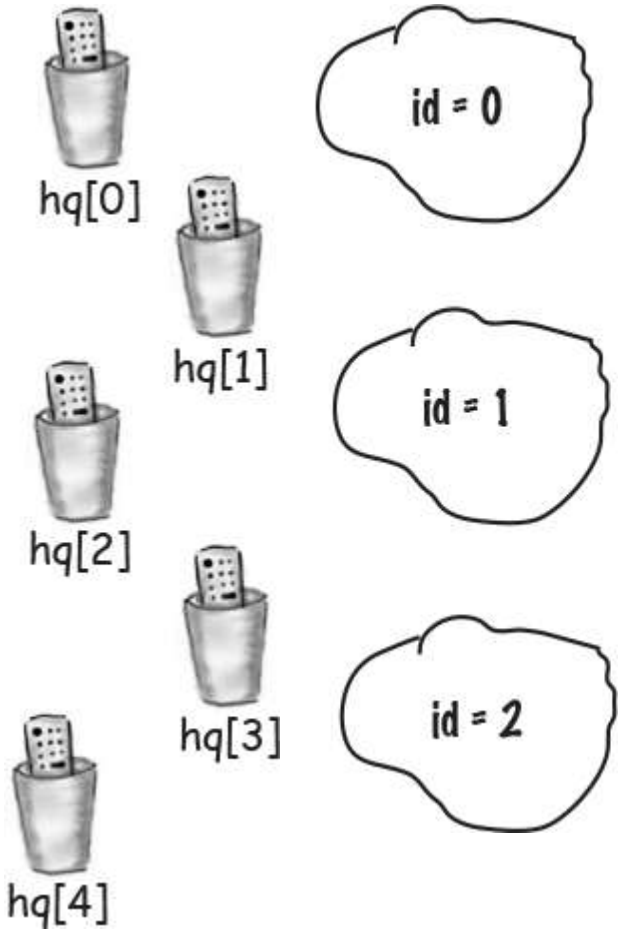

NOTE

Match each reference variable with matching object(s).

You might not have to use every reference.

Answers in "A Heap o' Trouble".

The case of the pilfered references

It was a dark and stormy night. Tawny strolled into the programmers' bullpen like she owned the place. She knew that all the programmers would still be hard at work, and she wanted help. She needed a new method added to the pivotal class that was to be loaded into the client's new top-secret Java-enabled cell phone. Heap space in the cell phone's memory was tight, and everyone knew it. The normally raucous buzz in the bullpen fell to silence as Tawny eased her way to the white board. She sketched a quick overview of the new method's functionality and slowly scanned the room. "Well folks, it's crunch time," she purred. "Whoever creates the most memory efficient version of this method is coming with me to the client's launch party on Maui tomorrow...to help me install the new software."

Five-Minute Mystery

The next morning Tawny glided into the bullpen. "Ladies and Gentlemen," she smiled, "the plane leaves in a few hours, show me what you've got!" Bob went first; as he began to sketch his design on the white board, Tawny said, "Let's get to the point Bob, show me how you handled updating the list of contact objects." Bob quickly drew a code fragment on the board:

```
Contact [] contacts = new Contact[10];
while (x < 10 ) {   // make 10 contact objects
  contacts[x] = new Contact();
  x = x + 1;
```

```
}
// do complicated Contact list updating with contacts
```

"Tawny, I know we're tight on memory, but your spec said that we had to be able to access individual contact information for all ten allowable contacts; this was the best scheme I could cook up," said Bob. Kate was next, already imagining coconut cocktails at the party, "Bob," she said, "your solution's a bit kludgy, don't you think?" Kate smirked, "Take a look at this baby":

```
Contact contactRef;
while ( x < 10 ) {   // make 10 contact objects
  contactRef = new Contact();
  x = x + 1;
}
// do complicated Contact list updating with contactRef
```

"I saved a bunch of reference variables worth of memory, Bob-o-rino, so put away your sunscreen," mocked Kate. "Not so fast Kate!" said Tawny, "you've saved a little memory, but Bob's coming with me."

Why did Tawny choose Bob's method over Kate's, when Kate's used less memory?

→ **Answers in "Five-Minute Mystery".**

Exercise Solutions

Sharpen your pencil

(from "Sharpen your pencil")

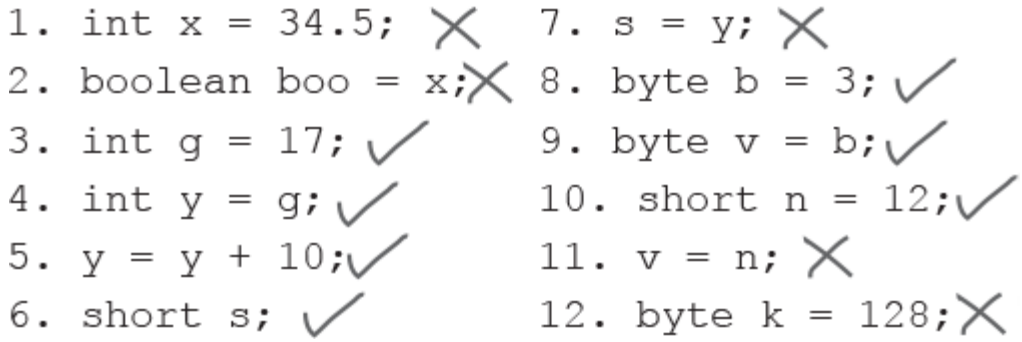

Code Magnets

(from "Code Magnets")

```
class TestArrays {
  public static void main(String[] args) {
    int[] index = new int[4];
    index[0] = 1;
    index[1] = 3;
    index[2] = 0;
    index[3] = 2;
    String[] islands = new String[4];
    islands[0] = "Bermuda";
    islands[1] = "Fiji";
    islands[2] = "Azores";
    islands[3] = "Cozumel";
    int y = 0;
    int ref;
    while (y < 4) {
      ref = index[y];
      System.out.print("island = ");
      System.out.println(islands[ref]);
      y = y + 1;
    }
  }
}
```

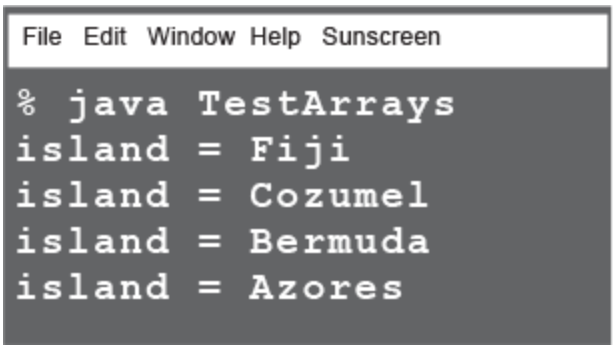

BE the Compiler

(from "BE the Compiler")

A

```
class Books {
  String title;
  String author;
}

class BooksTestDrive {
  public static void main(String[] args) {
    Books[] myBooks = new Books[3];
    int x = 0;
    myBooks[0] = new Books();
    myBooks[1] = new Books();
    myBooks[2] = new Books();
    myBooks[0].title = "The Grapes of Java";
    myBooks[1].title = "The Java Gatsby";
    myBooks[2].title = "The Java Cookbook";
    myBooks[0].author = "bob";
    myBooks[1].author = "sue";
    myBooks[2].author = "ian";
    while (x < 3) {
      System.out.print(myBooks[x].title);
      System.out.print(" by ");
      System.out.println(myBooks[x].author);
      x = x + 1;
    }
  }
}
```

Remember: We have to actually make the Book objects!

B

```
class Hobbits {
  String name;

  public static void main(String[] args) {
    Hobbits[] h = new Hobbits[3];
    int z = -1;
    while (z < 2) {
      z = z + 1;
      h[z] = new Hobbits();
      h[z].name = "bilbo";
      if (z == 1) {
        h[z].name = "frodo";
      }
      if (z == 2) {
        h[z].name = "sam";
      }
      System.out.print(h[z].name + " is a ");
      System.out.println("good Hobbit name");
    }
  }
}
```

Remember: arrays start with element 0!

Puzzle Solutions

Pool Puzzle

(from "Pool Puzzle")

```
class Triangle {
  double area;
  int height;
  int length;
```

```
  public static void main(String[] args) {
    int x = 0;
    Triangle[] ta = new Triangle[4];
    while (x < 4) {
      ta[x] = new Triangle();
      ta[x].height = (x + 1) * 2;
      ta[x].length = x + 4;
      ta[x].setArea();
      System.out.print("triangle " + x +
                       ", area");
      System.out.println(" = " + ta[x].area);
      x = x + 1;
    }
    int y = x;
    x = 27;
    Triangle t5 = ta[2];
    ta[2].area = 343;
    System.out.print("y = " + y);
    System.out.println(", t5 area = " +
                       t5.area);
  }

  void setArea() {
    area = (height * length) / 2;
  }
}
```

```
File Edit Window Help Bermuda
%java Triangle
triangle 0, area = 4.0
triangle 1, area = 10.0
triangle 2, area = 18.0
triangle 3, area = 28.0
y = 4, t5 area = 343.0
```

Five-Minute Mystery

(from "Five-Minute Mystery")

The case of the pilfered references

Tawny could see that Kate's method had a serious flaw. It's true that she didn't use as many reference variables as Bob, but there was no way to access any but the last of the Contact objects that her method created. With each trip through the loop, she was assigning a new object to the one reference variable, so the previously referenced object was abandoned on the heap—*unreachable*. Without access to nine of the ten objects created, Kate's method was useless.

(The software was a huge success, and the client gave Tawny and Bob an extra week in Hawaii. We'd like to tell you that by finishing this book you too will get stuff like that.)

A Heap o' Trouble

(from "A Heap o' Trouble")

Reference Variables: **HeapQuiz Objects:**

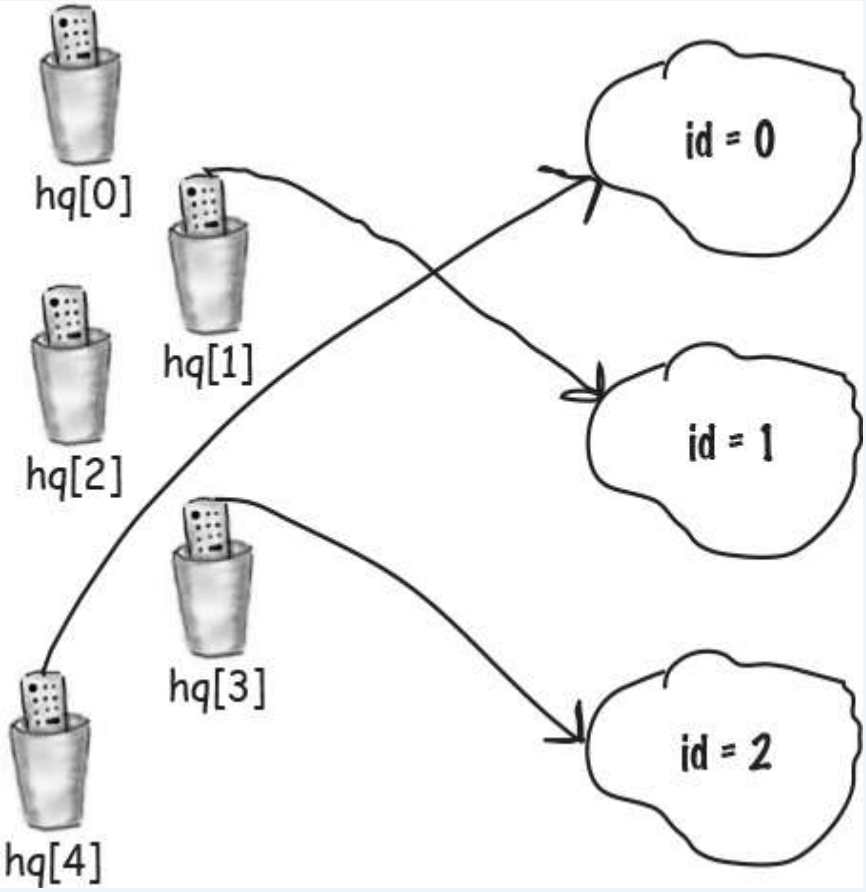

Chapter 4. How Objects Behave: Methods Use Instance Variables

State affects behavior, behavior affects state. We know that objects have **state** and **behavior**, represented by **instance variables** and **methods**. But until now, we haven't looked at how state and behavior are *related*. We already know that each instance of a class (each object of a particular type) can have its own unique values for its instance variables. Dog A can have a *name* "Fido" and a *weight* of 70 pounds. Dog B is "Killer" and weighs 9 pounds. And if the Dog class has a method makeNoise(), well, don't you

think a 70-pound dog barks a bit deeper than the little 9-pounder? (Assuming that annoying yippy sound can be considered a *bark*.) Fortunately, that's the whole point of an object—it has *behavior* that acts on its *state*. In other words, ***methods use instance variable values***. Like, "if dog is less than 14 pounds, make yippy sound, else..." or "increase weight by 5." ***Let's go change some state.***

Remember: a class describes what an object knows and what an object does

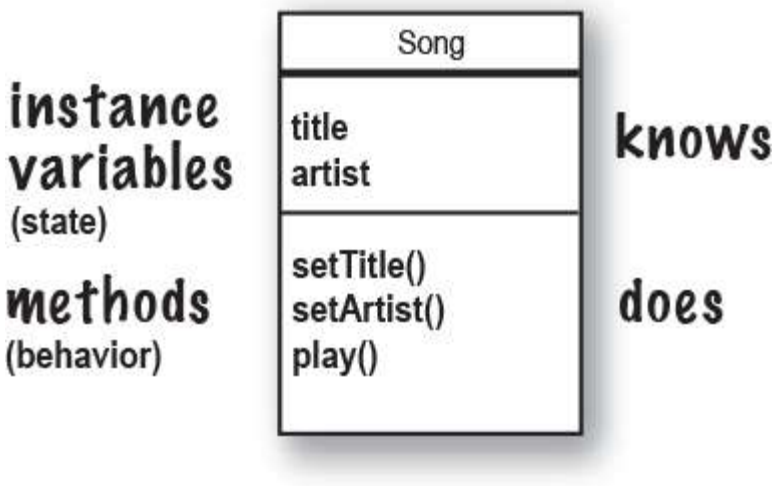

A class is the blueprint for an object. When you write a class, you're describing how the JVM should make an object of that type. You already know that every object of that type can have different *instance variable* values. But what about the methods?

Can every object of that type have different method behavior?

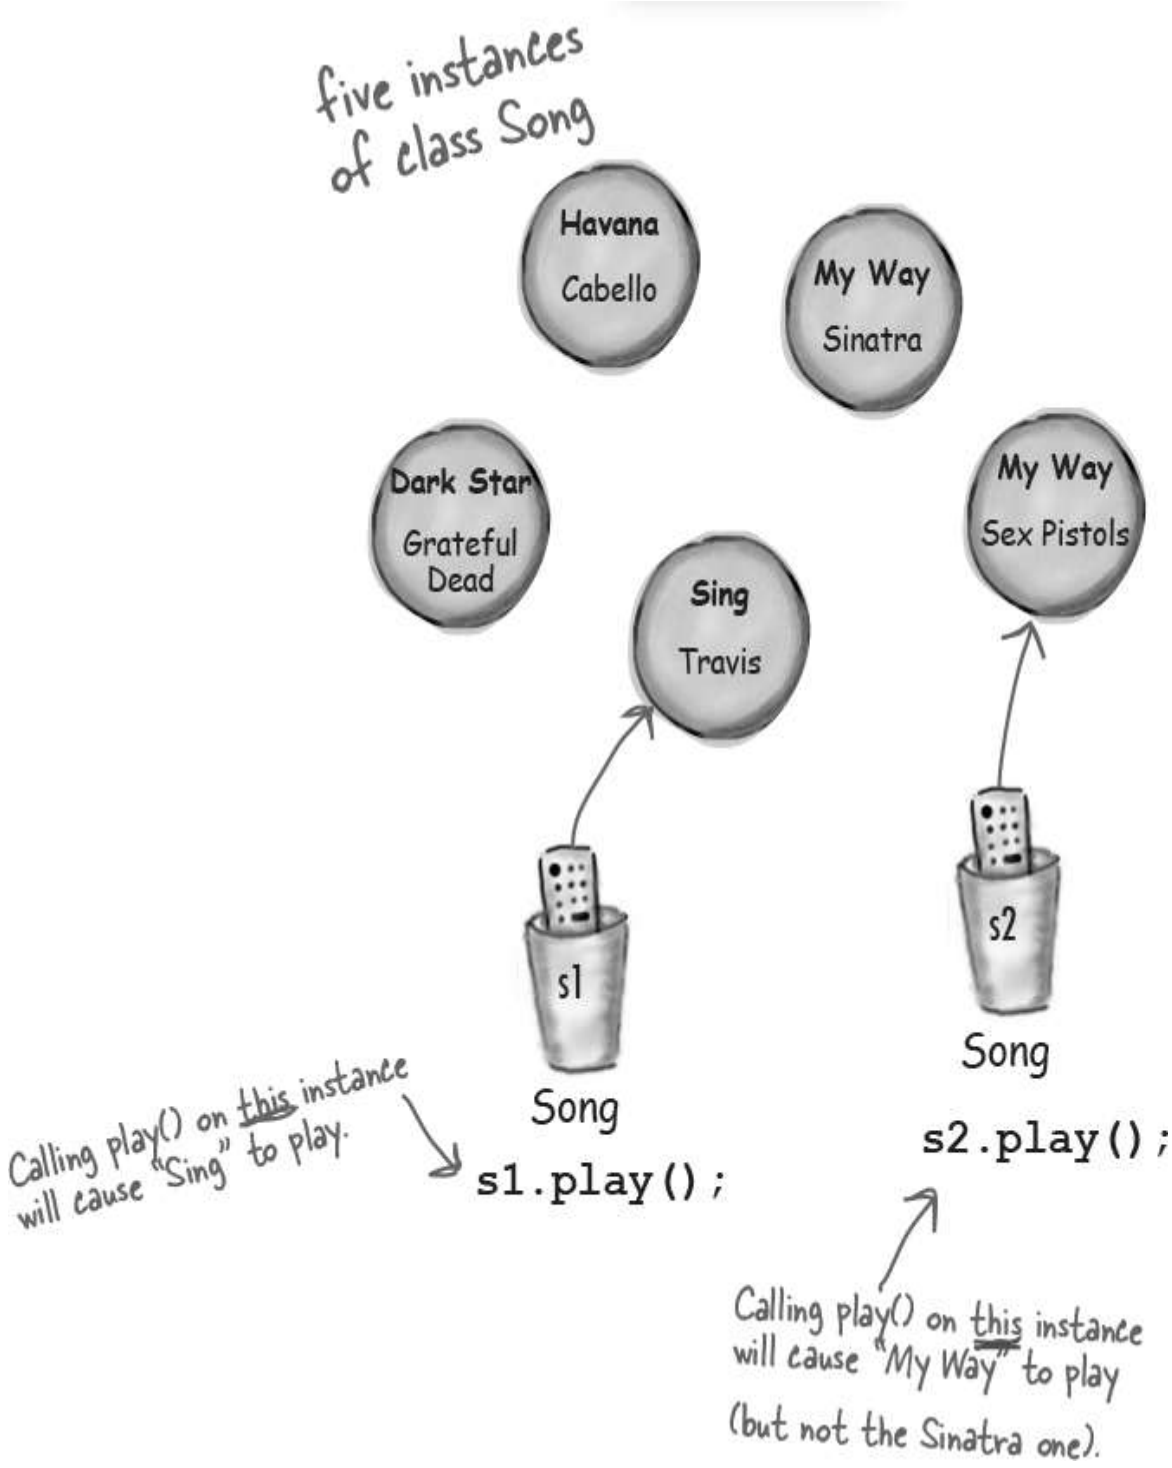

Well...***sort of.****

Every instance of a particular class has the same methods, but the methods can *behave* differently based on the value of the instance variables.

The Song class has two instance variables, *title* and *artist*. When you call the play() method on an the instance, it will play the song represented by the value of the *title* and *artist* instance variables for that instance. So, if you call the play() method on one instance, you'll hear the song "Havana" by Cabello, while another instance plays "Sing" by Travis. The method code, however, is the same.

```
void play() {
    soundPlayer.playSound(title, artist);
}
```

```
Song song1 = new Song();
song1.setArtist("Travis");
song1.setTitle("Sing");
Song song2 = new Song();
song2.setArtist("Sex Pistols");
song2.setTitle("My Way");
```

The size affects the bark

A small Dog's bark is different from a big Dog's bark.

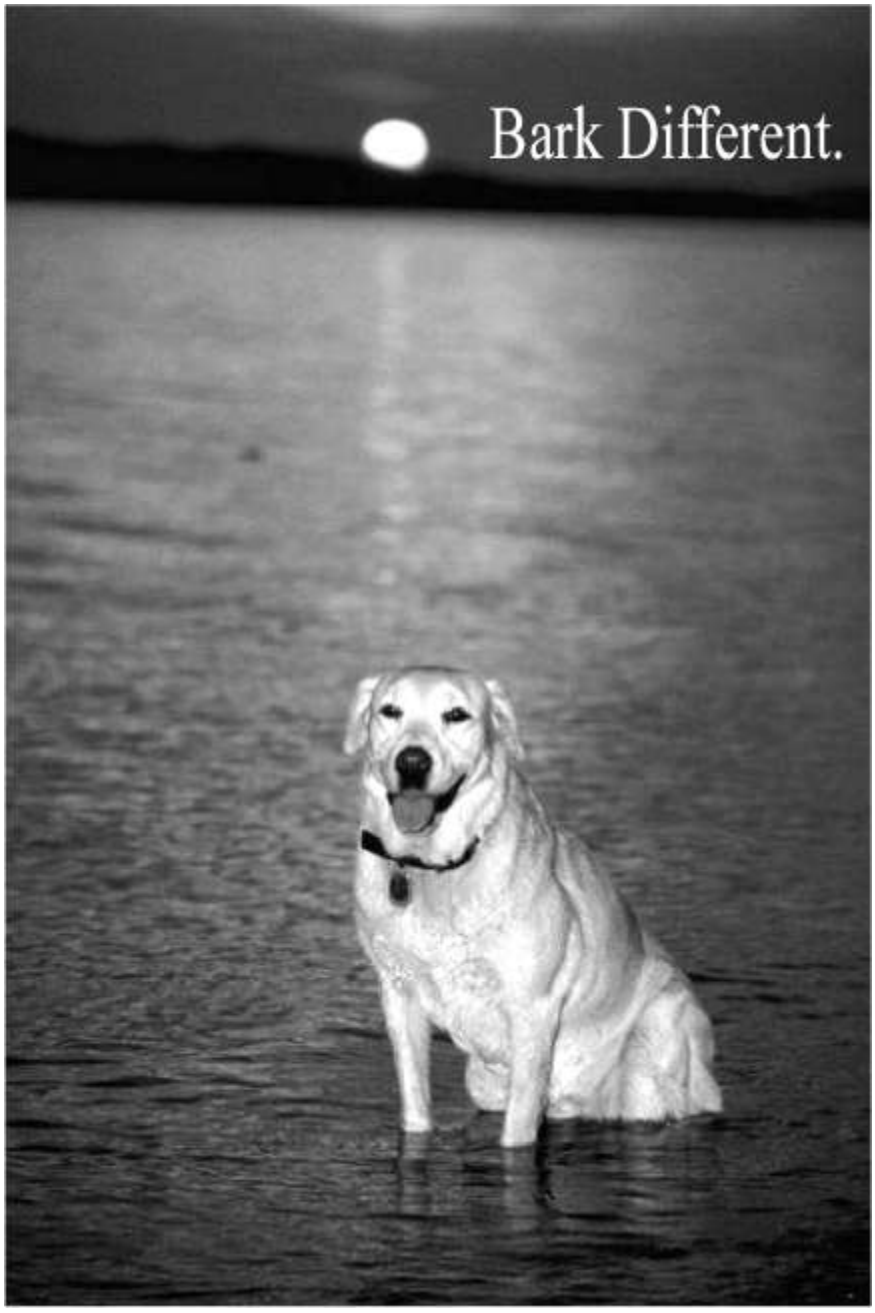

The Dog class has an instance variable *size* that the *bark()* method uses to decide what kind of bark sound to make.

```
class Dog {
  int size;
  String name;

  void bark() {
    if (size > 60) {
      System.out.println("Wooof! Wooof!");
    } else if (size > 14) {
      System.out.println("Ruff!  Ruff!");
    } else {
      System.out.println("Yip! Yip!");
    }
  }
}
```

```
class DogTestDrive {

  public static void main(String[] args) {
    Dog one = new Dog();
    one.size = 70;
    Dog two = new Dog();
    two.size = 8;
    Dog three = new Dog();
    three.size = 35;

    one.bark();
    two.bark();
    three.bark();
  }
}
```

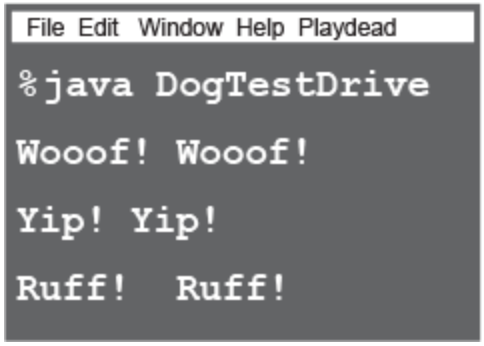

You can send things to a method

Just as you expect from any programming language, you can pass values into your methods. You might, for example, want to tell a Dog object how many times to bark by calling:

```
d.bark(3);
```

Depending on your programming background and personal preferences, *you* might use the term *arguments* or perhaps *parameters* for the values passed into a method. Although there *are* formal computer science distinctions that people who wear lab coats (and who will almost certainly not read this book) make, we have bigger fish to fry in this book. So *you* can call them whatever you like (arguments, donuts, hairballs, etc.) but we're doing it like this:

A caller passes arguments. A method takes parameters.

Arguments are the things you pass into the methods. An ***argument*** (a value like 2, Foo, or a reference to a Dog) lands face-down into a...wait for it...***parameter***. And a parameter is nothing more than a local variable. A variable with a type and a name that can be used inside the body of the method.

But here's the important part: **If a method takes a parameter, you *must* pass it something when you call it.** And that something must be a value of the appropriate type.

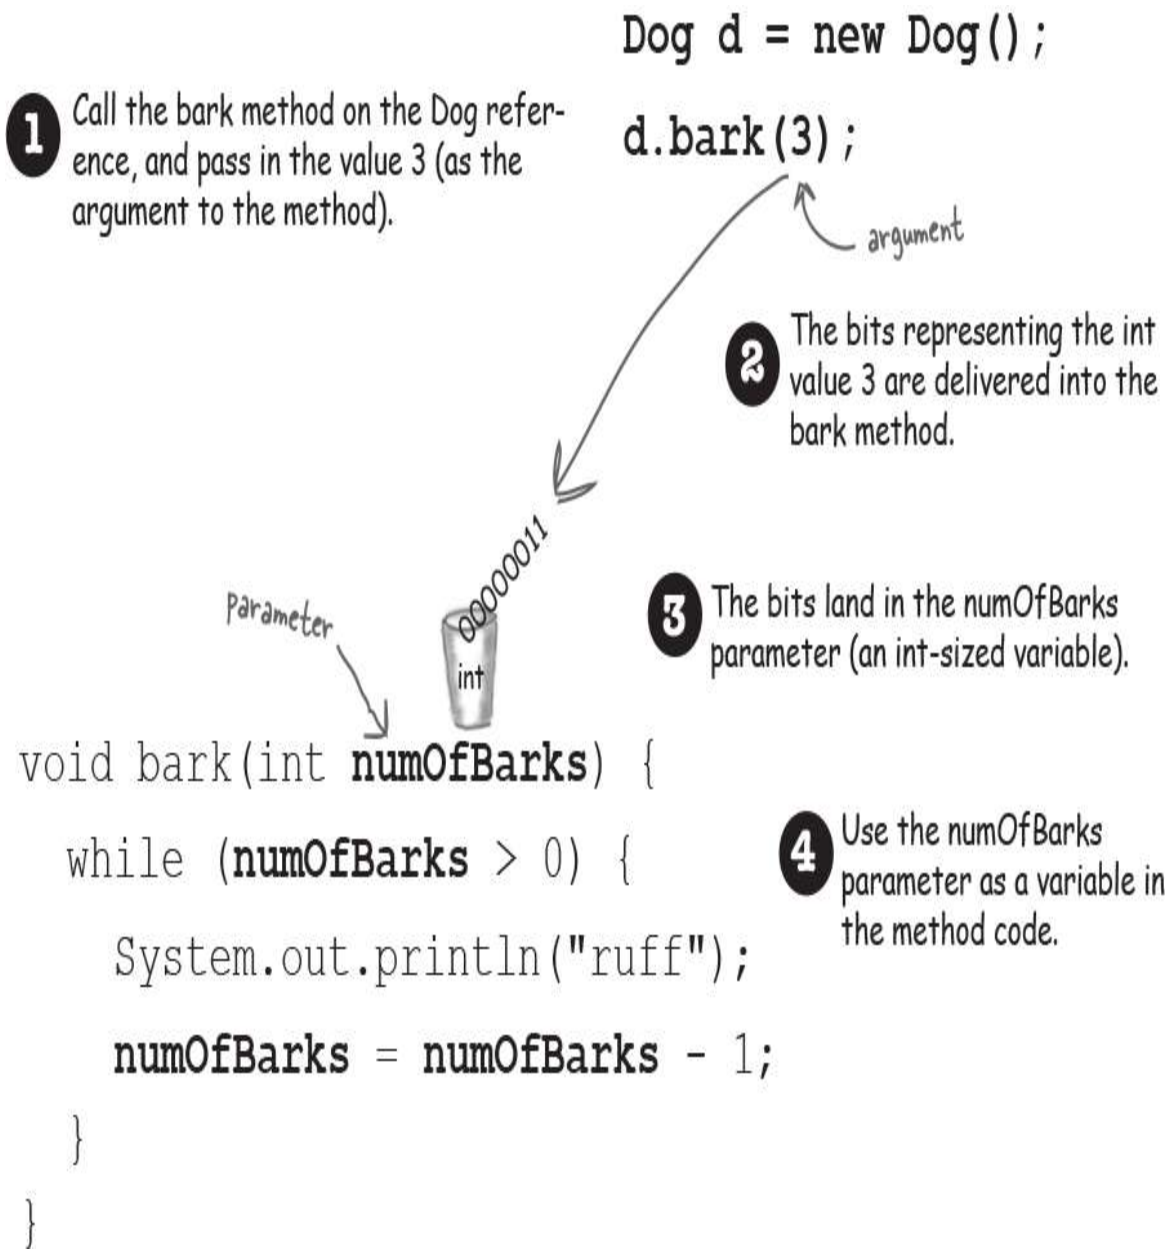

You can get things back from a method

Methods can also *return* values. Every method is declared with a return type, but until now we've made all of our methods with a **void** return type, which means they don't give anything back.

```
void go() {
}
```

But we can declare a method to give a specific type of value back to the caller, such as:

```
int giveSecret() {
  return 42;
}
```

If you declare a method to return a value, you *must* return a value of the declared type! (Or a value that is *compatible* with the declared type. We'll get into that more when we talk about polymorphism in Chapter 7 and Chapter 8.)

Whatever you say you'll give back, you *better* give back!

The compiler won't let you return the wrong type of thing.

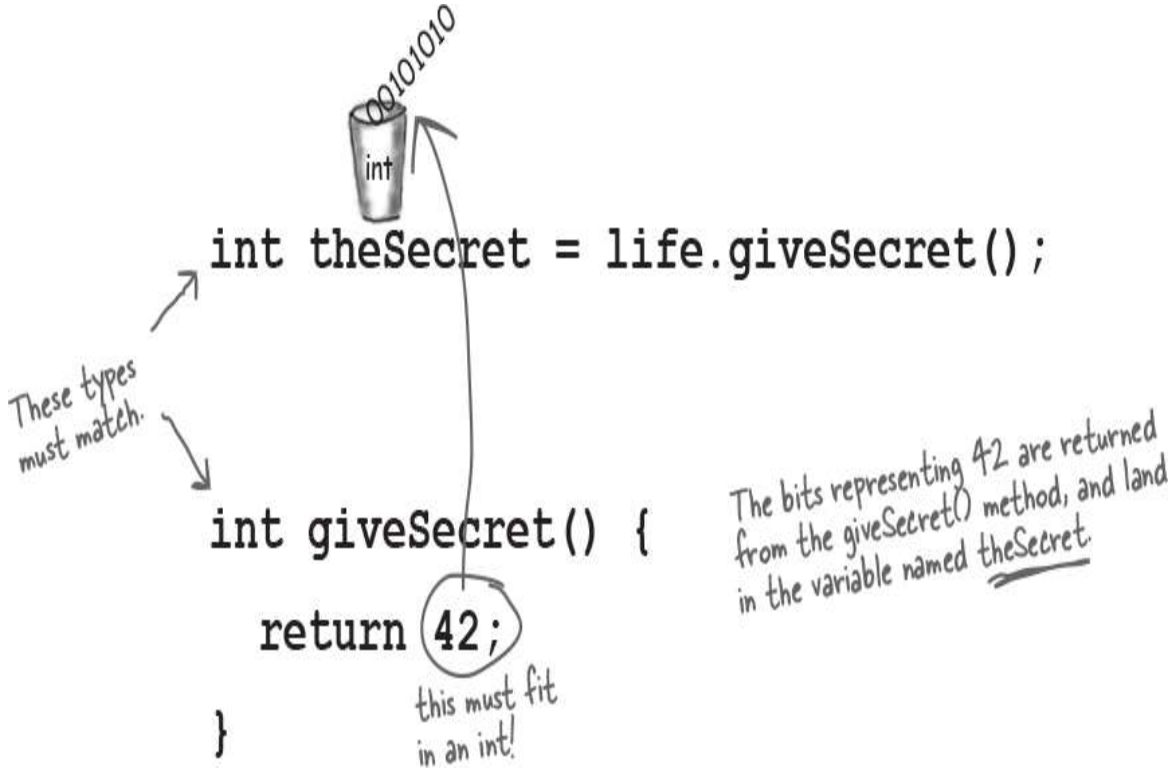

You can send more than one thing to a method

Methods can have multiple parameters. Separate them with commas when you declare them, and separate the arguments with commas when you pass them. Most importantly, if a method has parameters, you *must* pass arguments of the right type and order.

Calling a two-parameter method and sending it two arguments

```
void go() {
  TestStuff t = new TestStuff();
  t.takeTwo(12, 34);
}

void takeTwo(int x, int y) {
  int z = x + y;
  System.out.println("Total is " + z);
}
```

The arguments you pass land in the same order you passed them. First argument lands in the first parameter, second argument in the second parameter, and so on.

You can pass variables into a method, as long as the variable type matches the parameter type

```
void go() {
   int foo = 7;
   int bar = 3;
   t.takeTwo(foo, bar);
}

void takeTwo(int x, int y) {
   int z = x + y;
   System.out.println("Total is " + z);
}
```

The values of foo and bar land in the x and y parameters. So now the bits in x are identical to the bits in foo (the bit pattern for the integer '7'), and the bits in y are identical to the bits in bar.

What's the value of z? It's the same result you'd get if you added foo + bar at the time you passed them into the takeTwo method.

Java is pass-by-value. That means pass-by-copy.



1 Declare an int variable and assign it the value '7'. The bit pattern for 7 goes into the variable named x.

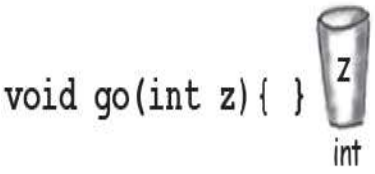

2 Declare a method with an int parameter named z.

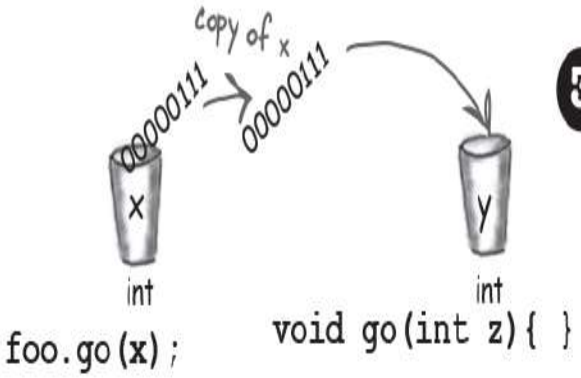

3 Call the go() method, passing the variable x as the argument. The bits in x are copied, and the copy lands in z.

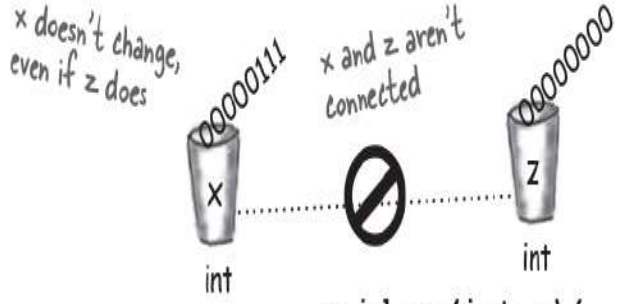

4 Change the value of z inside the method. The value of x doesn't change! The argument passed to the z parameter was only a copy of x.

The method can't change the bits that were in the calling variable x.

THERE ARE NO DUMB QUESTIONS

Q: What happens if the argument you want to pass is an object instead of a primitive?

A: You'll learn more about this in later chapters, but you already *know* the answer. Java passes *everything* by value. ***Everything***. But...*value* means *bits inside the variable*. And remember, you don't stuff objects into variables; the variable is a remote control—*a reference to an object*. So if you pass a reference to an object into a method, you're passing a *copy of the remote control*. Stay tuned, though, we'll have lots more to say about this.

Q: Can a method declare multiple return values? Or is there some way to return more than one value?

A: Sort of. A method can declare only one return value. BUT...if you want to return, say, three int values, then the declared return type can be an int *array*. Stuff those ints into the array, and pass it on back. It's a little more involved to return multiple values with different types; we'll be talking about that in a later chapter when we talk about ArrayList.

Q: Do I have to return the exact type I declared?

A: You can return anything that can be *implicitly* promoted to that type. So, you can pass a byte where an int is expected. The caller won't care, because the byte fits just fine into the int the caller will use for assigning the result. You must use an *explicit* cast when the declared type is *smaller* than what you're trying to return (we'll see these in Chapter 5).

Q: Do I have to do something with the return value of a method? Can I just ignore it?

A: Java doesn't require you to acknowledge a return value. You might want to call a method with a non-void return type, even though you don't care about the return value. In this case, you're calling the method for the work it does *inside* the method, rather than for what the method gives *returns*. In Java, you don't have to assign or use the return value.

Reminder: Java cares about type!

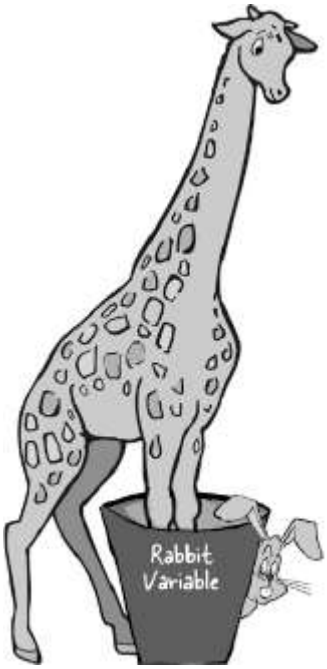

You can't return a Giraffe when the return type is declared as a Rabbit. Same thing with parameters. You can't pass a Giraffe into a method that takes a Rabbit.

BULLET POINTS

- Classes define what an object knows and what an object does.
- Things an object knows are its **instance variables** (state).
- Things an object does are its **methods** (behavior).
- Methods can use instance variables so that objects of the same type can behave differently.
- A method can have parameters, which means you can pass one or more values in to the method.
- The number and type of values you pass in must match the order and type of the parameters declared by the method.
- Values passed in and out of methods can be implicitly promoted to a larger type or explicitly *cast* to a smaller type.
- The value you pass as an argument to a method can be a literal value (2, ‘c’, etc.) or a variable of the declared parameter type (for example, *x* where *x* is an int variable). (There are other things you can pass as arguments, but we’re not there yet.)
- A method *must* declare a return type. A void return type means the method doesn’t return anything.
- If a method declares a non-void return type, it *must* return a value compatible with the declared return type.

Cool things you can do with parameters and return types

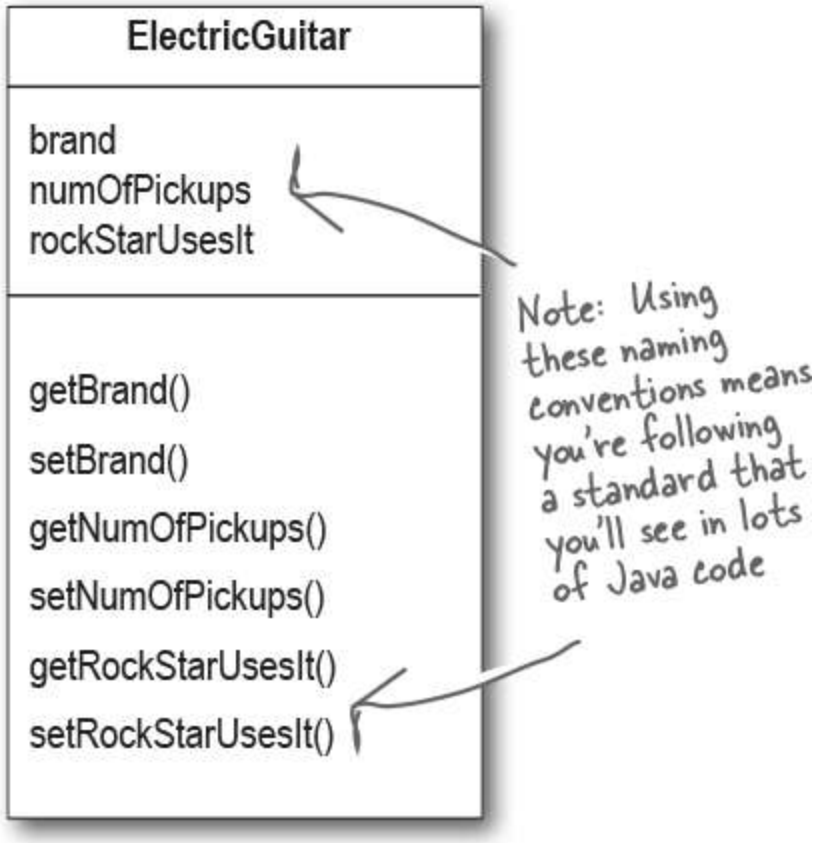

Now that we've seen how parameters and return types work, it's time to put them to good use: let's create **Getters** and **Setters**. If you're into being all formal about it, you might prefer to call them *Accessors* and *Mutators*. But that's a waste of perfectly good syllables. Besides, Getters and Setters fits a common Java naming convention, so that's what we'll call them.

Getters and Setters let you, well, *get and set things*. Instance variable values, usually. A Getter's sole purpose in life is to send back, as a return value, the value of whatever it is that particular Getter is supposed to be Getting. And by now, it's probably no surprise that a Setter lives and breathes for the chance to take an argument value and use it to *set* the value of an instance variable.

```
class ElectricGuitar {
  String brand;
  int numOfPickups;
  boolean rockStarUsesIt;

  String getBrand() {
    return brand;
  }

  void setBrand(String aBrand) {
    brand = aBrand;
  }

  int getNumOfPickups() {
    return numOfPickups;
  }

  void setNumOfPickups(int num) {
    numOfPickups = num;
  }

  boolean getRockStarUsesIt() {
    return rockStarUsesIt;
  }

  void setRockStarUsesIt(boolean yesOrNo) {
    rockStarUsesIt = yesOrNo;
```

```
  }
}
```

Encapsulation

Do it or risk humiliation and ridicule.

Until this most important moment, we've been committing one of the worst OO faux pas (and we're not talking minor violation like showing up without the "B" in BYOB). No, we're talking Faux Pas with a capital "F." And "P."

Our shameful transgression?

Exposing our data!

Here we are, just humming along without a care in the world leaving our data out there for *anyone* to see and even touch.

You may have already experienced that vaguely unsettling feeling that comes with leaving your instance variables exposed.

Exposed means reachable with the dot operator, as in:

```
theCat.height = 27;
```

Think about this idea of using our remote control to make a direct change to the Cat object's size instance variable. In the hands of the wrong person, a reference variable (remote control) is quite a dangerous weapon. Because what's to prevent:

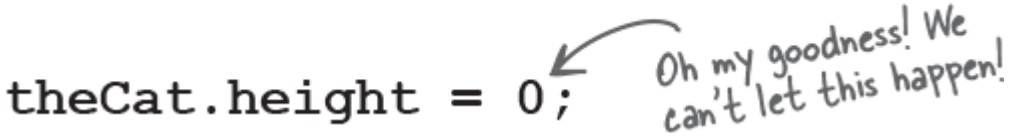

This would be a Bad Thing. We need to build setter methods for all the instance variables, and find a way to force other code to call the setters rather than access the data directly.

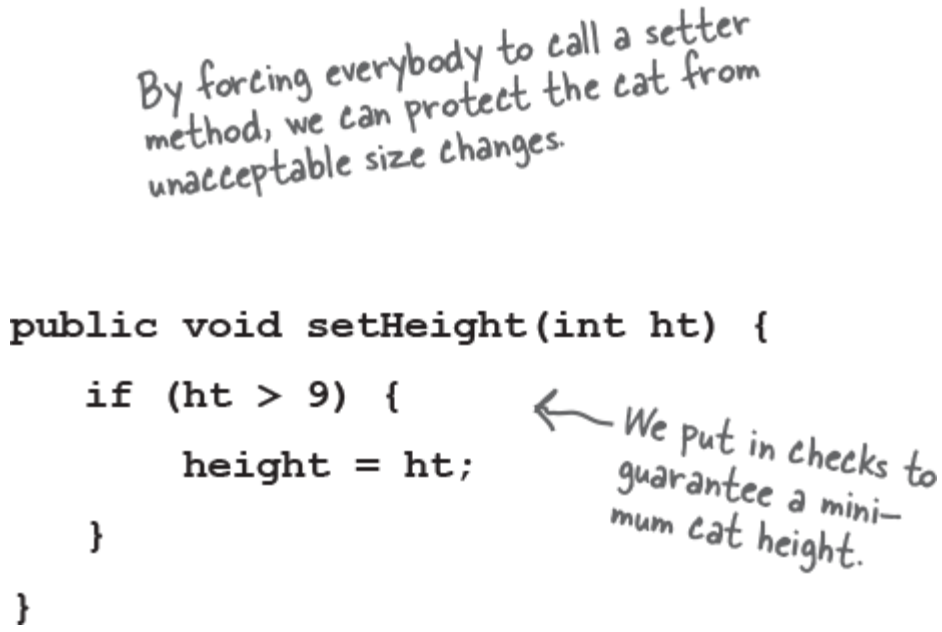

Hide the data

Yes, it *is* that simple to go from an implementation that's just begging for bad data to one that protects your data *and* protects your right to modify your implementation later.

OK, so how exactly do you *hide* the data? With the **`public`** and **`private`** access modifiers. You're familiar with **`public`**—we use it with every main method.

Here's an encapsulation *starter* rule of thumb (all standard disclaimers about rules of thumb are in effect): mark your instance variables ***private*** and provide ***public*** getters and setters for access control. When you have more design and coding savvy in Java, you will probably do things a little differently, but for now, this approach will keep you safe.

Mark instance variables private.

Mark getters and setters public.

“Sadly, Bill forgot to encapsulate his Cat class and ended up with a flat cat.”

(overheard at the water cooler)

Java Exposed

This week’s interview: An Object gets candid about encapsulation.

HeadFirst: What’s the big deal about encapsulation?

Object: OK, you know that dream where you’re giving a talk to 500 people when you suddenly realize you’re *naked*?

HeadFirst: Yeah, we’ve had that one. It’s right up there with the one about the Pilates machine and...no, we won’t go there. OK, so you feel naked. But other than being a little exposed, is there any danger?

Object: Is there any danger? Is there any *danger*? [starts laughing] Hey, did all you other instances hear that, *“Is there any danger?”* he asks? [falls on the floor laughing]

HeadFirst: What’s funny about that? Seems like a reasonable question.

Object: OK, I’ll explain it. It’s [bursts out laughing again, uncontrollably]

HeadFirst: Can I get you anything? Water?

Object: Whew! Oh boy. No I’m fine, really. I’ll be serious. Deep breath. OK, go on.

HeadFirst: So what does encapsulation protect you from?

Object: Encapsulation puts a force-field around my instance variables, so nobody can set them to, let's say, something *inappropriate*.

HeadFirst: Can you give me an example?

Object: Happy to. Most instance variable values are coded with certain assumptions about their boundaries. Like, think of all the things that would break if negative numbers were allowed. Number of bathrooms in an office. Velocity of an airplane. Birthdays. Barbell weight. Phone numbers. Microwave oven power.

HeadFirst: I see what you mean. So how does encapsulation let you set boundaries?

Object: By forcing other code to go through setter methods. That way, the setter method can validate the parameter and decide if it's doable. Maybe the method will reject it and do nothing, or maybe it'll throw an Exception (like if it's a null Social Security number for a credit card application), or maybe the method will round the parameter sent in to the nearest acceptable value. The point is, you can do whatever you want in the setter method, whereas you can't do *anything* if your instance variables are public.

HeadFirst: But sometimes I see setter methods that simply set the value without checking anything. If you have an instance variable that doesn't have a boundary, doesn't that setter method create unnecessary overhead? A performance hit?

Object: The point to setters (and getters, too) is that ***you can change your mind later, without breaking anybody else's code!*** Imagine if half the people in your company used your class with public instance variables, and one day you suddenly realized, "Oops—there's something I didn't plan for with that value, I'm going to have to switch to a setter method." You break everyone's code. The cool thing about encapsulation is that *you get to change your mind.* And nobody gets hurt. The performance gain from using variables directly is so miniscule and would rarely—*if ever*—be worth it.

Encapsulating the GoodDog class

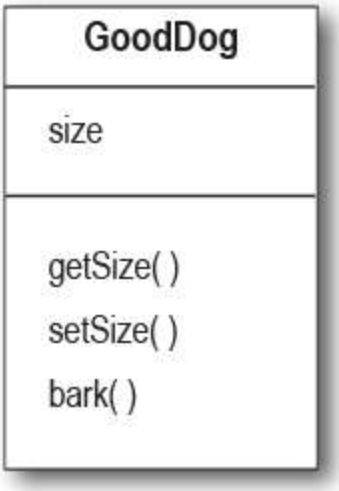

Make the instance variable private.

Make the getter and setter methods public.

Even though the methods don't really add new functionality, the nice thing is that you can change your mind later. You can come back and make a method safer, faster, better.

```
class GoodDog {
  private int size;

  public int getSize() {
    return size;
  }

  public void setSize(int s) {
    size = s;
  }

  void bark() {
    if (size > 60) {
      System.out.println("Wooof! Wooof!");
    } else if (size > 14) {
      System.out.println("Ruff!  Ruff!");
    } else {
      System.out.println("Yip! Yip!");
    }
  }
}

class GoodDogTestDrive {

  public static void main(String[] args) {
    GoodDog one = new GoodDog();
    one.setSize(70);
    GoodDog two = new GoodDog();
    two.setSize(8);
    System.out.println("Dog one: " + one.getSize());
    System.out.println("Dog two: " + two.getSize());
    one.bark();
    two.bark();
  }
}
```

Any place where a particular value can be used, a method *call that returns that type can be used.*

instead of:

int x = 3 + 24;

you can say:

int x = 3 + one.getSize();

How do objects in an array behave?

Just like any other object. The only difference is how you *get* to them. In other words, how you get the remote control. Let's try calling methods on Dog objects in an array.

- ❶ Declare and create a Dog array to hold seven Dog references.

```
Dog[] pets;
pets = new Dog[7];
```

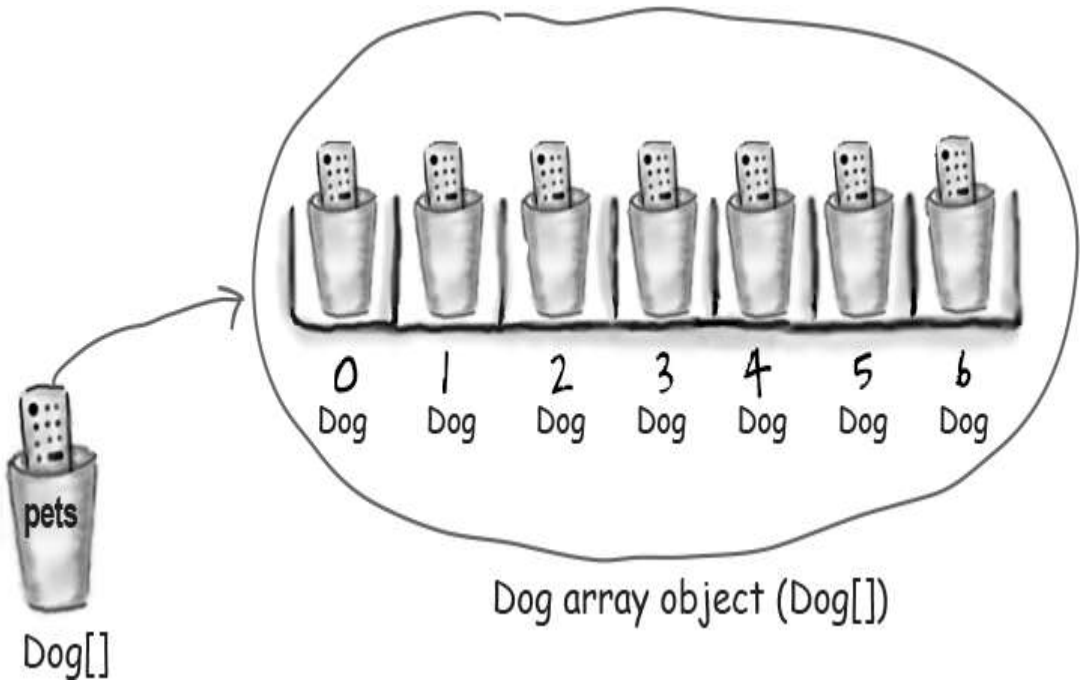

- ❷ Create two new Dog objects, and assign them to the first two array elements.

```
pets[0] = new Dog();
pets[1] = new Dog();
```

- ❸ Call methods on the two Dog objects.

```
pets[0].setSize(30);
int x = pets[0].getSize();
pets[1].setSize(8);
```

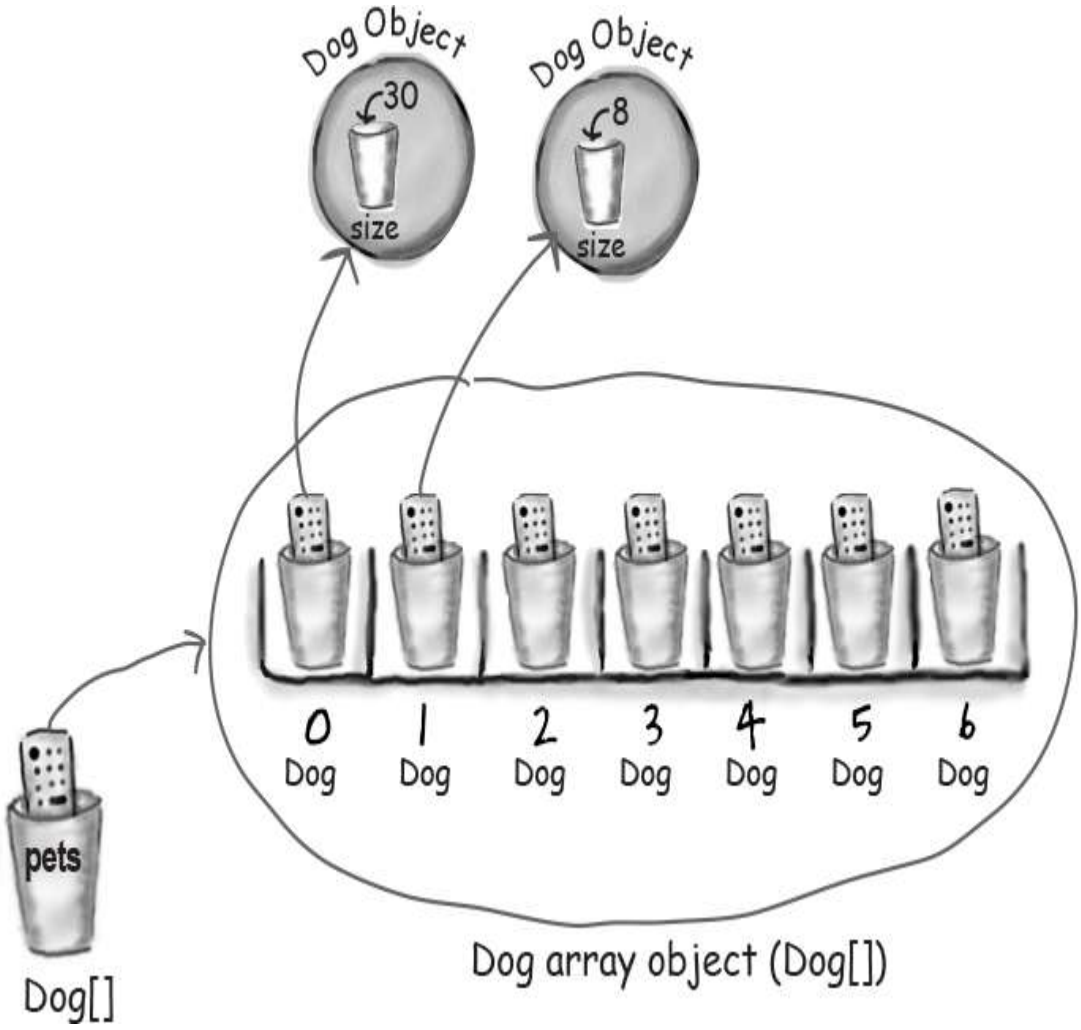

Declaring and initializing instance variables

You already know that a variable declaration needs at least a name and a type:

```
int size;
String name;
```

And you know that you can initialize (assign a value to) the variable at the same time:

```
int size = 420;
String name = "Donny";
```

But when you don't initialize an instance variable, what happens when you call a getter method? In other words, what is the *value* of an instance variable *before* you initialize it?

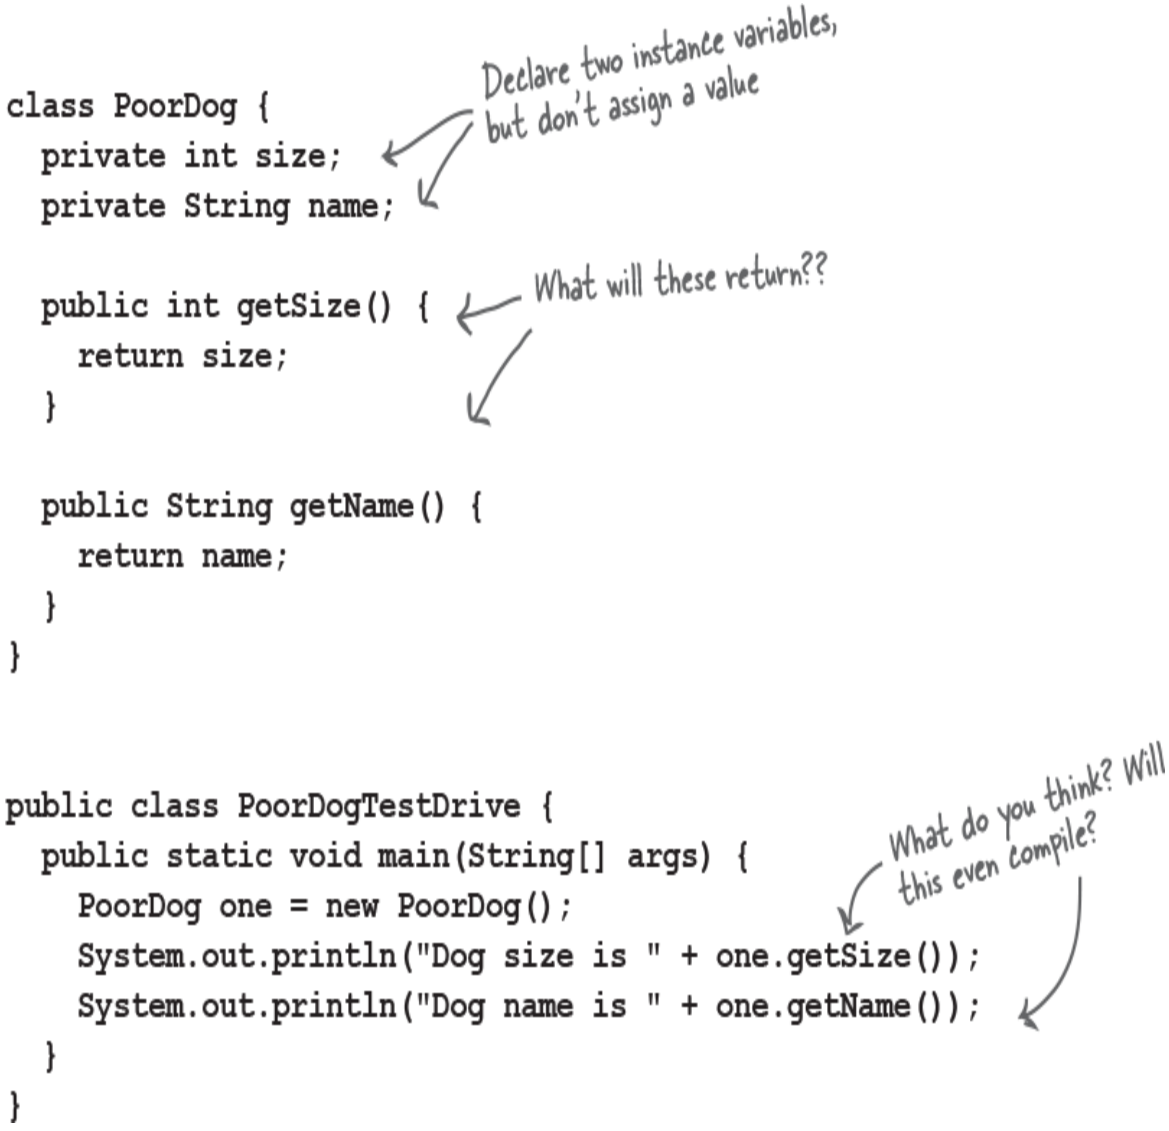


```
class PoorDog {
  private int size;
  private String name;

  public int getSize() {
    return size;
  }

  public String getName() {
    return name;
  }
}
```

```
public class PoorDogTestDrive {
  public static void main(String[] args) {
    PoorDog one = new PoorDog();
    System.out.println("Dog size is " + one.getSize());
    System.out.println("Dog name is " + one.getName());
  }
}
```

Instance variables always get a default value. If you don't explicitly assign a value to an instance variable or you don't call a setter method, the instance variable still has a value!

integers	0
floating points	0.0
booleans	false
references	null

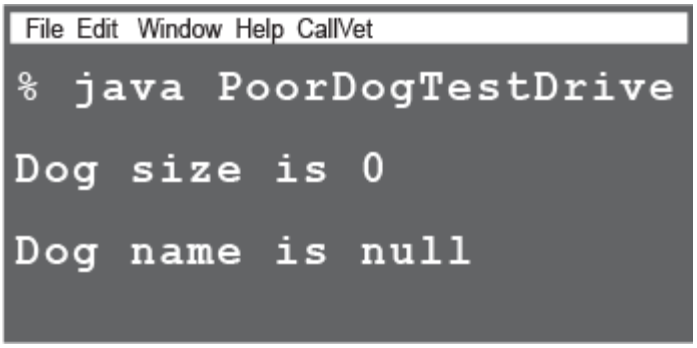

You don't have to initialize instance variables, because they always have a default value. Number primitives (including char) get 0, booleans get false, and object reference variables get null.

(Remember, null just means a remote control that isn't controlling / programmed to anything. A reference, but no actual object.)

The difference between instance and local variables

- ❶ **Instance** variables are declared inside a class but not within a method.

```
class Horse {
  private double height = 15.2;
  private String breed;
  // more code...
}
```

- ❷ **Local** variables are declared <u>within a method.</u>

```
class AddThing {
  int a;
  int b = 12;

  public int add() {
    int total = a + b;
    return total;
  }
}
```

INSTANCE variables

← LOCAL variable

- ❸ **Local** variables <u>MUST be initialized</u> before use!

```
class Foo {
  public void go() {
    int x;
    int z = x + 3;
  }
}
```

Won't compile!! You can declare x without a value, but as soon as you try to USE it, the compiler freaks out.

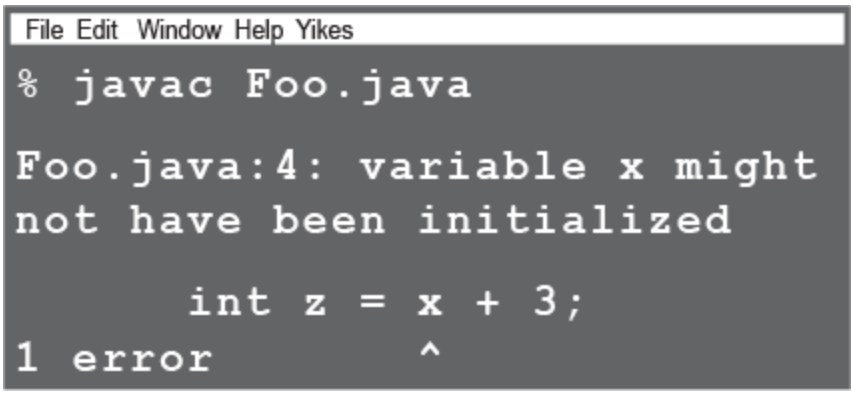

Local variables do NOT get a default value! The compiler complains if you try to use a local variable before the variable is initialized.

THERE ARE NO DUMB QUESTIONS

Q: What about method parameters? How do the rules about local variables apply to them?

A: Method parameters are virtually the same as local variables—they're declared *inside* the method (well, technically they're declared in the *argument list* of the method rather than within the *body* of the method, but they're still local variables as opposed to instance variables). But method parameters will never be uninitialized, so you'll never get a compiler error telling you that a parameter variable might not have been initialized.

Instead, the compiler will give you an error if you try to invoke a method without giving the arguments that the method needs. So parameters are *always* initialized, because the compiler guarantees that methods are always called with arguments that match the parameters. The arguments are assigned (automatically) to the parameters.

Comparing variables (primitives or references)

Sometimes you want to know if two *primitives* are the same; for example, you might want to check an int result with some expected integer value. That's easy enough: just use the == operator. Sometimes you want to know if two reference variables refer to a single object on the heap; for example, is this Dog object exactly the same Dog object I started with? Easy as well: just use the == operator. But sometimes you want to know if two *objects* are equal. And for that, you need the .equals() method.

The idea of equality for objects depends on the type of object. For example, if two different String objects have the same characters (say, "my name"), they are meaningfully equivalent, regardless of whether they are two distinct objects on the heap. But what about a Dog? Do you want to treat two Dogs as being equal if they happen to have the same size and weight? Probably not. So whether two different objects should be treated as equal depends on what makes sense for that particular object type. We'll explore the notion of object equality again in later chapters, but for now, we need to understand that the == operator is used *only* to compare the bits in two variables. *What* those bits represent doesn't matter. The bits are either the same, or they're not.

To compare two primitives, use the == operator

The == operator can be used to compare two variables of any kind, and it simply compares the bits.

if (a == b) {...} looks at the bits in a and b and returns true if the bit pattern is the same (although all the extra zeros on the left end don't matter).

```
int a = 3;
byte b = 3;
if (a == b) { // true }
```

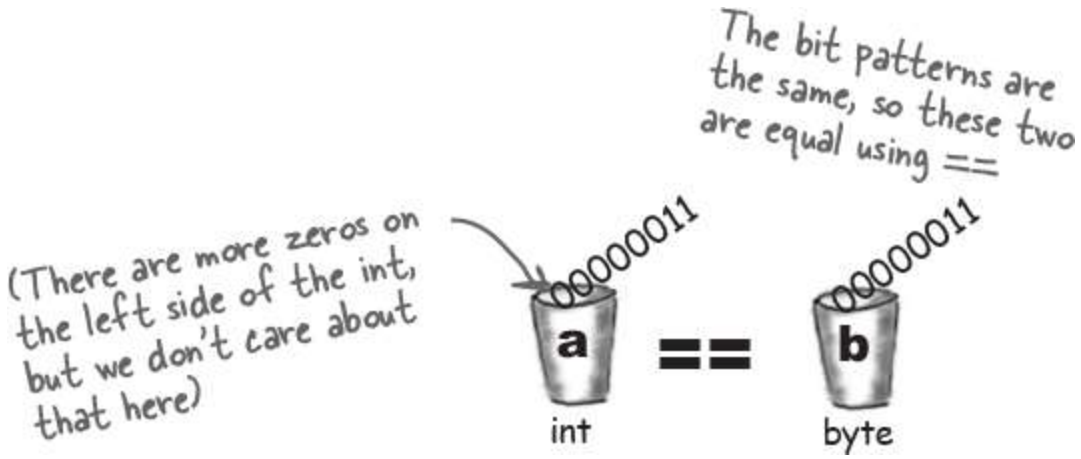

Use == to compare two primitives or to see if two references refer to the same object.

Use the equals() method to see if two different objects are equal.

(E.g., two different String objects that both contain the characters "Fred")

To see if two <u>references</u> are the same (which means they refer to the same object on the heap) use the == operator

Remember, the == operator cares only about the pattern of bits in the variable. The rules are the same whether the variable is a reference or primitive. So the == operator returns true if two reference variables refer to the same object! In that case, we don't know what the bit pattern is (because it's dependent on the JVM and hidden from us), but we *do* know that whatever it looks like, *it will be the same for two references to a single object*.

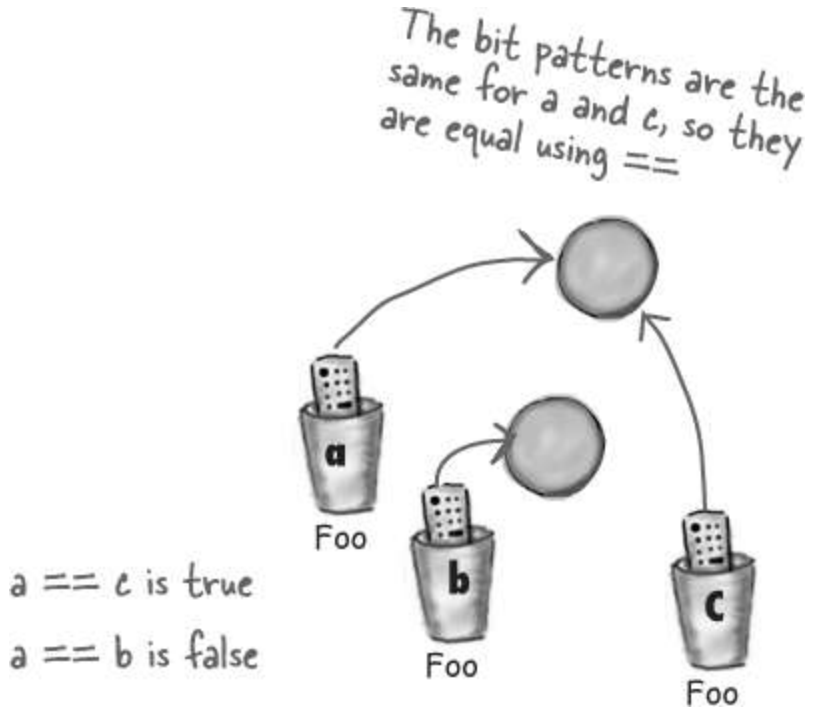


```
Foo a = new Foo();
Foo b = new Foo();
Foo c = a;
if (a == b) { } // false
if (a == c) { } // true
if (b == c) { } // false
```

I always keep my variables private. If you want to see them, you have to talk to my methods.
private

BULLET POINTS

- Encapsulation gives you control over who changes the data in your class and how.
- Make an instance variable *private* so it can't be changed by accessing the variable directly.
- Create a public mutator method, e.g., a setter, to control how other code interacts with your data. For example, you can add validation code inside a setter to make sure the value isn't changed to something invalid.
- *Instance* variables are assigned values by default, even if you don't set them explicitly.
- *Local* variables, e.g., variables inside methods, are not assigned a value by default. You always need to initialize them.
- Use == to check if two primitives are the same value.
- Use == to check if two references are the same, i.e., two object variables are actually the same object.
- Use .equals() to see if two objects are equivalent (but not necessarily the same object), e.g., to check if two String values contain the same characters.

SHARPEN YOUR PENCIL

What's legal?

Given the method below, which of the method calls listed on the right are legal?

Put a checkmark next to the ones that are legal. (Some statements are there to assign values used in the method calls.)

```
int calcArea(int height, int width) {
    return height * width;
}

int a = calcArea(7, 12);
short c = 7;
calcArea(c, 15);

int d = calcArea(57);

calcArea(2, 3);

long t = 42;
int f = calcArea(t, 17);

int g = calcArea();
```

```
calcArea();

byte h = calcArea(4, 20);

int j = calcArea(2, 3, 5);
```

→ **Answers in "Sharpen your pencil".**

Exercise

BE the Compiler

Each of the Java files on this page represents a complete source file. Your job is to play compiler and determine whether each of these files will compile. If they won't compile, how would you fix them, and if they do compile, what would be their output?

A

```
class XCopy {

  public static void main(String[] args) {
    int orig = 42;
    XCopy x = new XCopy();
    int y = x.go(orig);
    System.out.println(orig + " " + y);
  }

  int go(int arg) {
    arg = arg * 2;
    return arg;
  }
}
```

B

```
class Clock {
  String time;

  void setTime(String t) {
    time = t;
  }

  void getTime() {
    return time;
  }
}

class ClockTestDrive {
  public static void main(String[] args) {
    Clock c = new Clock();

    c.setTime("1245");
    String tod = c.getTime();
    System.out.println("time: "+tod);
  }
}
```

Answers in "BE the Compiler".

A bunch of Java components, in full costume, are playing a party game, "Who am I?" They give you a clue, and you try to guess who they are, based on what they say. Assume they always tell the truth about themselves. If they

happen to say something that could be true for more than one attendee, then write down all for whom that sentence applies. Fill in the blanks next to the sentence with the names of one or more attendees.

Who Am I?

Tonight's attendees:

instance variable, argument, return, getter, setter, encapsulation, public, private, pass by value, method

A class can have any number of these.	_____
A method can have only one of these.	_____
This can be implicitly promoted.	_____
I prefer my instance variables private.	_____
It really means "make a copy."	_____
Only setters should update these.	_____
A method can have many of these.	_____
I return something by definition.	_____
I shouldn't be used with instance variables.	_____
I can have many arguments.	_____
By definition, I take one argument.	_____
These help create encapsulation.	_____
I always fly solo.	_____

Answers in "Who Am I?".

Mixed Messages

A short Java program is listed to your right. Two blocks of the program are missing. Your challenge is to **match the candidate blocks of code** (below) **with the output** that you'd see if the blocks were inserted.

Not all the lines of output will be used, and some of the lines of output might be used more than once. Draw lines connecting the candidate blocks of code with their matching command-line output.

```
public class Mix4 {
  int counter = 0;

  public static void main(String[] args) {
    int count = 0;
    Mix4[] mixes = new Mix4[20];
    int i = 0;
    while ( [          ] ) {
      mixes[i] = new Mix4();
      mixes[i].counter = mixes[i].counter + 1;
      count = count + 1;
      count = count + mixes[i].maybeNew(i);
      i = i + 1;
    }
    System.out.println(count + " " +
                       mixes[1].counter);
  }

  public int maybeNew(int index) {
    if ( [             ] ) {
      Mix4 mix = new Mix4();
      mix.counter = mix.counter + 1;
      return 1;
    }
    return 0;
  }
}
```

Candidates:	Possible output:
`i < 9` `index < 5`	`14 7` `9 5`
`i < 20` `index < 5`	`19 1` `14 1`
`i < 7` `index < 7`	`25 1` `7 7`
`i < 19` `index < 1`	`20 1` `20 5`

→ Answers in "Mixed Messages".

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You may **not** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make a class that will compile and run and produce the output listed.

→ **Answers in "Pool Puzzle".**

Output

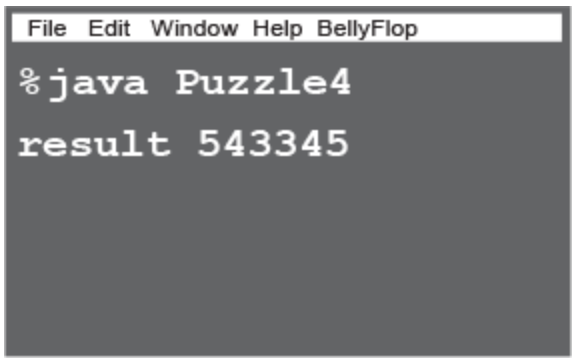


```
public class Puzzle4 {
  public static void main(String [] args) {
    ____________________________________
    int number = 1;
    int i = 0;
    while (i < 6) {
      ____________________________
      ____________________________
      number = number * 10;
      ________________
    }

    int result = 0;
    i = 6;
    while (i > 0) {
      ________________
```

```
      result = result + ____________________
    }
    System.out.println("result " + result);
  }
}

class ___________ {
  int intValue;
  ________  ______ doStuff(int _________) {
    if (intValue > 100) {
      return ____________________________
    } else {
      return ____________________________
    }
  }
}
```

NOTE

Note: Each snippet from the pool can be used only once!

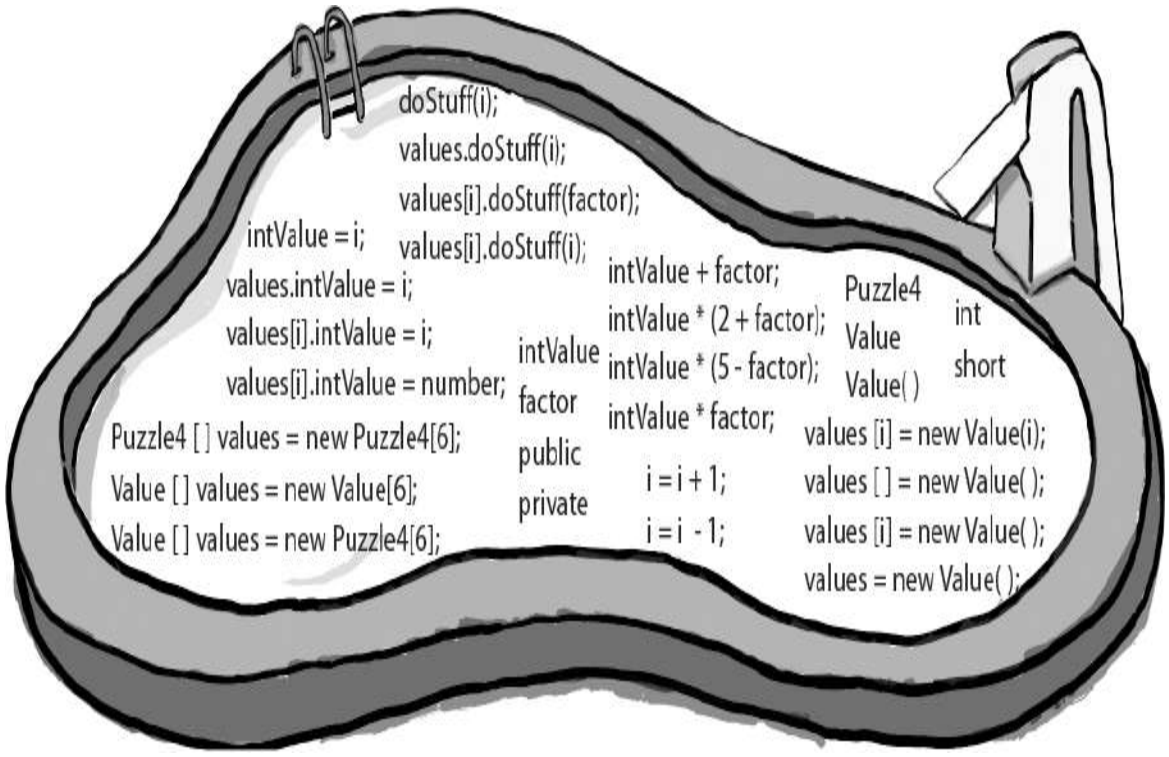

Fast Times in Stim-City

Five-Minute Mystery

When Buchanan roughly grabbed Jai's arm from behind, Jai froze. Jai knew that Buchanan was as stupid as he was ugly and he didn't want to spook the big guy. Buchanan ordered Jai into his boss's office, but Jai'd done nothing wrong (lately), so he figured a little chat with Buchanan's boss Leveler couldn't be too bad. He'd been moving lots of neural-stimmers in the west side lately, and he figured Leveler would be pleased. Black market stimmers weren't the best money pump around, but they were pretty harmless. Most of the stim-junkies he'd seen tapped out after a while and got back to life, maybe just a little less focused than before.

Leveler's "office" was a skungy-looking skimmer, but once Buchanan shoved him in, Jai could see that it'd been modified to provide all the extra speed and armor that a local boss like Leveler could hope for. "Jai my boy," hissed Leveler, "pleasure to see you again." "Likewise I'm sure...," said Jai, sensing the malice behind Leveler's greeting, "We should be square Leveler, have I missed something?" "Ha! You're making it look pretty good, Jai. Your volume is up, but I've been experiencing, shall we say, a little 'breach' lately," said Leveler.

Jai winced involuntarily; he'd been a top drawer jack-hacker in his day. Anytime someone figured out how to break a street-jack's security, unwanted attention turned toward Jai. "No way it's me man," said Jai, "not worth the downside. I'm retired from hacking, I just move my stuff and mind my own business." "Yeah, yeah," laughed Leveler, "I'm sure you're clean on this one, but I'll be losing big margins until this new jack-hacker is shut out!" "Well, best of luck, Leveler. Maybe you could just drop me here and I'll go move a few more 'units' for you before I wrap up today," said Jai.

“I’m afraid it’s not that easy, Jai. Buchanan here tells me that word is you’re current on Java NE 37.3.2,” insinuated Leveler. “Neural edition? Sure, I play around a bit, so what?” Jai responded, feeling a little queasy. “Neural edition’s how I let the stim-junkies know where the next drop will be,” explained Leveler. “Trouble is, some stim-junkie’s stayed straight long enough to figure out how to hack into my Warehousing database.” “I need a quick thinker like yourself, Jai, to take a look at my StimDrop Java NE class; methods, instance variables, the whole enchilada, and figure out how they’re getting in. It should...,” “HEY!” exclaimed Buchanan, “I don’t want no scum hacker like Jai nosin’ around my code!” “Easy big guy,” Jai saw his chance, “I’m sure you did a top rate job with your access modi...” “Don’t tell me, bit twiddler!” shouted Buchanan, “I left all of those junkie-level methods public so they could access the drop site data, but I marked all the critical WareHousing methods private. Nobody on the outside can access those methods, buddy, nobody!”

“I think I can spot your leak, Leveler. What say we drop Buchanan here off at the corner and take a cruise around the block?” suggested Jai. Buchanan clenched his fists and started toward Jai, but Leveler’s stunner was already on Buchanan’s neck, “Let it go, Buchanan,” sneered Leveler, “Keep your hands where I can see them and step outside. I think Jai and I have some plans to make.”

What did Jai suspect?

Will he get out of Leveler’s skimmer with all his bones intact?

→ **Answers in “Five-Minute Mystery”.**

Exercise Solutions

Sharpen your pencil

(from "Sharpen your pencil")

```
int a = calcArea(7, 12);
short c = 7;
calcArea(c, 15);

int d = calcArea(57);

calcArea(2, 3);

long t = 42;
int f = calcArea(t, 17);

int g = calcArea();

calcArea();

byte h = calcArea(4, 20);

int j = calcArea(2, 3, 5);
```

BE the Compiler

(from "BE the Compiler")

Class 'XCopy' compiles and runs as it stands! The output is: '42 84'. Remember, Java is pass by value, (which means pass by copy), and the variable 'orig' is not changed by the go( ) method.

A

```
class Clock {
  String time;

  void setTime(String t) {
    time = t;
  }

  String getTime() {
    return time;
  }
}
```

B

Note: 'Getter' methods have a return type by definition.

```
class ClockTestDrive {
  public static void main(String[] args) {
    Clock c = new Clock();
    c.setTime("1245");
    String tod = c.getTime();
    System.out.println("time: " + tod);
  }
}
```

Who Am I?

(from "Who Am I?")

A class can have any number of these.	**instance variables, getter, setter, method**
A method can have only one of these.	**return**
This can be implicitly promoted.	**return, argument**
I prefer my instance variables private.	**encapsulation**
It really means "make a copy."	**pass by value**
Only setters should update these.	**instance variables**
A method can have many of these.	**argument**
I return something by definition.	**getter**
I shouldn't be used with instance variables	**public**
I can have many arguments.	**method**
By definition, I take one argument.	**setter**
These help create encapsulation.	**getter, setter, public, private**
I always fly solo.	**return**

Puzzle Solutions

Pool Puzzle

(from "Pool Puzzle")

```
public class Puzzle4 {
  public static void main(String[] args) {
    Value[] values = new Value[6];
    int number = 1;
    int i = 0;
    while (i < 6) {
      values[i] = new Value();
      values[i].intValue = number;
      number = number * 10;
      i = i + 1;
    }

    int result = 0;
    i = 6;
    while (i > 0) {
      i = i - 1;
      result = result + values[i].doStuff(i);
    }
```

```
    System.out.println("result " + result);
  }
}

class Value {
  int intValue;
  public int doStuff(int factor) {
    if (intValue > 100) {
      return intValue * factor;
    } else {
      return intValue * (5 - factor);
    }
  }
}
```

Output

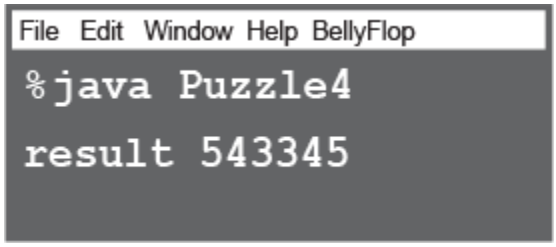

Five-Minute Mystery

(from "Five-Minute Mystery")

What did Jai suspect?

Jai knew that Buchanan wasn't the sharpest pencil in the box. When Jai heard Buchanan talk about his code, Buchanan never mentioned his instance variables. Jai suspected that while Buchanan did in fact handle his methods correctly, he failed to mark his instance variables `private`. That slip-up could have easily cost Leveler thousands.

Mixed Messages

(from "Mixed Messages")

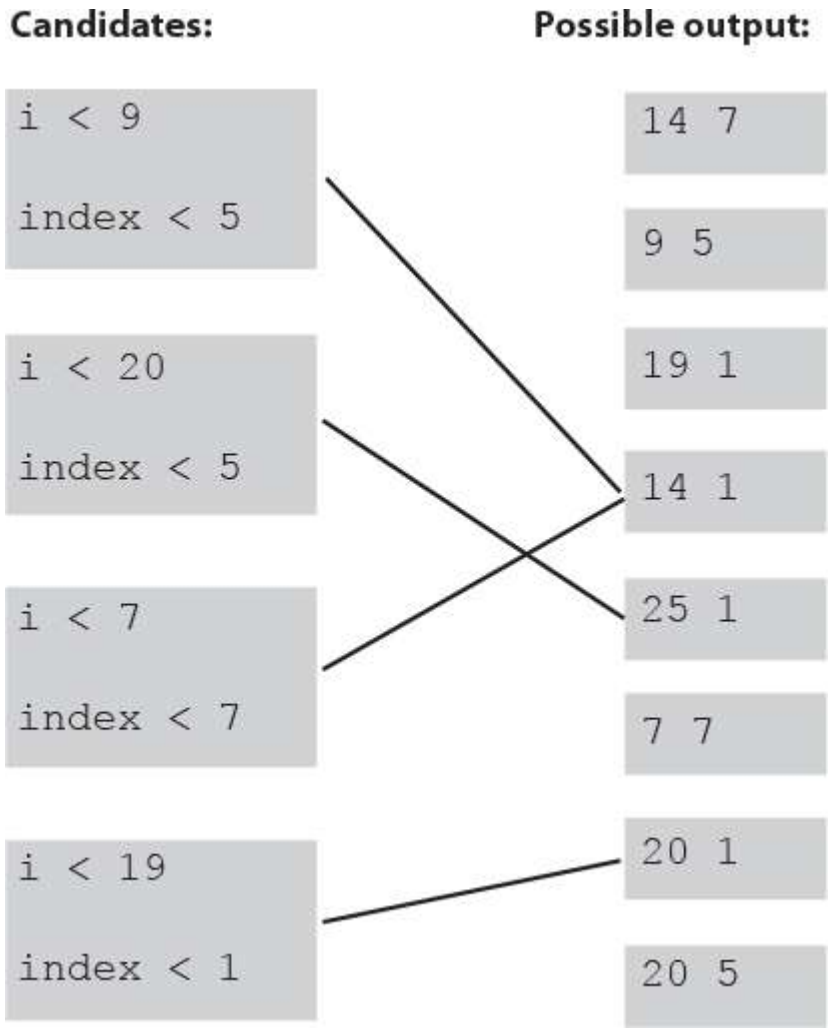
Candidates:
Possible output:
i < 9
index < 5
i < 20
index < 5
i < 7
index < 7
i < 19
index < 1
14 7
9 5
19 1
14 1
25 1
7 7
20 1
20 5

Chapter 5. Extra-Strength Methods: Writing A Program

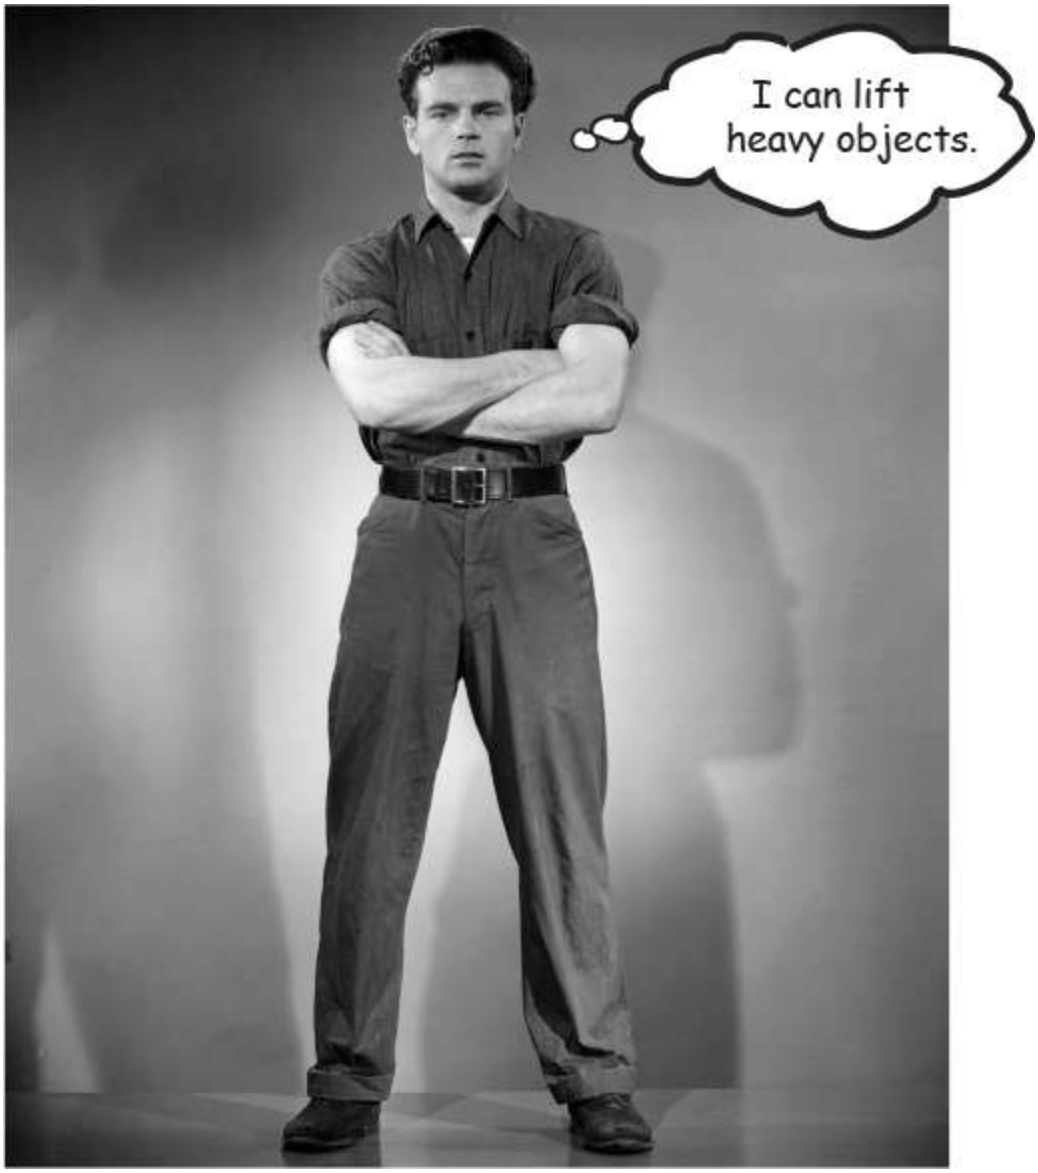

Let's put some muscle in our methods. We dabbled with variables, played with a few objects, and wrote a little code. But we were weak. We need more tools. Like **operators**. We need more operators so we can do something

a little more interesting than, say, *bark*. And **loops**. We need loops, but what's with the wimpy *while* loops? We need ***for*** loops if we're really serious. Might be useful to **generate random numbers**. Better learn that too. And why don't we learn it all by *building* something real, to see what it's like to write (and test) a program from scratch. **Maybe a game**, like Battleships. That's a heavy-lifting task, so it'll take *two* chapters to finish. We'll build a simple version in this chapter and then build a more powerful deluxe version in Chapter 6, *Using the Java Library*.

Let's build a Battleship-style game: "Sink a Startup"

It's you against the computer, but unlike the real Battleship game, in this one you don't place any ships of your own. Instead, your job is to sink the computer's ships in the fewest number of guesses.

Oh, and we aren't sinking ships. We're killing ill-advised, Silicon Valley Startups (thus establishing business relevancy so you can expense the cost of this book).

Goal: Sink all of the computer's Startups in the fewest number of guesses. You're given a rating or level, based on how well you perform.

Setup: When the game program is launched, the computer places three Startups on a **virtual 7 x 7 grid**. When that's complete, the game asks for your first guess.

How you play: We haven't learned to build a GUI yet, so this version works at the command line. The computer will prompt you to enter a guess (a cell) that you'll type at the command line as "A3," "C5," etc.). In response to your guess, you'll see a result at the command-line, either "hit," "miss," or "You sunk poniez" (or whatever the lucky Startup of the day is). When you've sent all three Startups to that big 404 in the sky, the game ends by printing out your rating.

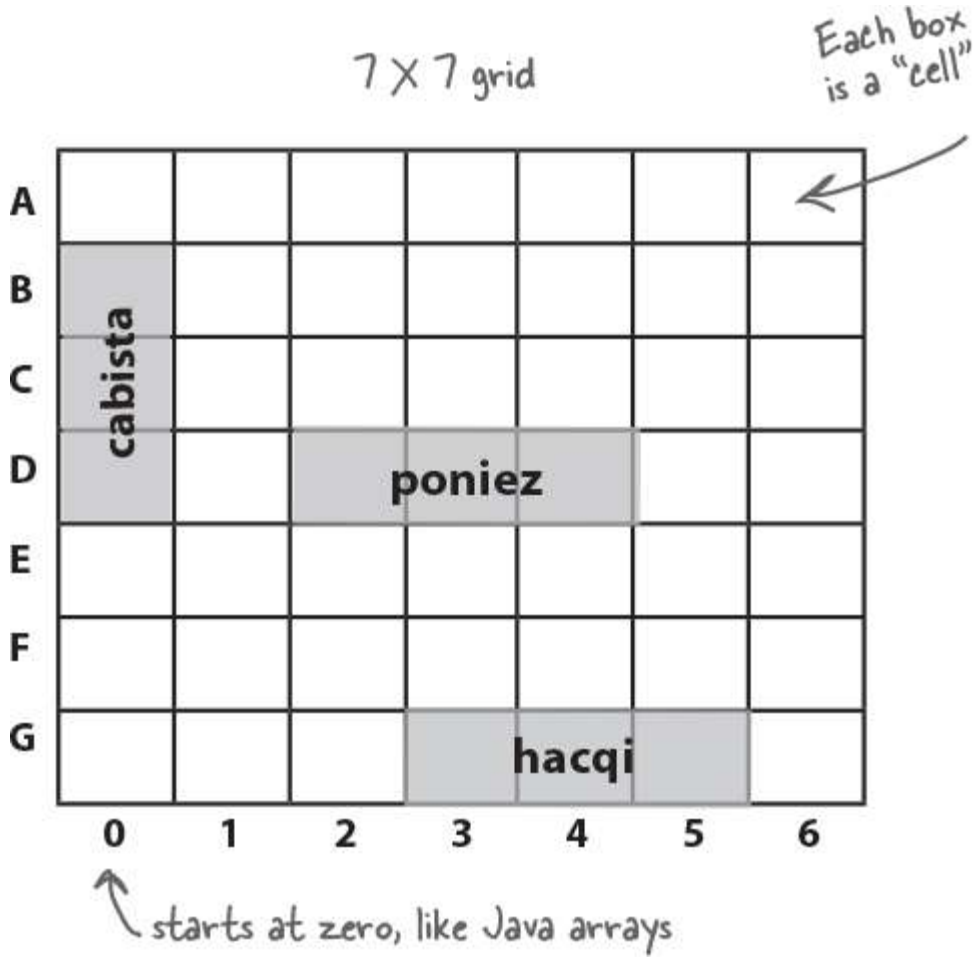

You're going to build the Sink a Startup game, with a 7 x 7 grid and three Startups. Each Startup takes up three cells.

part of a game interaction

File Edit Window Help Sell

```
%java StartupBust
Enter a guess  A3
miss
Enter a guess  B2
miss
Enter a guess  C4
miss
Enter a guess  D2
hit
Enter a guess  D3
hit
Enter a guess  D4
Ouch! You sunk poniez   : (
kill
Enter a guess  G3
hit
Enter a guess  G4
hit
Enter a guess  G5
Ouch! You sunk hacqi   : (
All Startups are dead! Your stock
is now worthless
Took you long enough. 62 guesses.
```

First, a high-level design

We know we'll need classes and methods, but what should they be? To answer that, we need more information about what the game should do.

First, we need to figure out the general flow of the game. Here's the basic idea:

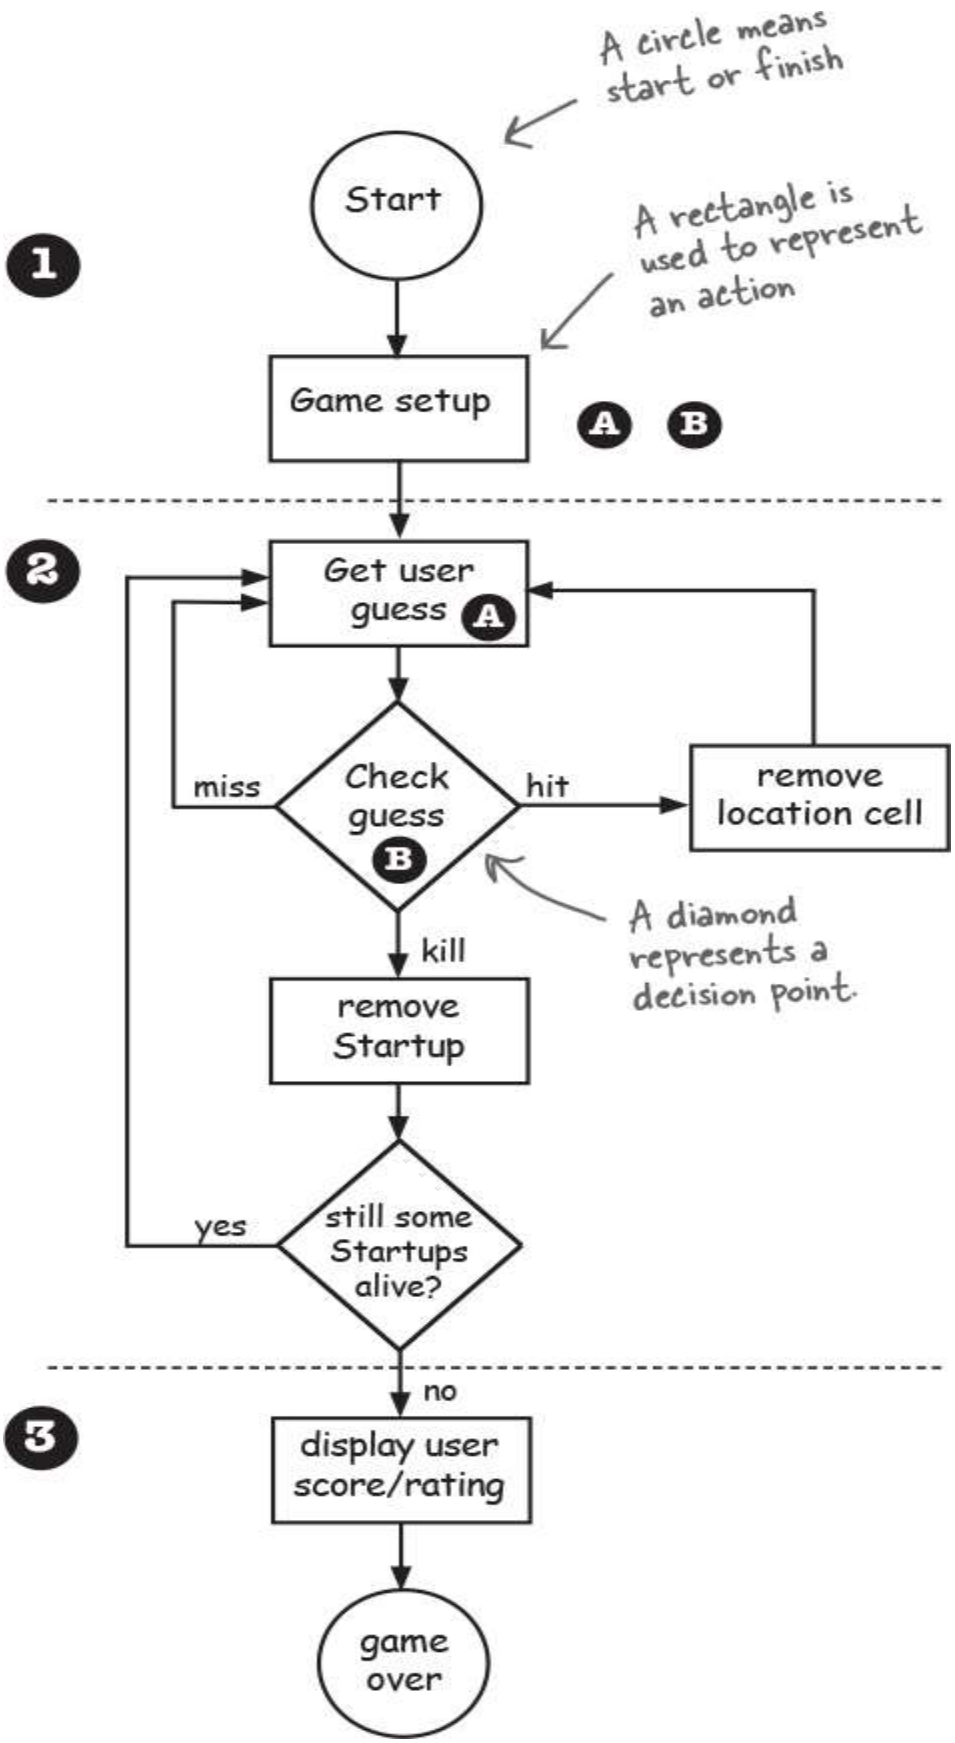
A circle means start or finish
Start
1
A rectangle is used to represent an action
Game setup
A
B
2
Get user guess
A
miss
Check guess
B
hit
remove location cell
A diamond represents a decision point.
kill
remove Startup
yes
still some Startups alive?
no
3
display user score/rating
game over

Figure 5-1. Whoa. A real flow chart.

- 1 User starts the game.
  - A Game creates three Startups
  - B Game places the three Startups onto a virtual grid
- 2 Game play begins.

  Repeat the following until there are no more Startups:

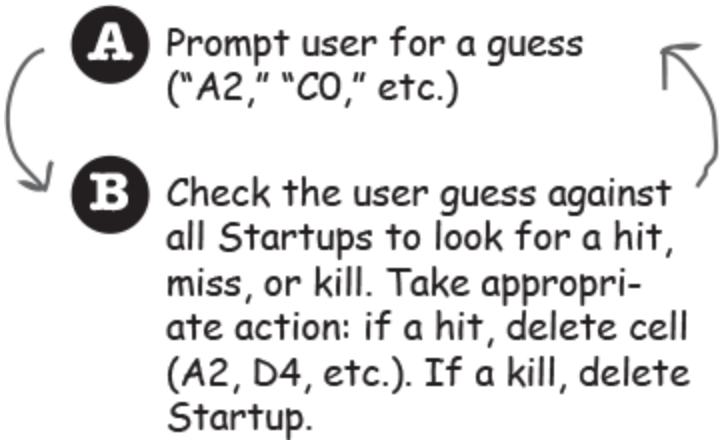

- 3 Game finishes.

  Give the user a rating based on the number of guesses.

Now we have an idea of the kinds of things the program needs to do. The next step is figuring out what kind of **objects** we'll need to do the work. Remember, think like Brad rather than Laura (who we met in Chapter 2, *A Trip to Objectville*); focus first on the ***things*** in the program rather than the ***procedures.***

The "Simple Startup Game" a gentler introduction

It looks like we're gonna need at least two classes, a Game class and a Startup class. But before we build the fullmonty ***Sink a Startup*** game, we'll start with a strippeddown, simplified version, ***Simple Startup Game***. We'll build the simple version in *this* chapter, followed by the deluxe version that we build in the *next* chapter.

Everything is simpler in this game. Instead of a 2-D grid, we hide the Startup in just a single *row*. And instead of *three* Startups, we use *one*.

The goal is the same, though, so the game still needs to make a Startup instance, assign it a location somewhere in the row, get user input, and when all of the Startup's cells have been hit, the game is over. This simplified version of the game gives us a big head start on building the full game. If we can get this small one working, we can scale it up to the more complex one later.

In this simple version, the game class has no instance variables, and all the game code is in the main() method. In other words, when the program is launched and main() begins to run, it will make the one and only Startup instance, pick a location for it (three consecutive cells on the single virtual seven-cell row), ask the user for a guess, check the guess, and repeat until all three cells have been hit.

Keep in mind that the virtual row is...*virtual*. In other words, it doesn't exist anywhere in the program. As long as both the game and the user know that the Startup is hidden in three consecutive cells out of a possible seven (starting at zero), the row itself doesn't have to be represented in code. You might be tempted to build an array of seven ints and then assign the Startup to three of the seven elements in the array, but you don't need to. All we need is an array that holds just the three cells the Startup occupies.

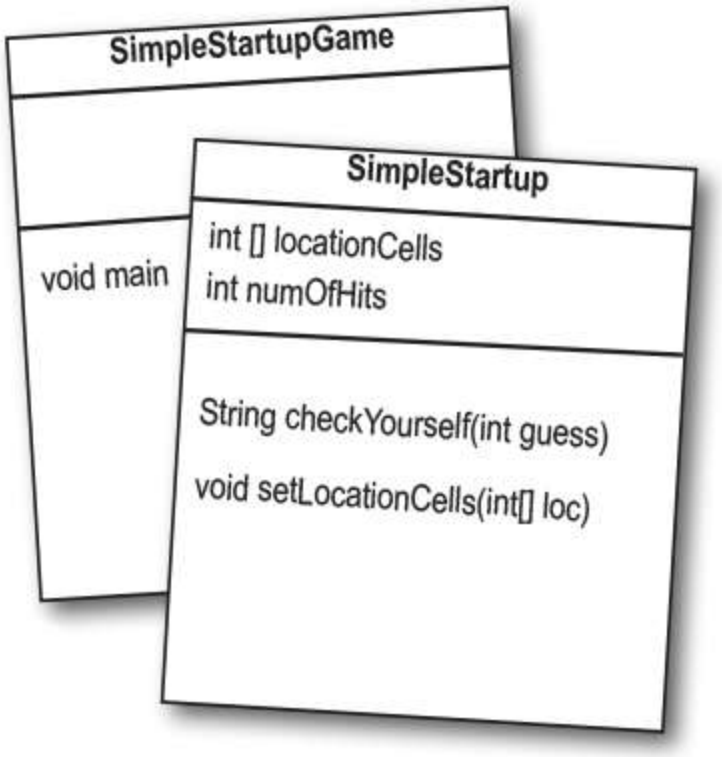

- ❶ **Game starts** and creates ONE Startup and gives it a location on three cells in the single row of seven cells.

  Instead of "A2," "C4," and so on, the locations are just integers (for example: 1,2,3 are the cell locations in this picture):

- ❷ **Game play begins.** Prompt user for a guess; then check to see if it hit any of the Startup's three cells. If a hit, increment the numOfHits variable.
- ❸ **Game finishes** when all three cells have been hit (the numOfHits variable value is 3), and the user is told how many guesses it took to sink the Startup.

A complete game interaction

Developing a Class

As a programmer, you probably have a methodology/process/approach to writing code. Well, so do we. Our sequence is designed to help you see (and learn) what we're thinking as we work through coding a class. It isn't necessarily the way we (or *you*) write code in the Real World. In the Real World, of course, you'll follow the approach your personal preferences, project, or employer dictate. We, however, can do pretty much whatever we want. And when we create a Java class as a "learning experience," we usually do it like this:

- ❑ Figure out what the class is supposed to *do*.
- ❑ List the **instance variables and methods.**
- ❑ Write **prep code** for the methods. (You'll see this in just a moment.)
- ❑ Write **test code** for the methods.
- ❑ **Implement** the class.

- ❑ **Test** the methods.
- ❑ **Debug** and **reimplement** as needed.
- ❑ Express gratitude that we don't have to test our so-called *learning experience* app on actual live users.

BRAIN POWER



Flex those dendrites.

How would you decide which class or classes to build *first*, when you're writing a program? Assuming that all but the tiniest programs need more than one class (if you're following good OO principles and not having *one* class do many different jobs), where do you start?

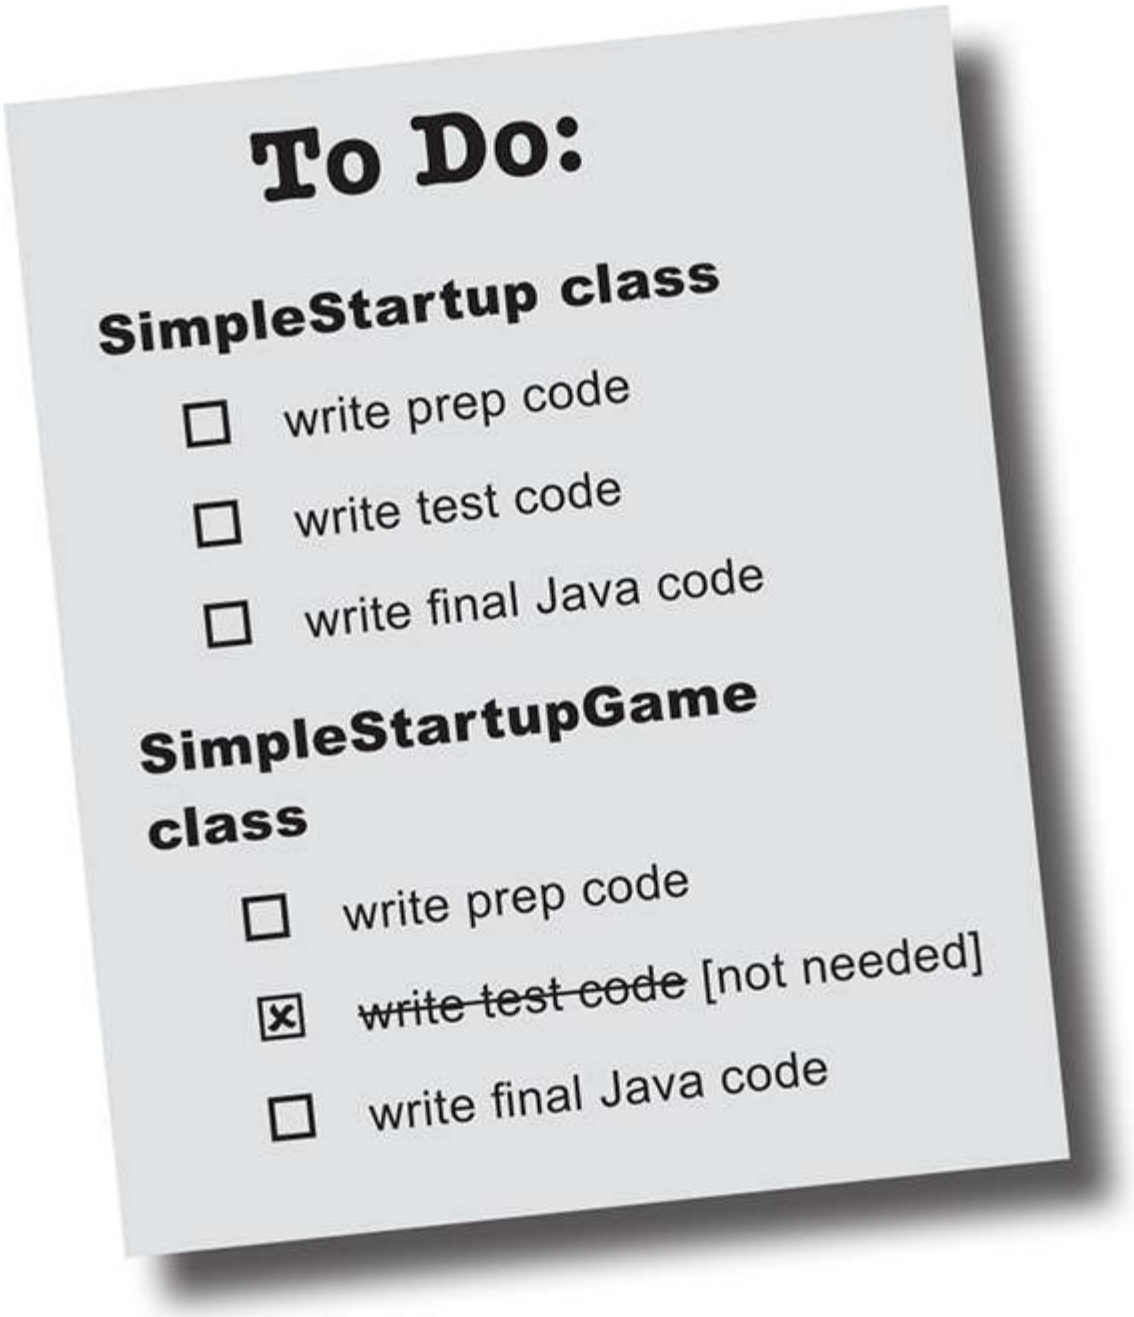

The three things we'll write for each class:

prep code	test code	real code

This bar is displayed on the next set of pages to tell you which part you're working on. For example, if you see this picture at the top of a page, it means you're working on prep code for the SimpleStartup class.

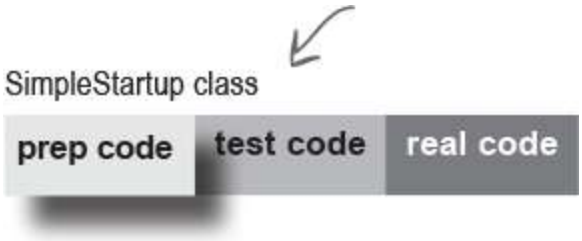

prep code

A form of pseudocode, to help you focus on the logic without stressing about sy ntax.

test code

A class or methods that will test the real code and validate that it's doing the right thing.

real code

The actual implementation of the class. This is where we write real Java code.



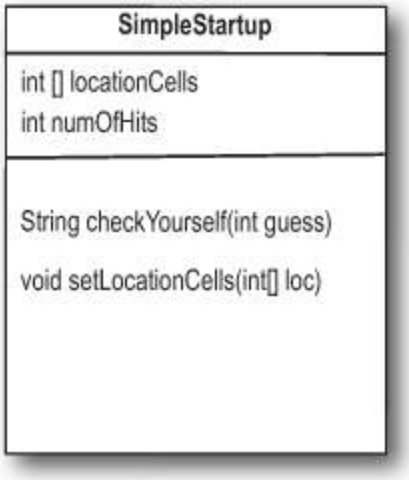

You'll get the idea of how prep code (our version of pseudocode) works as you read through this example. It's sort of halfway between real Java code and a plain English description of the class. Most prep code includes three parts: instance variable declarations, method declarations, method logic. The most important part of prep code is the method logic, because it defines *what* has to happen, which we later translate into *how* when we actually write the method code.

DECLARE an *int array* to hold the location cells. Call it *locationCells*.

DECLARE an *int* to hold the number of hits. Call it *numOfHits* and **SET** it to 0.

DECLARE a *checkYourself()* method that takes a *int* for the user's guess (1, 3, etc.), checks it, and returns a result representing a "hit," "miss," or "kill."

DECLARE a *setLocationCells()* setter method that takes an *int array* (which has the three cell locations as *ints* (2, 3, 4, etc.)).

METHOD: *String checkYourself(int userGuess)*

GET the user guess as an int parameter

REPEAT with each of the location cells in the *int* array

// COMPARE the user guess to the location cell

IF the user guess matches

INCREMENT the number of hits

// FIND OUT if it was the last location cell:

IF number of hits is 3, **RETURN** "kill" as the result

ELSE it was not a kill, so **RETURN** "hit"

END IF

ELSE the user guess did not match, so **RETURN** "miss"

END IF

END REPEAT

END METHOD

METHOD: *void setLocationCells(int[] cellLocations)*

GET the cell locations as an *int array* parameter

ASSIGN the cell locations parameter to the cell locations instance variable

END METHOD

Writing the method implementations

Let's write the real method code now and get this puppy working.

Before we start coding the methods, though, let's back up and write some code to *test* the methods. That's right, we're writing the test code *before* there's anything to test!

The concept of writing the test code first is one of the practices of Test-Driven Development (TDD), and it can make it easier (and faster) for you to write your code. We're not necessarily saying you should use TDD, but we do like the part about writing tests first. And TDD just *sounds* cool.

TEST-DRIVEN DEVELOPMENT (TDD)

Back in 1999, Extreme Programming (XP) was a newcomer to the software development methodology world. One of the central ideas in XP was to write test code before writing the actual code. Since then, the idea of writing test code first has spun off of XP and become the core of a newer, more popular subset of XP called TDD. (Yes, yes, we know we've just grossly oversimplified this, please cut us a little slack here.)

TDD is a LARGE topic, and we're only going to scratch the surface in this book. But we hope that the way we're going about developing the "Sink a Startup" game gives you some sense of TDD.

Check out *Test Driven Development: By Example* by Kent Beck if you want to learn more about how TDD works.

Here is a partial list of key ideas in TDD:

- Write the test code first.
- Develop in iteration cycles.
- Keep it (the code) simple.
- Refactor (improve the code) whenever and wherever you notice the opportunity.
- Don't release anything until it passes all the tests.
- Don't put in anything that's not in the spec (no matter how tempted you are to put in functionality "for the future").
- No killer schedules; work regular hours.

Writing test code for the SimpleStartup class

We need to write test code that can make a SimpleStartup object and run its methods. For the SimpleStartup class, we really care about only the *checkYourself()* method, although we *will* have to implement the *setLocationCells()* method in order to get the *checkYourself()* method to run correctly.

Take a good look at the prep code below for the *checkYourself()* method (the *setLocationCells()* method is a no-brainer setter method, so we're not worried about it, but in a "real" application we might want a more robust "setter" method, which we *would* want to test).

Then ask yourself, "If the checkYourself() method were implemented, what test code could I write that would prove to me the method is working correctly?"

Based on this prep code:

```
METHOD String checkYourself(int userGuess)
 GET the user guess as an int parameter
 REPEAT with each of the location cells in the int array
   // COMPARE the user guess to the location cell
   IF the user guess matches
      INCREMENT the number of hits
      // FIND OUT if it was the last location cell:
      IF number of hits is 3, RETURN "Kill" as the result
      ELSE it was not a kill, so RETURN "Hit"
      END IF
   ELSE the user guess did not match, so RETURN "Miss"
   END IF
  END REPEAT
END METHOD
```

Here's what we should test:

1. Instantiate a SimpleStartup object.
2. Assign it a location (an array of 3 ints, like {2, 3, 4}).

3. Create an int to represent a user guess (2, 0, etc.).

4. Invoke the checkYourself() method passing it the fake user guess.

5. Print out the result to see if it's correct ("passed" or "failed").

THERE ARE NO DUMB QUESTIONS

Q: Maybe I'm missing something here, but how exactly do you run a test on something that doesn't yet exist!?

A: You don't. We never said you start by *running* the test; you start by *writing* the test. At the time you write the test code, you won't have anything to run it against, so you probably won't be able to compile it until you write "stub" code that can compile, but that will always cause the test to fail (like, return null).

Q: Then I still don't see the point. Why not wait until the code is written, and then whip out the test code?

A: The act of thinking through (and writing) the test code helps clarify your thoughts about what the method itself needs to do.

As soon as your implementation code is done, you already have test code just waiting to validate it. Besides, you *know* if you don't do it now, you'll *never* do it. There's always something more interesting to do.

Ideally, write a little test code, then write *only* the implementation code you need in order to pass that test. Then write a little *more* test code and write *only* the new implementation code needed to pass *that* new test. At each test iteration, you run *all* the previously written tests to prove that your latest code additions don't break previously tested code.

Test code for the SimpleStartup class

```
public class SimpleStartupTestDrive {

  public static void main(String[] args) {

    SimpleStartup dot = new SimpleStartup();

    int[] locations = {2, 3, 4};

    dot.setLocationCells(locations);

    int userGuess = 2;

    String result = dot.checkYourself(userGuess);

    String testResult = "failed";

    if (result.equals("hit")) {

      testResult = "passed";

    }

    System.out.println(testResult);

  }

}
```

Instantiate a SimpleStartup object.

Make an int array for the location of the Startup (3 consecutive ints out of a possible 7).

Invoke the setter method on the Startup.

Make a fake user guess.

Invoke the checkYourself() method on the Startup object, and pass it the fake guess.

If the fake guess (2) gives back a "hit", it's working.

Print out the test result ("passed" or "failed").

→ **Yours to solve.**

SHARPEN YOUR PENCIL

In the next couple of pages we implement the SimpleStartup class, and then later we return to the test class. Looking at our test code above, what else should be added? What are we *not* testing in this code that we *should* be testing for? Write your ideas (or lines of code) below:

The checkYourself() method

There isn't a perfect mapping from prep code to Java code; you'll see a few adjustments. The prep code gave us a much better idea of *what* the code needs to do, and now we have to figure out the Java code that can do the *how*.

In the back of your mind, be thinking about parts of this code you might want (or need) to improve. The numbers ① are for things (syntax and language features) you haven't seen yet. They're explained on the opposite page.

GET the user guess

REPEAT with each cell in the *int* array

IF the user guess matches

INCREMENT the number of hits

// FIND OUT if it was the last cell

IF number of hits is 3,

RETURN "kill" as the result

ELSE it was not a kill, so **RETURN** "hit"

ELSE

RETURN "miss"

```
public String checkYourself(int guess) {

  String result = "miss";

  1
  for (int cell : locationCells) {

    if (guess == cell) {

      result = "hit";

          2
      numOfHits++;

        3
      break;

    } // end if

  } // end for

  if (numOfHits == locationCells.length) {

    result = "kill";

  } // end if

  System.out.println(result);

  return result;

} // end method
```

Make a variable to hold the result we'll return. Put "miss" in as the default (i.e., we assume a "miss")

Repeat with each cell in the locationCells array (each cell location of the object)

Compare the user guess to this element (cell) in the array

We got a hit!

Get out of the loop, no need to test the other cells

We're out of the loop, but let's see if we're now 'dead' (hit 3 times) and change the result String to "Kill"

Display the result for the user ("miss", unless it was changed to "hit" or "kill")

Return the result back to the calling method

Just the new stuff

The things we haven't seen before are on this page. Stop worrying! There are more details later in the chapter. This is just enough to get you going.

Read this for loop declaration as "repeat for each element in the 'locationCells' array: take the next element in the array and assign it to the int variable 'cell'."

The colon (:) means "in", so the whole thing means "for each int value IN locationCells..."

1 The **for** loop

```
for (int cell : locationCells) { }
```

Declare a variable that will hold one element from the array. Each time through the loop, this variable (in this case an int variable named "cell") will hold a different element from the array, until there are no more elements (or the code does a "break"... see #4 below).

The array to iterate over in the loop. Each time through the loop, the next element in the array will be assigned to the variable "cell". (More on this at the end of this chapter.)

2 The **post-increment** operator

The ++ means add 1 to whatever's there (in other words, increment by 1).

```
numOfHits++
```

numOfHits++ is the same (in this case) as saying numOfHits = numOfHits + 1, with less typing.

3 **break** statement

```
break;
```

Gets you out of a loop. Immediately. Right here. No iteration, no boolean test, just get out now!

THERE ARE NO DUMB QUESTIONS

Q: In the beginning of the book, there was an example of a *for* loop that was really different from this one—are there two different styles of *for* loops?

A: Yes! From the first version of Java there has been a single kind of *for* loop (explained later in this chapter) that looks like this:

```
for (int i = 0; i < 10; i++)
{
    // do something 10 times
}
```

You can use this format for any kind of loop you need. But... since Java 5, you can also use the *enhanced* for loop (that's the official description) when your loop needs to iterate over the elements in an array (or *another* kind of collection, as you'll see in the *next* chapter). You can always use the plain old for loop to iterate over an array, but the *enhanced* for loop makes it easier.

Q: If you can add one to an int by using ++, can you also subtract one in some way?

A: Yep absolutely. Hopefully it's not too surprising to find out that the syntax is -- (two minuses), like this:

```
countdown = i--;
```

Final code for SimpleStartup and SimpleStartupTestDrive

```
public class SimpleStartupTestDrive {
  public static void main(String[] args) {
    SimpleStartup dot = new SimpleStartup();
    int[] locations = {2, 3, 4};
    dot.setLocationCells(locations);
    int userGuess = 2;
    String result = dot.checkYourself(userGuess);
    String testResult = "failed";
    if (result.equals("hit")) {
      testResult = "passed";
    }
    System.out.println(testResult);
  }
}
```

```
class SimpleStartup {
  private int[] locationCells;
  private int numOfHits = 0;

  public void setLocationCells(int[] locs) {
    locationCells = locs;
  }

  public String checkYourself(int guess) {
    String result = "miss";
    for (int cell : locationCells) {
      if (guess == cell) {
        result = "hit";
        numOfHits++;
        break;
      } // end if
    } // end for
    if (numOfHits ==
        locationCells.length) {
      result = "kill";
    } // end if
    System.out.println(result);
    return result;
  } // end method
} // close class
```

There's a little bug lurking here. It compiles and runs, but...don't worry about it for now, but we *will* have to face it a little later.

What should we see when we run this code?

The test code makes a SimpleStartup object and gives it a location at 2,3,4. Then it sends a fake user guess of "2" into the checkYouself() method. If the code is working correctly, we should see the result print out:

```
% java SimpleStartupTestDrive
hit
passed
```

SHARPEN YOUR PENCIL

We built the test class and the SimpleStartup class. But we still haven't made the actual *game*. Given the code on the opposite page and the spec for the actual game, write in your ideas for prep code for the game class. We've given you a few lines here and there to get you started. The actual game code is on the next page, so ***don't turn the page until you do this exercise!***

You should have somewhere between 12 and 18 lines (including the ones we wrote, but *not* including lines that have only a curly brace).

METHOD ***public static void main (String [] args)***

DECLARE an int variable to hold the number of user guesses, *named numOfGuesses*

COMPUTE a random number between 0 and 4 that will be the starting location cell position

WHILE the Startup is still alive:

GET user input from the command line

The SimpleStartupGame needs to do this:

1. Make the single SimpleStartup object.
2. Make a location for it (three consecutive cells on a single row of seven virtual cells).
3. Ask the user for a guess.
4. Check the guess.
5. Repeat until the Startup is sunk.

6. Tell the user how many guesses it took.

A complete game interaction

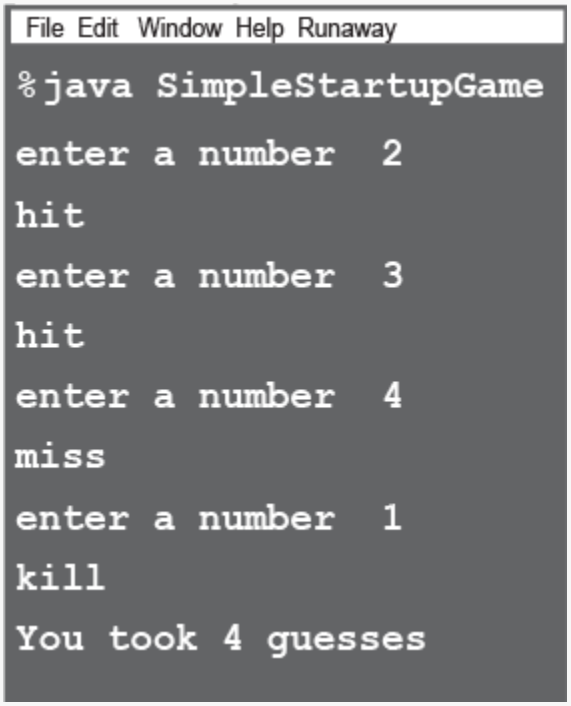

Yours to solve.

Prep code for the SimpleStartupGame class Everything happens in main()

There are some things you'll have to take on faith. For example, we have one line of prep code that says "GET user input from command line." Let me tell you, that's a little more than we want to implement from scratch right now. But happily, we're using OO. And that means you get to ask some *other* class/object to do something for you, without worrying about ***how*** it does it. When you write prep code, you should assume that *somehow* you'll be able to do whatever you need to do, so you can put all your brainpower into working out the logic.

```
public static void main (String [] args)
   DECLARE an int variable to hold the number of user guesses, named numOfGuesses,
and set it to 0
   MAKE a new SimpleStartup instance
   COMPUTE a random number between 0 and 4 that will be the starting location cell
position
   MAKE an int array with 3 ints using the randomly generated number, that number
incremented by 1, and that number incremented by 2 (example: 3,4,5)
   INVOKE the setLocationCells() method on the SimpleStartup instance
   DECLARE a boolean variable representing the state of the game, named isAlive.
SET it to true

   WHILE the Startup is still alive (isAlive == true):
     GET user input from the command line
     // CHECK the user guess
     INVOKE the checkYourself() method on the SimpleStartup instance
     INCREMENT numOfGuesses variable
     // CHECK for Startup death
    IF result is "kill"
          SET isAlive to false (which means we won't enter the loop again)
          PRINT the number of user guesses
    END IF
   END WHILE
END METHOD
```

METACOGNITIVE TIP

Don’t work one part of the brain for too long a stretch at one time. Working just the left side of the brain for more than 30 minutes is like working just your left *arm* for 30 minutes. Give each side of your brain a break by switching sides at regular intervals. When you shift to one side, the other side gets to rest and recover. Left-brain activities include things like step-by-step sequences, logical problem-solving, and analysis, while the right-brain kicks in for metaphors, creative problem-solving, pattern-matching, and visualizing.

BULLET POINTS

- Your Java program should start with a high-level design.
- Typically you'll write three things when you create a new class:
  - ***prep code***
  - ***test code***
  - ***real (Java) code***
- Prep code should describe *what* to do, not *how* to do it. Implementation comes later.
- Use the prep code to help design the test code.
- A class can have one superclass only.
- Write test code *before* you implement the methods.
- Choose *for* loops over *while* loops when you know how many times you want to repeat the loop code.
- The enhanced for loop is an easy way to loop over an array or collection.
- Use the *increment* operator to add 1 to a variable (x++;).
- Use the *decrement* operator to subtract 1 from a variable (x--;).
- Use *break* to leave a loop early (i.e., even if the boolean test condition is still true).

The game's main() method

Just as you did with the SimpleStartup class, be thinking about parts of this code you might want (or need) to improve. The numbered things ① are for stuff we want to point out. They're explained on the opposite page. Oh, if you're wondering why we skipped the test code phase for this class, we don't need a test class for the game. It has only one method, so what would you do in your test code? Make a separate class that would call main() on this class? We didn't bother, we'll just run this to test it.

```
public static void main(String[] args) {

  int numOfGuesses = 0;

  GameHelper helper = new GameHelper();

  SimpleStartup theStartup = new SimpleStartup();

  int randomNum = (int) (Math.random() * 5);

  int[] locations = {randomNum, randomNum + 1, randomNum + 2};

  theStartup.setLocationCells(locations);

  boolean isAlive = true;

  while (isAlive) {

    int guess = helper.getUserInput("enter a number");

    String result = theStartup.checkYourself(guess);

    numOfGuesses++;

    if (result.equals("kill")) {

      isAlive = false;

      System.out.println("You took " + numOfGuesses + " guesses");

    } // close if

  } // close while
```

DECLARE a variable to hold user guess count, and set it to 0

Make a variable to track how many guesses the user makes.

This is a special class we wrote that has the method for getting user input. For now, pretend it's part of Java.

MAKE a SimpleStartup object

Make the Startup object.

COMPUTE a random number between 0 and 4

1

Make a random number for the first cell, and use it to make the cell locations array.

MAKE an int array with the 3 cell locations, and

INVOKE setLocationCells on the Startup object

Give the Startup its locations (the array).

DECLARE a boolean isAlive

Make a boolean variable to track whether the game is still alive, to use in the while loop test.

WHILE the Startup is still alive

repeat while game is still alive.

GET user input

2

Get user guess.

// CHECK it

INVOKE checkYourself() on Startup

Ask the Startup to check the guess; save the returned result.

INCREMENT numOfGuesses

Increment guess count by one.

IF result is "kill"

Was it a "kill"? if so, set isAlive to false (so we won't re-enter the loop) and print user guess count.

SET isAlive to false

PRINT the number of user guesses

random() and getUserInput()

Two things that need a bit more explaining are on this page. This is just a quick look to keep you going; more details on the GameHelper class are at the end of this chapter.

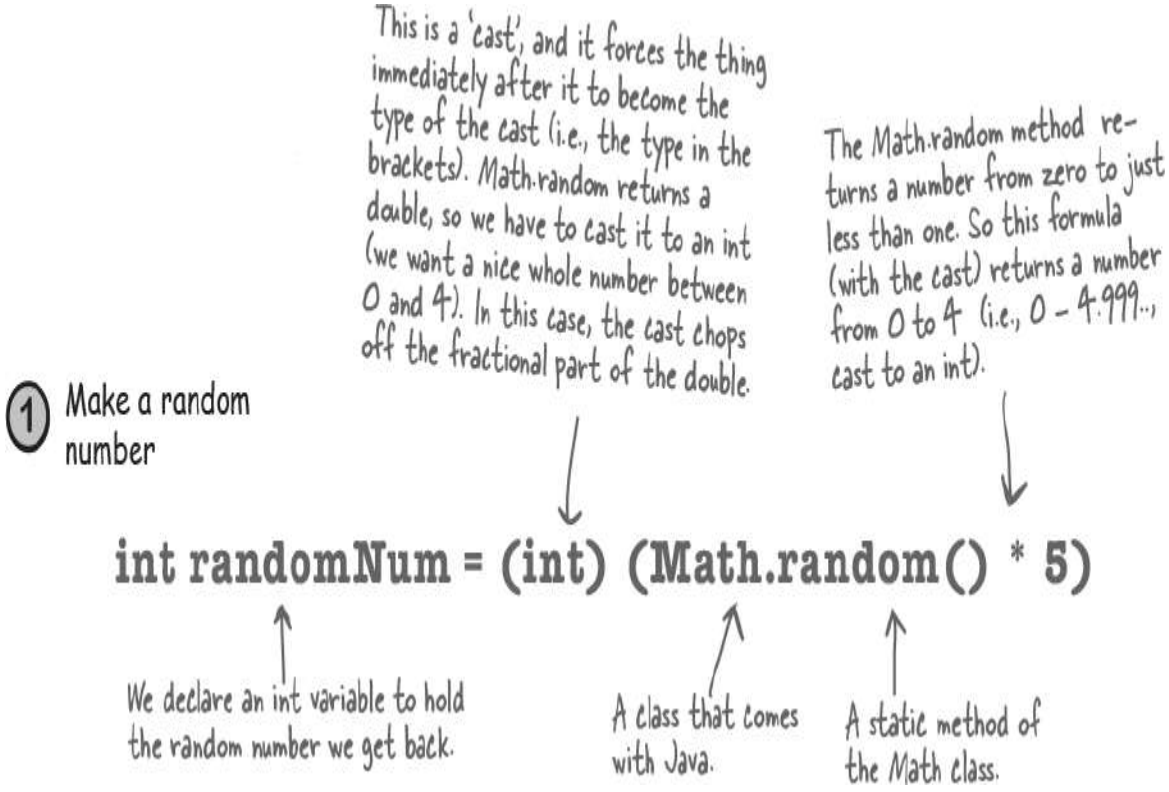

Math.random() has been around forever, so you'll see code like this in the Real World. These days you can use java.util.Random's nextInt() method instead, which is more convenient (you don't have to cast the result to an int).

The Random class is in a different package. Since we haven't covered importing packages yet (it's in the next chapter), we've used Math.random() instead.

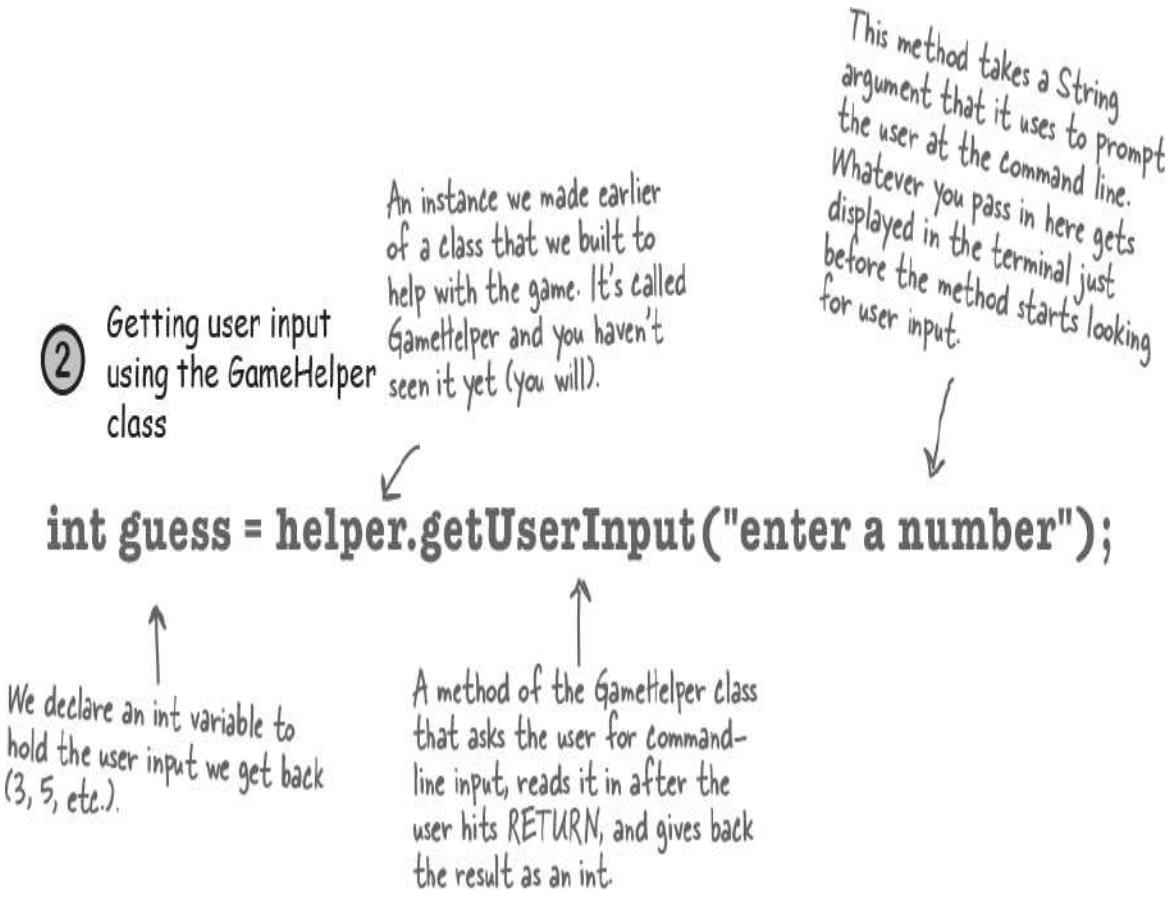

One last class: GameHelper

We made the *Startup* class.

We made the *game* class.

All that's left is the *helper* class—the one with the getUserInput() method. The code to get command-line input is more than we want to explain right now. It opens up topics best left for later. (Later, as in Chapter 16, *Saving Objects*.)

Just copy* the code below and compile it into a class named GameHelper. Drop all three class files (SimpleStartup, SimpleStartupGame, GameHelper) into the same directory, and make it your working directory.

Whenever you see this logo, you're seeing code that you have to type as-is and take on faith. Trust it. You'll learn how that code works later.

Ready-Bake Code

```
import java.util.Scanner;

public class GameHelper {
  public int getUserInput(String prompt) {
    System.out.print(prompt + ": ");
    Scanner scanner = new Scanner(System.in);
    return scanner.nextInt();
  }
}
```

* We know how much you enjoy typing, but for those rare moments when you'd rather do something else, we've made the Ready-Bake Code available on *https://oreil.ly/hfJava_3e_examples*.

Let's play

Here's what happens when we run it and enter the numbers 1,2,3,4,5,6. Lookin' good.

A complete game interaction

(your mileage may vary)

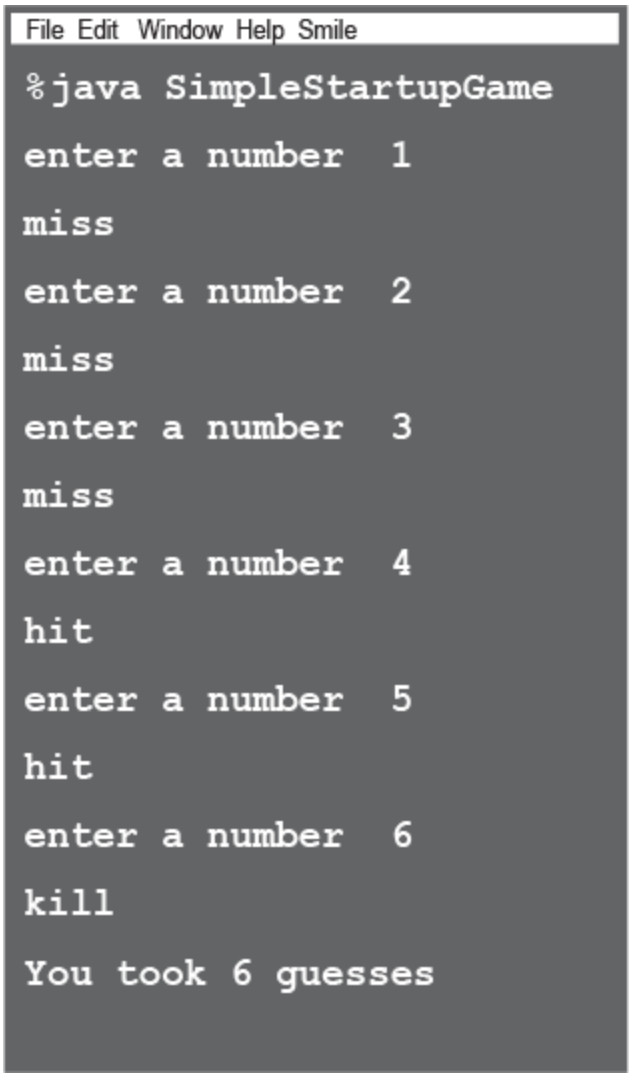

What's this? A bug ?

Gasp!

Here's what happens when we enter 1,1,1.

A different game interaction (yikes)

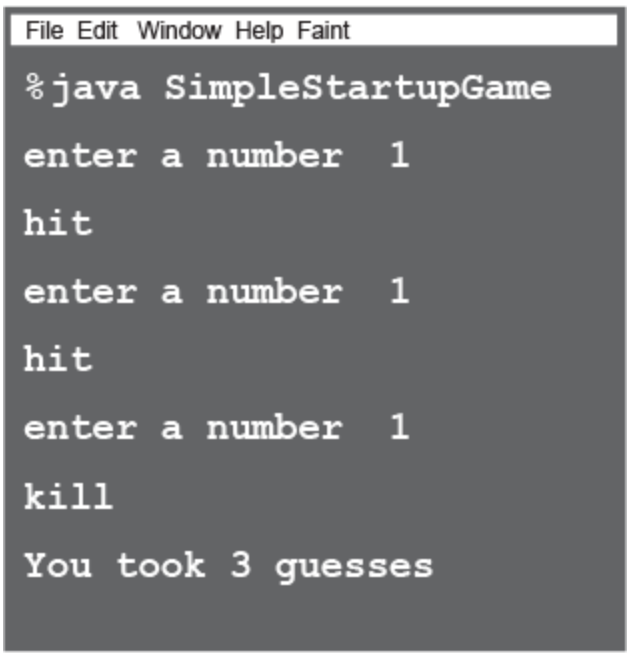
File Edit Window Help Faint
%java SimpleStartupGame
enter a number 1
hit
enter a number 1
hit
enter a number 1
kill
You took 3 guesses

SHARPEN YOUR PENCIL

It's a cliff-hanger!

Will we ***find*** the bug?

Will we ***fix*** the bug?

Stay tuned for the next chapter, where we answer these questions and more...

And in the meantime, see if you can come up with ideas for what went wrong and how to fix it.

→ **Yours to solve.**

More about for loops

We've covered all the game code for *this* chapter (but we'll pick it up again to finish the deluxe version of the game in the next chapter). We didn't want to interrupt your work with some of the details and background info, so we

put it back here. We'll start with the details of for loops, and if you've seen this kind of syntax in another programming language, just skim these last few pages...

Regular (non-enhanced) for loops

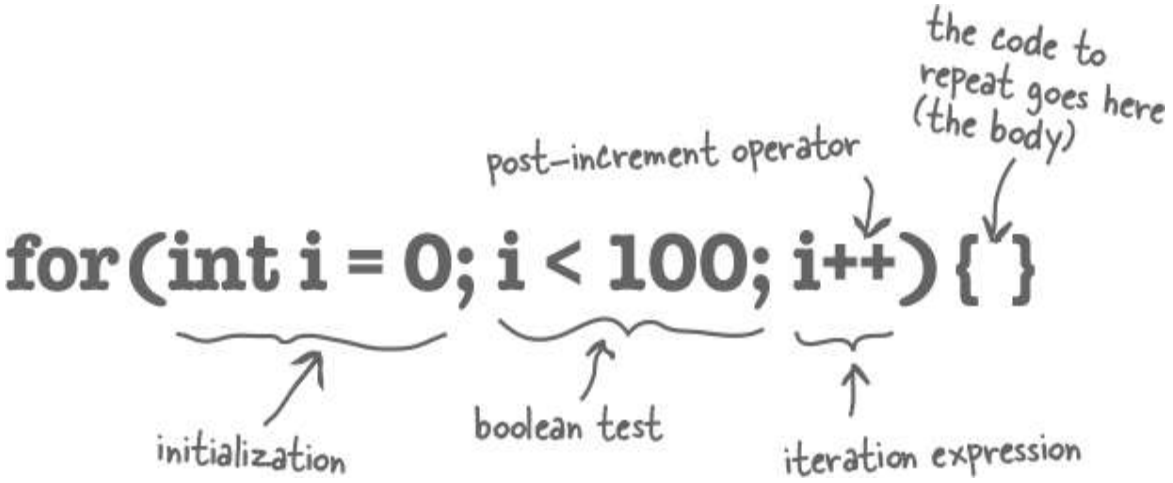

What it means in plain English: “Repeat 100 times.”

How the compiler sees it:

- create a variable *i* and set it to 0.
- repeat while *i* is less than 100.
- at the end of each loop iteration, add 1 to *i*.

Part One: *initialization*

Use this part to declare and initialize a variable to use within the loop body. You'll most often use this variable as a counter. You can actually initialize more than one variable here, but it's much more common to use a single variable.

Part Two: *boolean test*

This is where the conditional test goes. Whatever's in there, it *must* resolve to a boolean value (you know, ***true*** or ***false***). You can have a test, like (x >= 4), or you can even invoke a method that returns a boolean.

Part Three: *iteration expression*

In this part, put one or more things you want to happen with each trip through the loop. Keep in mind that this stuff happens at the *end* of each loop.

repeat for 100 reps:

Trips through a loop

```
for (int i = 0; i < 8; i++) {
   System.out.println(i);
}
System.out.println("done");
```

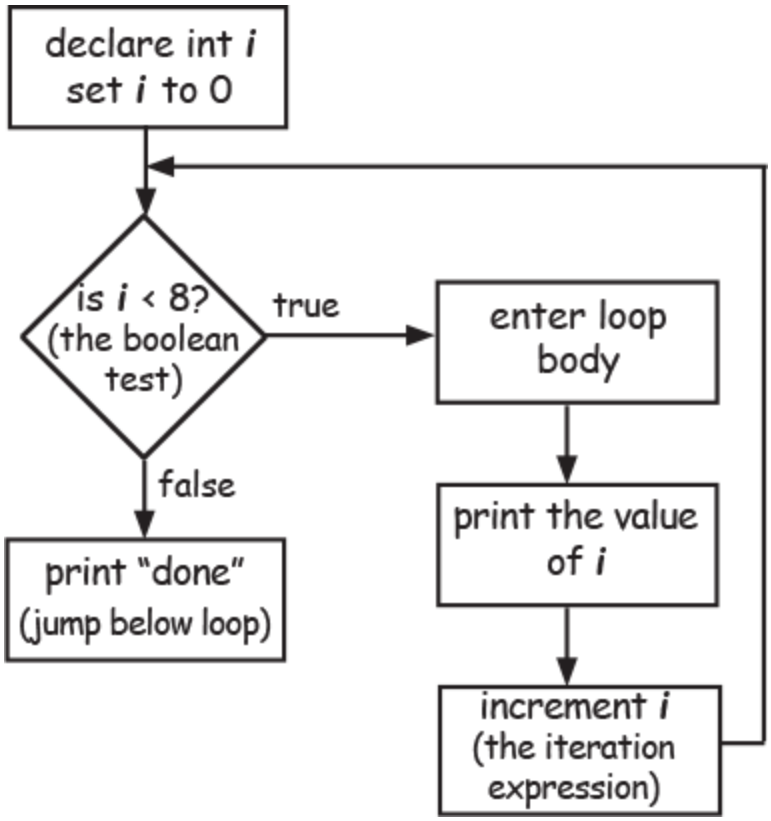

Difference between for and while

A *while* loop has only the boolean test; it doesn't have a built-in initialization or iteration expression. A *while* loop is good when you don't know how many times to loop and just want to keep going while some condition is true. But if you *know* how many times to loop (e.g., the length of an array, 7 times, etc.), a *for* loop is cleaner. Here's the loop above rewritten using *while:*

```
int i = 0;
while (i < 8) {
    System.out.println(i);
    i++;
}
System.out.println("done");
```

we have to declare and initialize the counter

we have to increment the counter

output:

++ --

Pre and Post Increment/Decrement Operator

The shortcut for adding or subtracting 1 from a variable:

```
x++;
```

is the same as:

```
x = x + 1;
```

They both mean the same thing in this context: “add 1 to the current value of x” or ***“increment*** x by 1” And:

```
x--;
```

is the same as:

```
x = x - 1;
```

Of course that’s never the whole story. The placement of the operator (either before or after the variable) can affect the result. Putting the operator *before* the variable (for example, ++x), means, “*first*, increment x by 1, and *then* use this new value of x.” This only matters when the ++x is part of some larger expression rather than just a single statement.

```
int x = 0;     int z = ++x;
```

produces: x is 1, z is 1

But putting the ++ *after* the x gives you a different result:

```
int x = 0;     int z = x++;
```

Once this code has run, x is 1, but ***z is 0***! z gets the value of *x*, and *then x* is incremented.

The enhanced for loop

The Java language added a second kind of *for* loop called the *enhanced for* back in Java 5. This makes it easier to iterate over all the elements in an array or other kinds of collections (you'll learn about *other* collections in the next chapter). That's really all that the enhanced for gives you—a simpler way to walk through all the elements in the collection. We'll see the enhanced for loop in the next chapter too, when we talk about collections that *aren't* arrays.

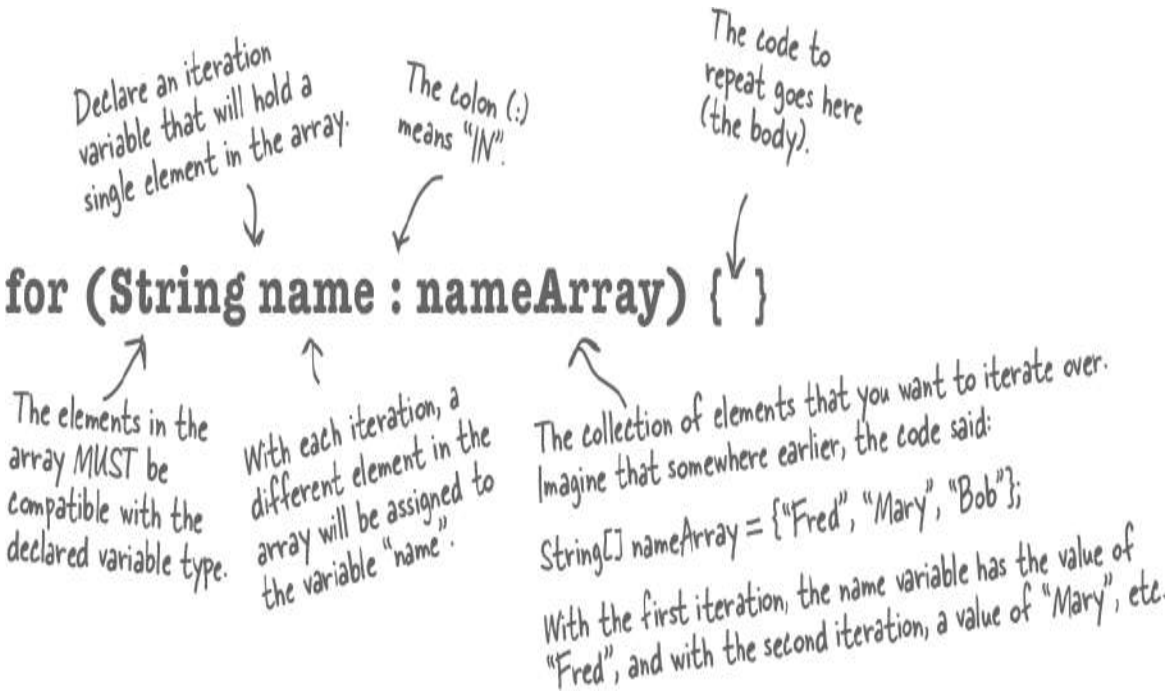

What it means in plain English: "For each element in nameArray, assign the element to the 'name' variable, and run the body of the loop."

How the compiler sees it:

- Create a String variable called *name* and set it to null.

- Assign the first value in *nameArray* to name.
- Run the body of the loop (the code block bounded by curly braces).
- Assign the next value in *nameArray* to name.
- Repeat while *there are still elements* in the array.

> **NOTE**
>
> Note: depending on the programming language they've used in the past, some people refer to the enhanced for as the "for each" or the "for in" loop, because that's how it reads: "for EACH thing IN the collection..."

Part One: *iteration variable declaration*

Use this part to declare and initialize a variable to use within the loop body. With each iteration of the loop, this variable will hold a different element from the collection. The type of this variable must be compatible with the elements in the array! For example, you can't declare an *int* iteration variable to use with a *String[] array.*

Part Two: *the actual collection*

This must be a reference to an array or other collection. Again, don't worry about the *other* non-array kinds of collections yet—you'll see them in the next chapter.

Casting primitives

Before we finish the chapter, we want to tie up a loose end. When we used Math.random(), we had to *cast* the result to an int. Casting one numeric type to another can change the value itself. It's important to understand the rules so you're not surprised by this.

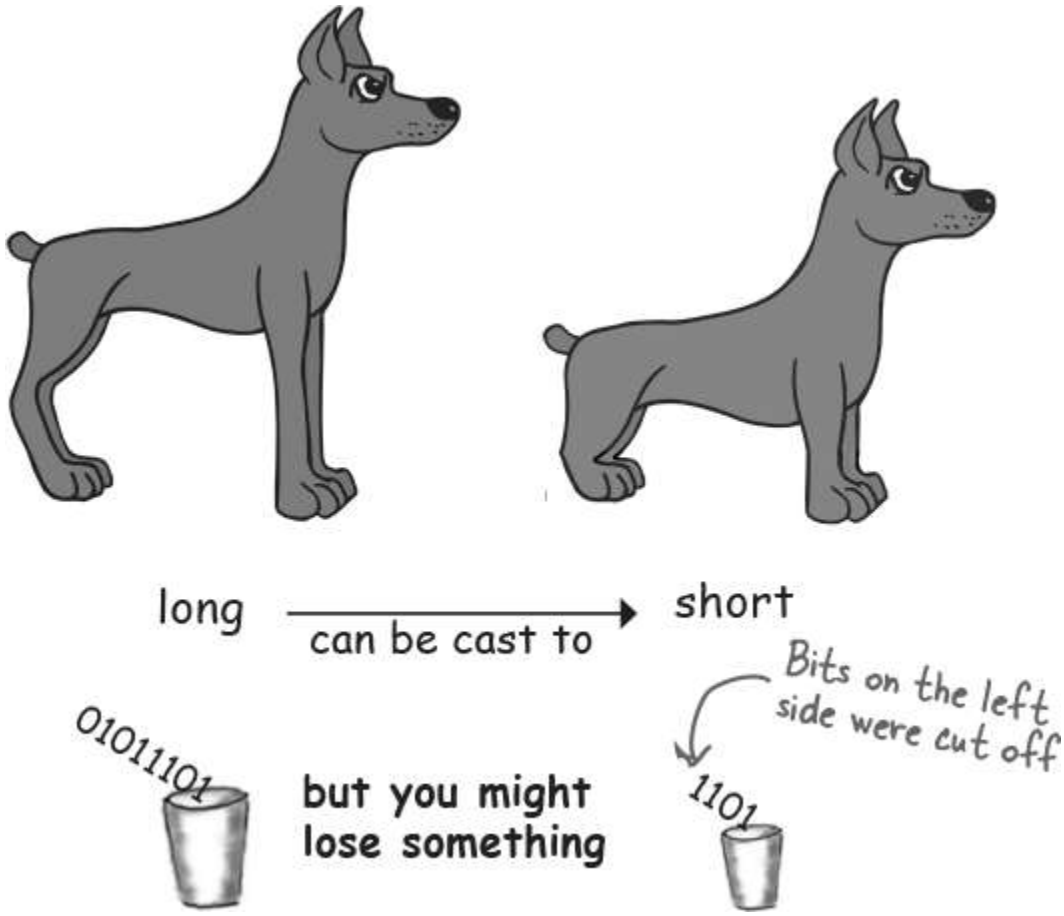

In Chapter 3, *Know Your Variables*, we talked about the sizes of the various primitives and how you can't shove a big thing directly into a small thing:

```
long y = 42;
int x = y;       // won't compile
```

A long is bigger than an int, and the compiler can't be sure where that long has been. It might have been out partying with the other longs, and taking on really big values. To force the compiler to jam the value of a bigger primitive variable into a smaller one, you can use the cast operator. It looks like this:

```
long y = 42;     // so far so good
int x = (int) y; // x = 42 cool!
```

Putting in the cast tells the compiler to take the value of y, chop it down to int size, and set x equal to whatever is left. If the value of y was bigger than the maximum value of x, then what's left will be a weird (but calculable*) number:

```
long y = 40002;       // 40002 exceeds the 16-bit limit of a short
short x = (short) y;  // x now equals -25534!
```

Still, the point is that the compiler lets you do it. And let's say you have a floating-point number and you just want to get at the whole number (int) part of it:

```
float f = 3.14f;
int x = (int) f;   //  x will equal 3
```

And don't even think about casting anything to a boolean or vice versa—just walk away.

**It involves sign bits, binary, "two's complement," and other geekery.*

Exercise

BE the JVM

The Java file on this page represents a complete source file. Your job is to play JVM and determine what would be the output when the program runs.

```
class Output {
  public static void main(String[] args) {
    Output output = new Output();
    output.go();
  }

  void go() {
    int value = 7;
    for (int i = 1; i < 8; i++) {
      value++;
      if (i > 4) {
        System.out.print(++value + " ");
      }
      if (value > 14) {
        System.out.println(" i = " + i);
        break;
      }
    }
  }
}
```

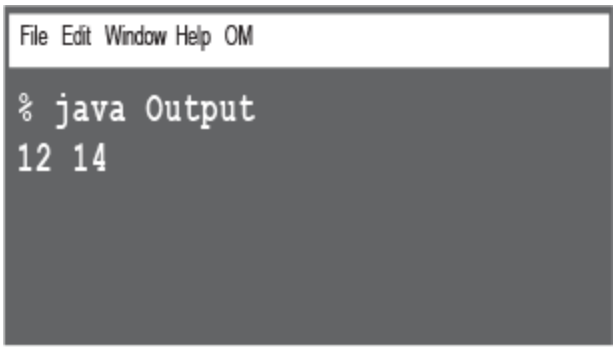

-or-

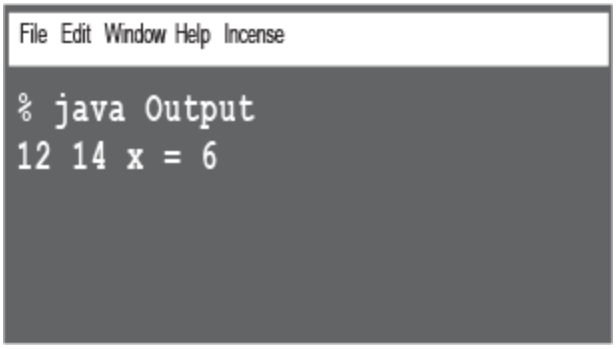

-or-

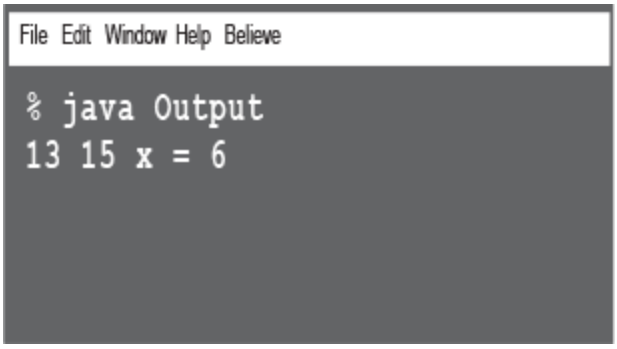

→ **Answers in "Be the JVM".**

Code Magnets

A working Java program is all scrambled up on the fridge. Can you reconstruct the code snippets to make a working Java program that produces the output listed below? Some of the curly braces fell on the floor and they were too small to pick up, so feel free to add as many of those as you need!

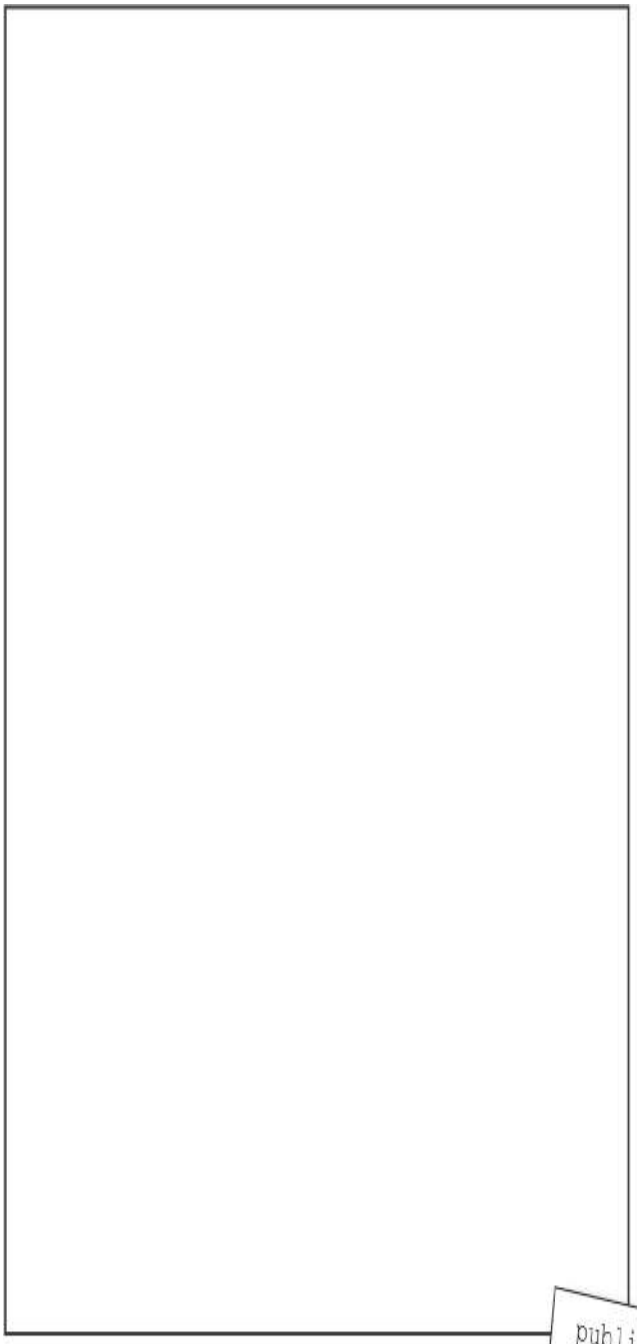

```
i++;
```

```
if (i == 1) {
```

```
System.out.println(i + " " + j);
```

```
class MultiFor {
```

```
for(int  j = 4; j > 2; j--) {
```

```
for(int i = 0; i < 4; i++) {
```

```
public static void main(String[] args) {
```

```
File  Edit  Window  Help  Raid
% java MultiFor
0 4
0 3
1 4
1 3
3 4
3 3
```

→ **Answers in "Code Magnets".**

JavaCross

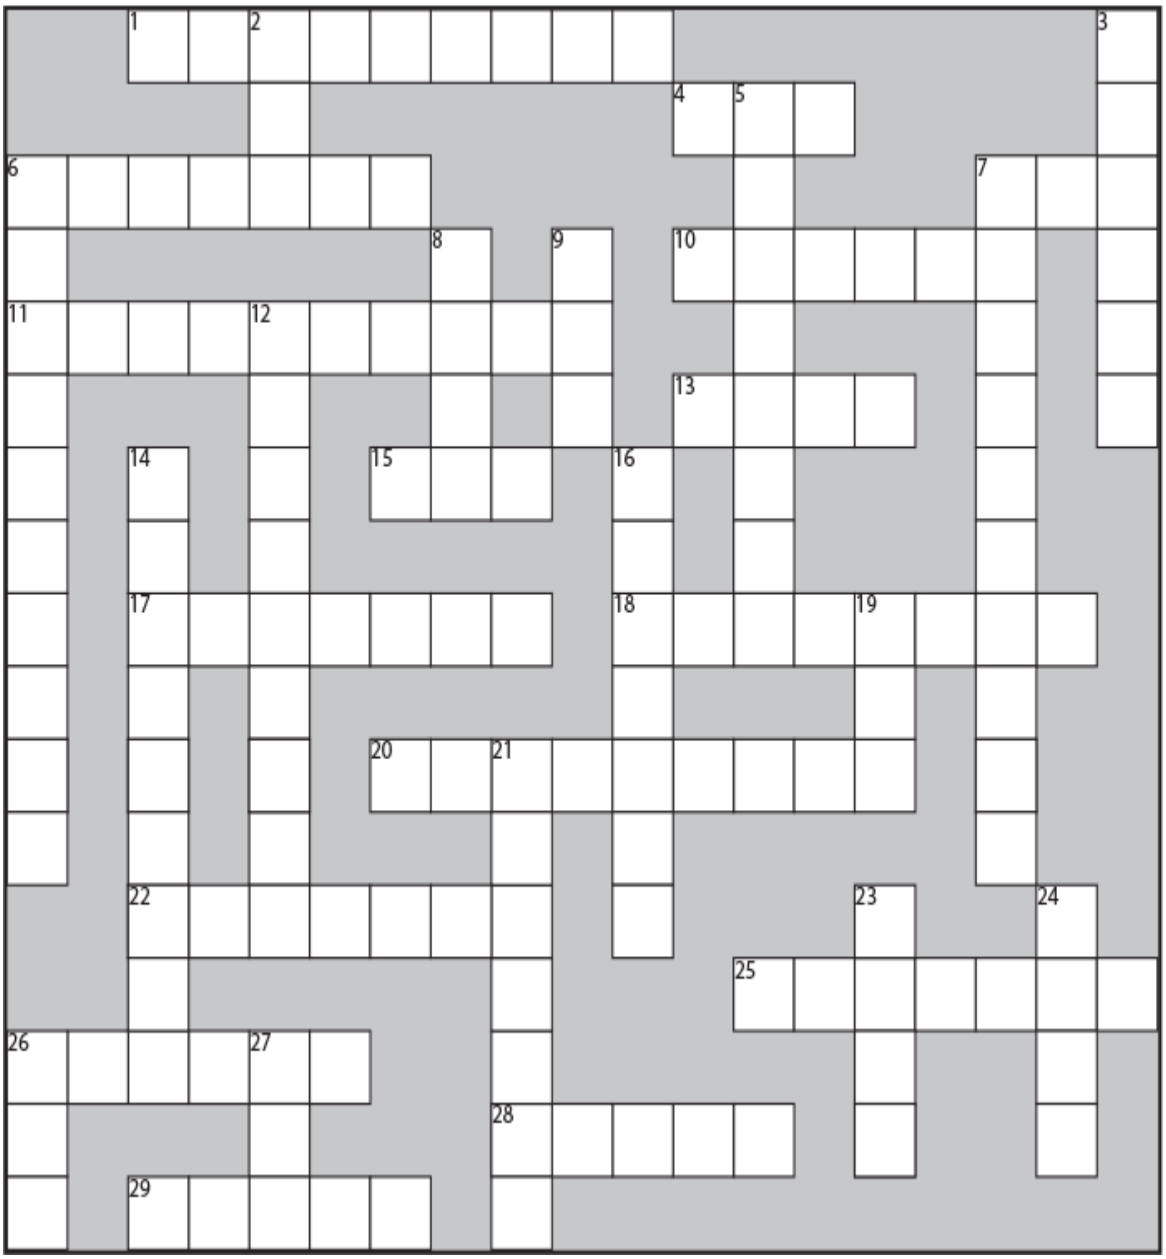

How does a crossword puzzle help you learn Java? Well, all of the words **are** Java related. In addition, the clues provide metaphors, puns, and the like. These mental twists and turns burn alternate routes to Java knowledge right into your brain!

Across

1. Fancy computer word for build

4. Multipart loop

6. Test first

7. 32 bits

10. Method's answer

11. Prep code-esque

13. Change

15. The big toolkit

17. An array unit

18. Instance or local

20. Automatic toolkit

22. Looks like a primitive, but..

25. Un-castable

26. Math method

28. Iterate over me

29. Leave early

Down

2. Increment type

3. Class's workhorse

5. Pre is a type of _____

6. For's iteration _____

7. Establish first value

8. While or For

9. Update an instance variable

12. Toward blastoff

14. A cycle

16. Talkative package

19. Method messenger (abbrev.)

21. As if

23. Add after

24. Pi house

26. Compile it and ____

27. ++ quantity

⟶ **Answers in "JavaCross".**

Mixed Messages

A short Java program is listed below. One block of the program is missing. Your challenge is to **match the candidate block of code** (on the left) **with the output** that you'd see if the block were inserted. Not all the lines of output will be used, and some of the lines of output might be used more than once. Draw lines connecting the candidate blocks of code with their matching command-line output.

⟶ **Answers in "Mixed Messages".**

```
public static void main(String[] args) {
  int x = 0;
  int y = 30;
  for (int outer = 0; outer < 3; outer++) {
    for (int inner = 4; inner > 1; inner--) {
      
      y = y - 2;
      if (x == 6) {
        break;
      }
      x = x + 3;
    }
    y = y - 2;
  }
  System.out.println(x + " " + y);
}
```

Candidate code goes here

Candidates:	Possible output:
`x = x + 3;`	`45 6`
`x = x + 6;`	`36 6`
`x = x + 2;`	`54 6`
`x++;`	`60 10`
`x--;`	`18 6`
`x = x + 0;`	`6 14`
	`12 14`

Match each candidate with one of the possible outputs

Exercise Solutions

Be the JVM

(from "BE the JVM")

```
class Output {

  public static void main(String[] args) {
    Output output = new Output();
    output.go();
  }

void go() {
```

```
  int value = 7;
  for (int i = 1; i < 8; i++) {
    value++;
    if (i > 4) {
      System.out.print(++value + " ");
    }
    if (value > 14) {
      System.out.println(" i = " + i);
      break;
    }
   }
  }
}
```

NOTE

Did you remember to factor in the break statement? How did that affect the output?

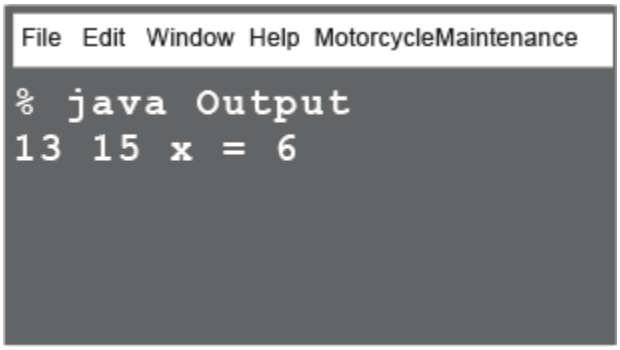

Code Magnets

(from "Code Magnets")

```
class MultiFor {

  public static void main(String[] args) {
    for (int i = 0; i < 4; i++) {

     for (int j = 4; j > 2; j--) {
       System.out.println(i + " " + j);
     }

     if (i == 1) {
```

```
      i++;
    }
  }
 }
}
```

NOTE

What would happen if this code block came before the 'j' for loop?

```
File  Edit  Window  Help  Monopole
% java MultiFor
0 4
0 3
1 4
1 3
3 4
3 3
```

Puzzle Solutions

JavaCross

(from "JavaCross")

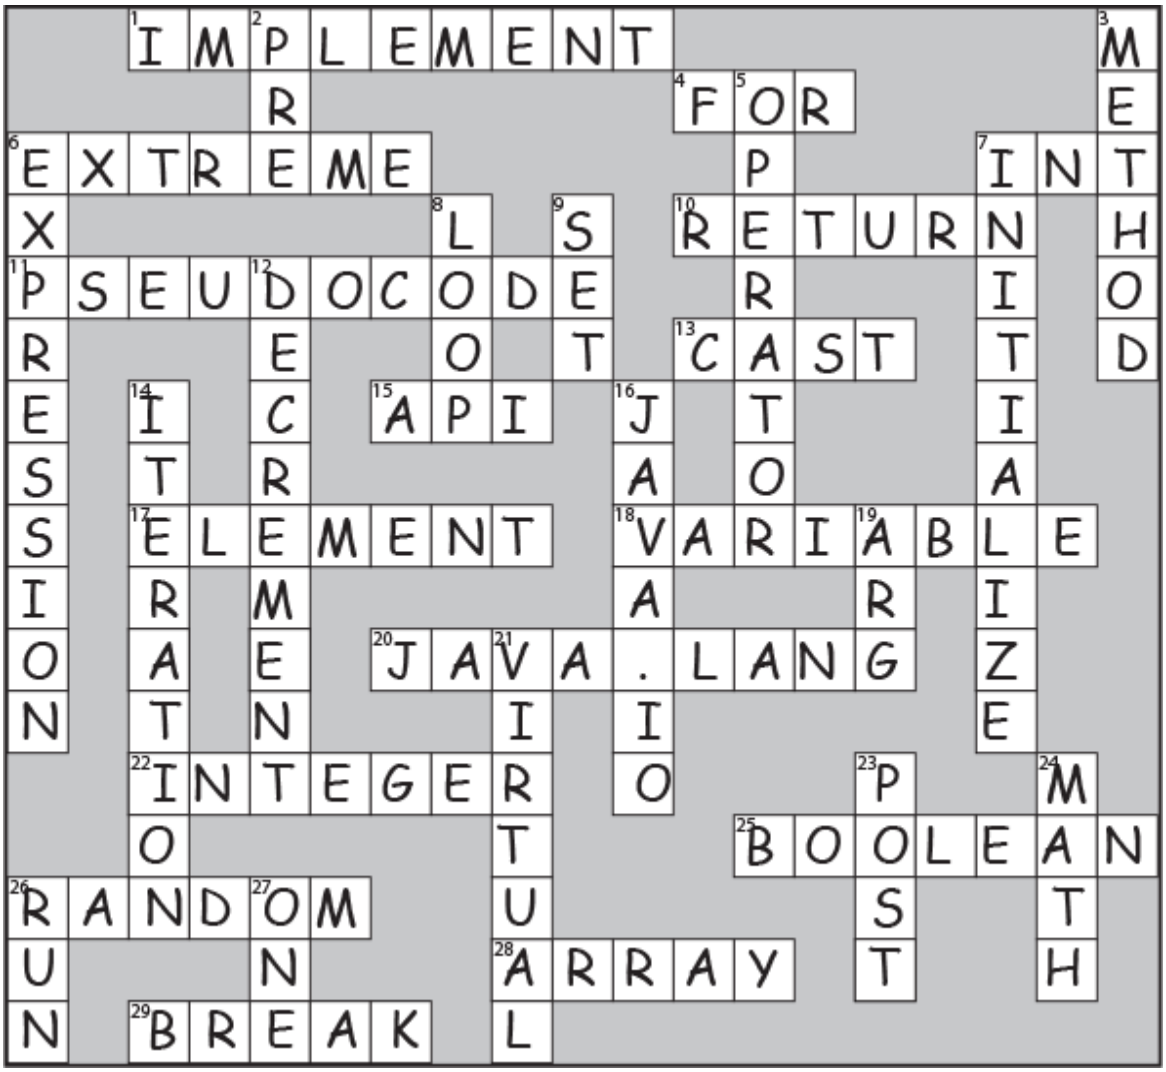

Mixed Messages

(from "Mixed Messages")

Candidates:

```
x = x + 3;
x = x + 6;
x = x + 2;
x++;
x--;
x = x + 0;
```

Possible output:

```
45 6
36 6
54 6
60 10
18 6
6 14
12 14
```

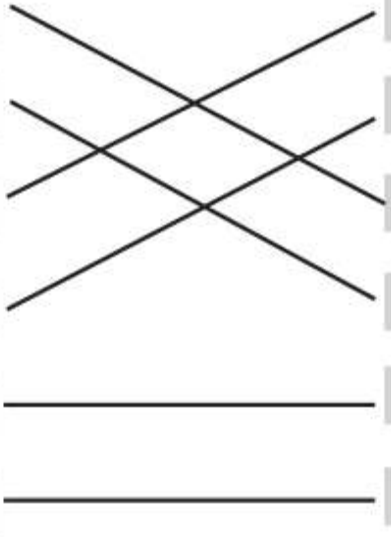

Chapter 6. Using the Java Library: Get to Know the Java API

Java ships with hundreds of prebuilt classes. You don't have to reinvent the wheel if you know how to find what you need in the Java library, known as the **Java API**. *You've got better things to do*. If you're going to write code, you might as well write *only* the parts that are truly custom for your application. You know those programmers who walk out the door each night at 5 PM? The ones who don't even show *up* until 10 AM? They use the Java API. And about eight pages from now, so will you. The core Java library is a giant pile of classes just waiting for you to use like building blocks, to assemble your own program out of largely prebuilt code. The Ready-Bake Java we use in this book is code you don't have to create from scratch, but you still have to type it. The Java API is full of code you don't even have to *type*. All you need to do is learn to use it.

In our last chapter, we left you with the cliff-hanger: a bug

How it's supposed to look

Here's what happens when we run it and enter the numbers 1,2,3,4,5,6. Lookin' good.

A complete game interaction (your mileage may vary)

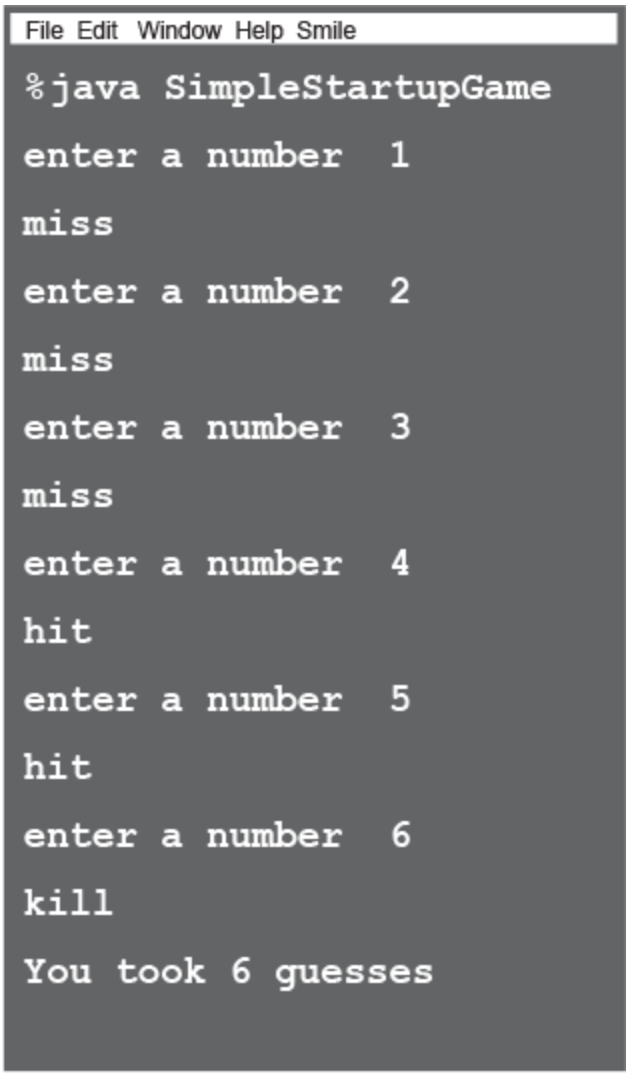

How the bug looks

Here's what happens when we enter 2,2,2.

A different game interaction (yikes)

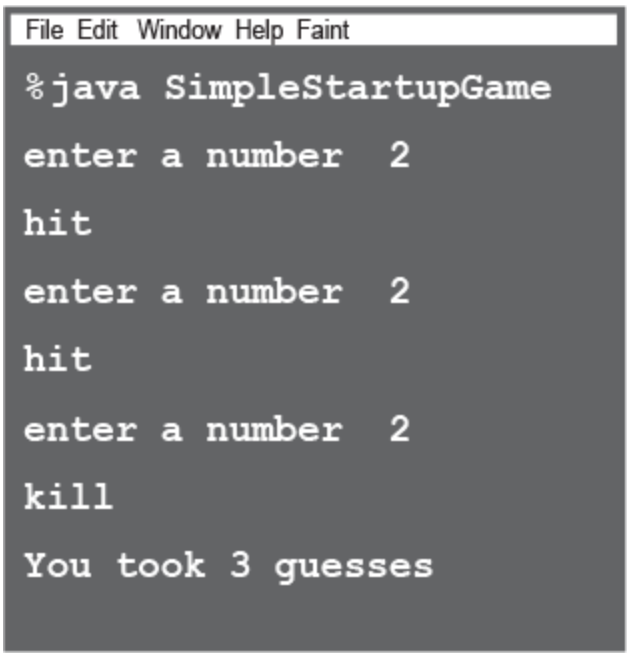

In the current version, once you get a hit, you can simply repeat that hit two more times for the kill!

So what happened?

```
public String checkYourself(int guess) {

    String result = "miss";
```

Make a variable to hold the result we'll return. Put "miss" in as the default (i.e., we assume a "miss").

```
    for (int cell : locationCells) {
```

Repeat with each thing in the array.

```
      if (guess == cell) {
```

Compare the user guess to this element (cell), in the array.

```
        result = "hit";
```

we got a hit!

```
        numOfHits++;
```

Here's where it goes wrong. We counted a hit every time the user guessed a cell location, *even if that location had already been hit!*

```
        break;
```

Get out of the loop; no need to test the other cells.

```
      } // end if

    } // end for

    if (numOfHits == locationCells.length) {
```

We're out of the loop, but let's see if we're now 'dead' (hit 3 times) and change the result String to "kill".

```
      result = "kill";

    } // end if

    System.out.println(result);
```

Display the result for the user ("miss" unless it was changed to "hit" or "kill").

```
    return result;
```

Return the result back to the calling method.

```
} // end method
```

We need a way to know that when a user makes a hit, they haven't previously hit that cell. If they have, then we don't want to count it as a hit.

How do we fix it?

We need a way to know whether a cell has already been hit. Let's run through some possibilities, but first, we'll look at what we kno w so far...

We have a virtual row of seven cells, and a Startup will occupy three consecutive cells somewhere in that row. This virtual row shows a Startup placed at cell locations 4, 5, and 6.

The Startup has an instance variable—an int array —that holds that Startup object's cell locations.

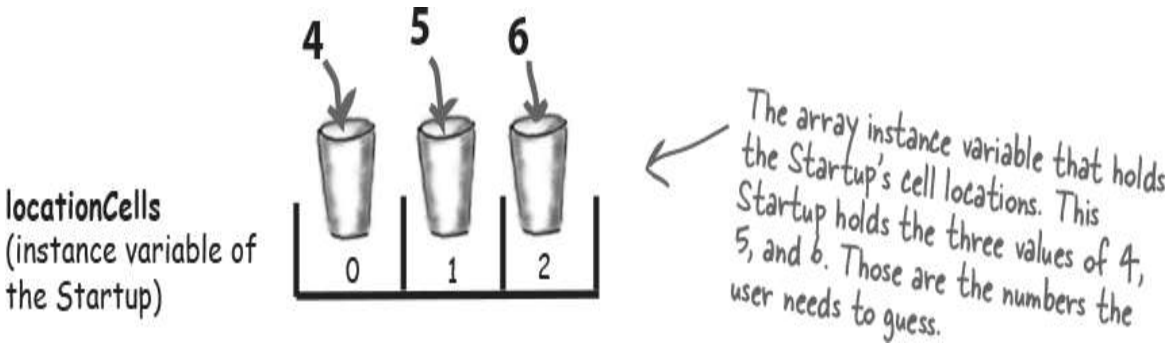

① Option one

We could make a second array, and each time the user makes a hit , we store that hit in the second array , and then check that array each time we get a hit, to see if that cell has been hit before.

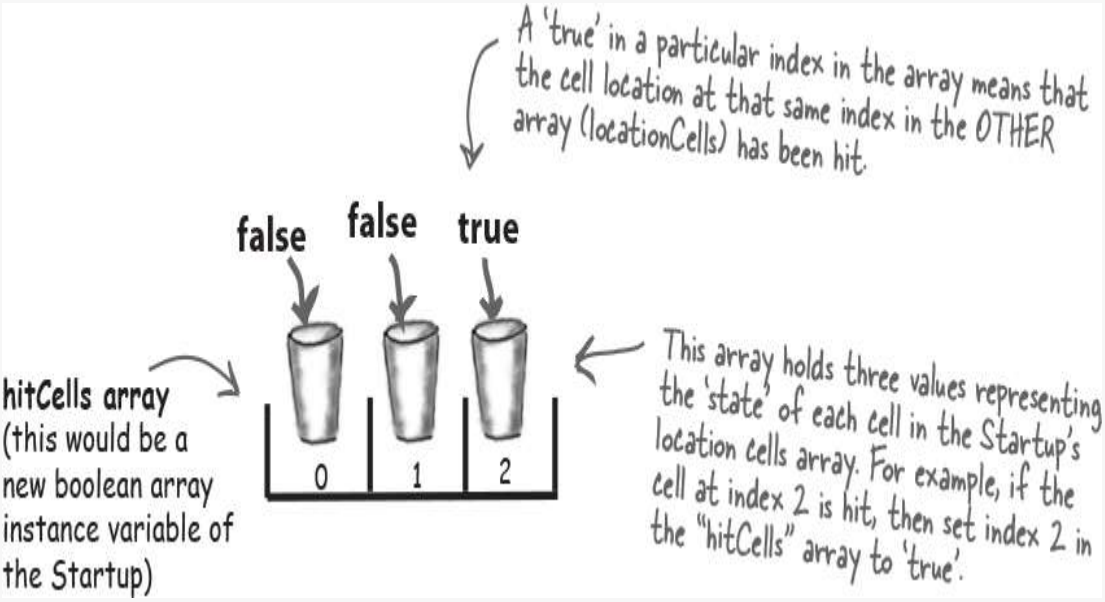

Option one is too clunky

Option one seems like more work than y ou'd expect. It means that each time the user makes a hit, y ou have to change the state of the second array (the hitCells array), oh—but first you have to CHECK the hitCells array to see if that cell has already been hit anyway. It would work, but there's got to be something better...

② **Option two**

We could just keep the one original array but change the value of any hit cells to -1. That way, we only have ONE array to check and manipulate.

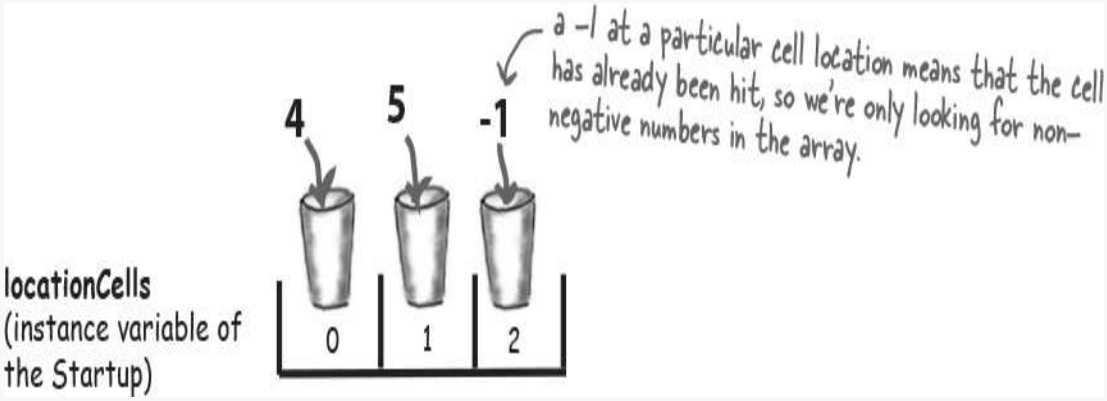

Option two is a little better, but still pretty clunky

Option two is a little less clunky than option one, but it's not very efficient. You'd still have to loop through all three slots (index positions) in the array, even if one or more are already invalid because they've been "hit" (and have a -1 value). There has to be something better...

③ Option three

We delete each cell location as it gets hit and then modify the array to be smaller. Except arrays can't change their size, so we have to make a **new** array and copy the remaining cells from the old array into the new smaller array.

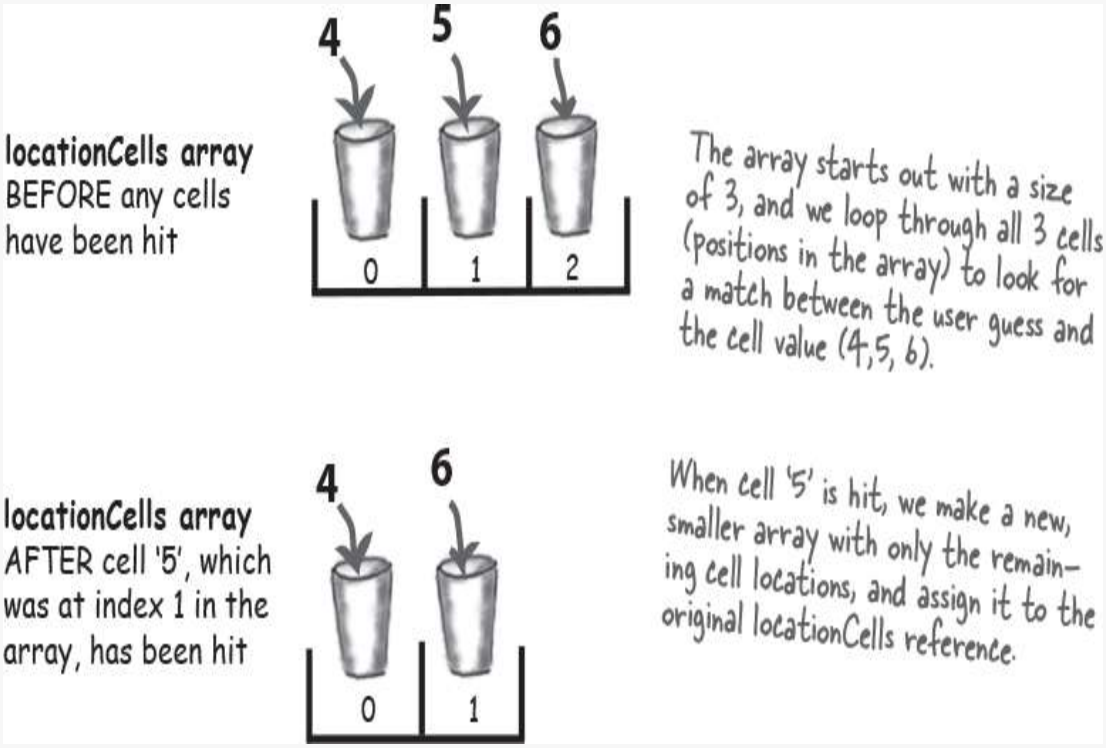

Option three would be much better if the array could shrink so that we wouldn't have to make a new smaller array, copy the remaining values in, and reassign the reference.

The original prep code for part of the checkYourself() method:	Life would be good if only we could change it to:

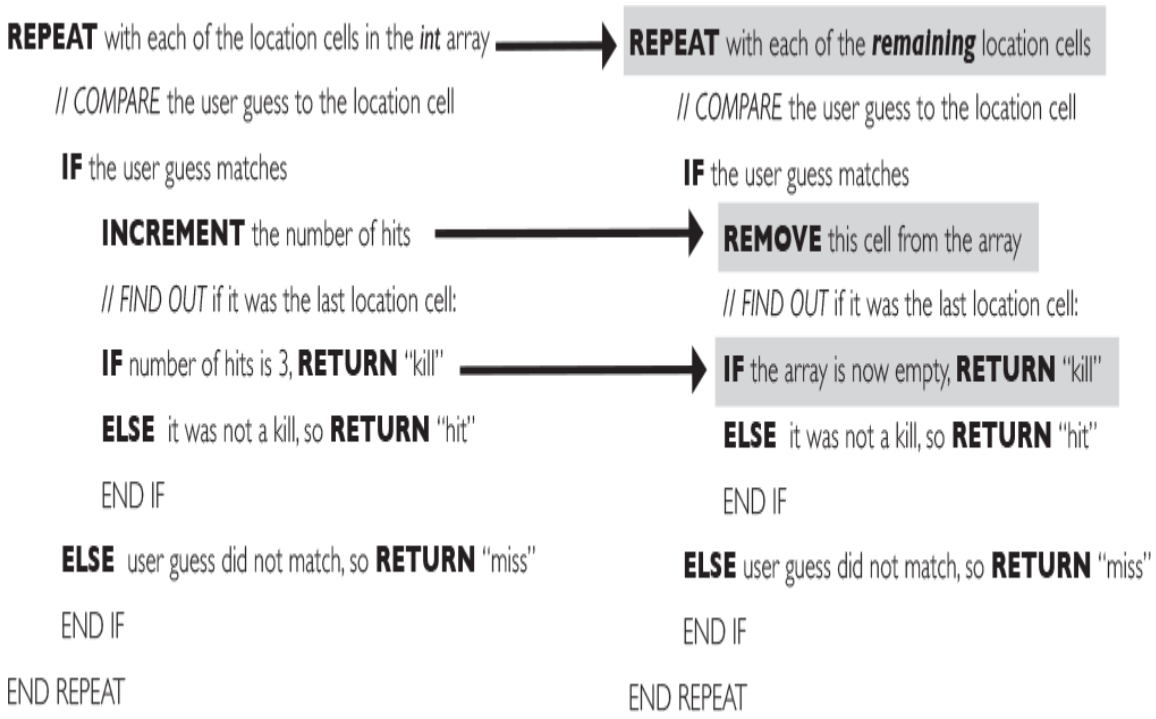

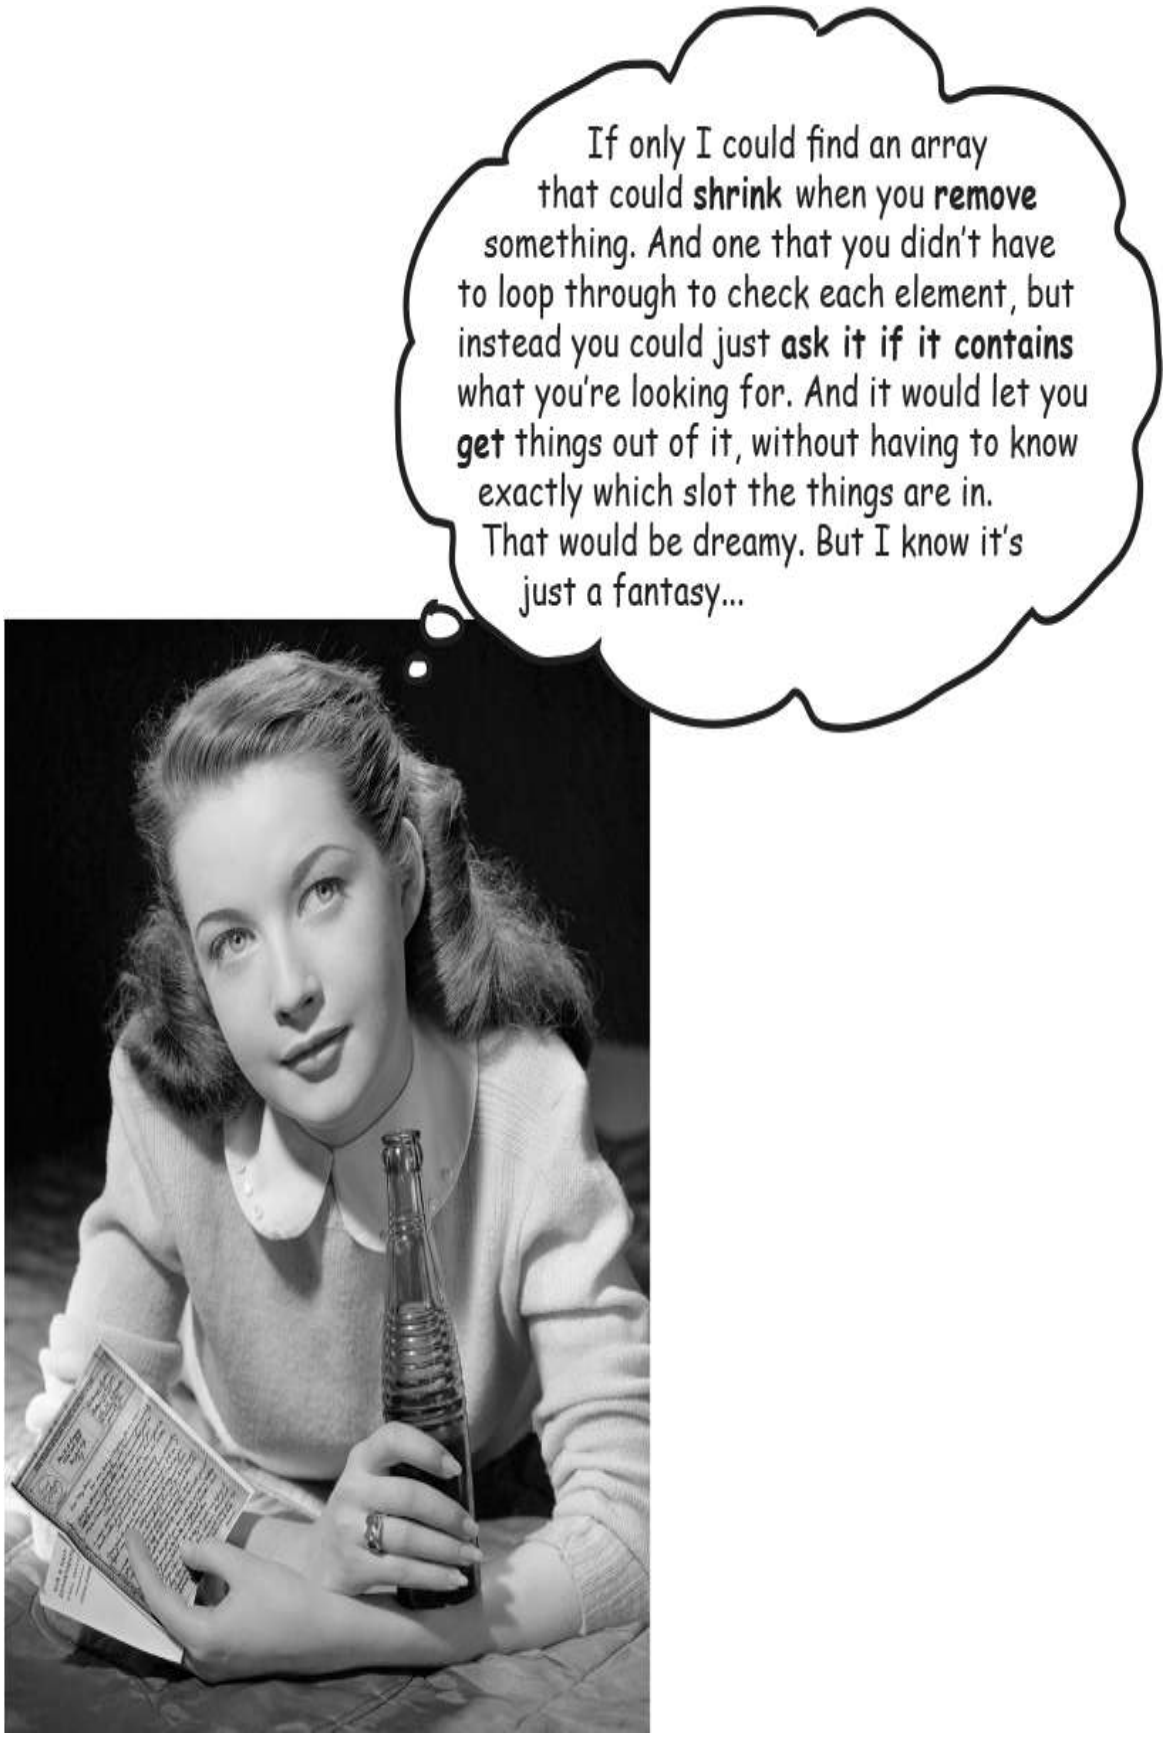
If only I could find an array that could **shrink** when you **remove** something. And one that you didn't have to loop through to check each element, but instead you could just **ask it if it contains** what you're looking for. And it would let you **get** things out of it, without having to know exactly which slot the things are in. That would be dreamy. But I know it's just a fantasy...

Wake up and smell the library

As if by magic, there really is such a thing.

But it's not an *array*, it's *an ArrayList*.

A class in the core Java library (the API).

The Java Platform, Standard Edition (Java SE) ships with hundreds of prebuilt classes. Just like our Ready-Bake Code. Except that these built-in classes are already compiled.

That means no typing.

Just use 'em.

ArrayList is one of a gazillion classes in the Java library.

You can use it in your code as if you wrote it yourself.

ArrayList

add(E e)
Appends the specified element to the end of this list.

remove(int index)
Removes the element at the specified position.

remove(Object o)
Removes the first occurrence of the specified element.

contains(Object o)
Returns true if this list contains the specified element.

isEmpty()
Returns "true" if the list contains no elements.

indexOf(Object o)
Returns either the first index of the element, or -1.

size()
Returns the number of elements in this list.

get(int index)
Returns the element at the specified position.

(Note: the add(E e) method looks a little strange...we'll get to this in Chapter 11. For now, just think of it as an add() method that takes the object you want to add.)

This is just a sample of SOME of the methods in ArrayList.

Some things you can do with ArrayList

① Make one

Don't worry about this new <Egg> angle-bracket syntax right now; it just means "make this a list of Egg objects."

```
ArrayList<Egg> myList = new ArrayList<Egg>();
```

A new ArrayList object is created on the heap. It's little because it's empty.

② Put something in it

```
Egg egg1 = new Egg();

myList.add(egg1);
```



Now the ArrayList grows a "box" to hold the Egg object.

③ Put another thing in it

```
Egg egg2 = new Egg();

myList.add(egg2);
```



The ArrayList grows again to hold the second Egg object.

④ Find out how many things are in it

```
int theSize = myList.size();
```

The ArrayList is holding 2 objects so the size() method returns 2.

⑤ Find out if it contains something

```
boolean isIn = myList.contains(egg1);
```

The ArrayList DOES contain the Egg object referenced by 'egg1', so contains() returns **true**.

⑥ Find out where something is (i.e., its index)

```
int idx = myList.indexOf(egg2);
```

ArrayList is zero-based (means first index is 0) and since the object referenced by 'egg2' was the second thing in the list, indexOf() returns 1.

⑦ Find out if it's empty

```
boolean empty = myList.isEmpty();
```

it's definitely NOT empty, so isEmpty() returns **false**.

⑧ Remove something from it

```
myList.remove(egg1);
```

Hey look – it shrank!

SHARPEN YOUR PENCIL

Fill in the rest of the table below by looking at the ArrayList code on the left and putting in what you think the code might be if it were using a regular array instead. We don't expect you to get all of them exactly right, so just make your best guess.

ArrayList	Regular array
`ArrayList<String> myList = new ArrayList<String>();`	String [] myList = new String[2];
`String a = "whoohoo";`	String a = "whoohoo";
`myList.add(a);`	
`String b = "Frog";`	String b = "Frog";
`myList.add(b);`	
`int theSize = myList.size();`	
`String str = myList.get(1);`	
`myList.remove(1);`	
`boolean isIn = myList.contains(b);`	

 Answers in "Solution".

THERE ARE NO DUMB QUESTIONS

Q: So ArrayList is cool, but how would I know it exists?

A: The question is really, "How do I *know* what's in the API?" and that's the key to your success as a Java programmer. Not to mention your key to being as lazy as possible while still managing to build software. You might be amazed at how much time you can save when somebody else has already done most of the heavy lifting and all you have to do is step in and create the fun part.

But we digress...the short answer is that you spend some time learning what's in the core API. The long answer is at the end of this chapter, where you'll learn *how* to do that.

Q: But that's a pretty big issue. Not only do I need to know that the Java library comes with ArrayList, but more importantly I have to know that ArrayList is the thing that can do what I want! So how do I go from a need-to-do-something to a-way-to-do-it using the API?

A: Now you're really at the heart of it. By the time you've finished this book, you'll have a good grasp of the language, and the rest of your learning curve really is about knowing how to get from a problem to a solution, with you writing the least amount of code. If you can be patient for a few more pages, we start talking about it at the end of this chapter.

Java Exposed

This week's interview: ArrayList, on arrays

HeadFirst: So, ArrayLists are like arrays, right?

ArrayList: In their dreams! ***I*** am an *object*, thank you very much.

HeadFirst: If I'm not mistaken, arrays are objects too. They live on the heap right there with all the other objects.

ArrayList: Sure arrays go on the heap, ***duh***, but an array is still a wanna-be ArrayList. A poser. Objects have state *and* behavior, right? We're clear on that. But have you actually tried calling a method on an array?

HeadFirst: Now that you mention it, can't say I have. But what method would I call, anyway? I only care about calling methods on the stuff I put *in* the array, not the array itself. And I can use array syntax when I want to put things in and take things out of the array.

ArrayList: Is that so? You mean to tell me you actually *removed* something from an array? (Sheesh, where do they train you guys?)

HeadFirst: Of *course* I take something out of the array. I say Dog d = dogArray[1], and I get the Dog object at index 1 out of the array.

ArrayList: Alright, I'll try to speak slowly so you can follow along. You were *not*, I repeat *not*, removing that Dog from the array. All you did was make a copy of the *reference to the Dog* and assign it to another Dog variable.

HeadFirst: Oh, I see what you're saying. No, I didn't actually remove the Dog object from the array. It's still there. But I can just set its reference to null, I guess.

ArrayList: But I'm a first-class object, so I have methods, and I can actually, you know, *do* things like remove the Dog's reference from myself, not just set it to null. And I can change my size, *dynamically* (look it up). Just try to get an *array* to do that!

HeadFirst: Gee, hate to bring this up, but the rumor is that you're nothing more than a glorified but less-efficient array. That in fact you're just a wrapper for an array, adding extra methods for things like resizing that I would have had to write myself. And while we're at it, *you can't even hold primitives*! Isn't that a big limitation?

ArrayList: I can't *believe* you buy into that urban legend. No, I am *not* just a less-efficient array. I will admit that there are a few *extremely* rare situations where an array might be just a tad, I repeat, *tad* bit faster for certain things. But is it worth the *miniscule* performance gain to give up all this *power*? Still, look at all this *flexibility*. And as for the primitives, of *course* you can put a primitive in an ArrayList, as long as it's wrapped in a primitive wrapper class (you'll see a lot more on that in Chapter 10). And if you're using Java 5 or above, that wrapping (and unwrapping when you take the primitive out again) happens automatically. And alright, I'll *acknowledge* that yes, if you're using an ArrayList of *primitives*, it probably is faster with an array, because of all the wrapping and unwrapping, but still...who really uses primitives *these* days?

Oh, look at the time! *I'm late for Pilates.* We'll have to do this again sometime.

Solution

Sharpen your pencil

(from "Sharpen your pencil")

ArrayList	Regular array
`ArrayList<String> myList = new ArrayList<String>();`	`String [] myList = new String[2];`
`String a = "whoohoo";`	`String a = "whoohoo";`
`myList.add(a);`	`myList[0] = a;`
`String b = "Frog";`	`String b = "Frog";`
`myList.add(b);`	`myList[1] = b;`
`int theSize = myList.size();`	`int theSize = myList.length;`
`String str = myList.get(1);`	`String str = myList[1];`
`myList.remove(1);`	`myList[1] = null;`

`boolean isIn = myList.contains(b);`	`boolean isIn = false;`
	`for (String item : myList) {`
	`  if (b.equals(item)) {`
	`  isIn = true;`
	`  break;`
	`  }`
	`}`

Here's where it starts to look really different...

Notice how with ArrayList, you're working with an object of type ArrayList, so you're just invoking regular old methods on a regular old object, using the regular old dot operator.

With an *array*, you use *special array syntax* (like myList[0] = foo) that you won't use anywhere else except with arrays. Even though an array is an object, it lives in its own special world, and you can't invoke any methods on it, although you can access its one and only instance variable, *length*.

Comparing ArrayList to a regular array

- ① **A plain old array has to know its size at the time it's created.**

  But for ArrayList, you just make an object of type ArrayList. Every time. It never needs to know how big it should be, because it grows and shrinks as objects are added or removed.

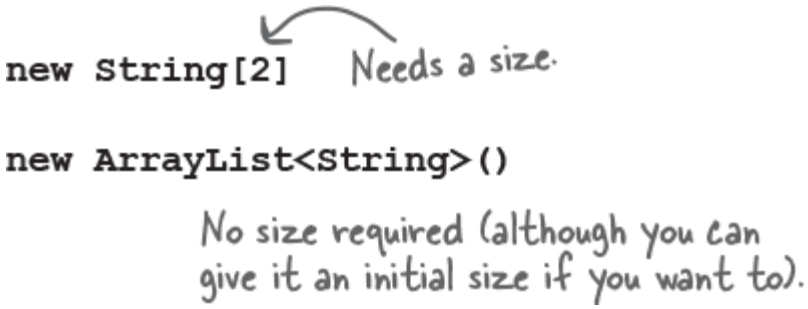

- ② **To put an object in a regular array, you must assign it to a specific location.**

  (An index from 0 to one less than the length of the array.)



  If that index is outside the boundaries of the array (like the array was declared with a size of 2, and now you're trying to assign something to

index 3), it blows up at runtime.

With ArrayList, you can specify an index using the *add(anInt, anObject)* method, or you can just keep saying *add(anObject)* and the ArrayList will keep growing to make room for the new thing.

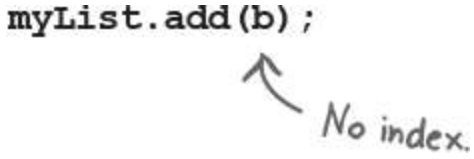

- ③ **Arrays use array syntax that's not used anywhere else in Java.**

  But ArrayLists are plain old Java objects, so they have no special syntax.

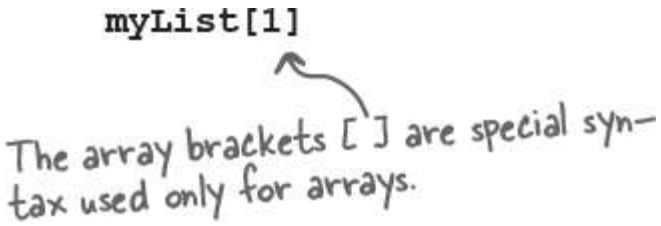

- ④ **ArrayLists are parameterized.**

  We just said that unlike arrays, ArrayLists have no special syntax. But they *do* use something special—***parameterized types.****

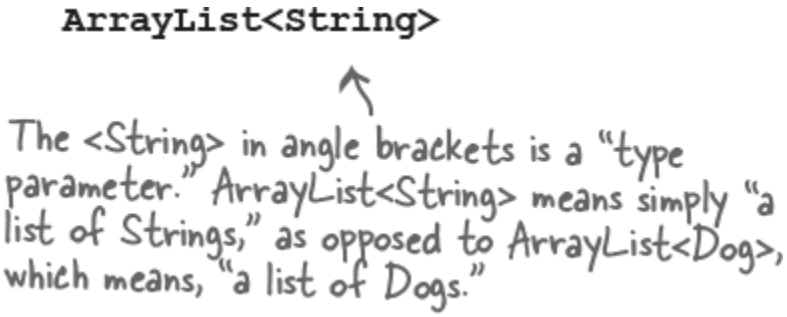

Using the <TypeGoesHere> syntax, we can declare and create an ArrayList that knows (and restricts) the types of objects it can hold. We'll look at the details of parameterized types in ArrayLists in Chapter 11, *Data Structures*, so for now, don't think too much about the angle bracket <> syntax you see

when we use ArrayLists. Just know that it's a way to force the compiler to allow only a specific type of object *(the type in angle brackets)* in the ArrayList.

**Parameterized types were added to Java in Java 5, which came out so long ago that you are almost definitely using a version that supports them!*



Let's fix the Startup code

Remember, this is how the buggy version looks:

```
class Startup {
  private int[] locationCells;
  private int numOfHits = 0;

  public void setLocationCells(int[] locs) {
    locationCells = locs;
  }

  public String checkYourself(int guess) {
    String result = "miss";
    for (int cell : locationCells) {
      if (guess == cell) {
        result = "hit";
        numOfHits++;

        break;
      }
    } // end for
    if (numOfHits == locationCells.length) {
      result = "kill";
    } // end if
    System.out.println(result);
    return result;
  } // end method
} // close class
```

We've renamed the class Startup now (instead of SimpleStartup), for the new advanced version, but this is the same code you saw in the last chapter.

Where it all went wrong. We counted each guess as a hit, without checking whether that cell had already been hit.

New and improved Startup class

```
import java.util.ArrayList;
```

Ignore this line for now; we talk about it at the end of the chapter.

```
public class Startup {

  private ArrayList<String> locationCells;
  // private int numOfHits;
  // don't need to track this now

  public void setLocationCells(ArrayList<String> locs) {
    locationCells = locs;
  }

  public String checkYourself(String userInput) {
    String result = "miss";
    int index = locationCells.indexOf(userInput);

    if (index >= 0) {

      locationCells.remove(index);

      if (locationCells.isEmpty()) {
        result = "kill";
      } else {
        result = "hit";
      } // end if
    } // end outer if
    return result;
  } // end method
} // close class
```

Change the int array to an ArrayList that holds Strings.

This is now a String – it needs to accept a value like "A3."

New and improved argument name.

Find out if the user guess is in the ArrayList, by asking for its index. If it's not in the list, then indexOf() returns a -1.

If index is greater than or equal to zero, the user guess is definitely in the list, so remove it.

If the list is empty, this was the killing blow!

Let's build the REAL game: "Sink a Startup"

We've been working on the "simple" version, but now let's build the real one. Instead of a single row, we'll use a grid. And instead of one Startup, we'll use three.

Goal: Sink all of the computer's Startups in the fewest number of guesses. You're given a rating level based on how well you perform.

Setup: When the game program is launched, the computer places three Startups, randomly, on the **virtual 7 x 7 grid**. When that's complete, the game asks for your first guess.

How you play: We haven't learned to build a GUI yet, so this version works at the command line. The computer will prompt you to enter a guess (a cell), which you'll type at the command line (as "A3," "C5," etc.). In response to your guess, you'll see a result at the command-line, either "hit," "miss," or "You sunk poniez" (or whatever the lucky Startup of the day is). When you've sent all three Startups to that big 404 in the sky, the game ends by printing out your rating.

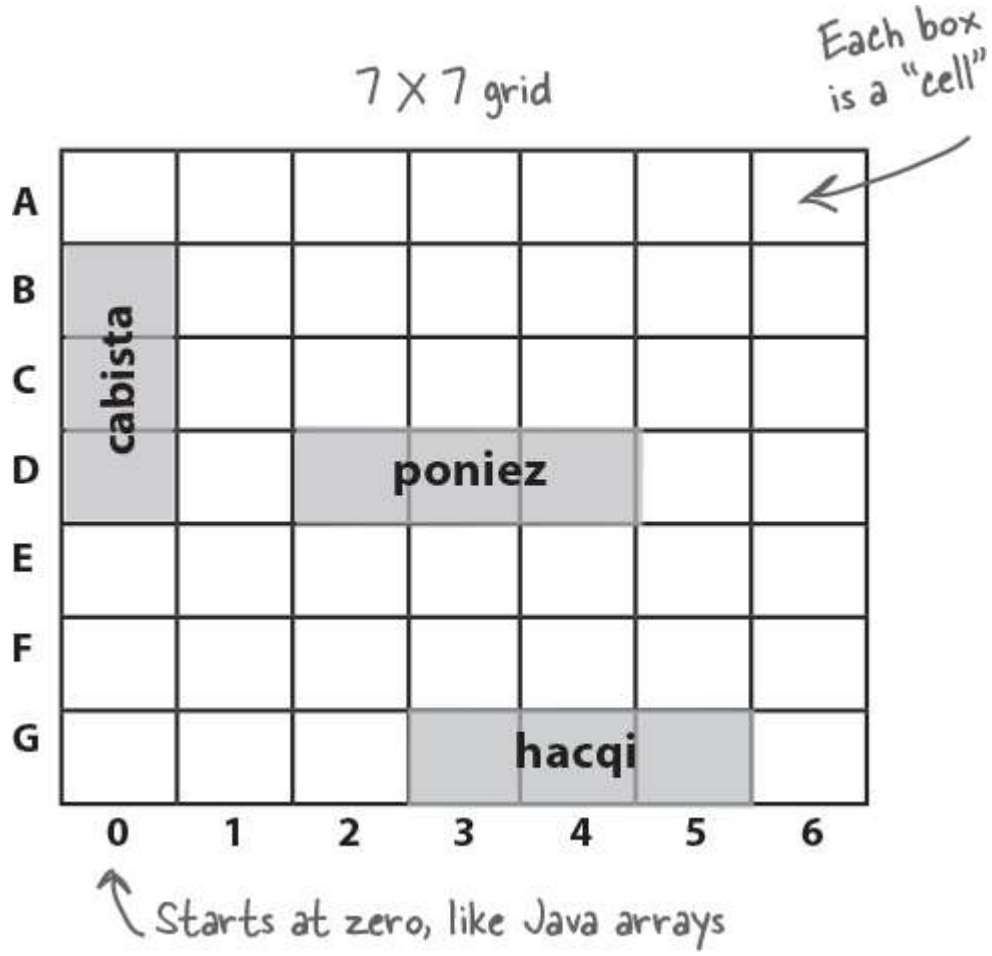

You're going to build the Sink a Startup game, with a 7 x 7 grid and three Startups. Each Startup takes up three cells.

part of a game interaction

```
File Edit Window Help Sell
%java StartupBust
Enter a guess  A3
miss
Enter a guess  B2
miss
Enter a guess  C4
miss
Enter a guess  D2
hit
Enter a guess  D3
hit
Enter a guess  D4
Ouch! You sunk poniez   : (
kill
Enter a guess  G3
hit
Enter a guess  G4
hit
Enter a guess  G5
Ouch! You sunk hacqi    : (
All Startups are dead! Your stock
is now worthless
Took you long enough. 62 guesses.
```

What needs to change?

We have three classes that need to change: the Startup class (which is now called Startup instead of SimpleStartup), the game class (StartupBust), and the game helper class (which we won't worry about now).

- **A Startup class**
  - **A Add a *name* variable** to hold the name of the Startup ("poniez," "cabista," etc.) so each Startup can print its name when it's killed (see the output screen on the opposite page).
- **B StartupBust class (the game)**
  - **Create *three* Startups instead of one.**
  - **Give each of the three Startups a *name*.** Call a setter method on each Startup instance so that the Startup can assign the name to its name instance variable.
  - **Put the Startups on a grid rather than just a single row, and do it for all three Startups.**

    This step is now way more complex than before, if we're going to place the Startups randomly. Since we're not here to mess with the math, we put the algorithm for giving the Startups a location into the GameHelper (Ready-Bake Code) class.
  - **Check each user guess *with all three Startups*, instead of just one.**
  - **Keep playing the game** (i.e., accepting user guesses and checking them with the remaining Startups) ***until there are no more live Startups.***
  - **Get out of main.** We kept the simple one in main just to...keep it simple. But that's not what we want for the *real* game.

3 Classes:

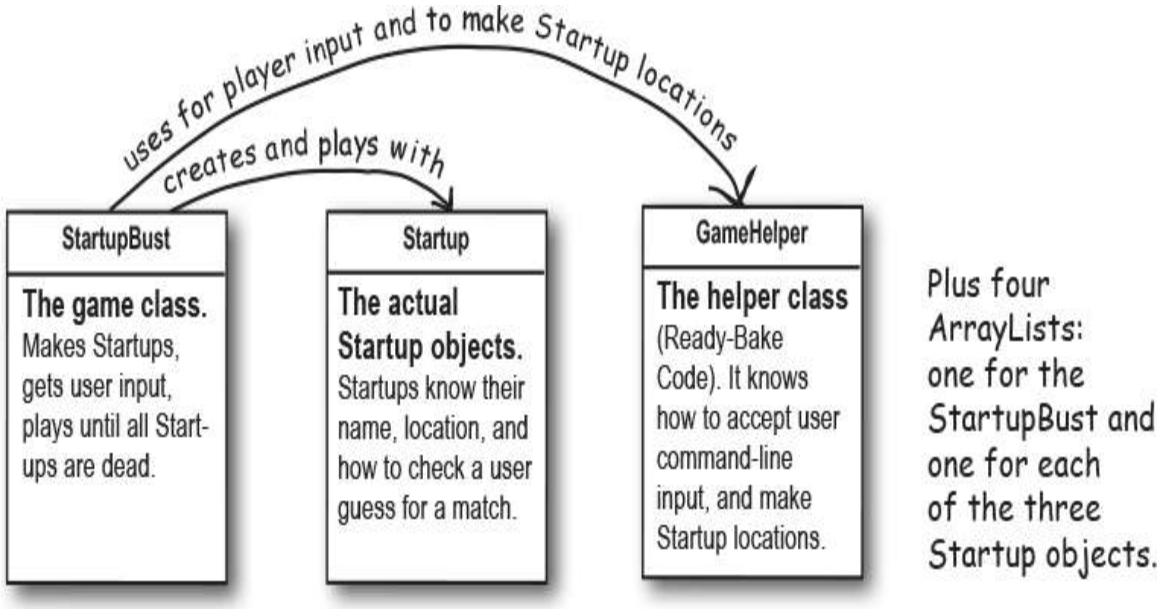

5 Objects:

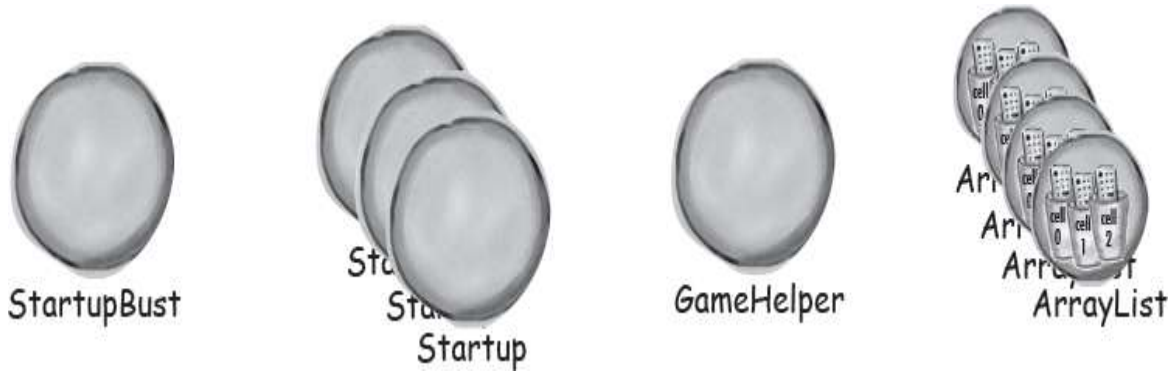

Who does what in the StartupBust game (and when)

- ❶

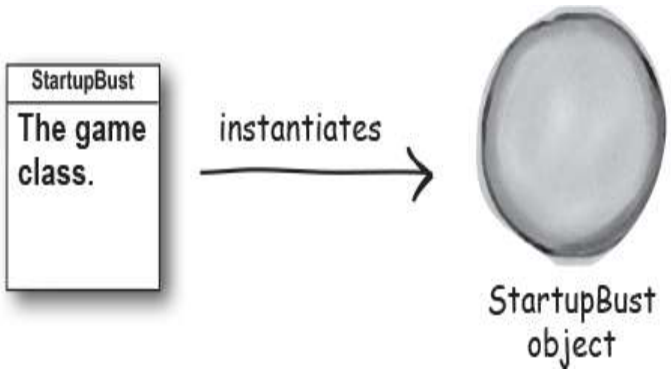

The main() method in the StartupBust class instantiates the StartupBust object that does all the game stuff.

- ❷

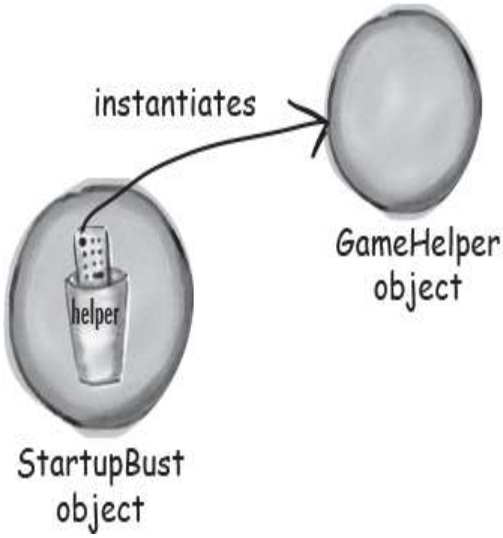

The StartupBust (game) object instantiates an instance of GameHelper, the object that will help the game do its work.

- ❸

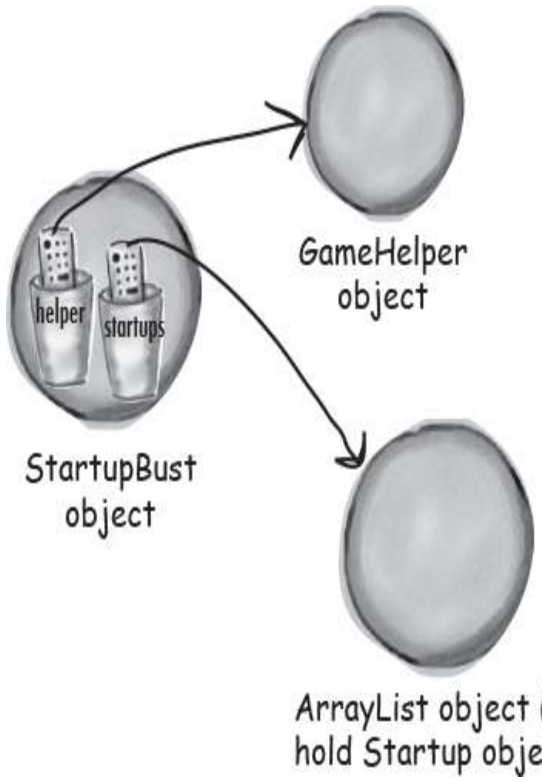

The StartupBust object instantiates an ArrayList that will hold the three Startup objects.

- 4

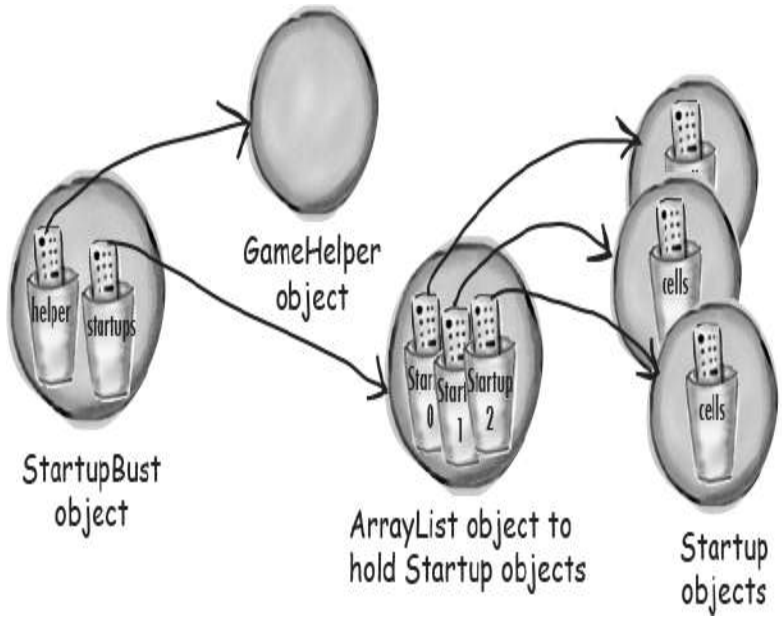

The StartupBust object creates three Startup objects (and puts them in the ArrayList).

- 5

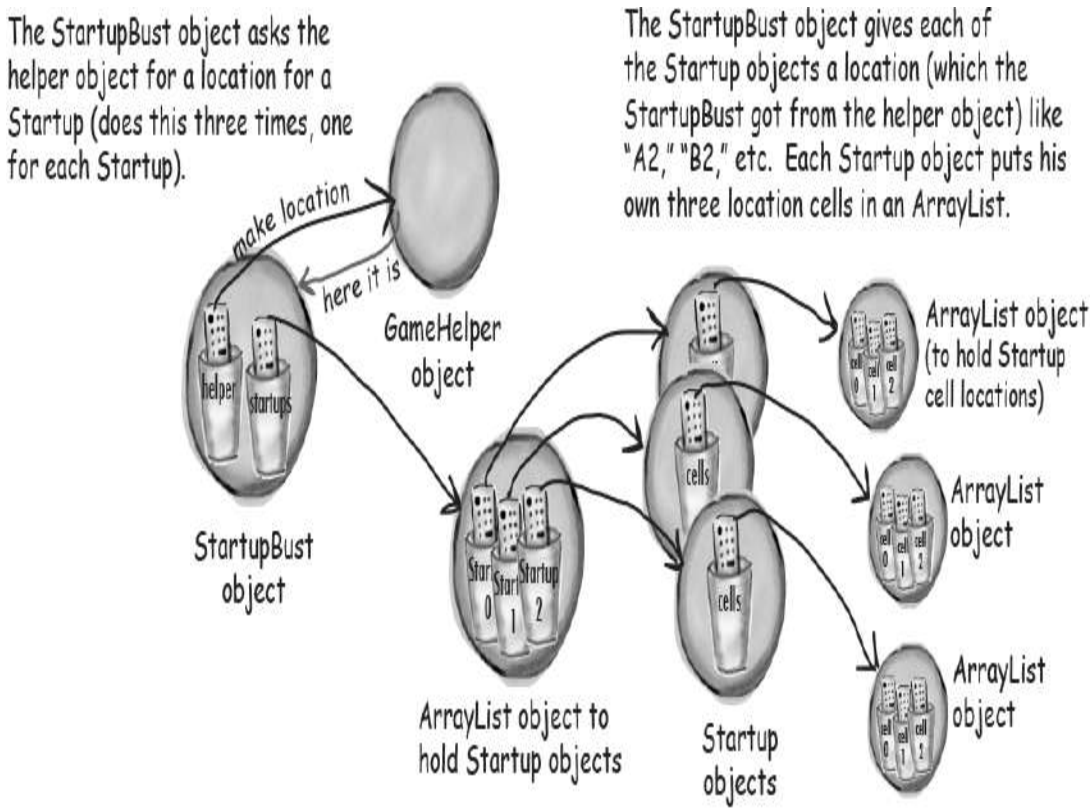
The StartupBust object asks the helper object for a location for a Startup (does this three times, one for each Startup).
The StartupBust object gives each of the Startup objects a location (which the StartupBust got from the helper object) like "A2," "B2," etc. Each Startup object puts his own three location cells in an ArrayList.
make location
here it is
GameHelper object
helper
startups
StartupBust object
ArrayList object to hold Startup objects
cells
cells
Startup objects
ArrayList object (to hold Startup cell locations)
ArrayList object
ArrayList object

- 6

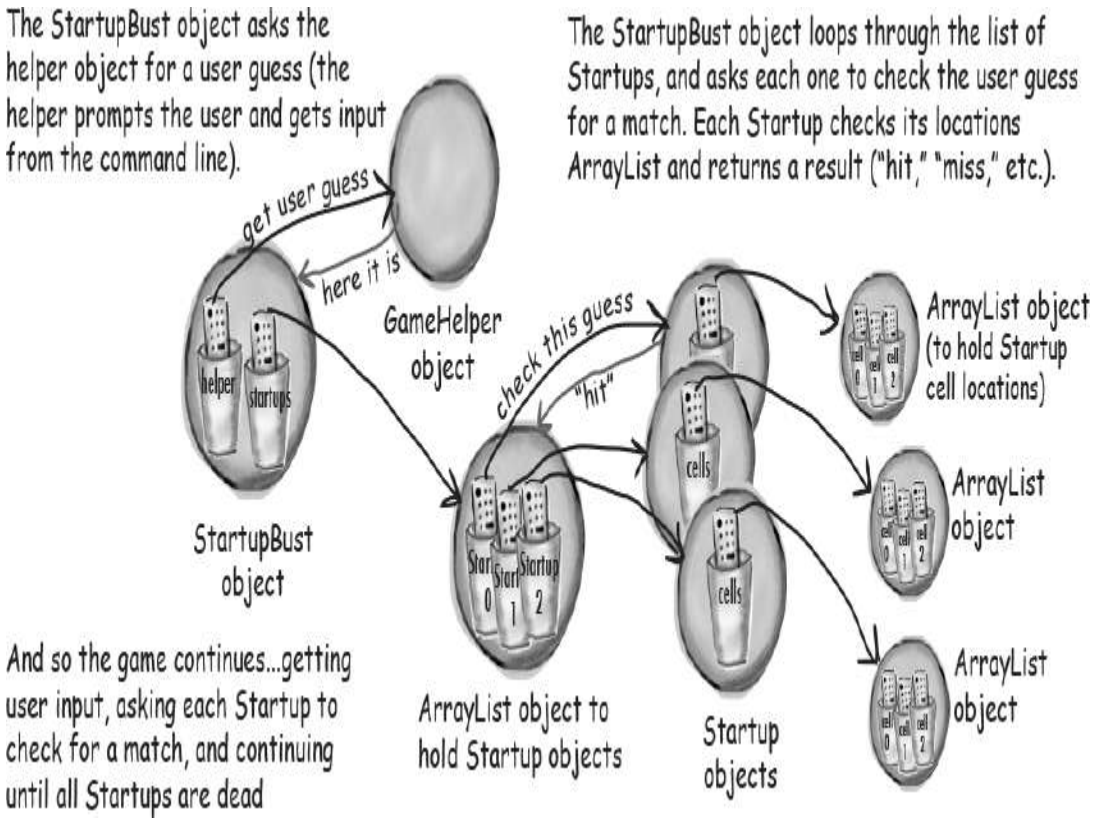

Prep code for the real StartupBust class

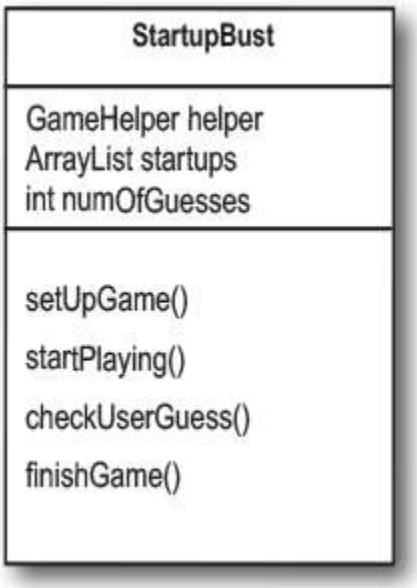

The StartupBust class has three main jobs: set up the game, play the game until the Startups are dead, and end the game. Although we could map those three jobs directly into three methods, we split the middle job (play the game) into *two* methods to keep the granularity smaller. Smaller methods (meaning smaller chunks of functionality) help us test, debug, and modify the code more easily.

Variable Declarations

DECLARE and instantiate the *GameHelper* instance variable, named *helper*.

DECLARE and instantiate an *ArrayList* to hold the list of Startups (initially three) Call it *startups*.

DECLARE an int variable to hold the number of user guesses (so that we can give the user a score at the end of the game). Name it *numOfGuesses* and set it to 0.

Method Declarations

DECLARE a *setUpGame()* method to create and initialize the Startup objects with names and locations. Display brief instructions to the user.

DECLARE a *startPlaying()* method that asks the player for guesses and calls the checkUserGuess() method until all the Startup objects are removed from play.

DECLARE a *checkUserGuess()* method that loops through all remaining Startup objects and calls each Startup object's checkYourself() method.

DECLARE a *finishGame()* method that prints a message about the user's performance, based on how many guesses it took to sink all of the Startup objects.

Method Implementations

METHOD: *void setUpGame()*

```
// make three Startup objects and name them
```

CREATE three Startup objects.

SET a name for each Startup.

ADD the Startups to *startups* (the ArrayList).

REPEAT with each of the Startup objects in the *startups* List:

CALL the *placeStartup()* method on the helper object, to get a randomly-selected

location for this Startup (three cells, vertically or horizontally aligned, on a 7 X 7 grid).

SET the location for each Startup based on the result of the *placeStartup()* call.

END REPEAT

END METHOD

METHOD: *void startPlaying()*

REPEAT while any Startups exist.

GET user input by calling the helper *getUserInput()* method.

EVALUATE the user's guess by *checkUserGuess()* method.

END REPEAT

END METHOD

METHOD: *void checkUserGuess(String userGuess)*

// find out if there's a hit (and kill) on any Startup

INCREMENT the number of user guesses in the *numOfGuesses* variable.

SET the local *result* variable (a *String*) to "miss", assuming that the user's guess will be a miss.

REPEAT with each of the Startup objects in the *startups* List.

EVALUATE the user's guess by calling the Startup object's *checkYourself()* method.

SET the result variable to "hit" or "kill" if appropriate.

IF the result is "kill", **REMOVE** the Startup from the *startups* List.

END REPEAT

DISPLAY the result value to the user.

END METHOD

METHOD: *void finishGame()*

DISPLAY a generic "game over" message, then:

IF number of user guesses is small,

DISPLAY a congratulations message.

ELSE

DISPLAY an insulting one.

END IF

END METHOD

→ **Yours to solve.**

SHARPEN YOUR PENCIL

How should we go from prep code to the final code? First we start with test code, and then test and build up our methods bit by bit. We won't keep showing you test code in this book, so now it's up to you to think about what you'd need to know to test these methods. And which method do you test and write first? See if you can work out some prep code for a set of tests. Prep code or even bullet points are good enough for this exercise, but if you want to try to write the *real* test code (in Java), knock yourself out.

```
import java.util.ArrayList;

public class StartupBust {
  private GameHelper helper = new GameHelper();
  private ArrayList<Startup> startups = new ArrayList<Startup>();
  private int numOfGuesses = 0;

  private void setUpGame() {
    // first make some Startups and give them locations
    Startup one = new Startup();
    one.setName("poniez");
    Startup two = new Startup();
    two.setName("hacqi");
    Startup three = new Startup();
    three.setName("cabista");
    startups.add(one);
    startups.add(two);
    startups.add(three);

    System.out.println("Your goal is to sink three Startups.");
    System.out.println("poniez, hacqi, cabista");
    System.out.println("Try to sink them all in the fewest number of guesses");

    for (Startup startup : startups) {
      ArrayList<String> newLocation = helper.placeStartup(3);
      startup.setLocationCells(newLocation);
    } // close for loop
  } // close setUpGame method

  private void startPlaying() {
    while (!startups.isEmpty()) {
      String userGuess = helper.getUserInput("Enter a guess");
      checkUserGuess(userGuess);
    } // close while
    finishGame();
  } // close startPlaying method
```

1
2
3
4
5
6
7
8
9
10

SHARPEN YOUR PENCIL

Annotate the code yourself!

Match the annotations at the bottom of each page with the numbers in the code. Write the number in the slot in front of the corresponding annotation.

You'll use each annotation just once, and you'll need all of the annotations.

Ask the helper for a Startup location

Declare and initialize the variables we'll need

Get user input

Repeat with each Startup in the list

Call the setter method on this Startup to give it the location you just got from the helper

Call our own checkUserGuess method

Print brief instructions for user

Make three Startup objects, give 'em names, and stick 'em in the ArrayList

As long as the Startup list is NOT empty

Call our own finishGame method

```
  private void checkUserGuess(String userGuess) {
    numOfGuesses++;  (11)
    String result = "miss";  (12)

    for (Startup startupToTest : startups) {  (13)
      result = startupToTest.checkYourself(userGuess);  (14)

      if (result.equals("hit")) {
        break;  (15)
      }
      if (result.equals("kill")) {
        startups.remove(startupToTest);  (16)
        break;
      }
    } // close for

    System.out.println(result);  (17)
  } // close method


  private void finishGame() {
    System.out.println("All Startups are dead! Your stock is now worthless");
    if (numOfGuesses <= 18) {
      System.out.println("It only took you " + numOfGuesses + " guesses.");
      System.out.println("You got out before your options sank.");
    } else {
      System.out.println("Took you long enough. " + numOfGuesses + " guesses.");
      System.out.println("Fish are dancing with your options");
    }
  } // close method  (18)

  public static void main(String[] args) {
    StartupBust game = new StartupBust();  (19)
    game.setUpGame();  (20)
    game.startPlaying();  (21)
  } // close method
}
```

Whatever you do, DON'T turn the page!

Not until you've finished this exercise.

Our version is on the next page.

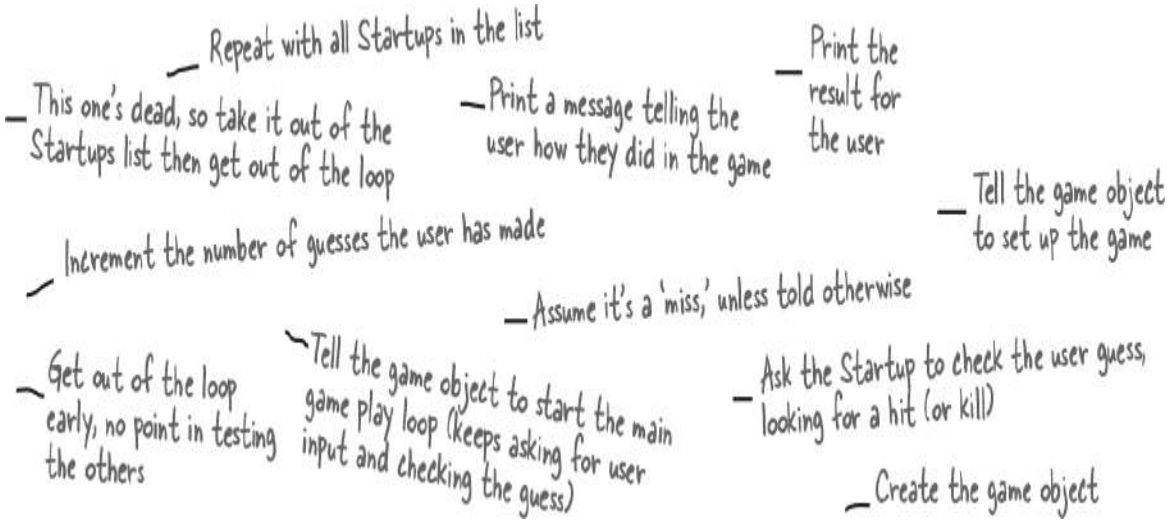

```
import java.util.ArrayList;

public class StartupBust {

  private GameHelper helper = new GameHelper();
  private ArrayList<Startup> startups = new ArrayList<Startup>();
  private int numOfGuesses = 0;

  private void setUpGame() {
    // first make some Startups and give them locations
    Startup one = new Startup();
    one.setName("poniez");
    Startup two = new Startup();
    two.setName("hacqi");
    Startup three = new Startup();
    three.setName("cabista");
    startups.add(one);
    startups.add(two);
    startups.add(three);

    System.out.println("Your goal is to sink three Startups.");
    System.out.println("poniez, hacqi, cabista");
    System.out.println("Try to sink them all in the fewest number of guesses");

    for (Startup startup : startups) {
      ArrayList<String> newLocation = helper.placeStartup(3);
      startup.setLocationCells(newLocation);
    } // close for loop
  } // close setUpGame method

  private void startPlaying() {
    while (!startups.isEmpty()) {
      String userGuess = helper.getUserInput("Enter a guess");
      checkUserGuess(userGuess);
    } // close while
    finishGame();
  } // close startPlaying method
```

Declare and initialize the variables we'll need.

Make three Startup objects, give 'em names, and stick 'em in the ArrayList.

Print brief instructions for user.

Repeat with each Startup in the list.

Ask the helper for a Startup location (an ArrayList of Strings).

Call the setter method on this Startup to give it the location you just got from the helper.

As long as the Startup list is NOT empty (the ! means NOT, it's the same as (startups.isEmpty() == false).

Get user input.

Call our own checkUserGuess method.

Call our own finishGame method.

```
  private void checkUserGuess(String userGuess) {
    numOfGuesses++;
    String result = "miss";

    for (Startup startupToTest : startups) {
      result = startupToTest.checkYourself(userGuess);

      if (result.equals("hit")) {
        break;
      }
      if (result.equals("kill")) {
        startups.remove(startupToTest);
        break;
      }
    } // close for

    System.out.println(result);
  } // close method

  private void finishGame() {
    System.out.println("All Startups are dead! Your stock is now worthless");
    if (numOfGuesses <= 18) {
      System.out.println("It only took you " + numOfGuesses + " guesses.");
      System.out.println("You got out before your options sank.");
    } else {
      System.out.println("Took you long enough. " + numOfGuesses + " guesses.");
      System.out.println("Fish are dancing with your options");
    }
  } // close method

  public static void main(String[] args) {
    StartupBust game = new StartupBust();
    game.setUpGame();
    game.startPlaying();
  } // close method
}
```

Increment the number of guesses the user has made

Assume it's a 'miss', unless told otherwise

Repeat with all Startups in the list

Ask the Startup to check the user guess, looking for a hit (or kill)

Get out of the loop early, no point in testing the others

This one's dead, so take it out of the Startups list then get out of the loop

Print the result for the user

Print a message telling the user how they did in the game

Create the game object

Tell the game object to set up the game

Tell the game object to start the main game play loop (keeps asking for user input and checking the guess)

The final version of the Startup class

```
import java.util.ArrayList;

public class Startup {
  private ArrayList<String> locationCells;
  private String name;

  public void setLocationCells(ArrayList<String> loc) {
    locationCells = loc;
  }

  public void setName(String n) {
    name = n;
  }

  public String checkYourself(String userInput) {
    String result = "miss";
    int index = locationCells.indexOf(userInput);
    if (index >= 0) {
      locationCells.remove(index);

      if (locationCells.isEmpty()) {
        result = "kill";
        System.out.println("Ouch! You sunk " + name + "   : ( ");
      } else {
        result = "hit";
      } // end if
    } // end outer if
    return result;
  } // end method

} // close class
```

Startup's instance variables:
- an ArrayList of cell locations
- the Startup's name

A setter method that updates the Startup's location. (Random location provided by the GameHelper placeStartup() method.)

Your basic setter method

The ArrayList indexOf( ) method in action! If the user guess is one of the entries in the ArrayList, indexOf( ) will return its ArrayList location. If not, indexOf( ) will return -1.

Using ArrayList's remove() method to delete an entry.

Using the isEmpty() method to see if all of the locations have been guessed

Tell the user when a Startup has been sunk.

Return: 'miss' or 'hit' or 'kill'.

Super powerful Boolean expressions

So far, when we've used Boolean expressions for our loops or `if` tests, they've been pretty simple. We will be using more powerful boolean expressions in some of the Ready-Bake Code you're about to see, and even though we know you wouldn't peek, we thought this would be a good time to discuss how to energize your expressions.

"And" and "Or" Operators (&&, ||)

Let's say you're writing a chooseCamera( ) method, with lots of rules about which camera to select. Maybe you can choose cameras ranging from $50 to $1000, but in some cases you want to limit the price range more precisely. You want to say something like:

"If the price range is between $300 ***and*** $400, then choose X."

```
if (price >= 300 && price < 400) {
  camera = "X";
}
```

Let's say that of the ten camera brands available, you have some logic that applies to only a *few* of the list:

```
if (brand.equals("A") || brand.equals("B")) {
  // do stuff for only brand A or brand B
}
```

Boolean expressions can get really big and complicated:

```
if ((zoomType.equals("optical") &&
     (zoomDegree >= 3 && zoomDegree <= 8)) ||
   (zoomType.equals("digital") &&
    (zoomDegree >= 5 && zoomDegree <= 12))) {
   // do appropriate zoom stuff
}
```

If you want to get *really* technical, you might wonder about the precedence of these operators. Instead of becoming an expert in the arcane world of precedence, we recommend that you ***use parentheses*** to make your code clear.

Not equals (!= and !)

Let's say that you have a logic like "of the ten available camera models, a certain thing is *true for all but one. "*

```
if (model != 2000) {
  //  do non-model 2000 stuff
}
```

or for comparing objects like strings...

```
if (!brand.equals("X")) {
 // do non-brand X stuff
}
```

Short-Circuit Operators (&& , ||)

The operators we've looked at so far, && and ||, are known as ***short-circuit*** operators. In the case of &&, the expression will be true only if both sides of the && are true. So if the JVM sees that the left side of a && expression is false, it stops right there! Doesn't even bother to look at the right side.

Similarly, with ||, the expression will be true if *either* side is true, so if the JVM sees that the left side is true, it declares the entire statement to be true and doesn't bother to check the right side.

Why is this great? Let's say that you have a reference variable and you're not sure whether it's been assigned to an object. If you try to call a method using this null reference variable (i.e., no object has been assigned), you'll get a NullPointerException. So, try this:

```
if (refVar != null &&
    refVar.isValidType()) {
  // do 'got a valid type' stuff
}
```

Non-Short-Circuit Operators (&, |)

When used in boolean expressions, the & and | operators act like their && and || counterparts, except that they force the JVM to *always* check *both* sides of the expression. Typically, & and | are used in another context, for manipulating bits.

Ready-Bake Code

This is the helper class for the game. Besides the user input method (that prompts the user and reads input from the command line), the helper's Big Service is to create the cell locations for the Startups. We tried to keep it fairly small so you wouldn't have to type so much. And remember, you won't be able to compile the StartupBust game class until you have *this* class.

```
import java.util.*;

public class GameHelper {
  private static final String ALPHABET = "abcdefg";
  private static final int GRID_LENGTH = 7;
  private static final int GRID_SIZE = 49;
  private static final int MAX_ATTEMPTS = 200;
  static final int HORIZONTAL_INCREMENT = 1;          // A better way to represent these two
  static final int VERTICAL_INCREMENT = GRID_LENGTH;  // things is an enum (see Appendix B)

  private final int[] grid = new int[GRID_SIZE];
  private final Random random = new Random();
  private int startupCount = 0;

  public String getUserInput(String prompt) {
    System.out.print(prompt + ": ");
    Scanner scanner = new Scanner(System.in);
    return scanner.nextLine().toLowerCase();
  } //end getUserInput

  public ArrayList<String> placeStartup(int startupSize) {
    // holds index to grid (0 - 48)
    int[] startupCoords = new int[startupSize];         // current candidate co-ordinates
    int attempts = 0;                                   // current attempts counter
    boolean success = false;                            // flag = found a good location?

    startupCount++;                                     // nth Startup to place
    int increment = getIncrement();                     // alternate vert & horiz alignment

    while (!success & attempts++ < MAX_ATTEMPTS) {      // main search loop
      int location = random.nextInt(GRID_SIZE);         // get random starting point

      for (int i = 0; i < startupCoords.length; i++) {  // create array of proposed coords
        startupCoords[i] = location;                    // put current location in array
        location += increment;                          // calculate the next location
      }
      // System.out.println("Trying: " + Arrays.toString(startupCoords));

      if (startupFits(startupCoords, increment)) {      // startup fits on the grid?
        success = coordsAvailable(startupCoords);       // ...and locations aren't taken?
      }                                                 // end loop
    }                                                   // end while
    savePositionToGrid(startupCoords);                  // coords passed checks, save
    ArrayList<String> alphaCells = convertCoordsToAlphaFormat(startupCoords);
    // System.out.println("Placed at: "+ alphaCells);
    return alphaCells;
  } //end placeStartup
```

Note: For extra credit, you might try "un-commenting" the System.out.println's, just to watch it work! These print statements will let you "cheat" by giving you the location of the Startups, but it will help you test it.

This is the statement that tells you exactly where the Startup is located.

```
  private boolean startupFits(int[] startupCoords, int increment) {
    int finalLocation = startupCoords[startupCoords.length - 1];
    if (increment == HORIZONTAL_INCREMENT) {
      // check end is on same row as start
      return calcRowFromIndex(startupCoords[0]) == calcRowFromIndex(finalLocation);
    } else {
      return finalLocation < GRID_SIZE;                // check end isn't off the bottom
    }
  } //end startupFits
  private boolean coordsAvailable(int[] startupCoords) {
    for (int coord : startupCoords) {                   // check all potential positions
      if (grid[coord] != 0) {                           // this position already taken
        // System.out.println("position: " + coord + " already taken.");
        return false;                                   // NO success
      }
    }
    return true;                                        // there were no clashes, yay!
  } //end coordsAvailable
  private void savePositionToGrid(int[] startupCoords) {
    for (int index : startupCoords) {
      grid[index] = 1;                                  // mark grid position as 'used'
    }
  } //end savePositionToGrid
  private ArrayList<String> convertCoordsToAlphaFormat(int[] startupCoords) {
    ArrayList<String> alphaCells = new ArrayList<String>();
    for (int index : startupCoords) {                   // for each grid coordinate
      String alphaCoords = getAlphaCoordsFromIndex(index); // turn it into an "a0" style
      alphaCells.add(alphaCoords);                      // add to a list
    }
    return alphaCells;                                  // return the "a0"-style coords
  } // end convertCoordsToAlphaFormat
  private String getAlphaCoordsFromIndex(int index) {
    int row = calcRowFromIndex(index);                  // get row value
    int column = index % GRID_LENGTH;                   // get numeric column value
    String letter = ALPHABET.substring(column, column + 1); // convert to letter
    return letter + row;
  } // end getAlphaCoordsFromIndex
  private int calcRowFromIndex(int index) {
    return index / GRID_LENGTH;
  } // end calcRowFromIndex
  private int getIncrement() {
    if (startupCount % 2 == 0) {                        // if EVEN Startup
      return HORIZONTAL_INCREMENT;                      // place horizontally
    } else {                                            // else ODD
      return VERTICAL_INCREMENT;                        // place vertically
    }
  } //end getIncrement
} //end class
```

This code, and a basic test, is available in the GitHub repo, https://oreil.ly/hfJava_3e_examples

Using the Library (the Java API)

You made it all the way through the StartupBust game, thanks to the help of ArrayList. And now, as promised, it's time to learn how to fool around in the Java library.

In the Java API, classes are grouped into packages.

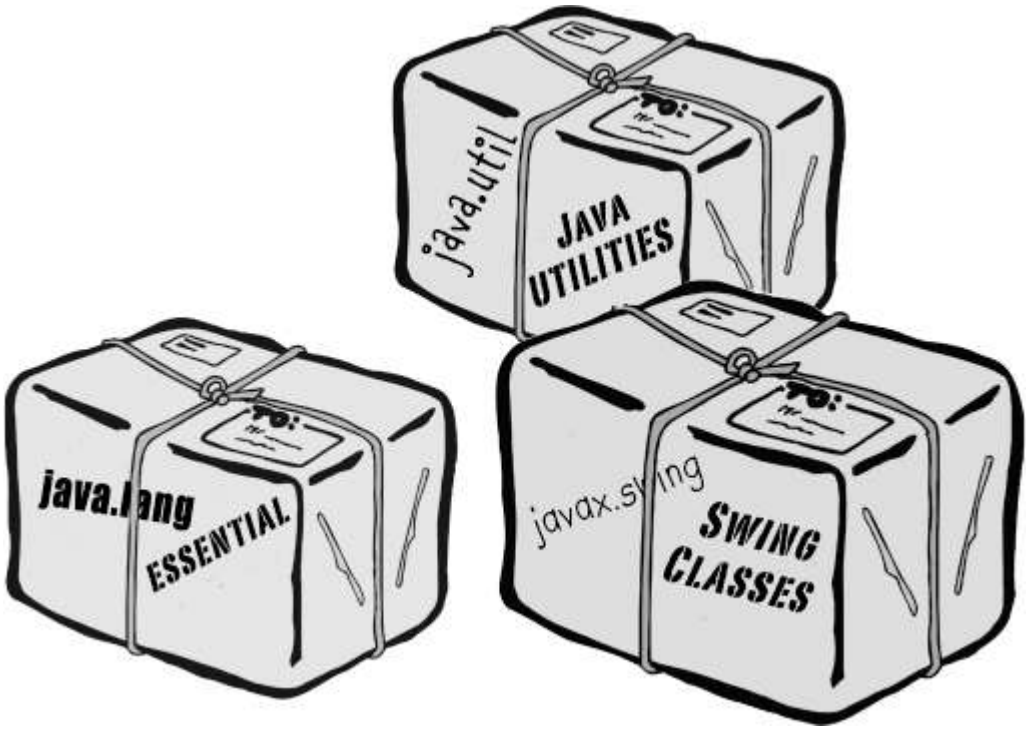

To use a class in the API, you have to know which package the class is in.

Every class in the Java library belongs to a package. The package has a name, like **`javax.swing`** (a package that holds some of the Swing GUI classes you'll learn about soon). ArrayList is in the package called **`java.util`**, which surprise surprise, holds a pile of *utility* classes. You'll learn a lot more about packages in Appendix B, including how to put your *own* classes into your *own* packages. For now, though, we're just looking to *use* some of the classes that come with Java.

Using a class from the API, in your own code, is simple. You just treat the class as though you wrote it yourself...as though you compiled it, and there it sits, waiting for you to use it. With one big difference: somewhere in your code you have to indicate the *full* name of the library class you want to use, and that means package name + class name.

Even if you didn't know it, ***you've already been using classes from a package.*** System (System.out.println), String, and Math (Math.random()) all belong to the **`java.lang`** package.

You have to know the full name* of the class you want to use in your code.

ArrayList is not the *full* name of ArrayList, just as Kathy isn't a full name (unless it's like Madonna or Cher, but we won't go there). The full name of ArrayList is actually:

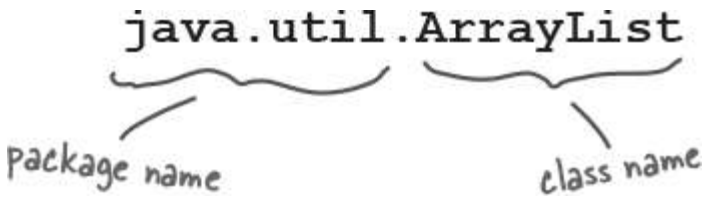

You have to tell Java which ArrayList you want to use. You have two options:

- 🅐 **IMPORT**

  Put an import statement at the top of your source code file:

  ```
  import java.util.ArrayList;
  public class MyClass {... }
  ```

  OR

- 🅑 **TYPE**

Type the full name everywhere in your code. Each time you use it. *Everywhere* you use it.

When you declare and/or instantiate it:

```
java.util.ArrayList<Dog> list = new java.util.ArrayList<Dog>();
```

When you use it as an argument type:

```
public void go(java.util.ArrayList<Dog> list) { }
```

When you use it as a return type:

```
public java.util.ArrayList<Dog> foo() {...}
```

**Unless the class is in the java.lang package.*

THERE ARE NO DUMB QUESTIONS

Q: Why does there have to be a full name? Is that the only purpose of a package?

A: Packages are important for three main reasons. First, they help the overall organization of a project or library. Rather than just having one horrendously large pile of classes, they're all grouped into packages for specific kinds of functionality (like GUI or data structures or database stuff, etc.).

Second, packages give you a name-scoping, to help prevent collisions if you and 12 other programmers in your company all decide to make a class with the same name. If you have a class named Set and someone else (including the Java API) has a class named Set, you need some way to tell the JVM *which* Set class you're trying to use.

Third, packages provide a level of security, because you can restrict the code you write so that only other classes in the same package can access it. The details are in Appendix B.

Q: OK, back to the name collision thing. How does a full name really help? What's to prevent two people from giving a class the same package name?

A: Java has a naming convention that usually prevents this from happening, as long as developers adhere to it.

BULLET POINTS

- **ArrayList** is a class in the Java API.
- To put something into an ArrayList, use **add().**
- To remove something from an ArrayList use **remove()**.
- To find out where something is (and if it is) in an ArrayList, use **indexOf().**
- To find out if an ArrayList is empty, use **isEmpty()**.
- To get the size (number of elements) in an ArrayList, use the **size()** ***method***.
- To get the **length** (number of elements) in a regular old array, remember, you use the **length** ***variable*.**
- An ArrayList **resizes dynamically** to whatever size is needed. It grows when objects are added, and it **shrinks** when objects are removed.
- You declare the type of the array using a **type parameter**, which is a type name in angle brackets. Example: ArrayList<Button> means the ArrayList will be able to hold only objects of type Button (or subclasses of Button as you'll learn in the next couple of chapters).
- Although an ArrayList holds objects and not primitives, the compiler will automatically "wrap" (and "unwrap" when you take it out) a primitive into an Object and place that object in the ArrayList instead of the primitive. (More on this feature later in the book.)
- Classes are grouped into packages.
- A class has a full name, which is a combination of the package name and the class name. Class ArrayList is really java.util.ArrayList.

- To use a class in a package other than java.lang, you must tell Java the full name of the class.
- You can either use an import statement at the top of your source code, or you can type the full name every place you use the class in your code.

THERE ARE NO DUMB QUESTIONS

Q: Does `import` make my class bigger? Does it actually compile the imported class or package into *my* code?

A: Perhaps you're a C programmer? An `import` is not the same as an `include`. So the answer is no and no. Repeat after me: "an `import` statement saves you from typing." That's really it. You don't have to worry about your code becoming bloated, or slower, from too many imports. An `import` is simply the way you give Java the *full name of a class*.

Q: OK, how come I never had to import the String class? Or System?

A: Remember, you get the java.lang package sort of "pre-imported" for free. Because the classes in java.lang are so fundamental, you don't have to use the full name. There is only one java.lang.String class and one java.lang.System class, and Java darn well knows where to find them.

Q: Do I have to put my own classes into packages? How do I do that? *Can* I do that?

A: In the real world (which you should try to avoid), yes, you *will* want to put your classes into packages. We'll get into that in detail in Appendix B. For now, we won't put our code examples in a package.*

**But when you look at the code in the repo (https://oreil.ly/hfJava_3e_examples), you'll see we put the classes into packages.*

MAKE IT STICK

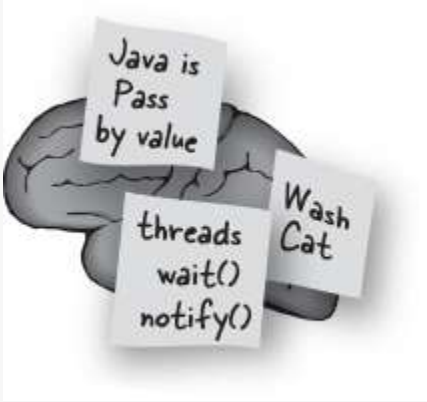

Roses are red,

apples are ripe,

if you don't import

you'll just have to type

You must tell Java the full name of every class you use, unless that class is in the java.lang package. An `import` statement for the class or package at the top of your source code is the easy way. Otherwise, you have to type the full name of the class, everywhere you use it!

One more time, in the unlikely event that you don't already have this down:

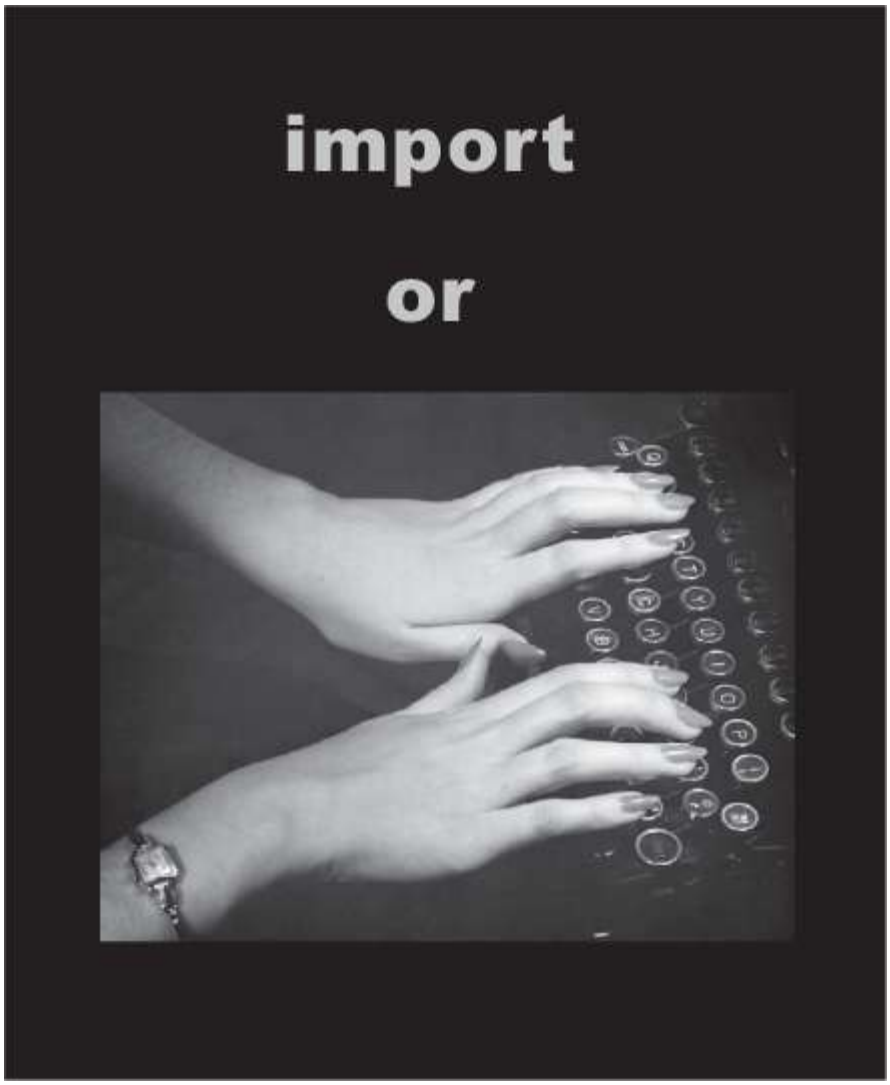

“Good to know there’s an ArrayList in the java. util package. But by myself, how would I have figured that out?”

- Julia, 31, hand model

How to discover the API

Two things you want to know:

- ❶ **What features are available in the library? (Which classes?)**
- ❷ **How do you use these features? (Once you find a class, how do you know what it can do?)**
- ❶ **Browse a book**

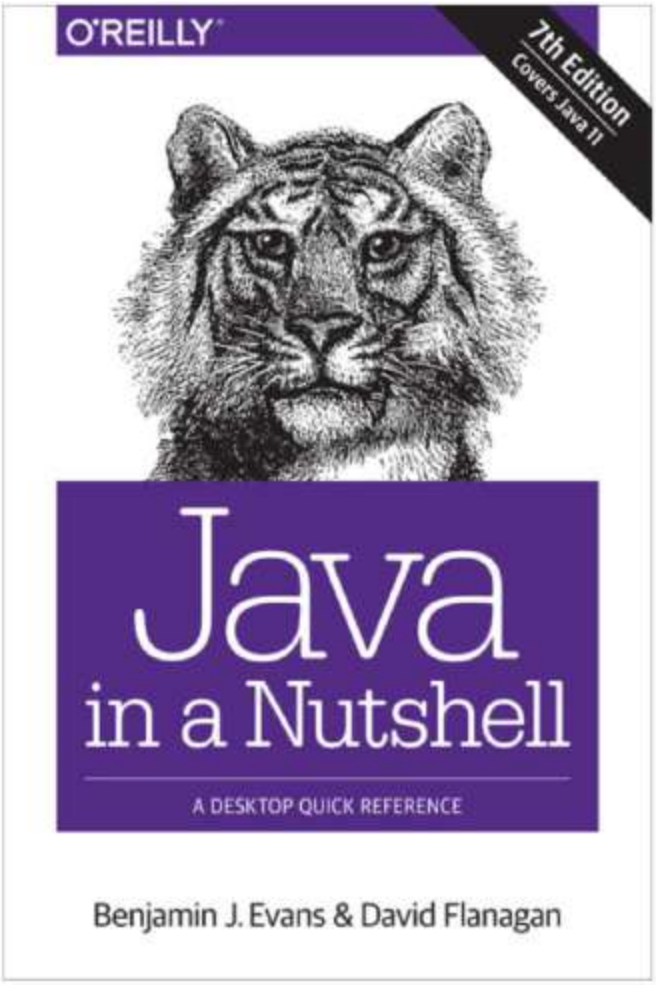

- **Use the HTML API docs**

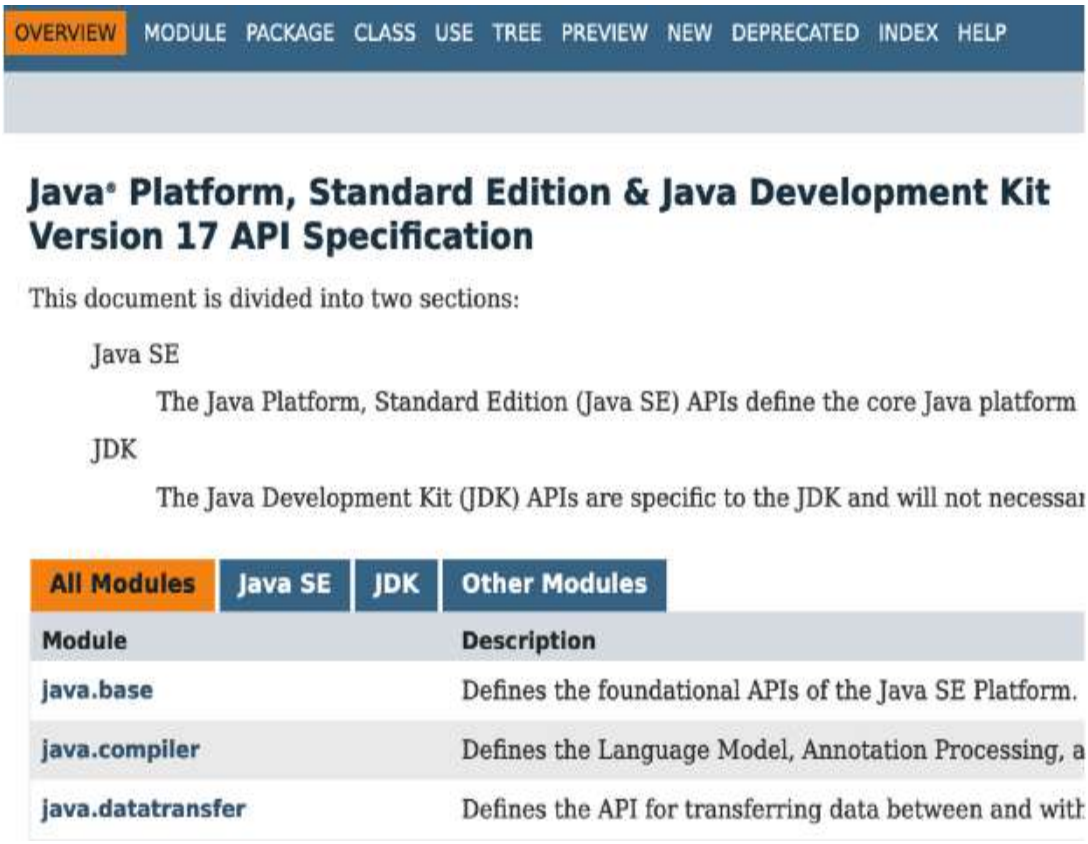

https://docs.oracle.com/en/java/javase/17/docs/api/index.html

❶ Browse a book



Flipping through a reference book is a good way to find out what's in the Java library. You can easily stumble on to a package or class that looks useful just by browsing pages.

The List Interface

A `List` is an ordered collection of objects. Each element of a list has a position in the list, and the `List` interface defines methods to query or set the element at a particular position, or *index*. In this respect, a `List` is like an array whose size changes as needed to accommodate the number of elements it contains. Unlike sets, lists allow duplicate elements.

In addition to its index-based `get()` and `set()` methods, the `List` interface defines methods to add or remove an element at a particular index and also defines methods to return the index of the first or last occurrence of a particular value in the list. The `add()` and `remove()` methods inherited from `Collection` are defined to append to the list and to remove the first occurrence of the specified value from the list. The inherited `addAll()` appends all elements in the specified collection to the end of the list, and another version inserts the elements at a specified index. The `retainAll()` and `removeAll()` methods behave as they do for any `Collection`, retaining or removing multiple occurrences of the same value, if needed.

The `List` interface does not define methods that operate on a range of list indexes. Instead, it defines a single `subList()` method that returns a `List` object that represents just the specified range of the original list. The sublist is backed by the parent list, and any changes made to the sublist are immediately visible in the parent list. Examples of `subList()` and the other basic `List` manipulation methods are shown here:

```
// Create lists to work with
List<String> l = new ArrayList<String>(Arrays.asList(args));
List<String> words = Arrays.asList("hello", "world");
List<String> words2 = List.of("hello", "world");

// Querying and setting elements by index
```

❷ Use the HTML API docs

Java comes with a fabulous set of online docs called, strangely, the Java API. You (or your IDE) can also download the docs to have on your hard drive just in case your internet connection fails at the Worst Possible Moment.

The API docs are the best reference for getting more details about what's in a package, and what the classes and interfaces in the package provide (e.g., in terms of methods and functionality).

The docs look different depending upon the version of Java you're using Make sure you're looking at the docs for your version of Java!

Java 8 and earlier

https://docs.oracle.com/javase/8/docs/api/index.html

You can navigate these docs:

- **Top down:** find a package you're interested in from the list in the top left and drill down.
- **Class-first:** find the class you want to know more about in the list in the bottom left, and click it.

The main panel will show you the details of whatever you're looking at. If you select a package, it will give summary information about that package and a list of the classes and interfaces.

If you select a class, it will show you a description of the class, and details of all the methods in the class, what they do, and how to use them.

Java 9 and later

Java 9 introduced the Java Module System, which we're not going to cover in this book. What you do need to know to understand the docs is that the JDK is now split into *modules*. These modules group together related packages. This can make it easier to find the classes that interest you, because they're grouped by function. All of the classes we've covered in this book so far are in the **java.base** module; this contains core Java packages like java.lang and java.util.

Slightly different URL to the older docs

https://docs.oracle.com/en/java/javase/17/docs/api/index.html

Java 17 is the current Long Term Support (LTS) version at the time of writing.

Search for a specific method/class/package/module by typing it here. You'll see a drop-down of suggestions.

The Java platform is now broken into a number of modules, which are listed on the home page of the docs.

We're mostly only interested in java.base. When we get to the Swing GUI, we'll care about java.desktop as well.

You can navigate these docs:

- **Top down:** find a module that looks like it covers the functionality you want, see its packages, and drill down from a package into its classes.
- **Search:** Use the search in the top right to go directly to the method, class, package, or module you want to read about.

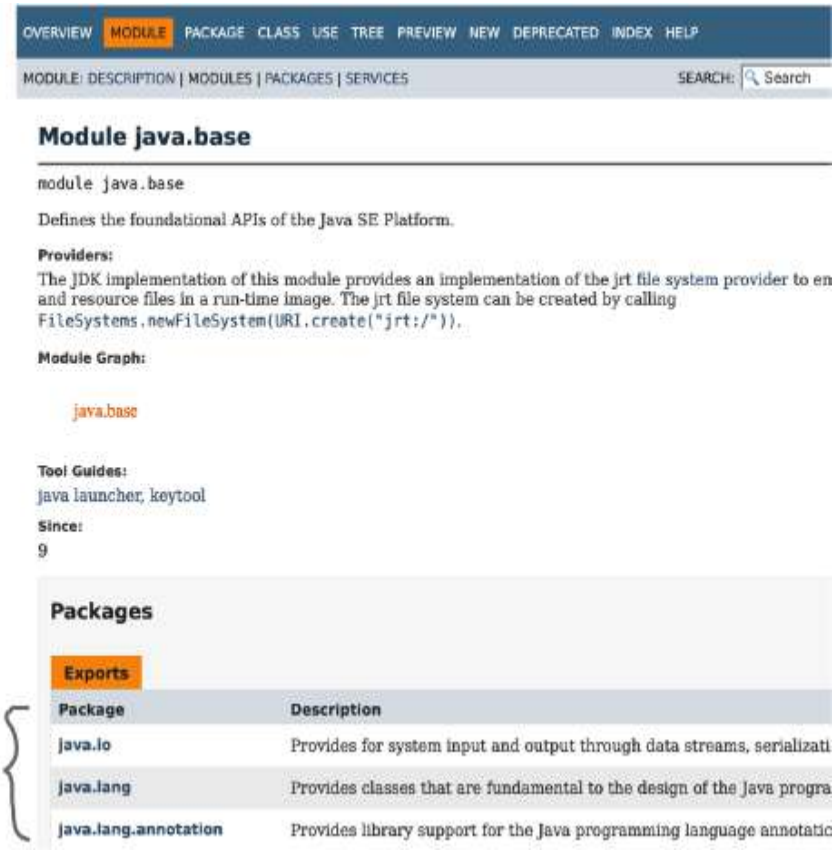

When you've selected a module, you can see a list of all its packages and a description of what each package is for.

Using the class documentation

Whichever version of the Java docs you're using, they all have a similar layout for showing information about a specific class. This is where the juicy details are.

Let's say you were browsing through the reference book and found a class called ArrayList, in java.util. The book tells you a little about it, enough to know that this is indeed what you want to use, but you still need to know more about the methods. In the reference book, you'll find the method indexOf(). But if all you knew is that there is a method called indexOf() that

takes an object and returns the index (an int) of that object, you still need to know one crucial thing: what happens if the object is not in the ArrayList? Looking at the method signature alone won't tell you how that works. But the API docs will (most of the time, anyway). The API docs tell you that the indexOf() method returns a -1 if the object parameter is not in the ArrayList. So now we know we can use it both as a way to check if an object is even in the ArrayList, and to get its index at the same time, if the object was there. But without the API docs, we might have thought that the indexOf() method would blow up if the object wasn't in the ArrayList.

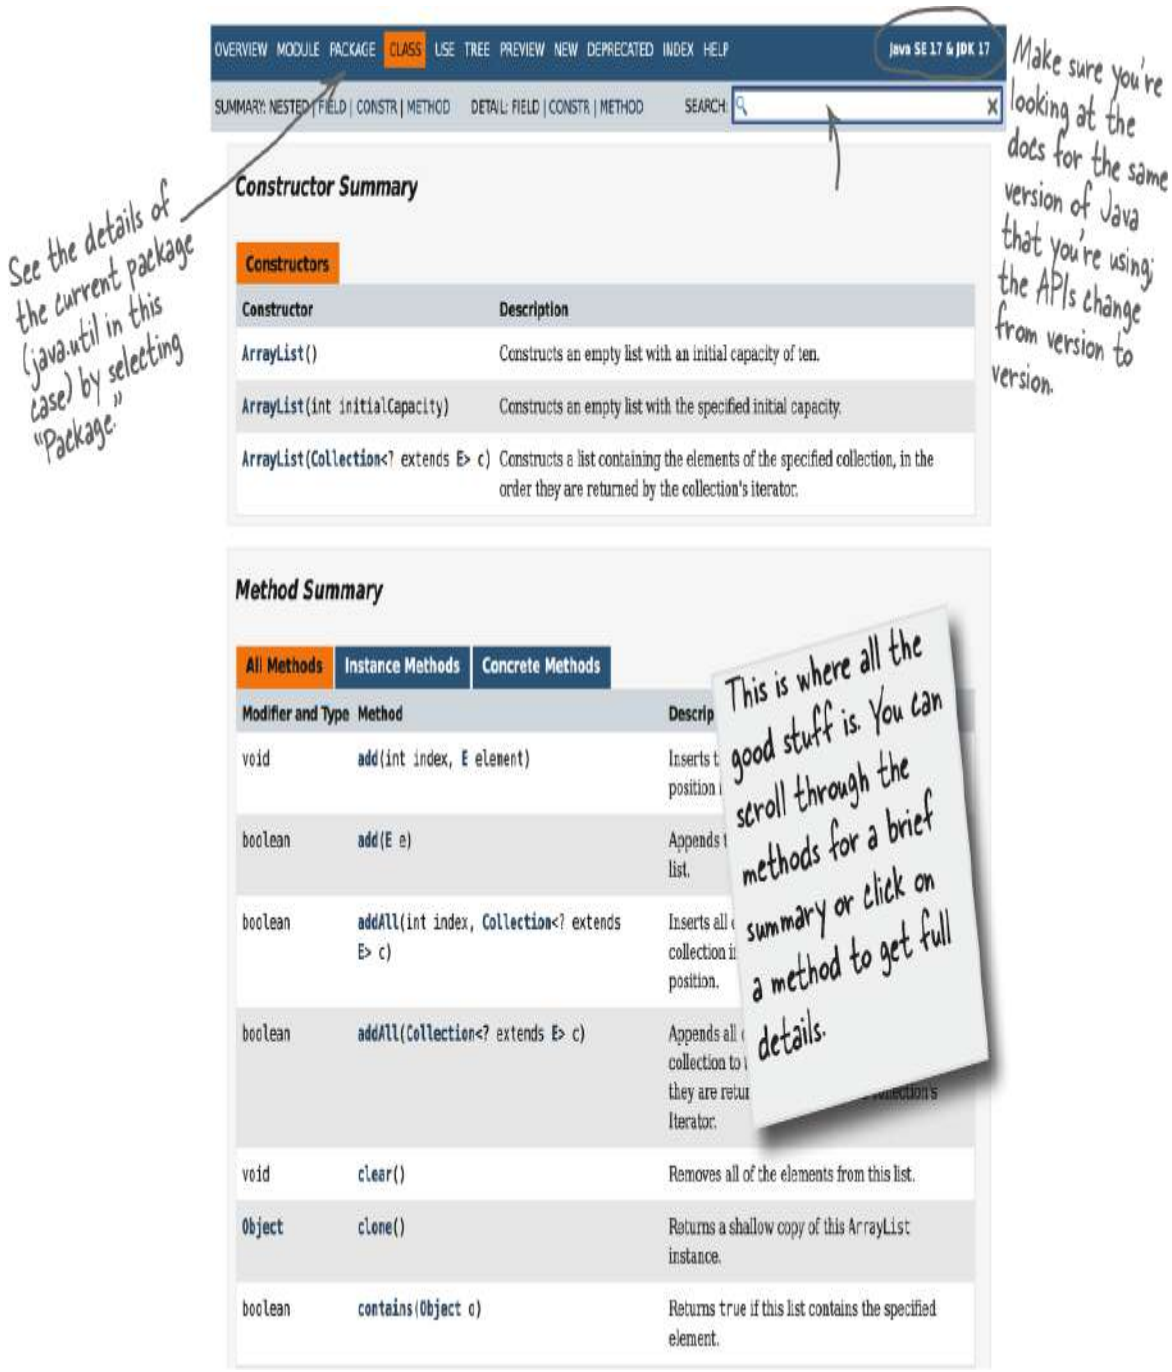

In Chapter 11 and Chapter 12, you'll see how we use the API docs to figure out how to use the Java Libraries.

Exercise

Code Magnets

Can you reconstruct the code snippets to make a working Java program that produces the output listed below? **NOTE:** To do this exercise, you need one NEW piece of info—if you look in the API for ArrayList, you'll find a second add method that takes two arguments:

add(int index, Object o)

It lets you specify to the ArrayList *where* to put the object you're adding.

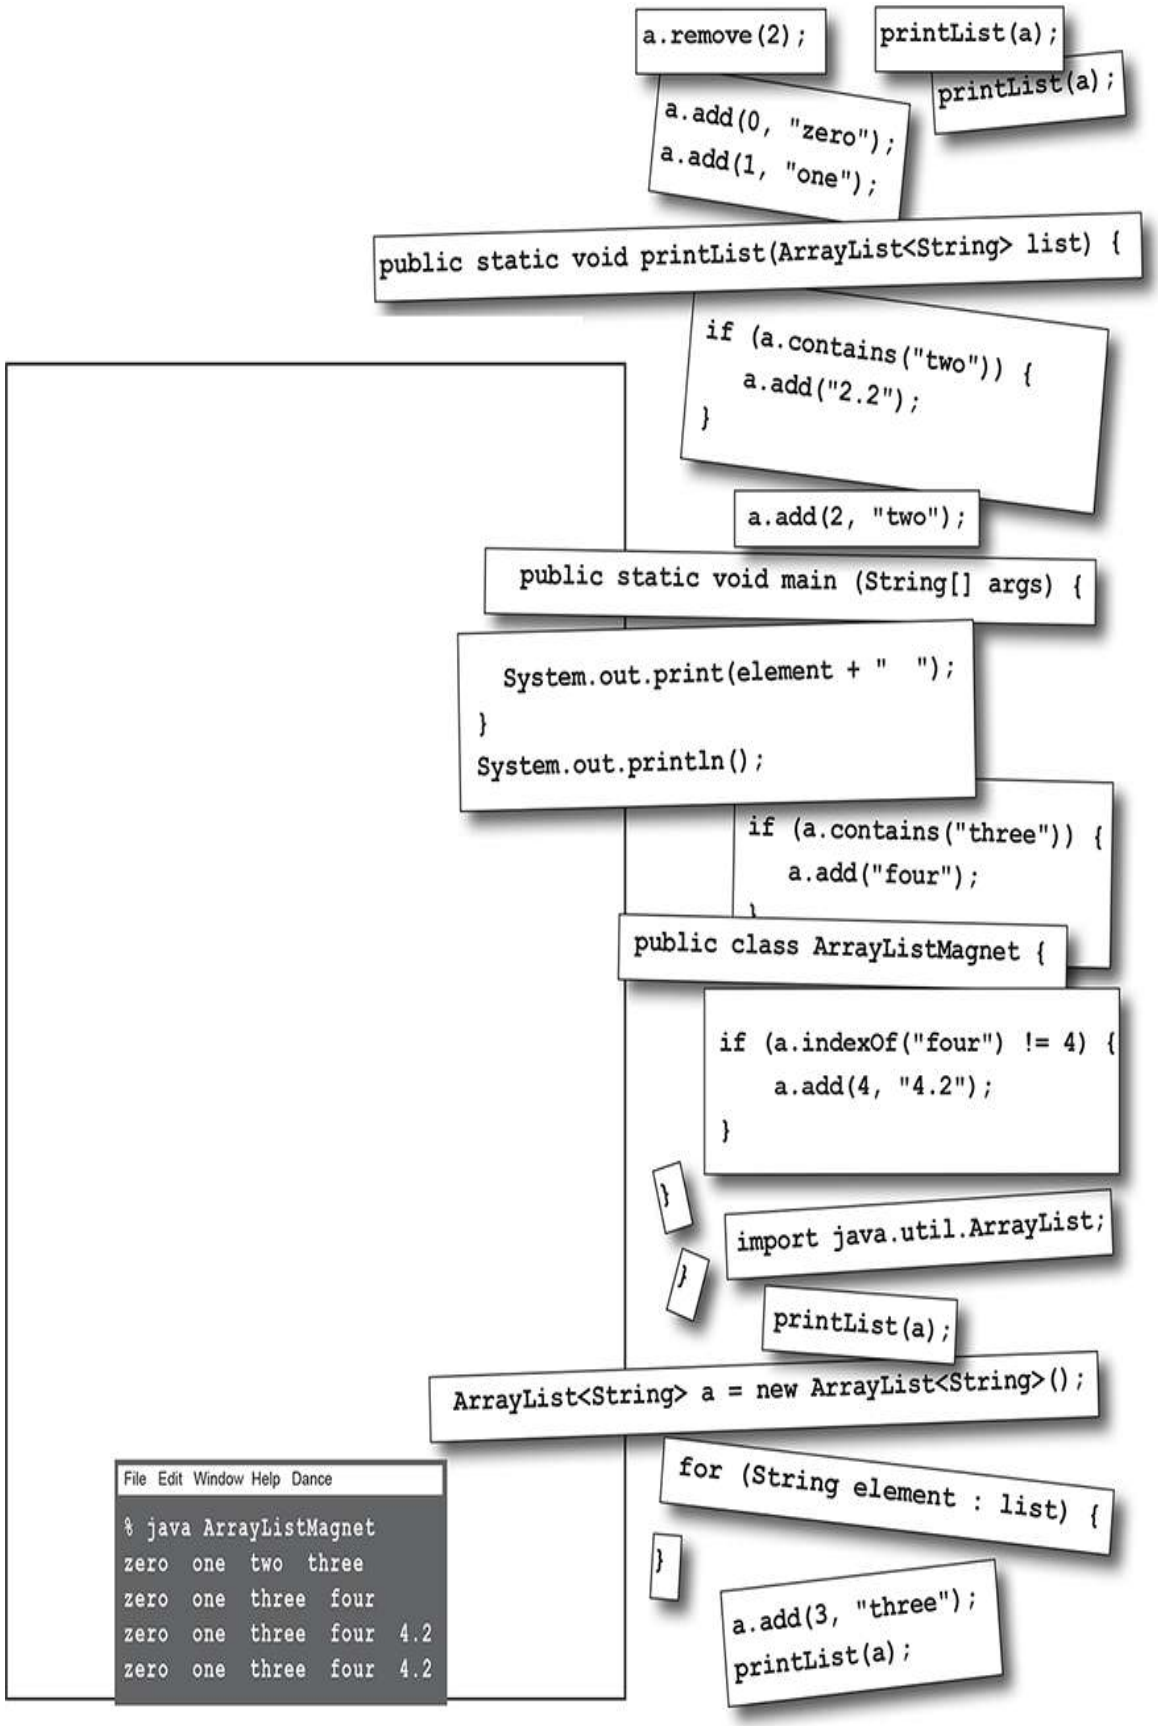
a.remove(2);
printList(a);
printList(a);
a.add(0, "zero");
a.add(1, "one");
public static void printList(ArrayList<String> list) {
if (a.contains("two")) {
a.add("2.2");
}
a.add(2, "two");
public static void main (String[] args) {
System.out.print(element + " ");
}
System.out.println();
if (a.contains("three")) {
a.add("four");
}
public class ArrayListMagnet {
if (a.indexOf("four") != 4) {
a.add(4, "4.2");
}
}
}
import java.util.ArrayList;
printList(a);
ArrayList<String> a = new ArrayList<String>();
for (String element : list) {
}
a.add(3, "three");
printList(a);
File Edit Window Help Dance
% java ArrayListMagnet
zero one two three
zero one three four
zero one three four 4.2
zero one three four 4.2

→ Answers in "Code Magnets".

JavaCross

How does this crossword puzzle help you learn Java? Well, all of the words **are** Java related (except one red herring).

Hint: When in doubt, remember ArrayList.

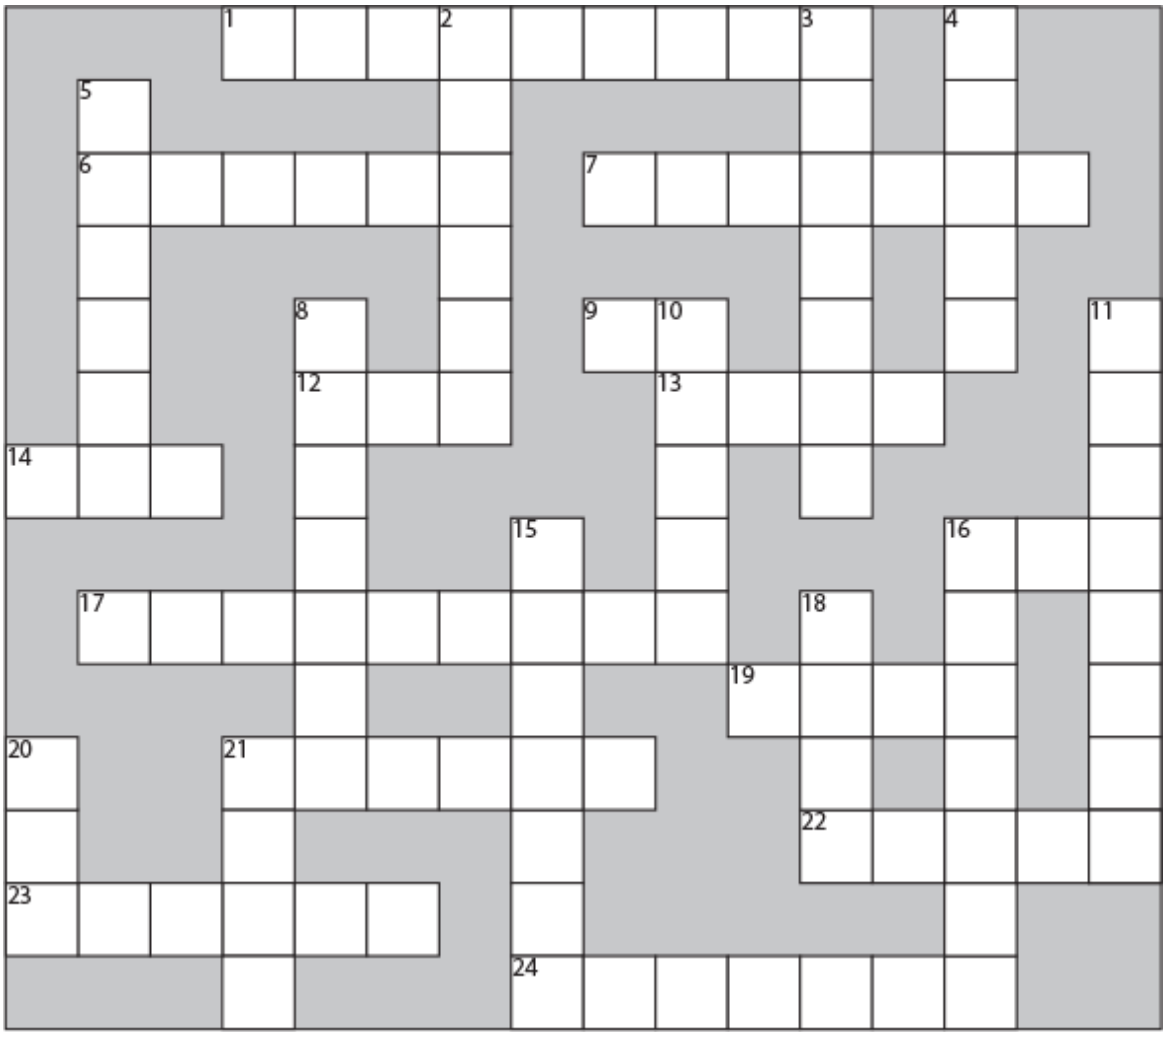

Across

1. I can’t behave
6. Or, in the courtroom
7. Where it’s at baby
9. A fork’s origin
12. Grow an ArrayList
13. Wholly massive
14. Value copy
16. Not an object
17. An array on steroids
19. Extent
21. 19’s counterpart
22. Spanish geek snacks (Note: This has nothing to do with Java.)
23. For lazy fingers
24. Where packages roam

Down

2. Where the Java action is
3. Addressable unit
4. 2nd smallest
5. Fractional default
8. Library’s grandest
10. Must be low density
11. He’s in there somewhere
15. As if

16. dearth method

18. What shopping and arrays have in common

20. Library acronym

21. What goes around

More Hints:

Across

1. 8 varieties

7. Think ArrayList

16. Common primitive

21. Array's extent

22. Not about Java—Spanish appetizers

Down

2. What's overridable?

3. Think ArrayList

4. & 10. Primitive

16. Think ArrayList

18. He's making a _____

→ **Answers in "JavaCross".**

Exercise Solutions

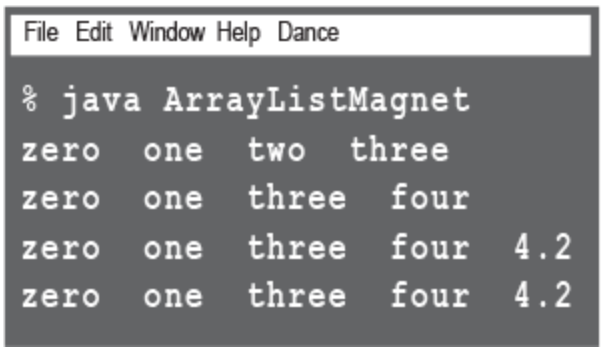

Code Magnets

(from "Code Magnets")

```
import java.util.ArrayList;

public class ArrayListMagnet {
  public static void main(String[] args) {
    ArrayList<String> a = new ArrayList<String>();
    a.add(0, "zero");
    a.add(1, "one");
    a.add(2, "two");
    a.add(3, "three");
    printList(a);

    if (a.contains("three")) {
      a.add("four");
    }
    a.remove(2);
    printList(a);

    if (a.indexOf("four") != 4) {
      a.add(4, "4.2");
    }
    printList(a);

    if (a.contains("two")) {
      a.add("2.2");
    }
    printList(a);
  }

  public static void printList(ArrayList<String> list) {
    for (String element : list) {
      System.out.print(element + "  ");
```

```
    }
    System.out.println();
  }
}
```

JavaCross

(from "JavaCross")

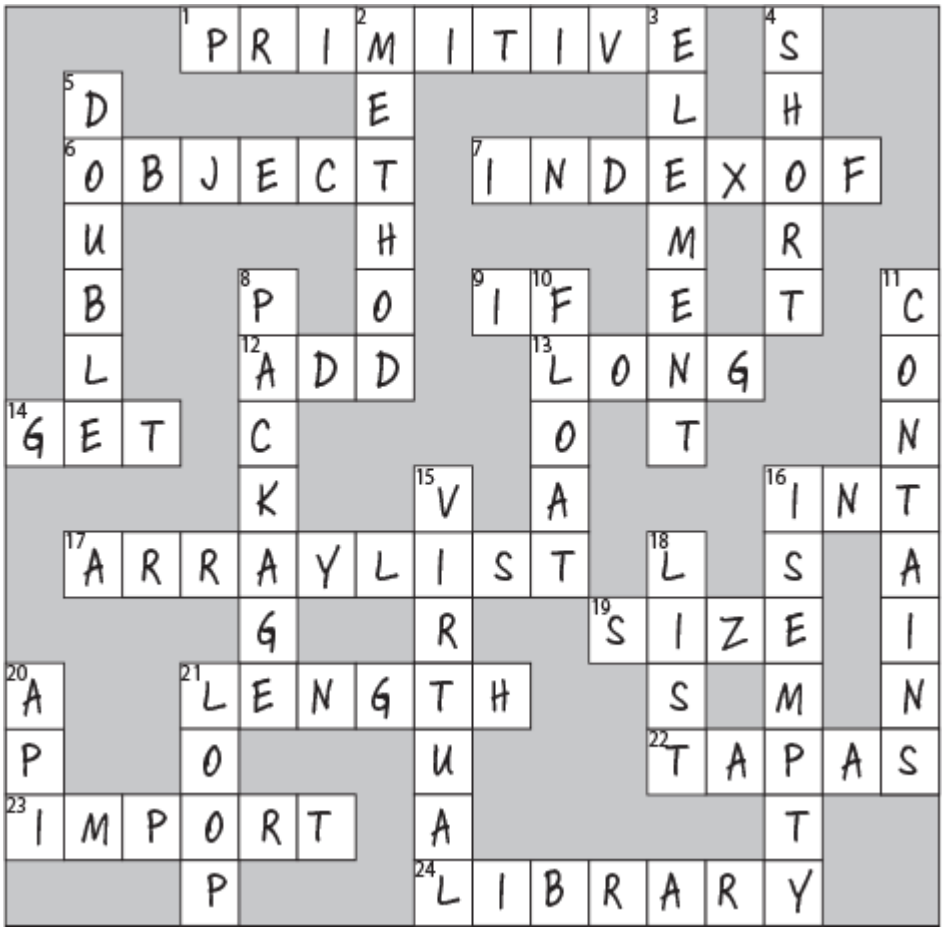

SHARPEN YOUR PENCIL

Write your OWN set of clues! Look at each word, and try to write your own clues. Try making them easier, or harder, or more technical than the ones we have.

Across

1. _____

6. _____

7. _____

9. _____

12. _____

13. _____

14. _____

16. _____

17. _____

19. _____

21. _____

22. _____

23. _____

24. _____

Down

2. _____

3. _____
4. _____
5. _____
8. _____
10. _____
11. _____
15. _____
16. _____
18. _____
20. _____
21. _____

Chapter 7. Better Living in Objectville: Inheritance and Polymorphism

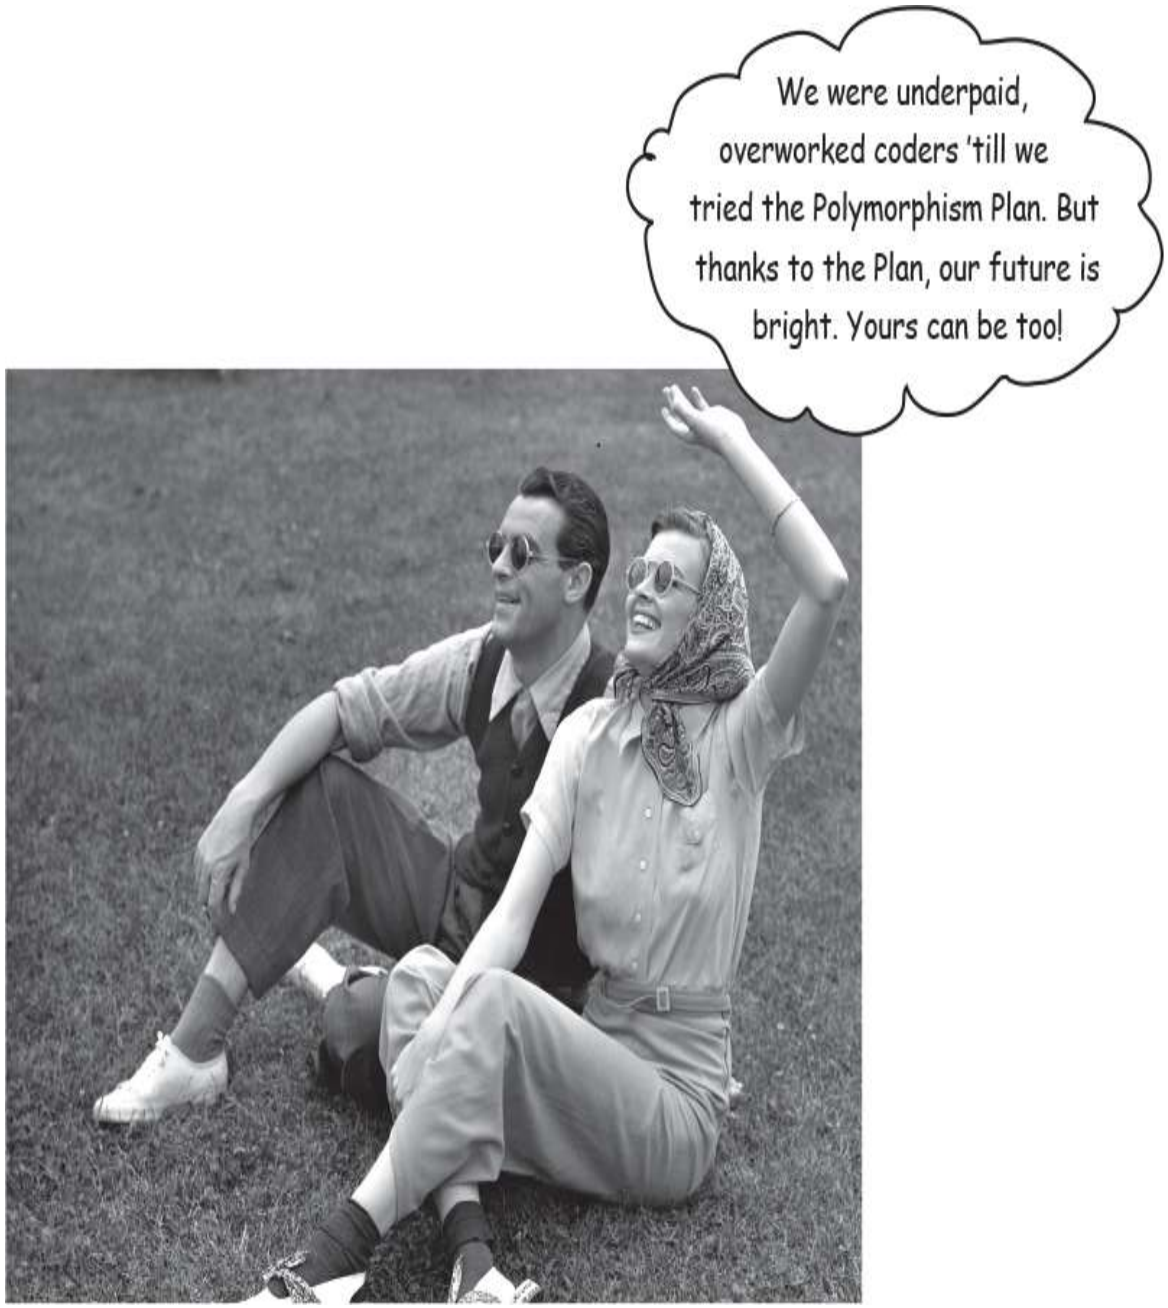

Plan your programs with the future in mind. If there were a way to write Java code such that you could take more vacations, how much would it be worth to you? What if you could write code that someone *else* could extend, **easily**? And if you could write code that was flexible, for those pesky last-minute spec changes, would that be something you'd be interested in? Then this is your lucky day. For just three easy payments of 60 minutes time, you can have all this. When you get on the Polymorphism Plan, you'll learn the 5

steps to better class design, the 3 tricks to polymorphism, the 8 ways to make flexible code, and if you act now—a bonus lesson on the 4 tips for exploiting inheritance. Don't delay, an offer this good will give you the design freedom and programming flexibility you deserve. It's quick, it's easy, and it's available now. Start today, and we'll throw in an extra level of abstraction!

Chair Wars Revisited...

Remember way back in Chapter 2, when Laura (procedural programmer) and Brad (OO developer) were vying for the Aeron chair? Let's look at a few pieces of that story to review the basics of inheritance.

LAURA: You've got duplicated code! The rotate procedure is in all four Shape things. It's a stupid design. You have to maintain four different rotate "methods." How can that ever be good?

BRAD: Oh, I guess you didn't see the final design. Let me show you how OO **inheritance** works, Laura.

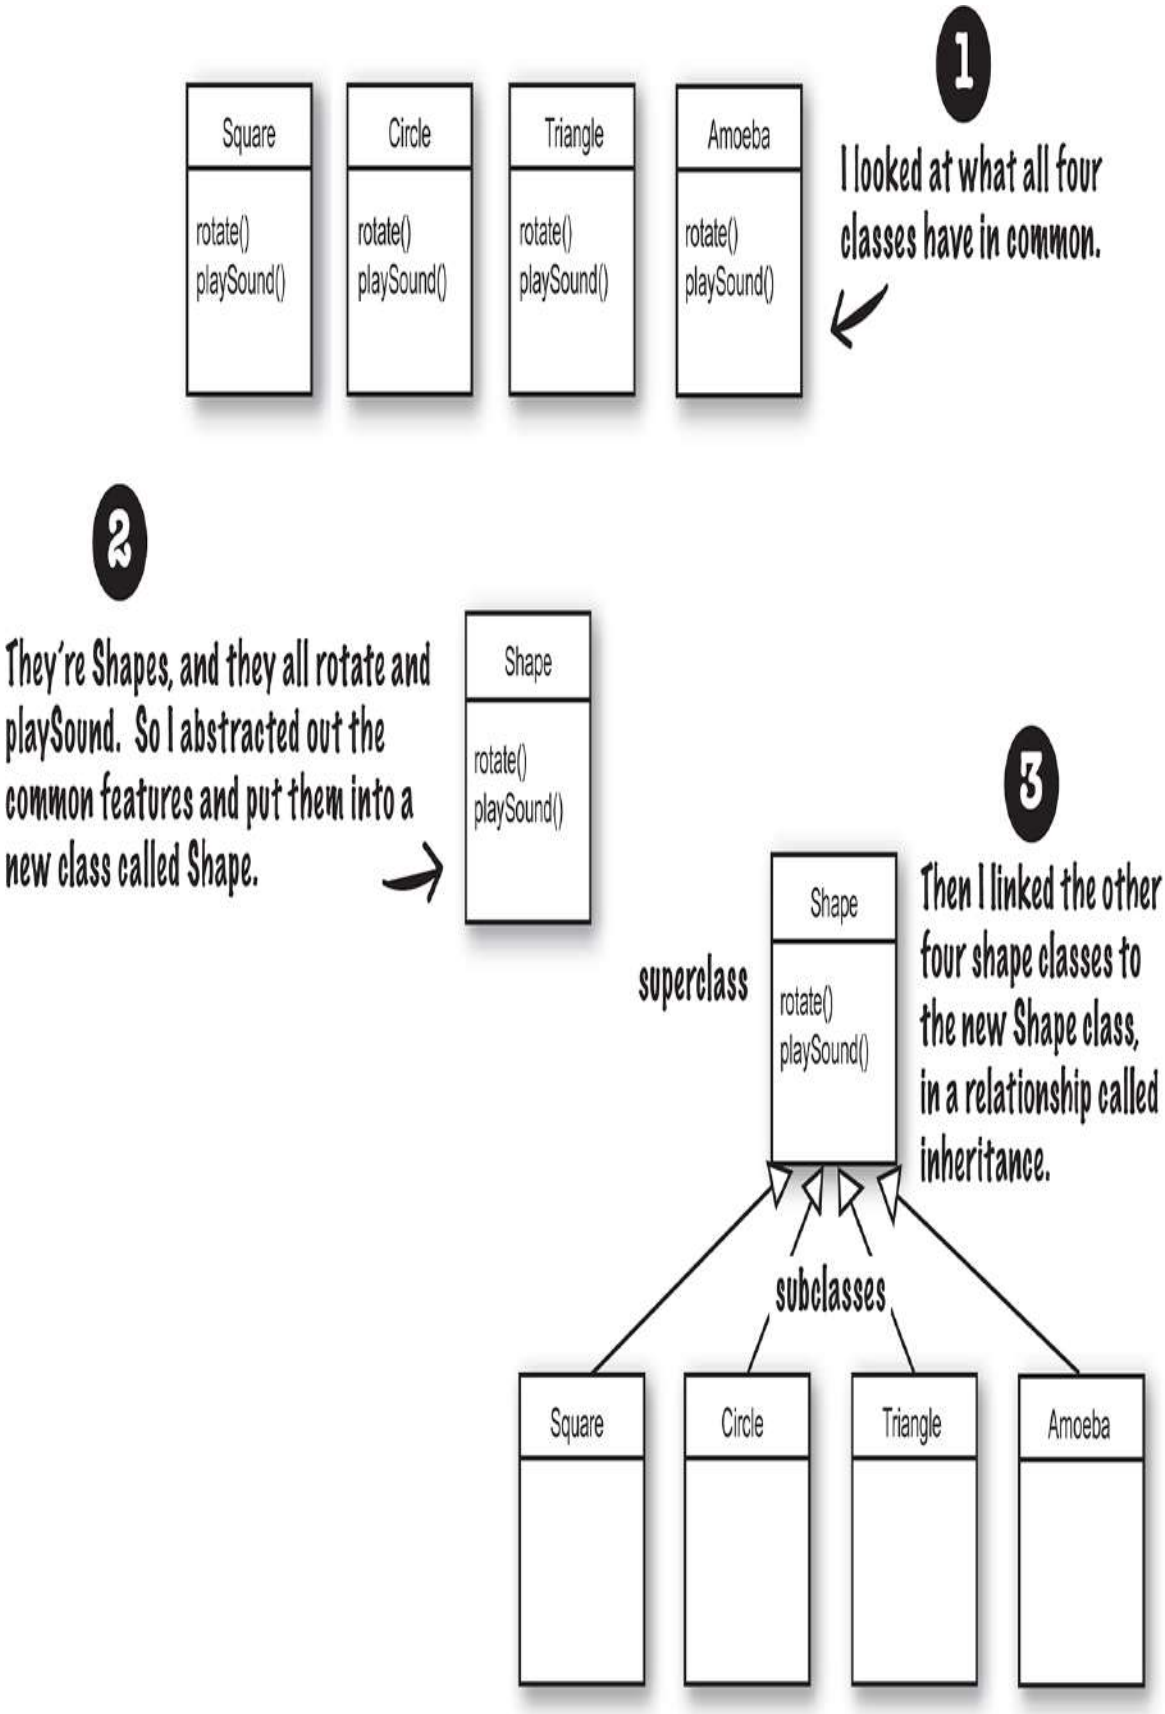
1
Square
rotate()
playSound()
Circle
rotate()
playSound()
Triangle
rotate()
playSound()
Amoeba
rotate()
playSound()
I looked at what all four classes have in common.
2
They're Shapes, and they all rotate and playSound. So I abstracted out the common features and put them into a new class called Shape.
Shape
rotate()
playSound()
3
Then I linked the other four shape classes to the new Shape class, in a relationship called inheritance.
superclass
Shape
rotate()
playSound()
subclasses
Square
Circle
Triangle
Amoeba

You can read this as **"Square inherits from Shape", "Circle inherits from Shape"** and so on. I removed rotate() and playSound() from the other shapes, so now there's only one copy to maintain.

The Shape class is called the **superclass** of the other four classes. The other four are the **subclasses** of Shape. The subclasses inherit the methods of the superclass. In other words, *if the Shape class has the functionality, then the subclasses automatically get that same functionality.*

What about the Amoeba rotate()?

LAURA: Wasn't that the whole problem here—that the Amoeba shape had a completely different rotate and playSound procedure?

How can Amoeba do something different if it *inherits* its functionality from the Shape class?

BRAD: That's the last step. The Amoeba class ***overrides*** any methods of the Shape class that need specific amoeba behavior. Then at runtime, the JVM knows exactly which rotate() method to run when someone tells the Amoeba to rotate.

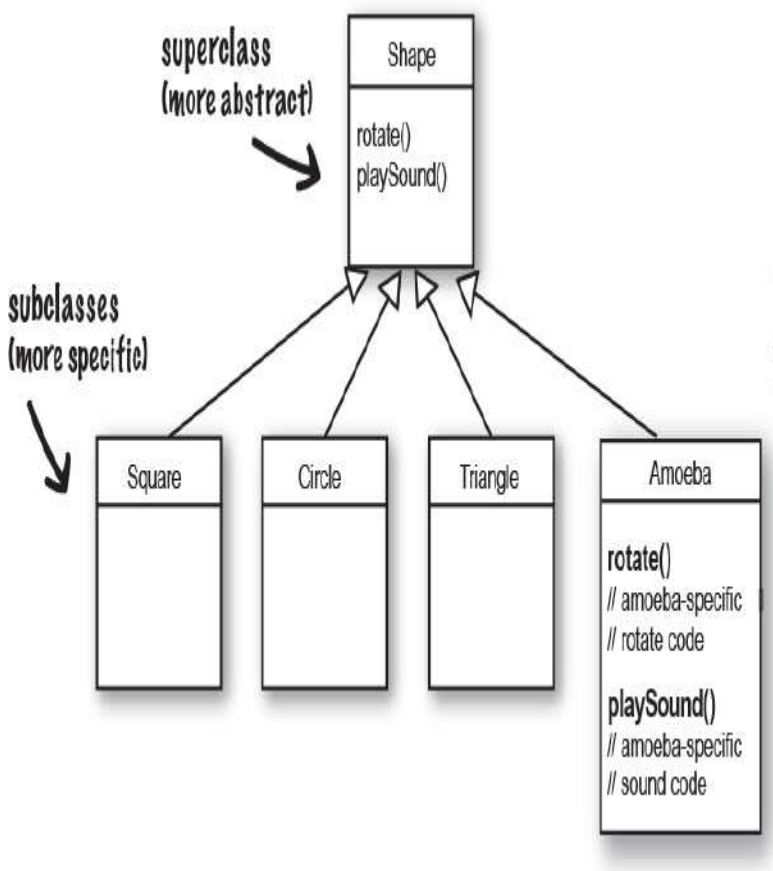

4

I made the Amoeba class override the rotate() and playSound() methods of the superclass Shape. Overriding just means that a subclass redefines one of its inherited methods when it needs to change or extend the behavior of that method.

BRAIN POWER



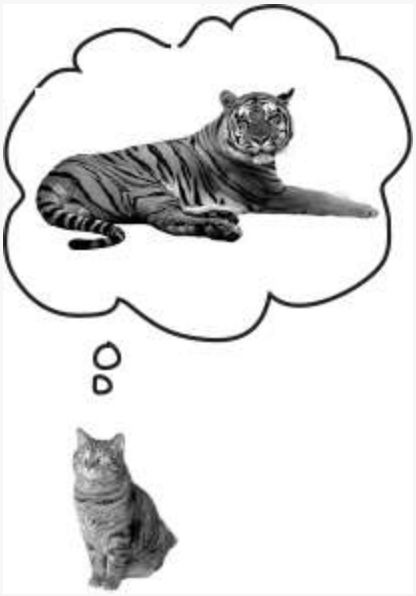

How would you represent a house cat and a tiger, in an inheritance structure? Is a domestic cat a specialized version of a tiger? Which would be the subclass, and which would be the superclass? Or are they both subclasses to some *other* class?

How would you design an inheritance structure? What methods would be overridden?

Think about it. *Before* you turn the page.

Understanding Inheritance

When you design with inheritance, you put common code in a class and then tell other more specific classes that the common (more abstract) class is their

superclass. When one class inherits from another, **the subclass inherits from the superclass.**

In Java, we say that the **subclass *extends* the superclass**. An inheritance relationship means that the subclass inherits the **members** of the superclass. When we say "members of a class," we mean the instance variables and methods. For example if PantherMan is a subclass of SuperHero, the PantherMan class automatically inherits the instance variables and methods common to all superheroes including `suit, tights, specialPower, useSpecialPower()`, and so on. But the PantherMan **subclass can add new methods and instance variables of its own, and it can override the methods it inherits from the superclass** SuperHero.

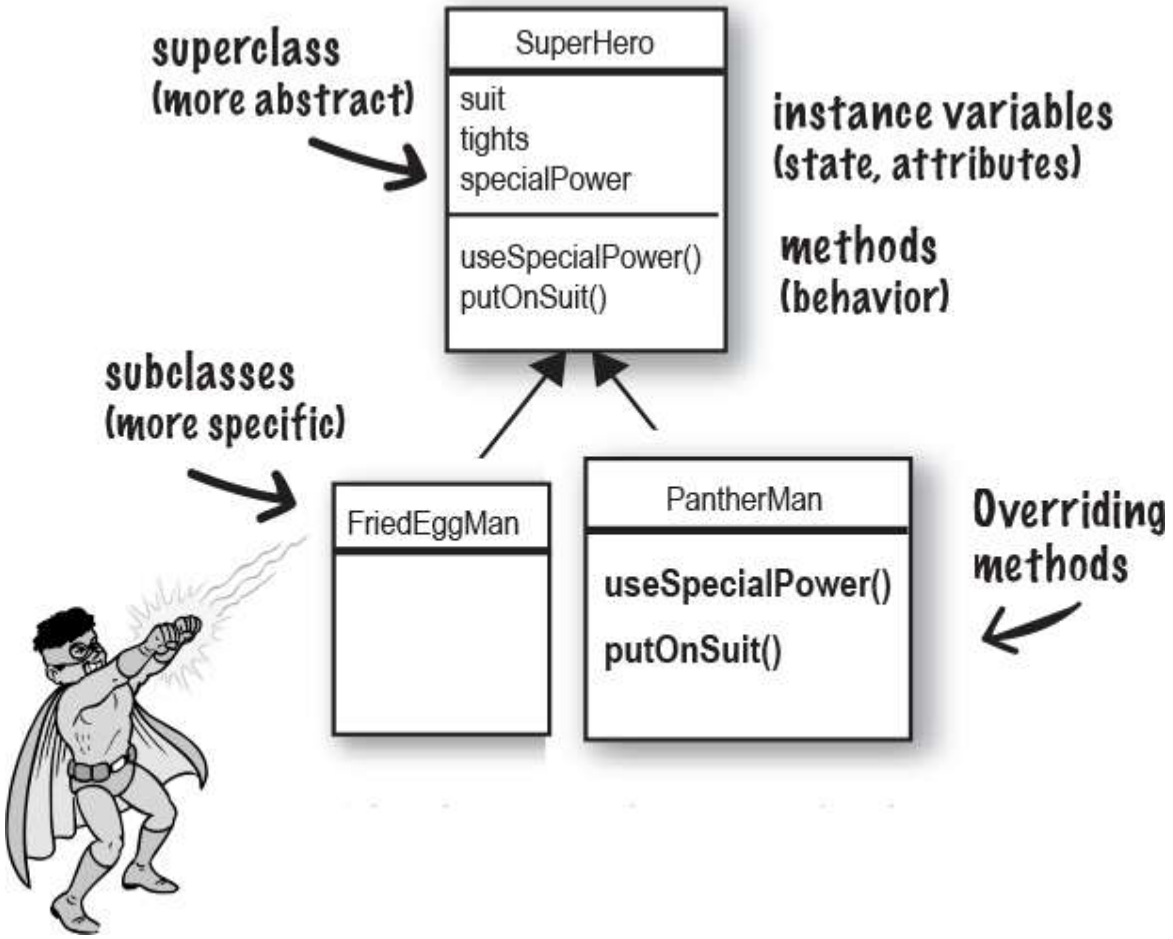

FriedEggMan doesn't need any behavior that's unique, so he doesn't override any methods. The methods and instance variables in SuperHero are

sufficient. PantherMan, though, has specific requirements for his suit and special powers, so `useSpecialPower()` and `putOnSuit()` are both overridden in the PantherMan class.

Instance variables are not overridden because they don't need to be. They don't define any special behavior, so a subclass can give an inherited instance variable any value it chooses. PantherMan can set his inherited `tights` to purple, while FriedEggMan sets his to white.

An inheritance example:

```
public class Doctor {

  boolean worksAtHospital;

  void treatPatient() {

    // perform a checkup
```

```
  }
}
```

```
public class FamilyDoctor extends Doctor {

  boolean makesHouseCalls;

  void giveAdvice() {
    // give homespun advice
  }
}
```

```
public class Surgeon extends Doctor {

  void treatPatient() {
    // perform surgery
  }

  void makeIncision() {
    // make incision (yikes!)
  }
}
```

SHARPEN YOUR PENCIL

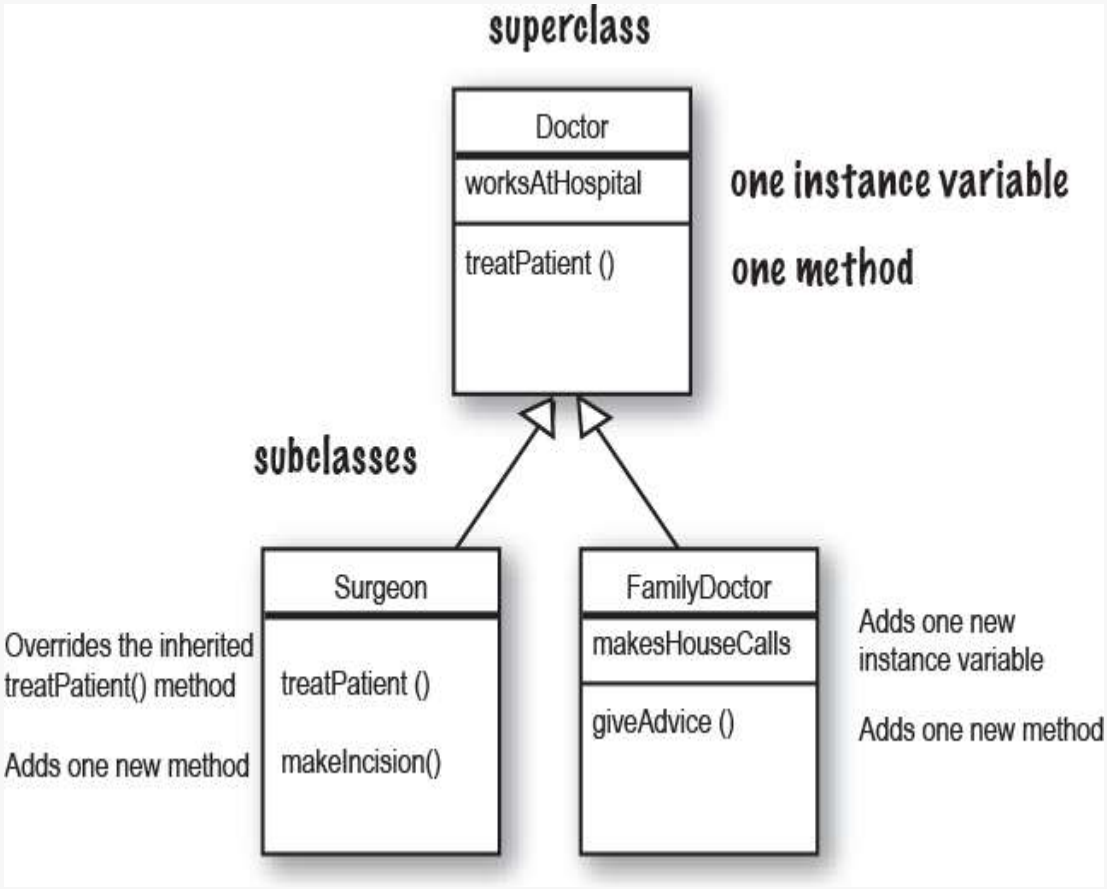

How many instance variables does Surgeon have? _____

How many instance variables does FamilyDoctor have? _____

How many methods does Doctor have? _____

How many methods does Surgeon have? _____

How many methods does FamilyDoctor have? _____

Can a FamilyDoctor do treatPatient()? _____

Can a FamilyDoctor do makeIncision()?

⟶ **Yours to solve.**

Let's design the inheritance tree for an Animal simulation program

Imagine you're asked to design a simulation program that lets the user throw a bunch of different animals into an environment to see what happens. We don't have to code the thing now; we're mostly interested in the design.

We've been given a list of *some* of the animals that will be in the program, but not all. We know that each animal will be represented by an object and that the objects will move around in the environment, doing whatever it is that each particular type is programmed to do.

And we want other programmers to be able to add new kinds of animals to the program at any time.

First we have to figure out the common, abstract characteristics that all animals have, and build those characteristics into a class that all animal classes can extend.

- ❶ Look for objects that have common attributes and behaviors.

  What do these six types have in common? This helps you to abstract out behaviors. (step 2)

  How are these types related? This helps you to define the inheritance tree relationships (steps 4-5)

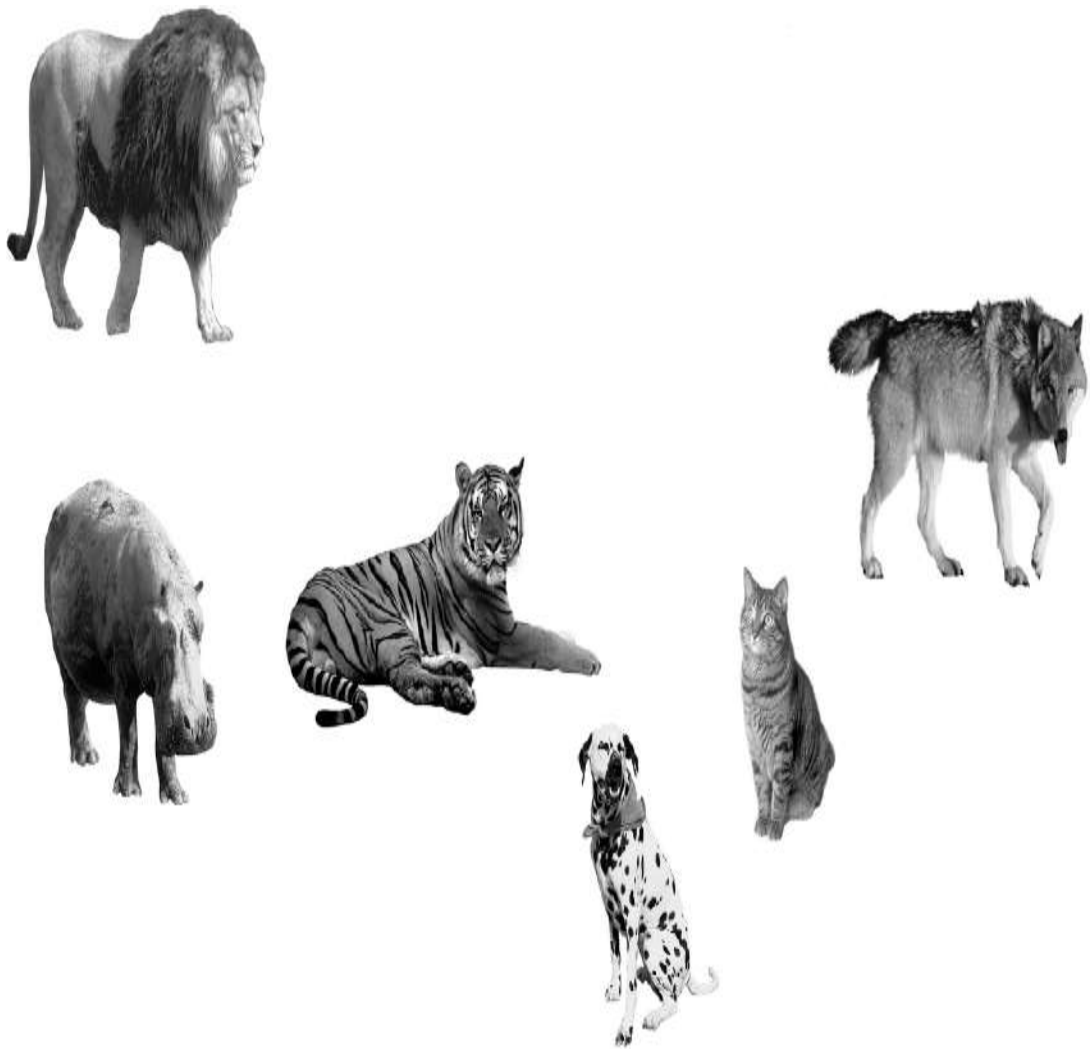

Using inheritance to avoid duplicating code in subclasses

We have five ***instance variables:***

picture – the filename representing the JPEG of this animal.

food – the type of food this animal eats. Right now, there can be only two values: *meat* or *grass*.

hunger – an int representing the hunger level of the animal. It changes depending on when (and how much) the animal eats.

boundaries – values representing the height and width of the "space" (for example, 640 x 480) that the animals will roam around in.

location – the X and Y coordinates for where the animal is in the space.

We have four ***methods:***

makeNoise() – behavior for when the animal is supposed to make noise.

eat() – behavior for when the animal encounters its preferred food source, *meat* or *grass*.

sleep() – behavior for when the animal is considered asleep.

roam() – behavior for when the animal is not eating or sleeping (probably just wandering around waiting to bump into a food source or a boundary).

- 2 Design a class that represents the common state and behavior.

These objects are all animals, so we'll make a common superclass called Animal.

We'll put in methods and instance variables that all animals might need.

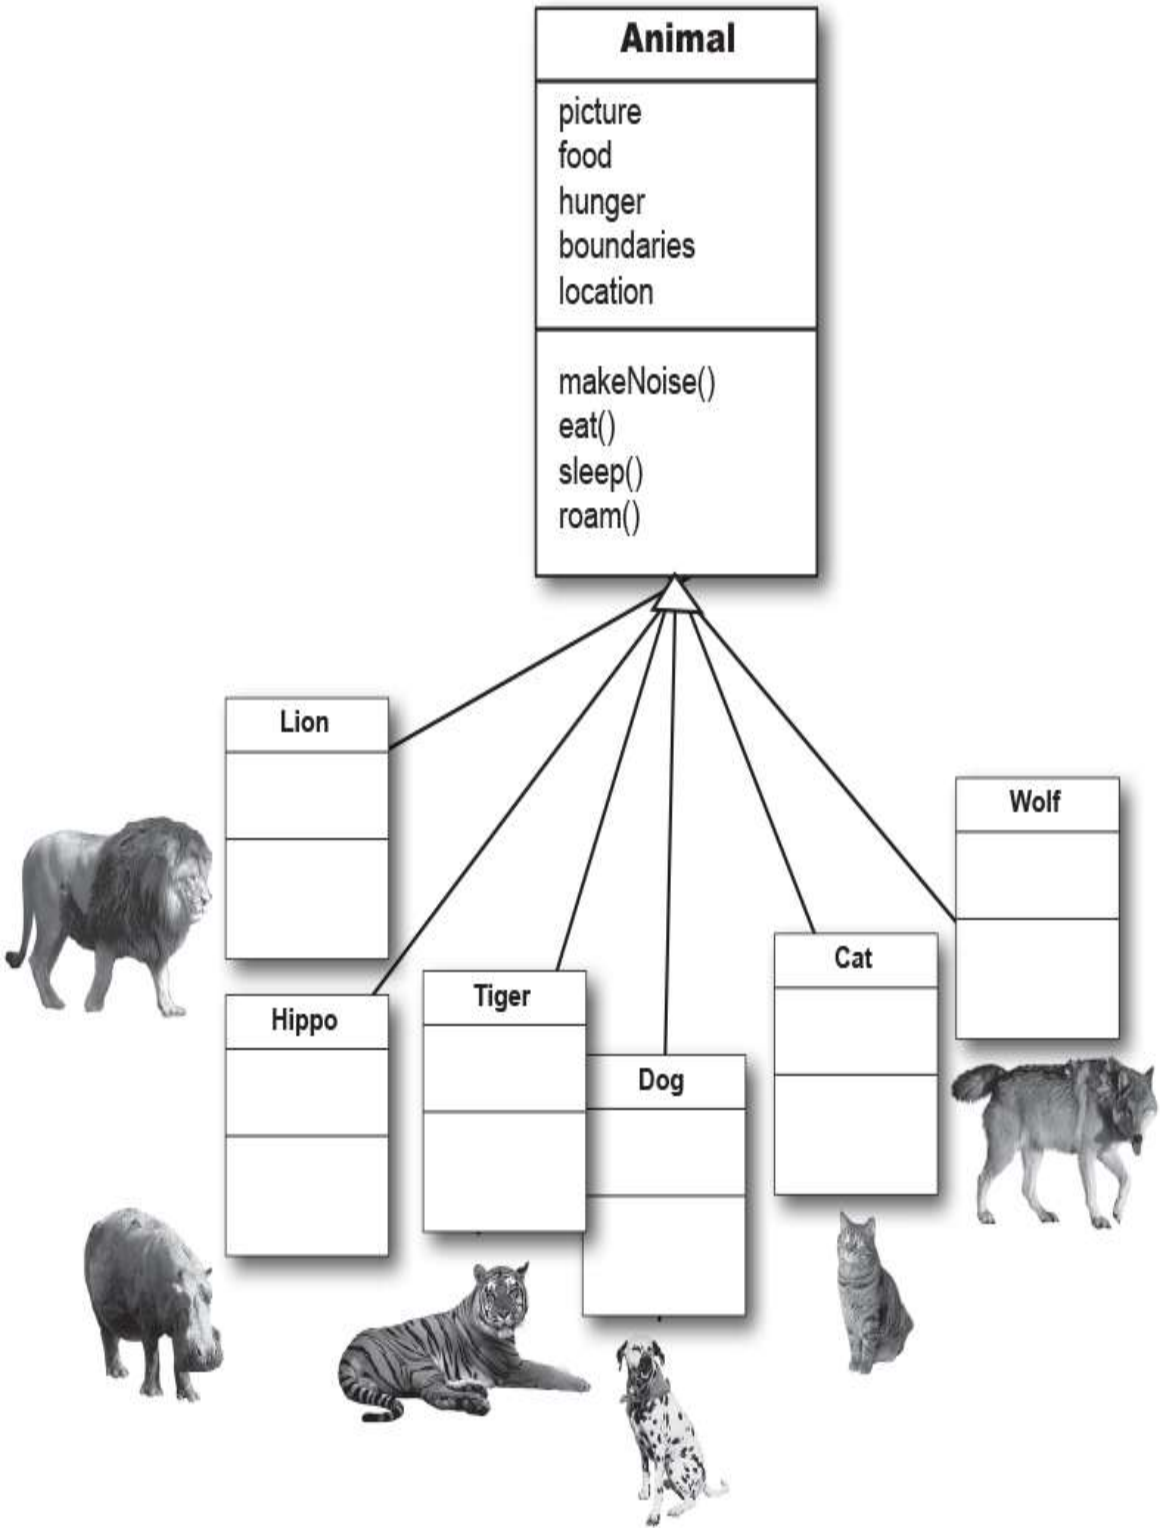

Do all animals eat the same way?

Assume that we all agree on one thing: the instance variables will work for *all* Animal types. A lion will have his own value for picture, food (we're thinking *meat*), hunger, boundaries, and location. A hippo will have different *values* for his instance variables, but he'll still have the same variables that the other Animal types have. Same with dog, tiger, and so on. But what about *behavior*?

Which methods should we override?

Does a lion make the same **noise** as a dog? Does a cat **eat** like a hippo? Maybe in *your* version, but in ours, eating and making noise are Animal-type-specific. We can't figure out how to code those methods in such a way that they'd work for any animal. OK, that's not true. We could write the makeNoise() method, for example, so that all it does is play a sound file defined in an instance variable for that type, but that's not very specialized. Some animals might make different noises for different situations (like one for eating, and another when bumping into an enemy, etc.)

So just as with the Amoeba overriding the Shape class rotate() method, to get more amoeba-specific (in other words, *unique*) behavior, we'll have to do the same for our Animal subclasses.

- 3 Decide if a subclass needs behaviors (method implementations) that are specific to that particular subclass type.

  Looking at the Animal class, we decide that eat() and makeNoise() should be overridden by the individual subclasses.

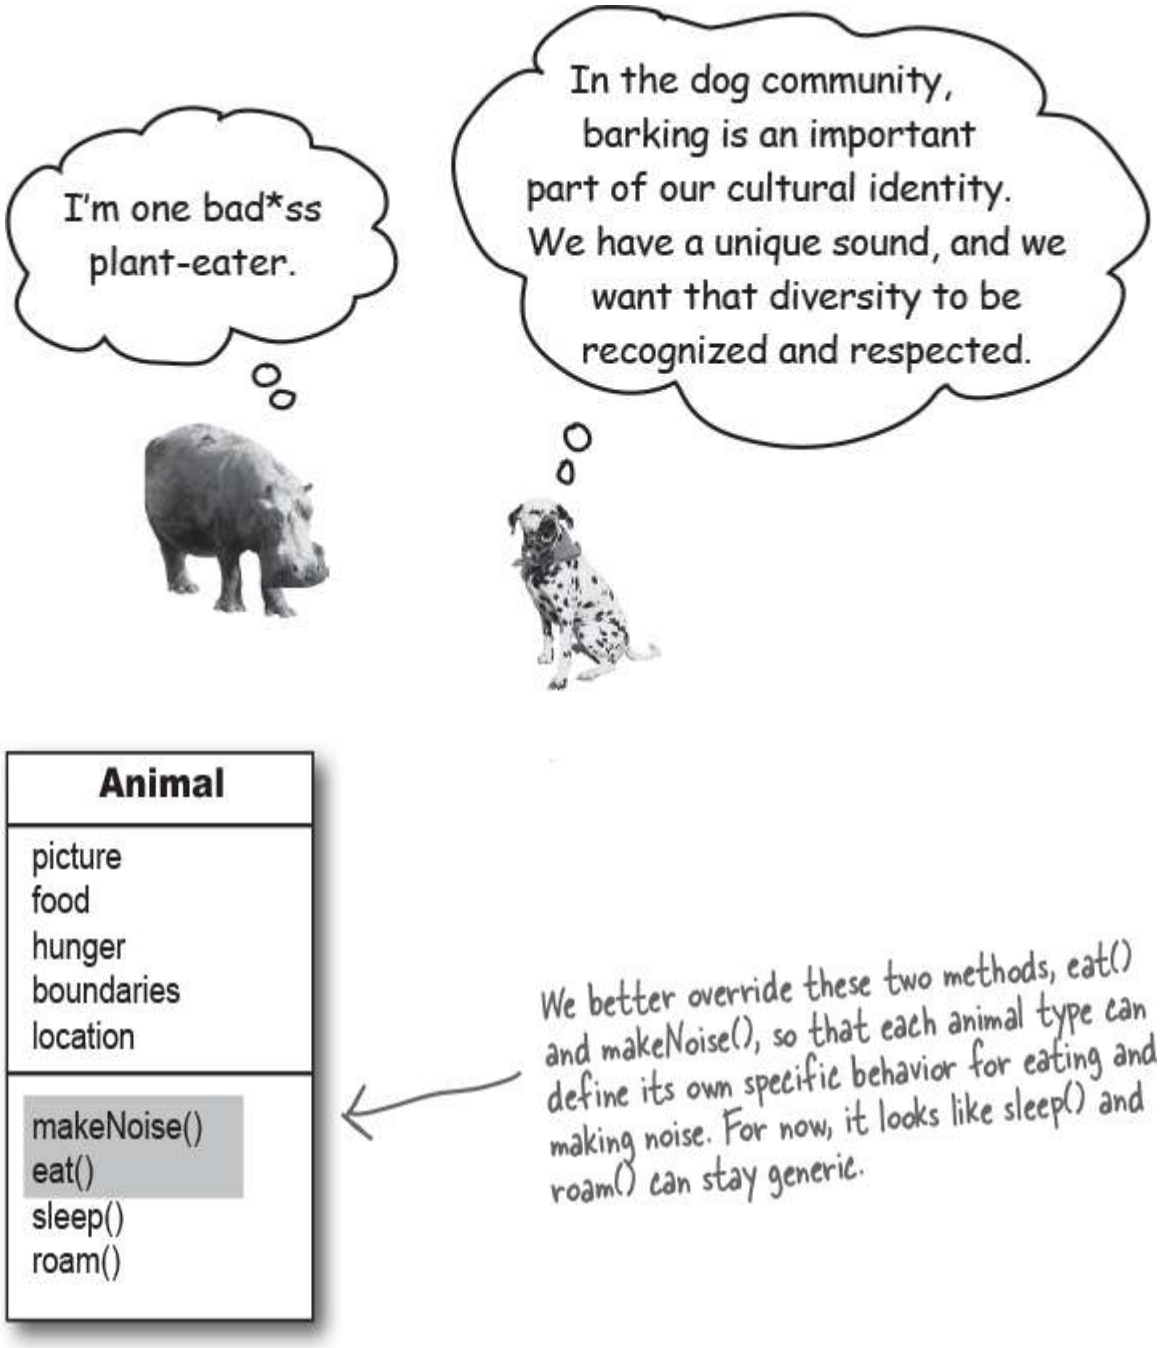

Looking for more inheritance opportunities

The class hierarchy is starting to shape up. We have each subclass override the *makeNoise()* and *eat()* methods so that there's no mistaking a Dog bark

from a Cat meow (quite insulting to both parties). And a Hippo won't eat like a Lion.

But perhaps there's more we can do. We have to look at the subclasses of Animal and see if two or more can be grouped together in some way, and given code that's common to only *that* new group. Wolf and Dog have similarities. So do Lion, Tiger, and Cat.

- 4 Look for more opportunities to use abstraction, by finding two or more *subclasses* that might need common behavior.

  We look at our classes and see that Wolf and Dog might have some behavior in common, and the same goes for Lion, Tiger, and Cat.

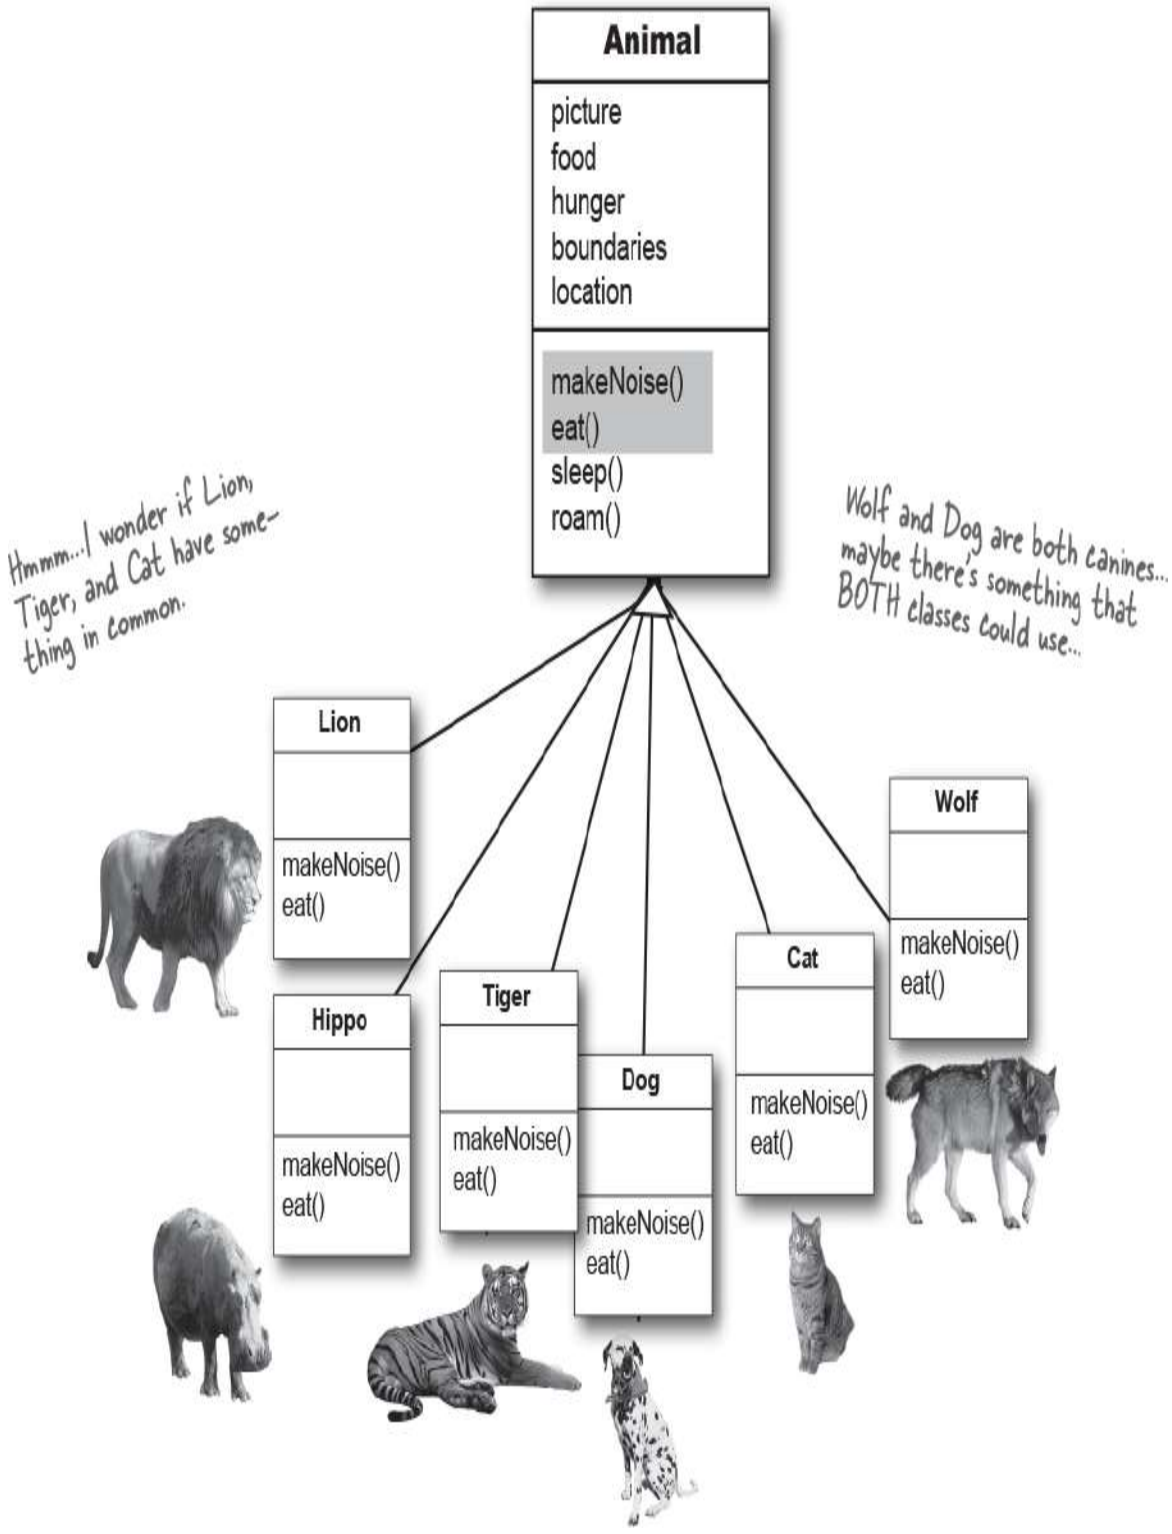

- 5 Finish the class hierarchy

Since animals already have an organizational hierarchy (the whole kingdom, genus, phylum thing), we can use the level that makes the most sense for class design. We'll use the biological "families" to organize the animals by making a Feline class and a Canine class.

We decide that Canines could use a common roam() method, because they tend to move in packs. We also see that Felines could use a common roam() method, because they tend to avoid others of their own kind. We'll let Hippo continue to use its inherited roam() method— the generic one it gets from Animal.

So we're done with the design for now; we'll come back to it later in the chapter.

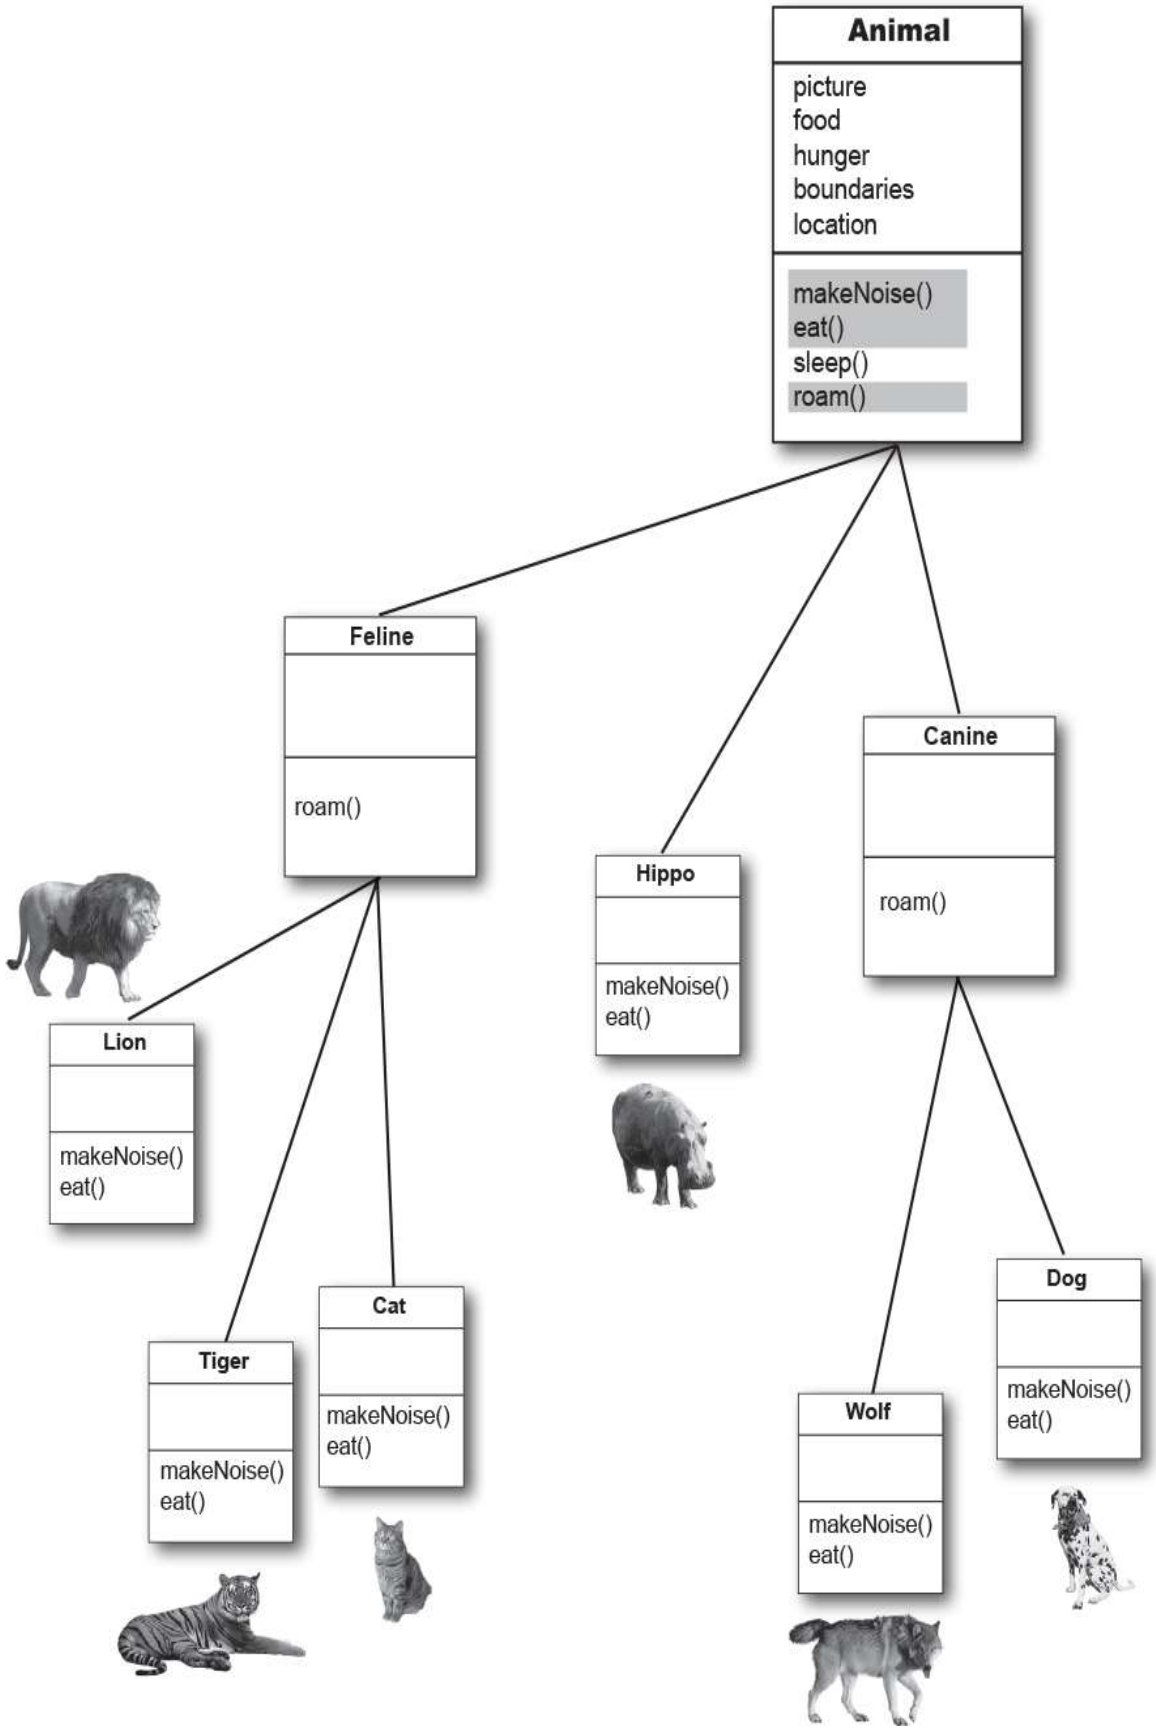
Animal
picture
food
hunger
boundaries
location
makeNoise()
eat()
sleep()
roam()
Feline
roam()
Canine
roam()
Hippo
makeNoise()
eat()
Lion
makeNoise()
eat()
Tiger
makeNoise()
eat()
Cat
makeNoise()
eat()
Wolf
makeNoise()
eat()
Dog
makeNoise()
eat()

Which method is called?

The Wolf class has four methods. One inherited from Animal, one inherited from Canine (which is actually an overridden version of a method in class Animal), and two overridden in the Wolf class. When you create a Wolf object and assign it to a variable, you can use the dot operator on that reference variable to invoke all four methods. But which *version* of those methods gets called?

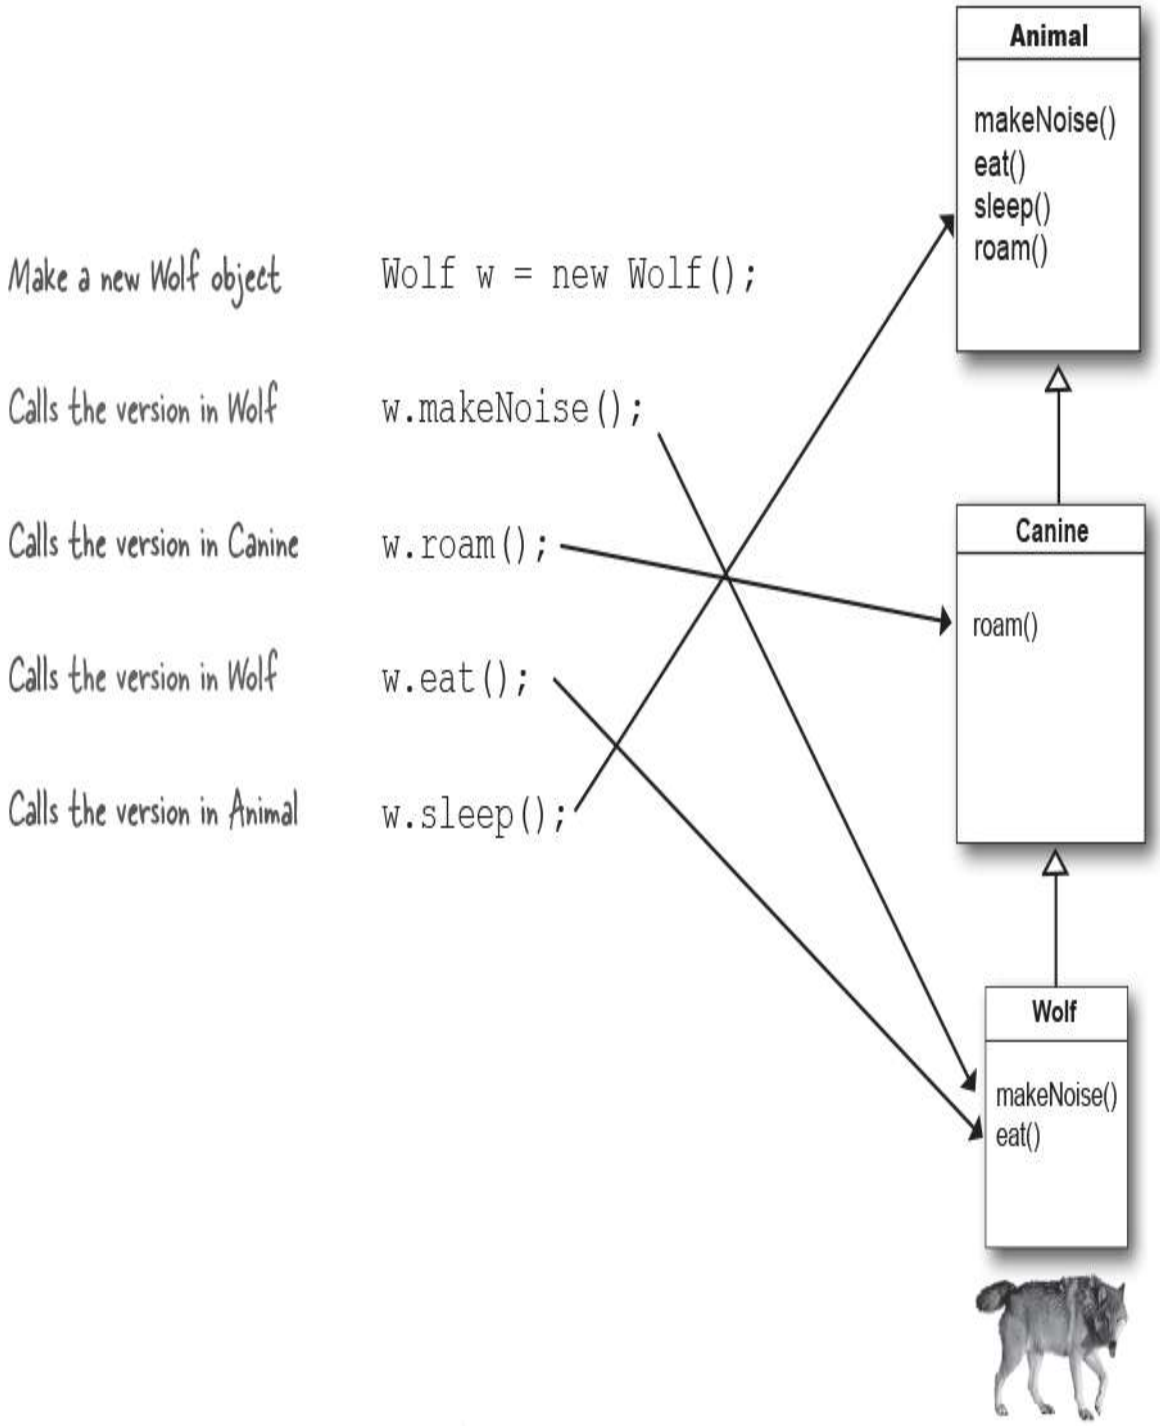

When you call a method on an object reference, you're calling the most specific version of the method for that object type.

In other words, ***the lowest one wins!***

"Lowest" meaning lowest on the inheritance tree. Canine is lower than Animal, and Wolf is lower than Canine, so invoking a method on a reference to a Wolf object means the JVM starts looking first in the Wolf class. If the JVM doesn't find a version of the method in the Wolf class, it starts walking back up the inheritance hierarchy until it finds a match.

Designing an Inheritance Tree

Class	Superclasses	Subclasses
Clothing	---	Boxers, Shirt
Boxers	Clothing	
Shirt	Clothing	

Inheritance Table

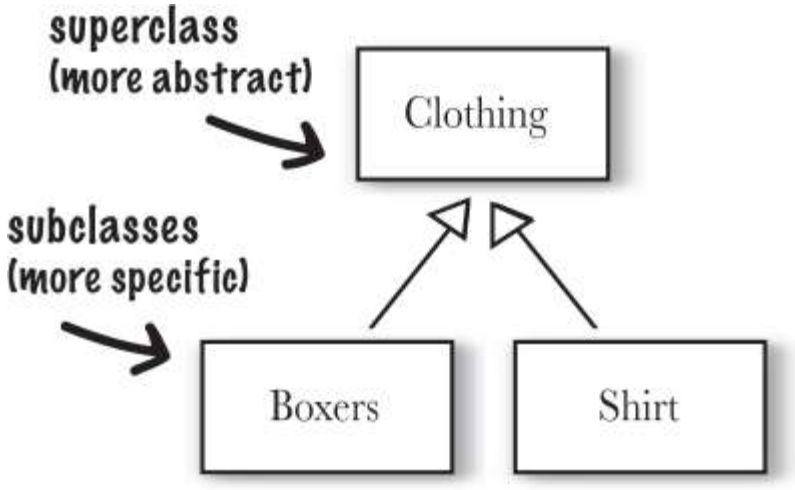

Inheritance Class Diagram

SHARPEN YOUR PENCIL

Draw an inheritance diagram here.

Find the relationships that make sense. Fill in the last two columns

Class	Superclasses	Subclasses
Musician		
Rock Star		
Fan		
Bass Player		
Concert Pianist		

Hint: not everything can be connected to something else.

Hint: you're allowed to add to or change the classes listed.

→ **Yours to solve.**

THERE ARE NO DUMB QUESTIONS

Q: You said that the JVM starts walking up the inheritance tree, starting at the class type you invoked the method on (like the Wolf example on the previous page). But what happens if the JVM doesn't ever find a match?

A: Good question! But you don't have to worry about that. The compiler guarantees that a particular method is callable for a specific reference type, but it doesn't say (or care) from which *class* that method actually comes from at runtime. With the Wolf example, the compiler checks for a sleep() method but doesn't care that sleep() is actually defined in (and inherited from) class Animal. Remember that if a class *inherits* a method, it *has* the method.

Where the inherited method is defined (in other words, in which superclass it is defined) makes no difference to the compiler. But at runtime, **the JVM will always pick the right one**. And the right one means ***the most specific version for that particular object.***

Using IS-A and HAS-A

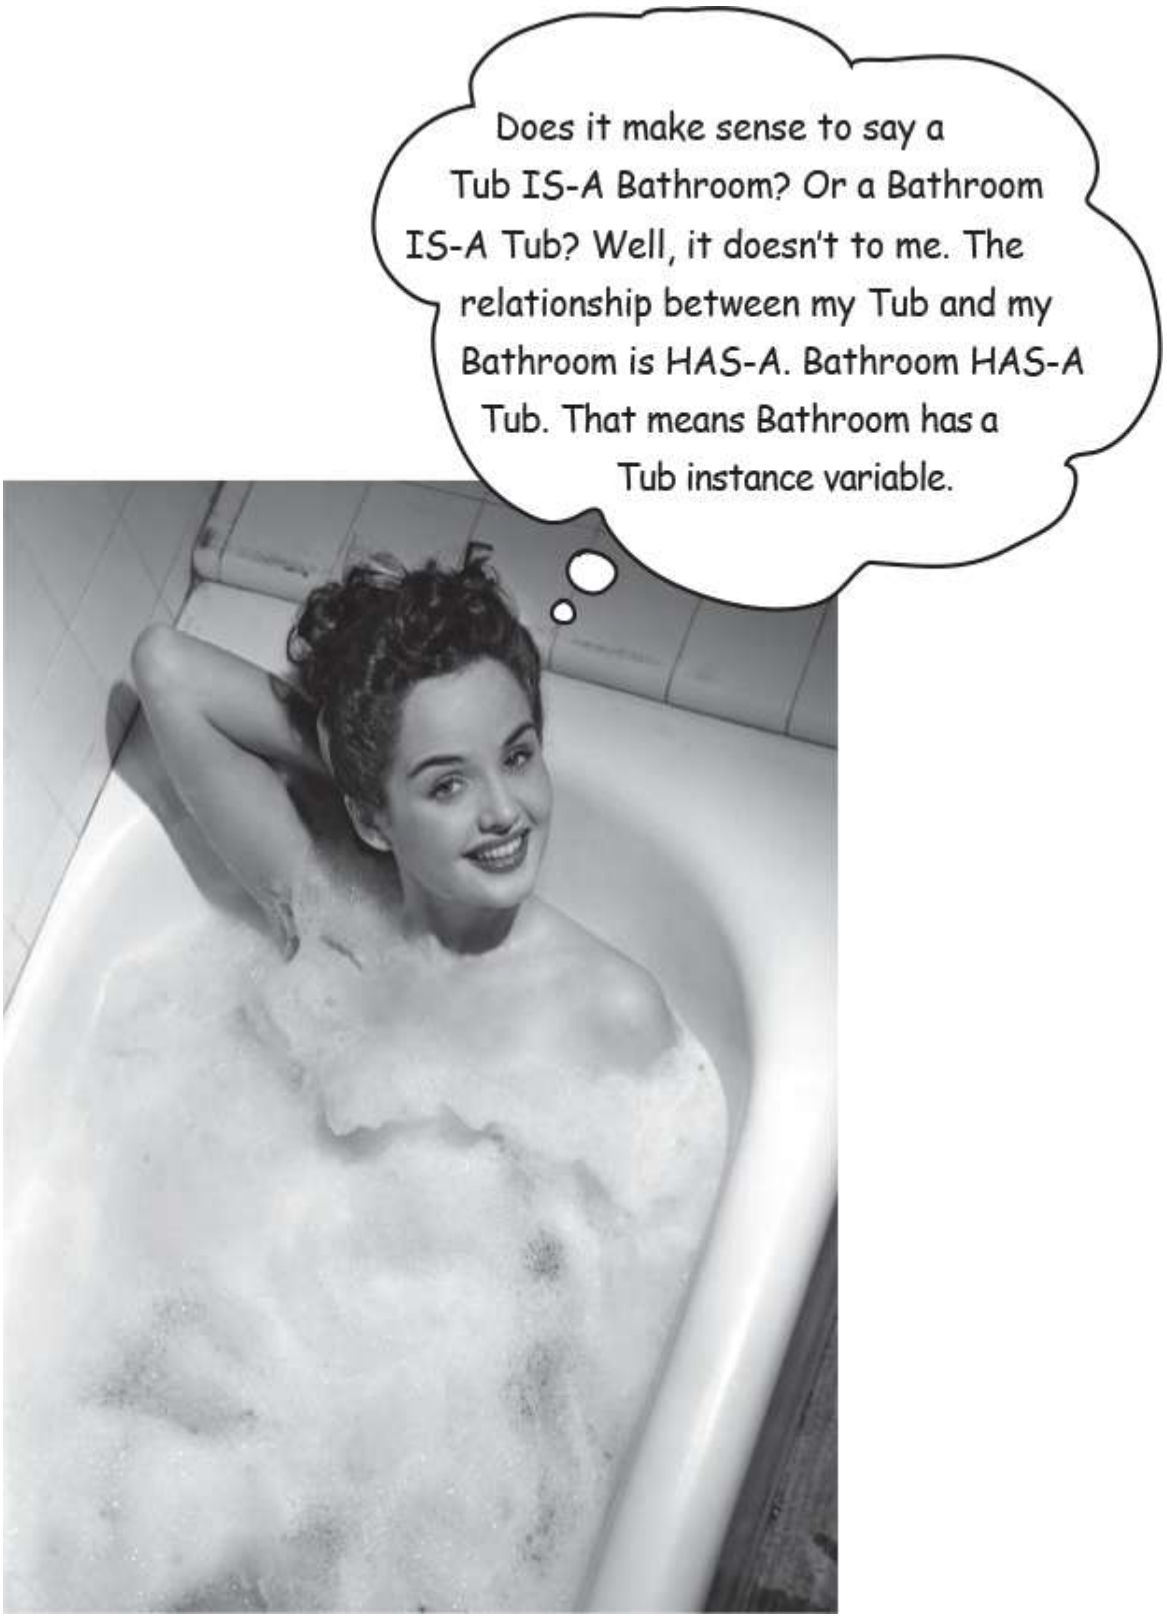
Does it make sense to say a Tub IS-A Bathroom? Or a Bathroom IS-A Tub? Well, it doesn't to me. The relationship between my Tub and my Bathroom is HAS-A. Bathroom HAS-A Tub. That means Bathroom has a Tub instance variable.

Remember that when one class inherits from another, we say that the subclass *extends* the superclass. When you want to know if one thing should extend another, apply the IS-A test.

Triangle IS-A Shape, yeah, that works.

Cat IS-A Feline, that works too.

Surgeon IS-A Doctor, still good.

Tub extends Bathroom, sounds reasonable.

Until you apply the IS-A test.

To know if you've designed your types correctly, ask, "Does it make sense to say type X IS-A type Y?" If it doesn't, you know there's something wrong with the design, so if we apply the IS-A test, Tub IS-A Bathroom is definitely false.

What if we reverse it to Bathroom extends Tub? That still doesn't work, Bathroom IS-A Tub doesn't work.

Tub and Bathroom *are* related, but not through inheritance. Tub and Bathroom are joined by a HAS-A relationship. Does it make sense to say "Bathroom HAS-A Tub"? If yes, then it means that Bathroom has a Tub instance variable. In other words, Bathroom has a *reference* to a Tub, but Bathroom does not *extend* Tub and vice versa.

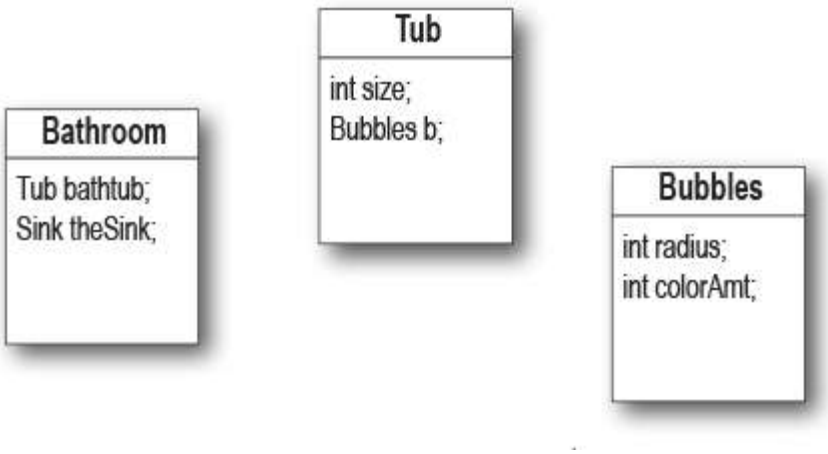

Bathroom HAS-A Tub and Tub HAS-A Bubbles.

But nobody inherits from (extends) anybody else.

But wait! There's more!

The IS-A test works *anywhere* in the inheritance tree. If your inheritance tree is well-designed, the IS-A test should make sense when you ask *any* subclass if it IS-A *any* of its supertypes.

If class B extends class A, class B IS-A class A.

This is true anywhere in the inheritance tree. If class C extends class B, class C passes the IS-A test for both B *and* A.

Canine extends Animal

Wolf extends Canine

Wolf extends Animal

Canine IS-A Animal

Wolf IS-A Canine

Wolf IS-A Animal

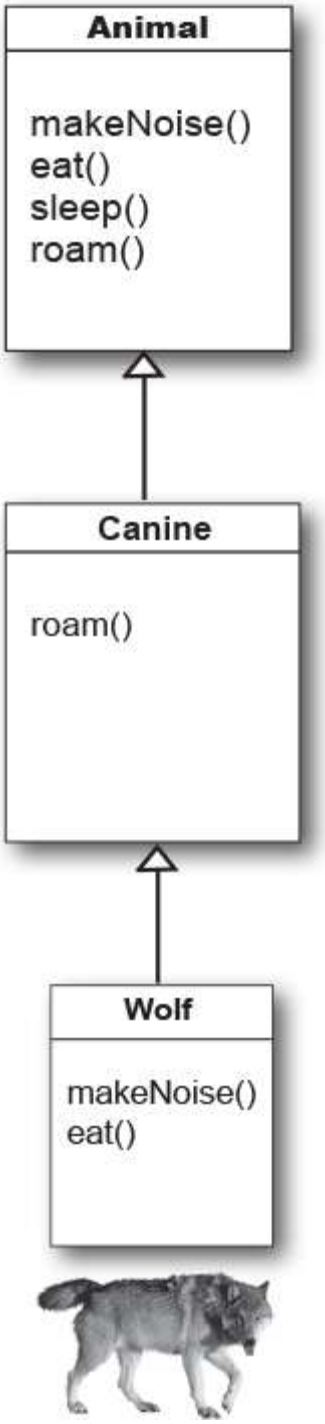

With an inheritance tree like the one shown here, you're always allowed to say **"Wolf extends Animal"** or **"Wolf IS-A Animal."** It makes no difference if Animal is the superclass of the superclass of Wolf. In fact, **as long as**

Animal is *somewhere* in the inheritance hierarchy above Wolf, Wolf IS-A Animal will always be true.

The structure of the Animal inheritance tree says to the world:

"Wolf IS-A Canine, so Wolf can do anything a Canine can do. And Wolf IS-A Animal, so Wolf can do anything an Animal can do."

It makes no difference if Wolf overrides some of the methods in Animal or Canine. As far as the world (of other code) is concerned, a Wolf can do those four methods. *How* he does them, or *in which class they're overridden*, makes no difference. A Wolf can makeNoise(), eat(), sleep(), and roam() because a Wolf extends from class Animal.

How do you know if you've got your inheritance right?

MAKE IT STICK

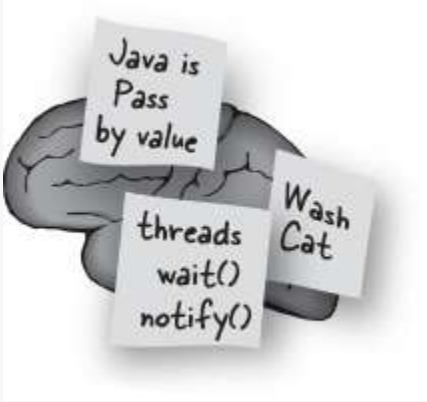

Roses are red, violets are blue.

***Square** is-a **Shape**, the reverse isn't true.*

Roses are red, violets are dear.

Beer** is-a **Drink**, but not all **drinks** are **beer.

OK, your turn. Make one that shows the oneway-ness of the IS-A relationship. Remember, if *X **extends Y, X IS-A** Y* must make sense.

There's obviously more to it than what we've covered so far, but we'll look at a lot more OO issues in the next chapter (where we eventually refine and improve on some of the design work we did in *this* chapter).

For now, though, a good guideline is to use the IS-A test. If "X IS-A Y" makes sense, both classes (X and Y) should probably live in the same inheritance hierarchy. Chances are, they have the same or overlapping behaviors.

Keep in mind that the inheritance IS-A relationship works in only *one* direction!

Triangle IS-A Shape makes sense, so you can have Triangle extend Shape.

But the reverse—Shape IS-A Triangle—does *not* make sense, so Shape should not extend Triangle. Remember that the IS-A relationship implies that

if X IS-A Y, then X can do anything a Y can do (and possibly more).

SHARPEN YOUR PENCIL

Put a check next to the relationships that make sense.

- ❑ **Oven extends Kitchen**
- ❑ **Guitar extends Instrument**
- ❑ **Person extends Employee**
- ❑ **Ferrari extends Engine**
- ❑ **FriedEgg extends Food**
- ❑ **Beagle extends Pet**
- ❑ **Container extends Jar**
- ❑ **Metal extends Titanium**
- ❑ **GratefulDead extends Band**
- ❑ **Blonde extends Smart**
- ❑ **Beverage extends Martini**

Yours to solve.

Hint: apply the IS-A test

THERE ARE NO DUMB QUESTIONS

Q: So we see how a subclass gets to inherit a superclass method, but what if the superclass wants to use the subclass version of the method?

A: A superclass won't necessarily *know* about any of its subclasses. You might write a class and much later someone else comes along and extends it. But even if the superclass creator does know about (and wants to use) a subclass version of a method, there's no sort of *reverse* or *backward* inheritance. Think about it, children inherit from parents, not the other way around.

Q: In a subclass, what if I want to use BOTH the superclass version and my overriding subclass version of a method? In other words, I don't want to completely *replace* the superclass version; I just want to add more stuff to it.

A: You can do this! And it's an important design feature. Think of the word "extends" as meaning "I want to *extend* the functionality of the superclass."

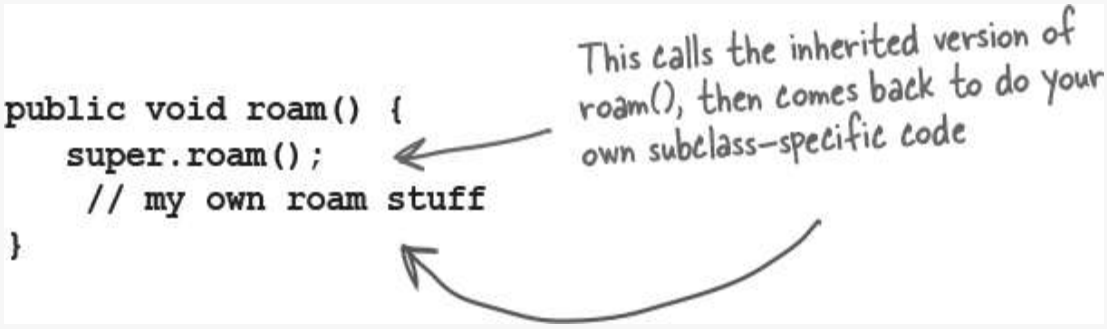

You can design your superclass methods in such a way that they contain method implementations that will work for any subclass, even though the subclasses may still need to "append" more code. In your subclass overriding method, you can call the superclass version using the keyword `super`. It's like saying, "first go run the superclass version, then come back and finish with my own code..."

Who ge ts the Porsche, who ge ts the porcelain? (how to know what a subclass can inherit from it's superclass)

A subclass inherits members of the superclass. Members include instance variables and methods, although later in this book we'll look at other inherited members. A superclass can choose whether or not it wants a subclass to inherit a particular member by the level of access the particular member is given.

There are four access levels that we'll cover in this book. Moving from most restrictive to least, the four access levels are:

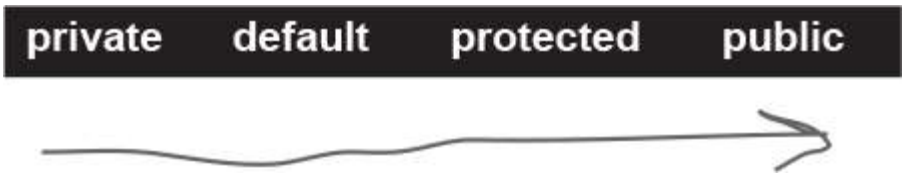

Access levels control *who sees what*, and are crucial to having well-designed, robust Java code. For now we'll focus just on public and private. The rules are simple for those two:

```
public members are inherited
private members are not inherited
```

When a subclass inherits a member, it is ***as if the subclass defined the member itself***. In the Shape example, Square inherited the `rotate()` and `playSound()` methods and to the outside world (other code) the Square class simply has a `rotate()` and `playSound()` method.

The members of a class include the variables and methods defined in the class plus anything inherited from a superclass.

> **NOTE**
>
> Note: get more details about default and protected in Appendix B.

When designing with inheritance, are you using or abusing?

Although some of the reasons behind these rules won't be revealed until later in this book, for now, simply *knowing* a few rules will help you build a better inheritance design.

DO use inheritance when one class *is* a more specific type of a superclass. Example: Willow is a more specific type of Tree, so Willow *extends* Tree makes sense.

DO consider inheritance when you have behavior (implemented code) that should be shared among multiple classes of the same general type. Example: Square, Circle, and Triangle all need to rotate and play sound, so putting that functionality in a superclass Shape might make sense and makes for easier maintenance and extensibility. Be aware, however, that while inheritance is one of the key features of object-oriented programming, it's not necessarily the best way to achieve behavior reuse. It'll get you started, and often it's the right design choice, but design patterns will help you see other more subtle and flexible options. If you don't know about design patterns, a good follow-on to this book would be *Head First Design Patterns*.

DO NOT use inheritance just so that you can reuse code from another class, if the relationship between the superclass and subclass violate either of the above two rules. For example, imagine you wrote special printing code in the Animal class and now you need printing code in the Potato class. You might think about making Potato extend Animal so that Potato inherits the printing code. That makes no sense! A Potato is *not* an Animal! (So the

printing code should be in a Printer class that all printable objects can take advantage of via a HAS-A relationship.)

DO NOT use inheritance if the subclass and superclass do not pass the IS-A test. Always ask yourself if the subclass IS-A more specific type of the superclass. Example: Tea IS-A Beverage makes sense. Beverage IS-A Tea does not.

BULLET POINTS

- A subclass *extends* a superclass.
- A subclass inherits all *public* instance variables and methods of the superclass, but does not inherit the *private* instance variables and methods of the superclass.
- Inherited methods can be overridden; instance variables cannot be overridden (although they can be *redefined* in the subclass, but that's not the same thing, and there's almost never a need to do it.)
- Use the IS-A test to verify that your inheritance hierarchy is valid. If X extends Y, then *X IS-A Y* must make sense.
- The IS-A relationship works in only one direction. A Hippo is an Animal, but not all Animals are Hippos.
- When a method is overridden in a subclass, and that method is invoked on an instance of the subclass, the overridden version of the method is called. (*The lowest one wins.*)
- If class B extends A, and C extends B, class B IS-A class A, and class C IS-A class B, and class C also IS-A class A.

So what does all this inheritance really buy you?

You get a lot of OO mileage by designing with inheritance. You can get rid of duplicate code by abstracting out the behavior common to a group of classes, and sticking that code in a superclass. That way, when you need to modify it, you have only one place to update, and *the change is magically reflected in all the classes that inherit that behavior.* Well, there's no magic involved, but it is pretty simple: make the change and compile the class again. That's it. **You don't have to touch the subclasses!**

Just deliver the newly changed superclass, and all classes that extend it will automatically use the new version.

A Java program is nothing but a pile of classes, so the subclasses don't have to be recompiled in order to use the new version of the superclass. As long as the superclass doesn't *break* anything for the subclass, everything's fine. (We'll discuss what the word "break" means in this context later in the book. For now, think of it as modifying something in the superclass that the subclass is depending on, like a particular method's arguments, return type, method name, etc.)

- ❶ **You avoid duplicate code.**

  Put common code in one place, and let the subclasses inherit that code from a superclass. When you want to change that behavior, you have to modify it in only one place, and everybody else (i.e., all the subclasses) sees the change.

- ❷ **You define a common protocol for a group of classes.**

Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

In other words, you define a common protocol for a set of classes related through inheritance.

When you define methods in a superclass that can be inherited by subclasses, you're announcing a kind of protocol to other code that says, "All my subtypes (i.e., subclasses) can do these things, with these methods that look like this..."

In other words, you establish a *contract*.

Class Animal establishes a common protocol for all Animal subtypes:

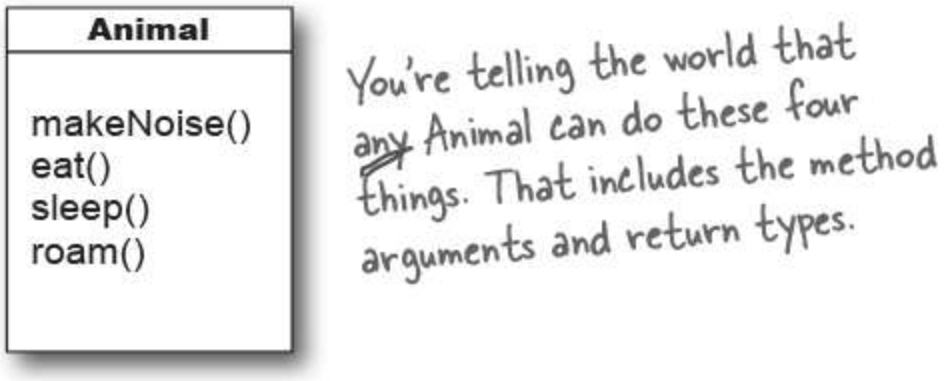

And remember, when we *say any Animal*, we mean Animal *and any class that extends from Animal*. That again means, *any class that has Animal somewhere above it in the inheritance hierarchy.*

But we're not even at the really cool part yet, because we saved the best—*polymorphism*—for last.

When you define a supertype for a group of classes, *any subclass of that supertype can be substituted where the supertype is expected.*

Say, what?

Don't worry, we're nowhere near done explaining it. Two pages from now, you'll be an expert.

And I care because...

You get to take advantage of polymorphism.

Which matters to me because...

You get to refer to a subclass object using a reference declared as the supertype.

And that means to me...

You get to write really flexible code. Code that's cleaner (more efficient, simpler). Code that's not just easier to *develop*, but also much, much easier to *extend*, in ways you never imagined at the time you originally wrote your code.

That means you can take that tropical vacation while your co-workers update the program, and your co-workers might not even need your source code.

You'll see how it works on the next page.

We don't know about you, but personally, we find the whole tropical vacation thing particularly motivating.

* When we say "all the methods," we mean "all the inheritable methods," which for now actually means "all the *public* methods," although later we'll refine that definition a bit more.

To see how polymorphism works, we have to step back and look at the way we normally declare a reference and create an object...

The 3 steps of object declaration and assignment

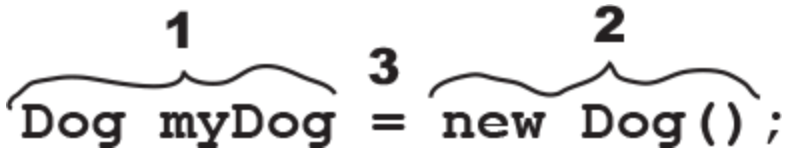

- ❶ **Declare a reference variable**

```
Dog myDog = new Dog();
```

Tells the JVM to allocate space for a reference variable. The reference variable is, forever, of type Dog. In other words, a remote control that has buttons to control a Dog, but not a Cat or a Button or a Socket.

- ❷ **Create an object**

```
Dog myDog = new Dog();
```

Tells the JVM to allocate space for a new Dog object on the garbage collectible heap.

- ❸ **Link the object and the reference**

```
Dog myDog = new Dog();
```

Assigns the new Dog to the reference variable myDog. In other words, ***program the remote control.***

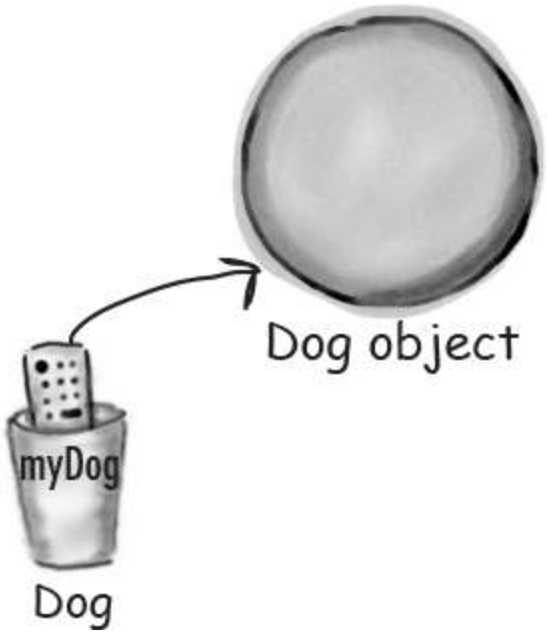

The important point is that the reference type AND the object type are the same.

In this example, both are <u>Dog</u>.

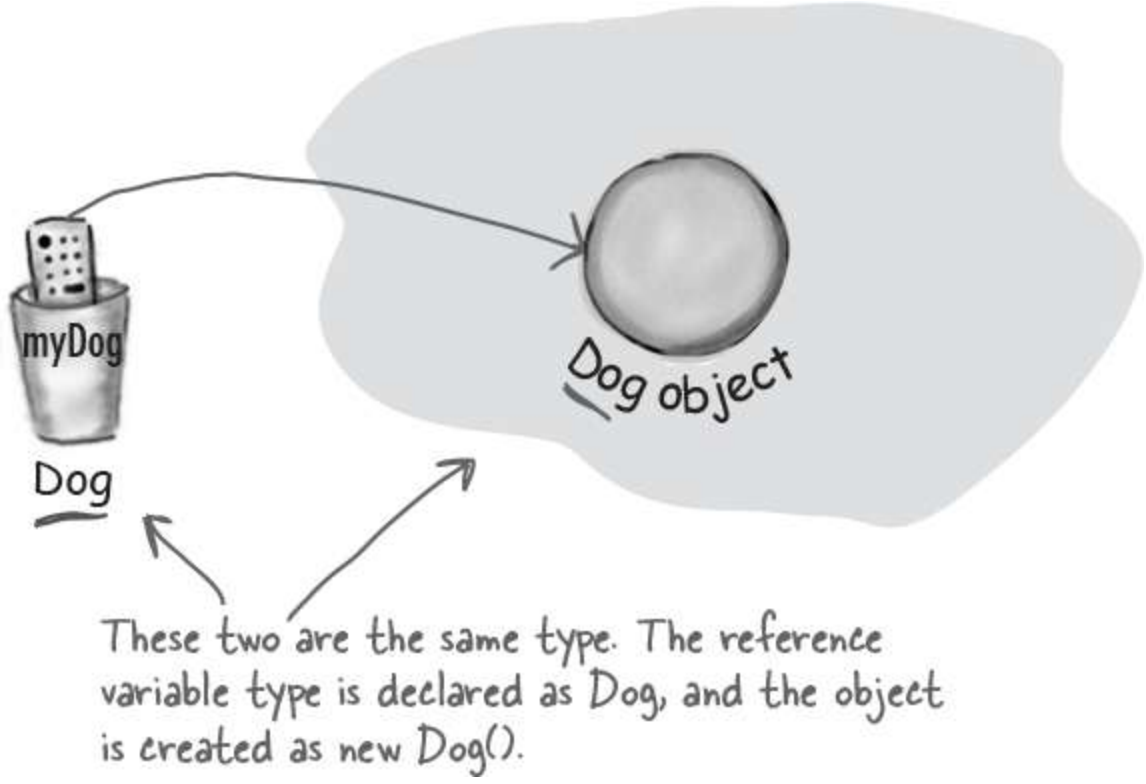

But with polymorphism, the reference type and the object type can be *different.*

```
Animal myDog = new Dog();
```

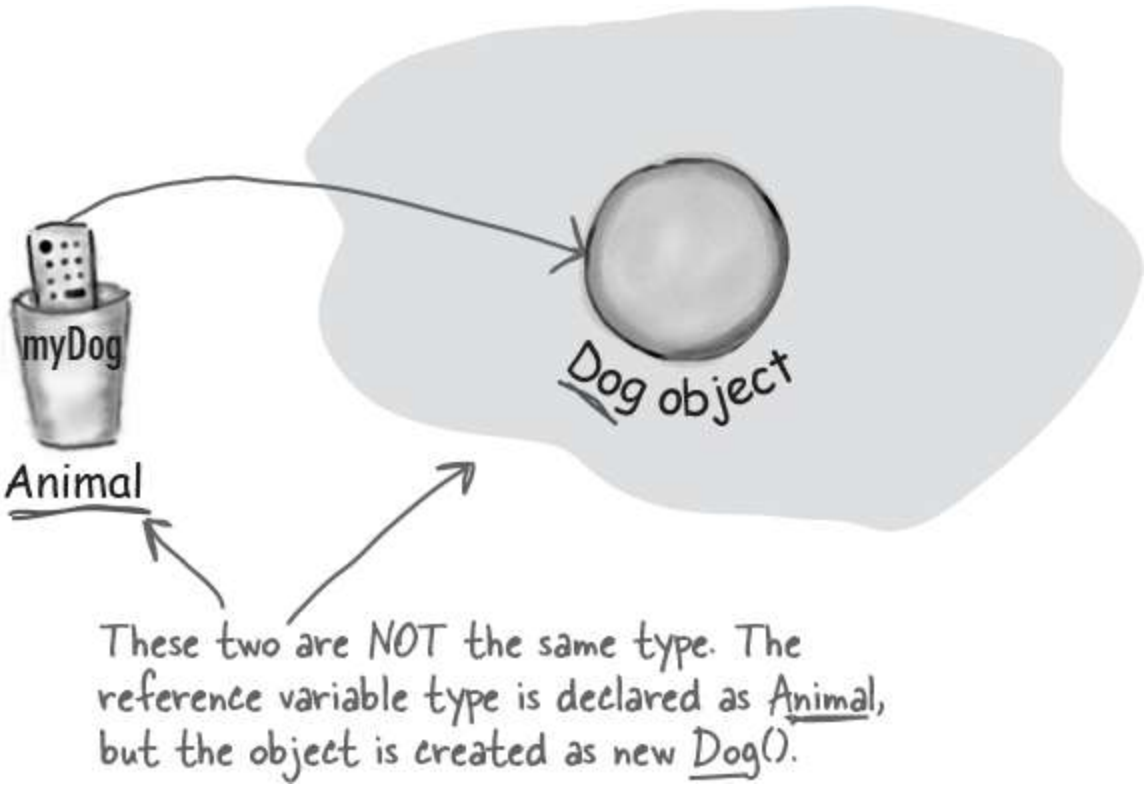

With polymorphism, the reference type can be a superclass of the actual object type.

When you declare a reference variable, any object that passes the IS-A test for the type of the reference can be assigned to that variable. In other words, anything that *extends* the declared reference variable type can be *assigned* to the reference variable. ***This lets you do things like make polymorphic arrays.***

OK, OK maybe an example will help.

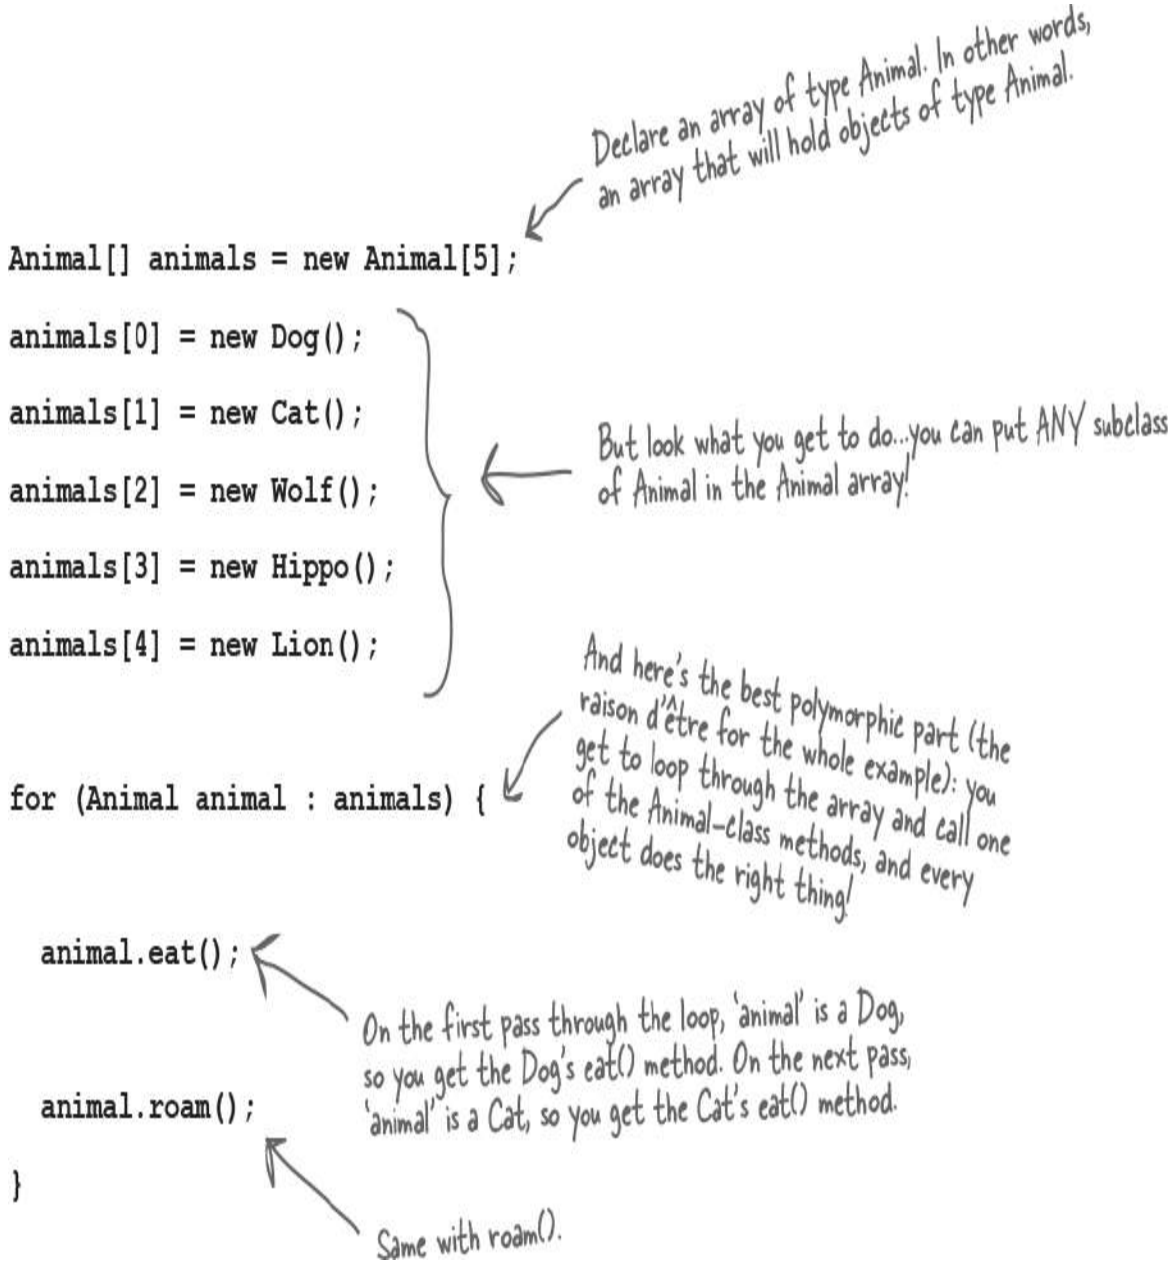

But wait! There's more!

You can have polymorphic arguments and return types.

If you can declare a reference variable of a supertype, say, Animal, and assign a subclass object to it, say, Dog, think of how that might work when the reference is an argument to a method...

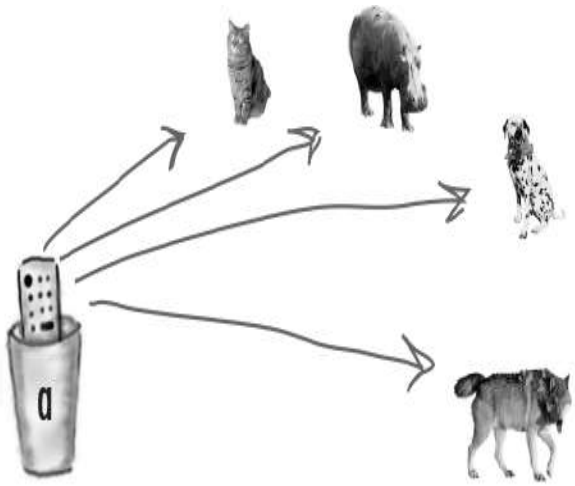

```
class Vet {

  public void giveShot(Animal a) {

    // do horrible things to the Animal at

    // the other end of the 'a' parameter

    a.makeNoise();

  }

}
```

The 'a' parameter can take ANY Animal type as the argument. And when the Vet is done giving the shot, it tells the Animal to makeNoise(), and whatever Animal is really out there on the heap, that's whose makeNoise() method will run.

```
class PetOwner {

  public void start() {

    Vet vet = new Vet();

    Dog dog = new Dog();

    Hippo hippo = new Hippo();

    vet.giveShot(dog);

    vet.giveShot(hippo);

  }

}
```

The Vet's giveShot() method can take any Animal you give it. As long as the object you pass in as the argument is a subclass of Animal, it will work.

Dog's makeNoise() runs

Hippo's makeNoise() runs

With polymorphism, you can write code that doesn't have to change when you introduce new subclass types into the program.

Remember that Vet class? If you write that Vet class using arguments declared as type *Animal*, your code can handle any Animal *subclass*. That means if others want to take advantage of your Vet class, all they have to do is make sure *their* new Animal types extend class Animal. The Vet methods

will still work, even though the Vet class was written without any knowledge of the new Animal subtypes the Vet will be working on.

BRAIN POWER



Why is polymorphism guaranteed to work this way? Why is it always safe to assume that any *subclass* type will have the methods you think you're calling on the *superclass* type (the superclass reference type you're using the dot operator on)?

THERE ARE NO DUMB QUESTIONS

Q: Are there any practical limits on the levels of subclassing? How deep can you go?

A: If you look in the Java API, you'll see that most inheritance hierarchies are wide but not deep. Most are no more than one or two levels deep, although there are exceptions (especially in the GUI classes). You'll come to realize that it usually makes more sense to keep your inheritance trees shallow, but there isn't a hard limit (well, not one that you'd ever run into).

Q: Hey, I just thought of something...if you don't have access to the source code for a class but you want to change the way a method of that class works, could you use subclassing to do that? To extend the "bad" class and override the method with your own better code?

A: Yep. That's one cool feature of OO, and sometimes it saves you from having to rewrite the class from scratch or track down the programmer who hid the source code.

Q: Can you extend *any* class? Or is it like class members where if the class is private you can't inherit it...

A: There's no such thing as a private class, except in a very special case called an *inner* class, which we haven't looked at yet. But there *are* three things that can prevent a class from being subclassed.

The first is access control. Even though a class *can't* be marked `private`, a class *can* be non-public (what you get if you don't declare the class as `public`). A non-public class can be subclassed only by classes in the same package as the class. Classes in a different package won't be able to subclass (or even *use*, for that matter) the non-public class.

The second thing that stops a class from being subclassed is the keyword modifier `final`. A final class means that it's the end of the inheritance line. Nobody, ever, can extend a final class.

The third issue is that if a class has only `private` constructors (we'll look at constructors in Chapter 9), it can't be subclassed.

Q: Why would you ever want to make a final class? What advantage would there be in preventing a class from being subclassed?

A: Typically, you won't make your classes final. But if you need security —the security of knowing that the methods will always work the way that you wrote them (because they can't be overridden), a final class will give you that. A lot of classes in the Java API are final for that reason. The String class, for example, is final because, well, imagine the havoc if somebody came along and changed the way Strings behave!

Q: Can you make a *method* final, without making the whole *class* final?

A: If you want to protect a specific method from being overridden, mark the *method* with the `final` modifier. Mark the whole *class* as final if you want to guarantee that *none* of the methods in that class will ever be overridden.

Keeping the contract: rules for overriding

When you override a method from a superclass, you're agreeing to fulfill the contract. The contract that says, for example, "I take no arguments and I return a boolean." In other words, the arguments and return types of your overriding method must look to the outside world *exactly* like the overridden method in the superclass.

The methods *are* the contract.

If polymorphism is going to work, the Toaster's version of the overridden method from Appliance has to work at runtime. Remember, the compiler looks at the reference type to decide whether you can call a particular method on that reference.

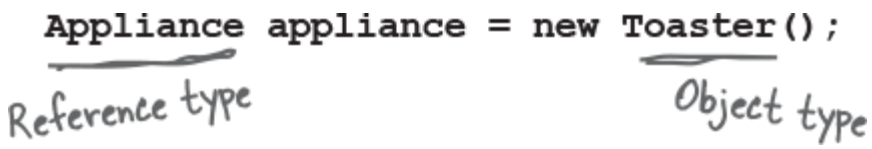

With an Appliance reference to a Toaster, the compiler cares only if class *Appliance* has the method you're invoking on an Appliance reference. But at runtime, the JVM does not look at the **reference** type (*Appliance*) but at the actual *Toaster* **object** on the heap.

So if the compiler has already approved the method call, the only way it can work is if the overriding method has the same arguments and return types. Otherwise, someone with an Appliance reference will call turnOn() as a no-arg method, even though there's a version in Toaster that takes an int. Which one is called at runtime? The one in Appliance. In other words, ***the turnOn(int level) method in Toaster is not an override!***

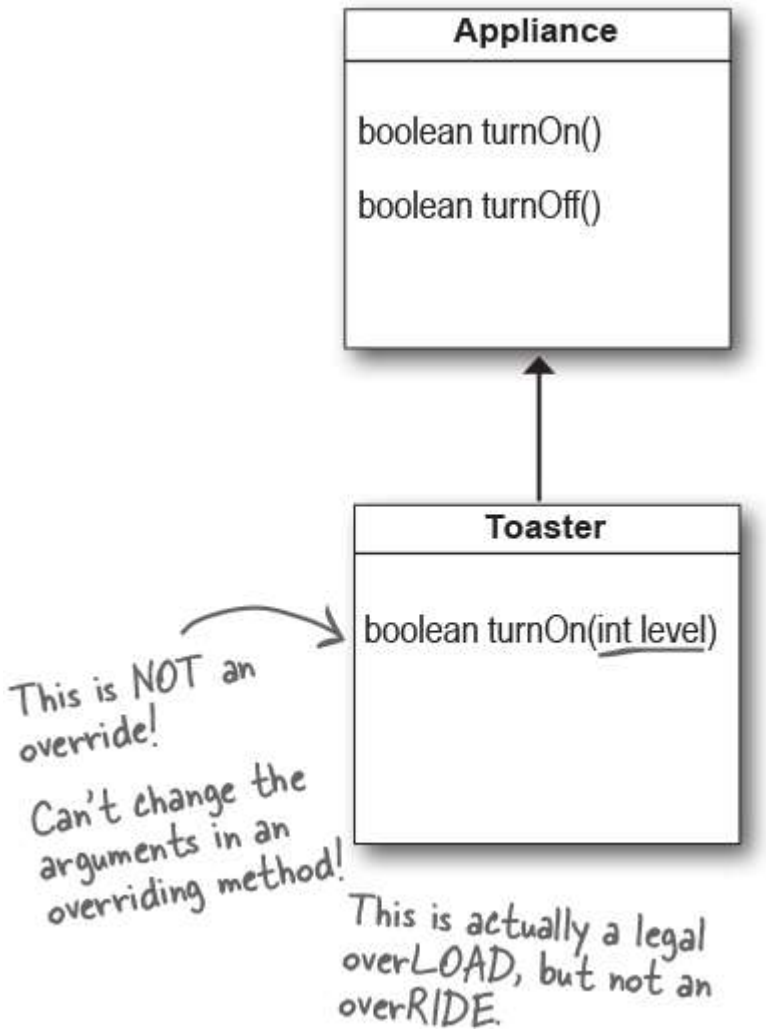

- ① **Arguments must be the same, and return types must be compatible.**

  The contract of superclass defines how other code can use a method. Whatever the superclass takes as an argument, the subclass overriding the method must use that same argument. And whatever the superclass declares as a return type, the overriding method must declare either the same type or a subclass type. Remember, a subclass object is guaranteed to be able to do anything its superclass declares, so it's safe to return a subclass where the superclass is expected.

- ② **The method can't be less accessible.**

That means the access level must be the same, or friendlier. You can't, for example, override a public method and make it private. What a shock that would be to the code invoking what it *thinks* (at compile time) is a public method, if suddenly at runtime the JVM slammed the door shut because the overriding version called at runtime is private!

So far we've learned about two access levels: private and public. The other two are in Appendix B. There's also another rule about overriding related to exception handling, but we'll wait until Chapter 13, *Risky Behavior*, to cover that.

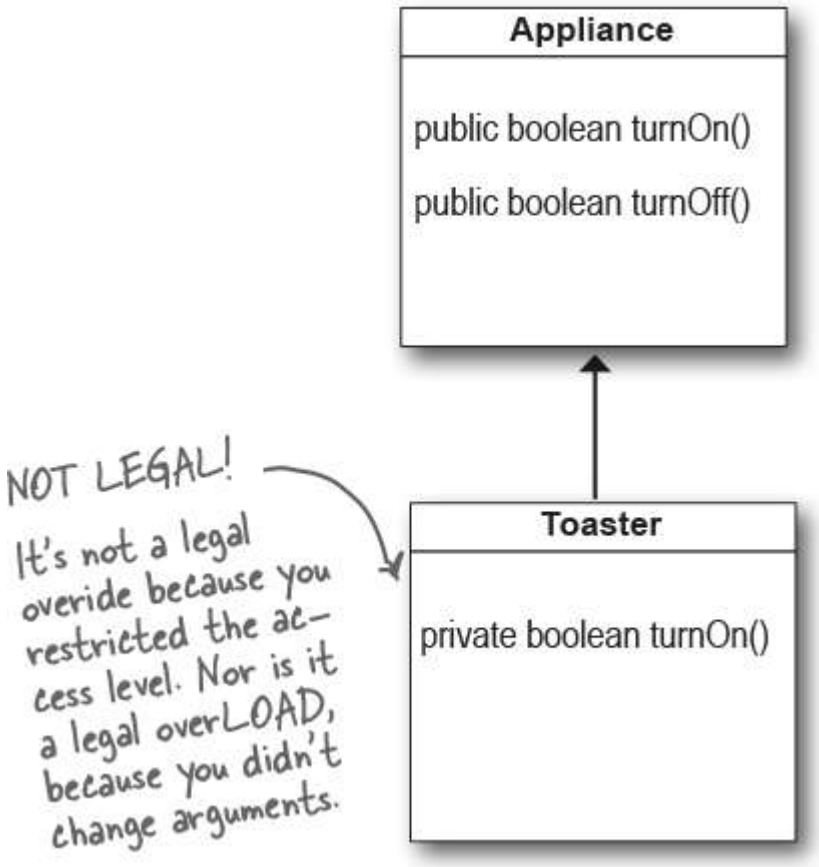

Overloading a method

Method overloading is nothing more than having two methods with the same name but different argument lists. Period. There's no polymorphism involved with overloaded methods!

Overloading lets you make multiple versions of a method, with different argument lists, for convenience to the callers. For example, if you have a method that takes only an int, the calling code has to convert, say, a double into an int before calling your method. But if you overloaded the method with another version that takes a double, then you've made things easier for the caller. You'll see more of this when we look into constructors in Chapter 9, *Life and Death of an Object*.

Since an overloading method isn't trying to fulfill the polymorphism contract defined by its superclass, overloaded methods have much more flexibility.

An overloaded method is just a different method that happens to have the same met hod name. It has nothing to do with inheritance and polymorphism. An overloaded met hod is NOT the same as an overridden method.

- ① **The return types can be different.**

  You can't change ONLY the return type.

- ② **You can't change ONLY the return type.**

  If only the return type is different, it's not a valid over*load*—the compiler will assume you're trying to override the method. And even *that* won't be legal unless the return type is a subtype of the return type declared in the superclass. To overload a method, you MUST change the argument list, although you *can* change the return type to anything.

- ③ **You *can* vary the access levels in any direction.**

  You're free to overload a method with a method that's more restrictive. It doesn't matter, since the new method isn't obligated to fulfill the contract of the overloaded method.

  Legal examples of method overloading:

```
public class Overloads {
  String uniqueID;

  public int addNums(int a, int b) {
```

```
    return a + b;
  }

  public double addNums(double a, double b) {
    return a + b;
  }

  public void setUniqueID(String theID) {
    // lots of validation code, and then:
    uniqueID = theID;
  }

  public void setUniqueID(int ssNumber) {
    String numString = "" + ssNumber;
    setUniqueID(numString);
  }
}
```

Exercise

Mixed Messages

A short Java program is listed below. One block of the program is missing! Your challenge is to match the candidate block of code (on the left), with the output that you'd see if the block were inserted. Not all the lines of output

will be used, and some of the lines of output might be used more than once. Draw lines connecting the candidate blocks of code with their matching command-line output.

The program:

```
class A {
  int ivar = 7;

  void m1() {
    System.out.print("A's m1, ");
  }
  void m2() {
    System.out.print("A's m2, ");
  }
  void m3() {
    System.out.print("A's m3, ");
  }
}

class B extends A {
  void m1() {
    System.out.print("B's m1, ");
  }
}
```

```
class C extends B {
  void m3() {
    System.out.print("C's m3, " + (ivar + 6));
  }
}

public class Mixed2 {
  public static void main(String[] args) {
    A a = new A();
    B b = new B();
    C c = new C();
    A a2 = new C();
```

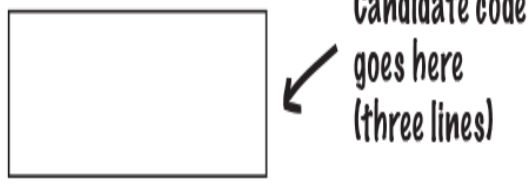


```
  }
}
```

Code candidates:

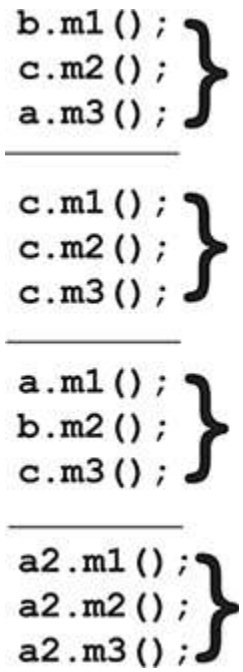

Output:

```
A's m1, A's m2, C's m3, 6

B's m1, A's m2, A's m3,

A's m1, B's m2, A's m3,

B's m1, A's m2, C's m3, 13

B's m1, C's m2, A's m3,

B's m1, A's m2, C's m3, 6

A's m1, A's m2, C's m3, 13
```

→ **Answers in "Mixed Messages".**

BE the Compiler

Which of the A-B pairs of methods listed on the right, if inserted into the classes on the left, would compile and produce the output shown? (The A method inserted into class Monster, the B method inserted into class Vampire.)

```
public class MonsterTestDrive {

  public static void main(String[] args) {
    Monster[] monsters = new Monster[3];
    monsters[0] = new Vampire();
    monsters[1] = new Dragon();
    monsters[2] = new Monster();
    for (int i = 0; i < monsters.length; i++) {
      monsters[i].frighten(i);
    }
  }
}

class Monster {
  A
}

class Vampire extends Monster {
  B
}

class Dragon extends Monster {
  boolean frighten(int degree) {
    System.out.println("breathe fire");
    return true;
  }
}
```

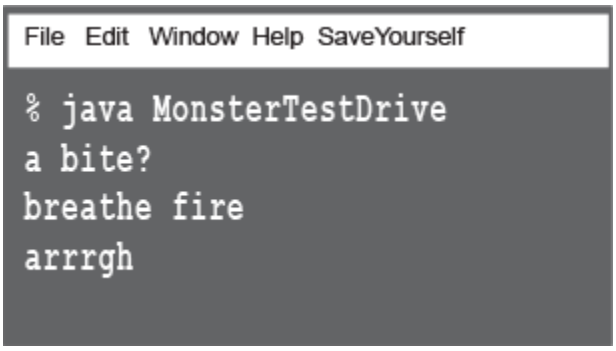

1

A
```
boolean frighten(int d) {
  System.out.println("arrrgh");
  return true;
}
```

B
```
boolean frighten(int x) {
  System.out.println("a bite?");
  return false;
}
```

2

A
```
boolean frighten(int x) {
  System.out.println("arrrgh");
  return true;
}
```

B
```
int frighten(int f) {
  System.out.println("a bite?");
  return 1;
}
```

3

A
```
boolean frighten(int x) {
  System.out.println("arrrgh");
  return false;
}
```

B
```
boolean scare(int x) {
  System.out.println("a bite?");
  return true;
}
```

4

A
```
boolean frighten(int z) {
  System.out.println("arrrgh");
  return true;
}
```

B
```
boolean frighten(byte b) {
  System.out.println("a bite?");
  return true;
}
```

→ **Answers in "BE the Compiler".**

POOL PUZZLE

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You may use the same snippet more than once, and you might not need to use all the snippets. Your ***goal*** is to make a set of classes that will compile and run together as a program. Don't be fooled—this one's harder than it looks.

```
public class Rowboat _____ _____ {

   public _________ rowTheBoat() {

      System.out.print("stroke natasha");

   }
}
```

```
public class _____ {

   private int _______ ;

   _____ void _______ ( ____ ) {

      length = len;

   }

   public int getLength() {

      _____ _______ ;

   }

   public _________ move() {

      System.out.print("_________");

   }
}
```

```
public class TestBoats {

   ____ _____ _____ main(String[] args){

      _______ b1 = new Boat();

      Sailboat b2 = new _______();

      Rowboat _____ = new Rowboat();

      b2.setLength(32);

      b1._______();

      b3._______();

      _____.move();

   }
}
```

```
public class _______ _____ Boat {

   public _____ _______() {

      System.out.print("_________");

   }
}
```

OUTPUT:

```
drift  drift  hoist sail
```

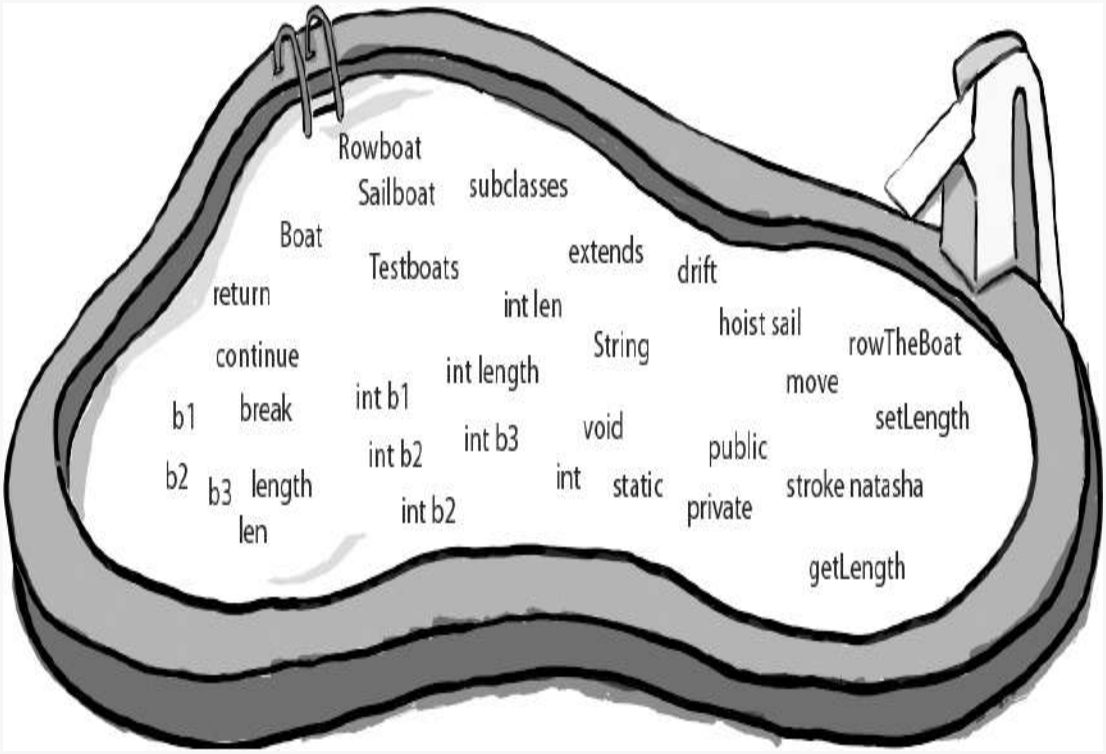

→ **Answers in "Pool Puzzle".**

Exercise Solutions

BE the Compiler

(from "BE the Compiler")

Set 1 **will** work.

Set 2 **will not** compile because of Vampire's return type (int).

The Vampire's frighten() method (B) is not a legal override OR overload of Monster's frighten() method. Changing ONLY the return type is not enough to make a valid overload, and since an int is not compatible with a boolean, the method is not a valid override. (Remember, if you change ONLY the return type, it must be to a return type that is compatible with the superclass version's return type, and then it's an override.)

Sets 3 and 4 **will** compile but produce:

```
arrrgh

breathe fire

arrrgh
```

Remember, class Vampire did not override class Monster's frighten() method. (The frighten() method in Vampire's set 4 takes a byte, not an int.)

Code candidates:

Mixed Messages

(from "Mixed Messages")

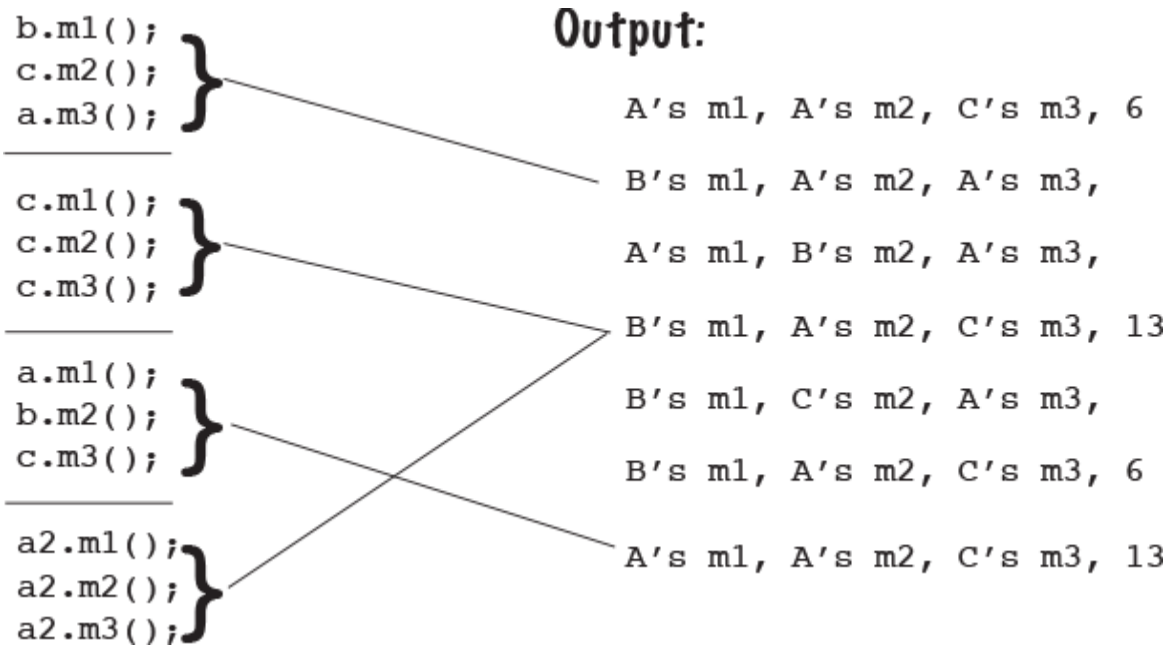

Pool Puzzle

(from "Pool Puzzle")

```
public class Rowboat extends Boat {
   public void rowTheBoat() {
      System.out.print("stroke natasha");
   }
}
public class Boat {
   private int length ;
   public void setLength ( int len ) {
         length = len;
   }
   public int getLength() {
      return length ;
   }
   public void move() {
      System.out.print("drift ");
   }
}



public class TestBoats {
   public static void main(String[] args){
      Boat b1 = new Boat();
      Sailboat b2 = new Sailboat();
      Rowboat b3 = new Rowboat();
      b2.setLength(32);
      b1.move();
      b3.move();
      b2.move();
   }
}
public class Sailboat extends Boat {
   public void move() {
      System.out.print("hoist sail ");
   }
}
```

OUTPUT:

```
drift  drift  hoist sail
```

Chapter 8. Serious Polymorphism: Interfaces and Abstract Classes

Inheritance is just the beginning. To exploit polymorphism, we need interfaces (and not the GUI kind). We need to go beyond simple inheritance to a level of flexibility and extensibility you can get only by designing and coding to interface specifications. Some of the coolest parts of Java wouldn't even be possible without interfaces, so even if you don't design with them

yourself, you still have to use them. But you'll *want* to design with them. You'll *need* to design with them. ***You'll*** wonder how you ever lived without them. What's an interface? It's a 100% abstract class. What's an abstract class? It's a class that can't be instantiated. What's that good for? You'll see in just a few moments. But if you think about the end of the previous chapter, and how we used polymorphic arguments so that a single Vet method could take Animal subclasses of all types, well, that was just scratching the surface. Interfaces are the ***poly*** in polymorphism. The ***ab*** in abstract. The ***caffeine*** in Java.

Did we forget about something when we designed this?

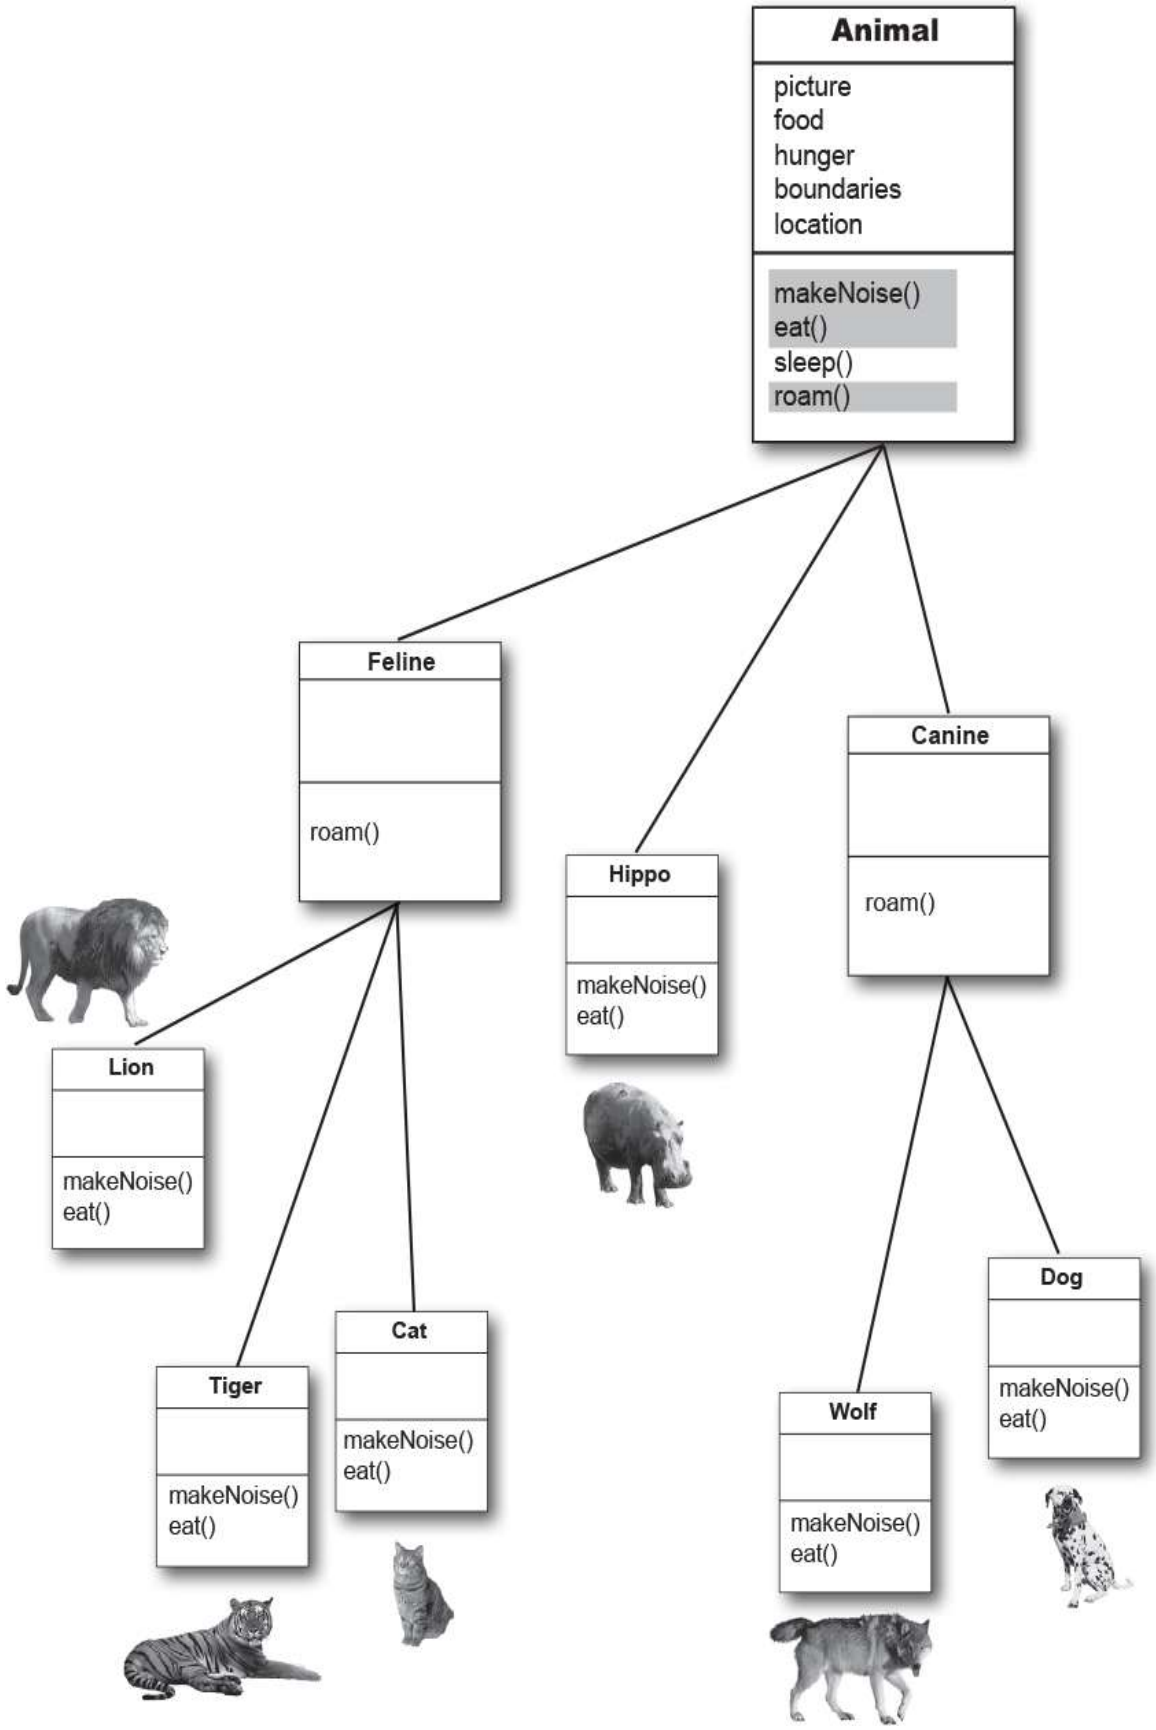
Animal
picture
food
hunger
boundaries
location
makeNoise()
eat()
sleep()
roam()
Feline
roam()
Hippo
makeNoise()
eat()
Canine
roam()
Lion
makeNoise()
eat()
Tiger
makeNoise()
eat()
Cat
makeNoise()
eat()
Wolf
makeNoise()
eat()
Dog
makeNoise()
eat()

The class structure isn't too bad. We've designed it so that duplicate code is kept to a minimum, and we've overridden the methods that we think should have subclass-specific implementations. We've made it nice and flexible from a polymorphic perspective, because we can design Animal-using programs with Animal arguments (and array declarations) so that any Animal subtype—***including those we never imagined at the time we wrote our code***—can be passed in and used at runtime. We've put the common protocol for all Animals (the four methods that we want the world to know all Animals have) in the Animal superclass, and we're ready to start making new Lions and Tigers and Hippos.

We know we can say:

```
Wolf aWolf = new Wolf();
```

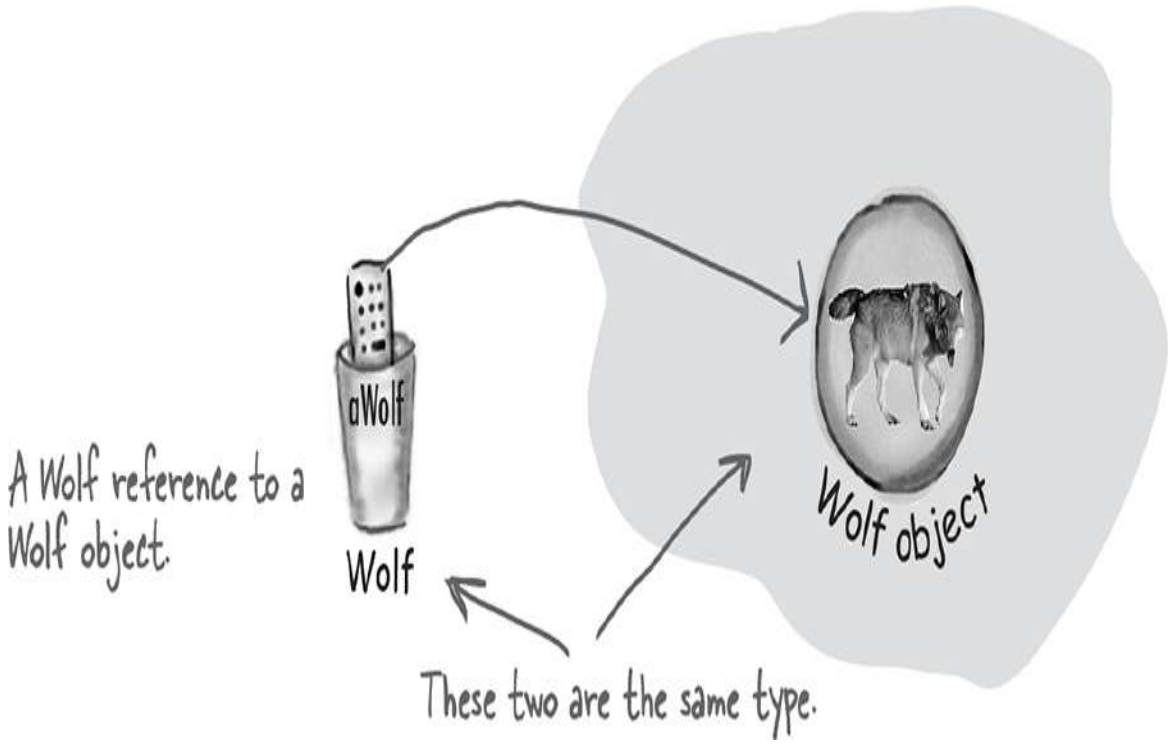

And we know we can say:

```
Animal aHippo = new Hippo();
```

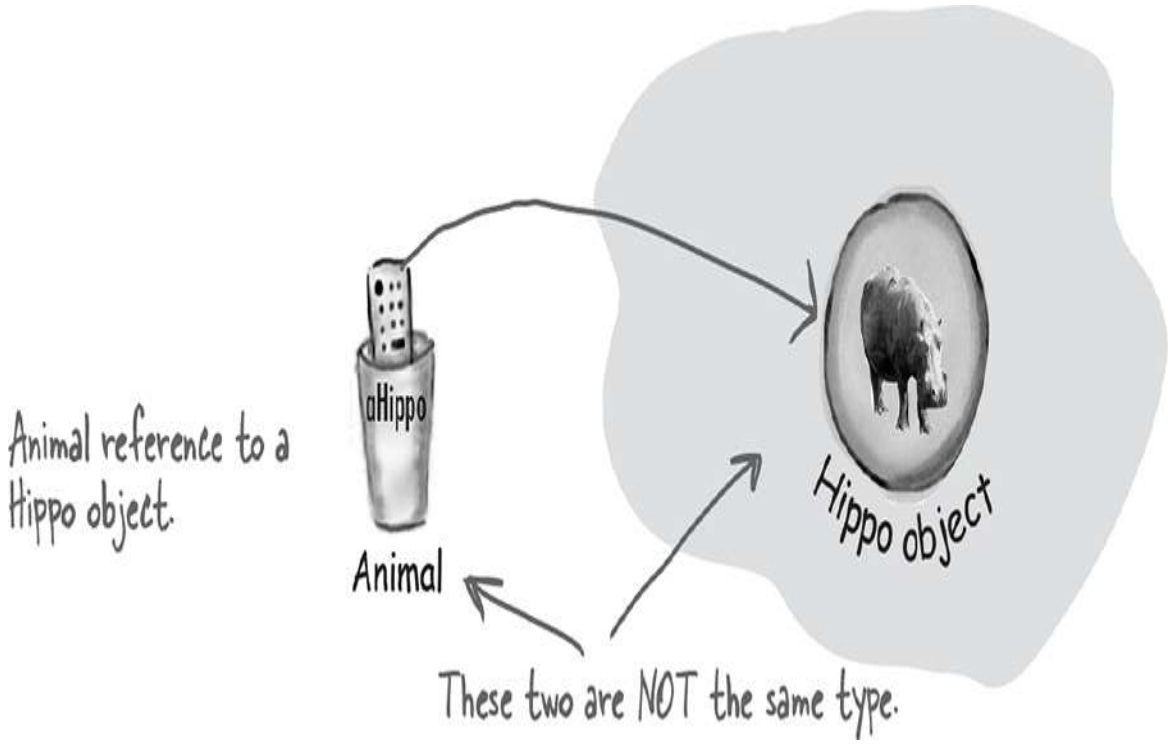

But here's where it gets weird:

```
Animal anim = new Animal();
```

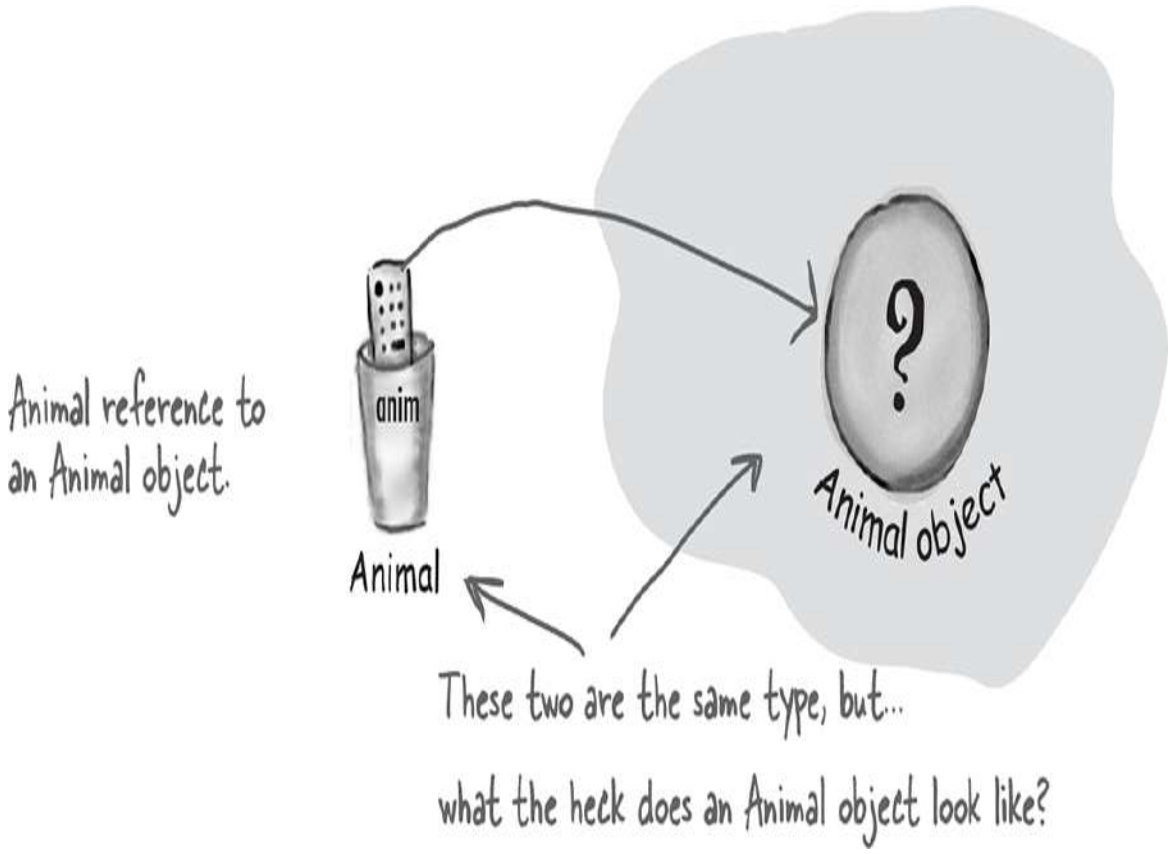

What does a new Animal() object *look* like?

What are the instance variable values?

Some classes just should *not* be instantiated!

It makes sense to create a Wolf object or a Hippo object or a Tiger object, but what exactly *is* an Animal object? What shape is it? What color, size, number of legs...

Trying to create an object of type Animal is like **a nightmare Star Trek™ transporter accident.** The one where somewhere in the beam-me-up process something bad happened to the buffer.

But how do we deal with this? We *need* an Animal class, for inheritance and polymorphism. But we want programmers to instantiate only the less abstract *subclasses* of class Animal, not Animal itself. We want Tiger objects and Lion objects, ***not Animal objects.***

Fortunately, there's a simple way to prevent a class from ever being instantiated. In other words, to stop anyone from saying "**`new`**" on that type. By marking the class as **`abstract`**, the compiler will stop any code, anywhere, from ever creating an instance of that type.

You can still use that abstract type as a reference type. In fact, that's a big part of why you have that abstract class in the first place (to use it as a polymorphic argument or return type, or to make a polymorphic array).

When you're designing your class inheritance structure, you have to decide which classes are *abstract* and which are *concrete*. Concrete classes are those that are specific enough to be instantiated. A *concrete* class just means that it's OK to make objects of that type.

Making a class abstract is easy—put the keyword **`abstract`** before the class declaration:

```
abstract class Canine extends Animal {
  public void roam() { }
}
```

The compiler won't let you instantiate an abstract class

An abstract class means that nobody can ever make a new instance of that class. You can still use that abstract class as a declared reference type, for the purpose of polymorphism, but you don't have to worry about somebody making objects of that type. The compiler *guarantees* it.

```
abstract public class Canine extends Animal
{
   public void roam() { }
}
```

```
public class MakeCanine {
   public void go() {
      Canine c;
      c = new Dog();
      c = new Canine();
      c.roam();
   }
}
```

This is OK, because you can always assign a subclass object to a superclass reference, even if the superclass is abstract.

class Canine is marked abstract, so the compiler will NOT let you do this.

File Edit Window Help BeamMeUp

```
% javac MakeCanine.java

MakeCanine.java:5: Canine is abstract;
cannot be instantiated
      c = new Canine();
          ^

1 error
```

An **abstract class** has virtually* no use, no value, no purpose in life, unless it is ***extended.***

With an abstract class, it's the **instances of a *subclass*** of your abstract class that's doing the work at runtime

*There is an exception to this—an abstract class can have static members (see Chapter 10).

Abstract vs. Concrete

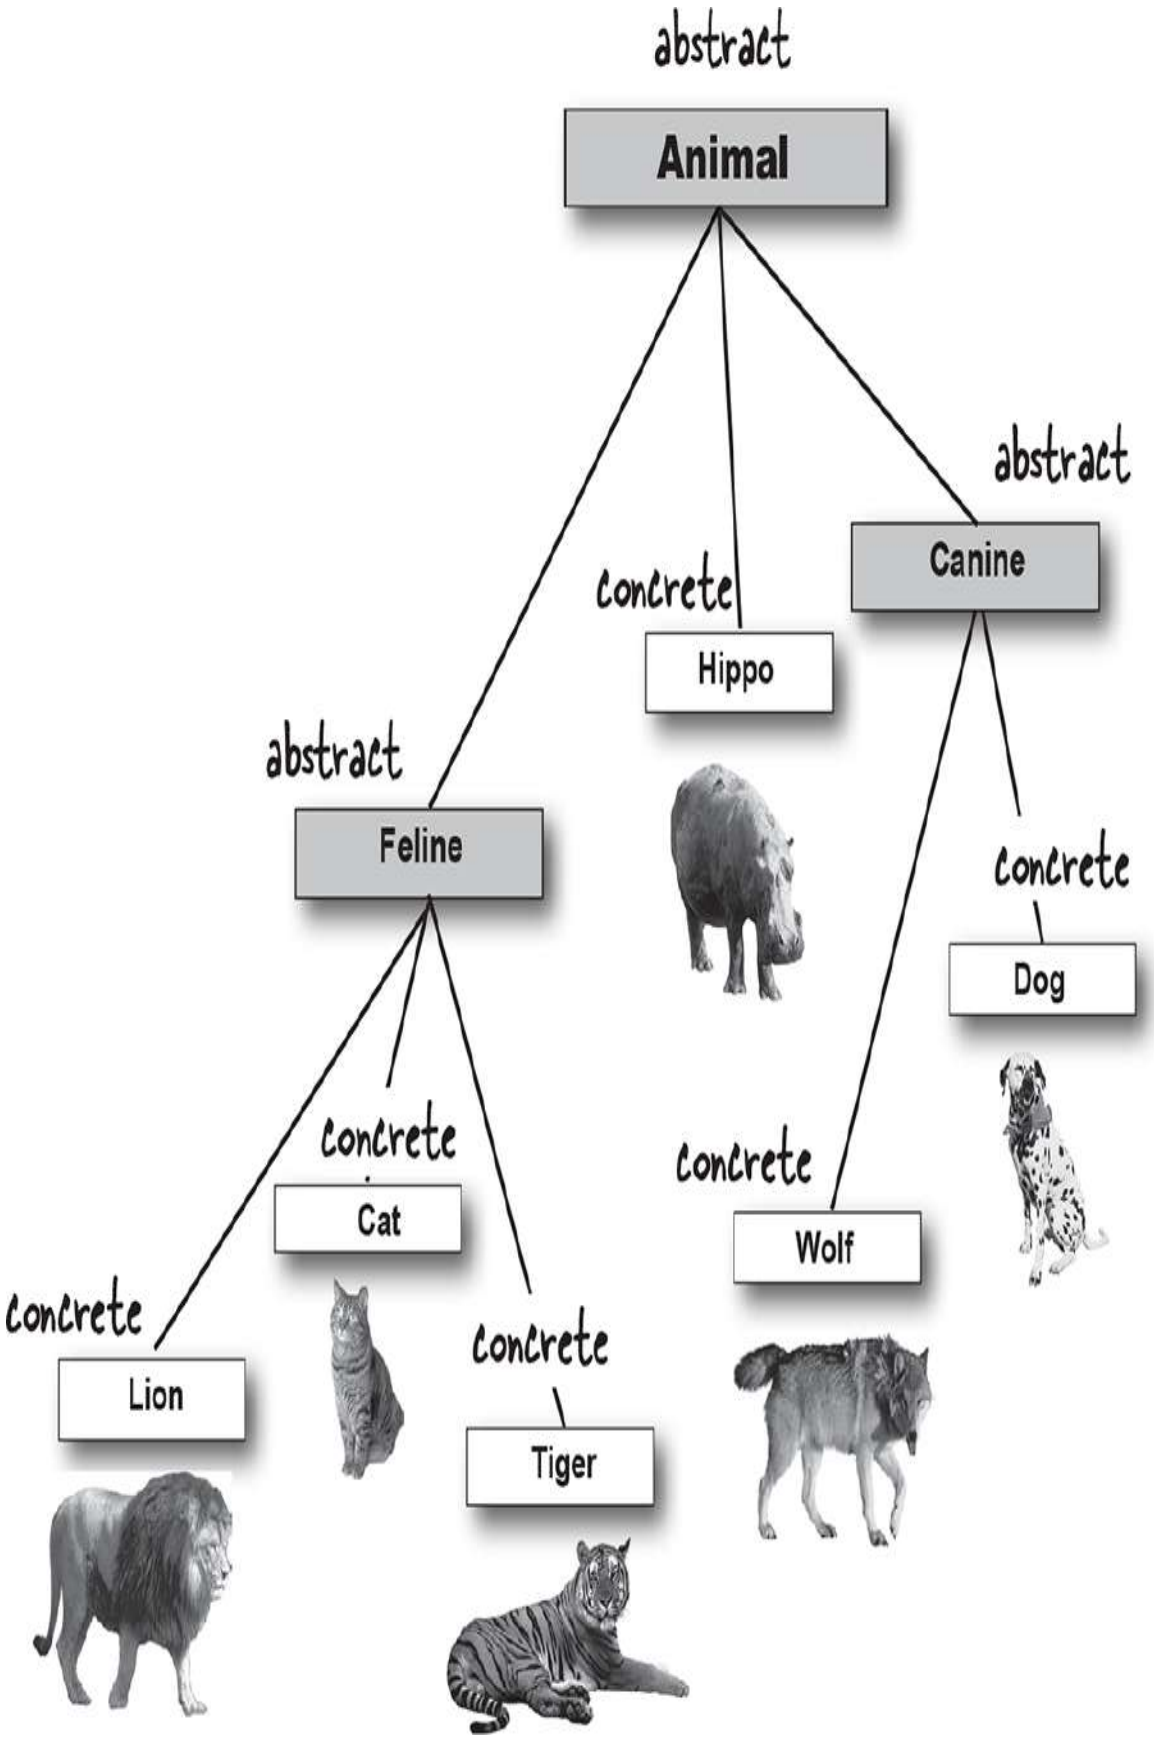
abstract
Animal
concrete
Hippo
abstract
Canine
abstract
Feline
concrete
Dog
concrete
Cat
concrete
Wolf
concrete
Lion
concrete
Tiger

A class that's not abstract is called a *concrete* class. In the Animal inheritance tree, if we make Animal, Canine, and Feline abstract, that leaves Hippo, Wolf, Dog, Tiger, Lion, and Cat as the concrete subclasses.

Flip through the Java API and you'll find a lot of abstract classes, especially in the GUI library. What does a GUI Component look like? The Component class is the superclass of GUI-related classes for things like buttons, text areas, scrollbars, dialog boxes, you name it. You don't make an instance of a generic *Component* and put it on the screen; you make a JButton. In other words, you instantiate only a *concrete subclass* of Component, but never Component itself.

BRAIN POWER



Abstract or concrete?

How do you know when a class should be abstract? ***Wine*** is probably abstract. But what about ***Red*** and ***White***? Again probably abstract (for

some of us, anyway). But at what point in the hierarchy do things become concrete?

Do you make ***PinotNoir*** concrete, or is it abstract too? It looks like the Camelot Vineyards 1997 Pinot Noir is probably concrete no matter what. But how do you know for sure?

Look at the Animal inheritance tree above. Do the choices we've made for which classes are abstract and which are concrete seem appropriate? Would you change anything about the Animal inheritance tree (other than adding more Animals, of course)?

Abstract methods

Besides classes, you can mark *methods* abstract, too. An abstract class means the class must be *extended*; an abstract method means the method must be *overridden*. You might decide that some (or all) behaviors in an abstract class don't make any sense unless they're implemented by a more specific subclass. In other words, you can't think of any generic method implementation that could possibly be useful for subclasses. What would a generic eat() method look like?

An abstract method has no body!

Because you've already decided there isn't any code that would make sense in the abstract method, you won't put in a method body. So no curly braces—just end the declaration with a semicolon.

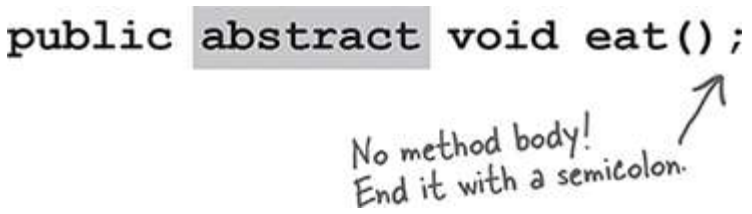

If you declare an abstract *method*, you MUST mark the *class* abstract as well. You can't have an abstract method in a non-abstract class.

If you put even a single abstract method in a class, you have to make the class abstract. But you *can* mix both abstract and non-abstract methods in the abstract class.

THERE ARE NO DUMB QUESTIONS

Q: What is the *point* of an abstract method? I thought the whole point of an abstract class was to have common code that could be inherited by subclasses.

A: Inheritable method implementations (in other words, methods with actual *bodies*) are A Good Thing to put in a superclass. *When it makes sense.* And in an abstract class, it often *doesn't* make sense, because you can't come up with any generic code that subclasses would find useful. The point of an abstract method is that even though you haven't put in any actual method code, you've still defined part of the *protocol* for a group of subtypes (subclasses).

Q: Which is good because...

A: Polymorphism! Remember, what you want is the ability to use a superclass type (often abstract) as a method argument, return type, or array type. That way, you get to add new subtypes (like a new Animal subclass) to your program without having to rewrite (or add) new methods to deal with those new types. Imagine how you'd have to change the Vet class, if it didn't use Animal as its argument type for methods. You'd have to have a separate method for every single Animal subclass! One that takes a Lion, one that takes a Wolf, one that takes a...you get the idea. So with an abstract method, you're saying, "All subtypes of this type have THIS method" for the benefit of polymorphism.

You MUST implement all abstract methods

***Implementing* an abstract method is just like *overriding* a method.**

Abstract methods don't have a body; they exist solely for polymorphism. That means the first concrete class in the inheritance tree must implement *all* abstract methods.

You can, however, pass the buck by being abstract yourself. If both Animal and Canine are abstract, for example, and both have abstract methods, class Canine does not have to implement the abstract methods from Animal. But as soon as we get to the first concrete subclass, like Dog, that subclass must implement *all* of the abstract methods from both Animal and Canine.

But remember that an abstract class can have both abstract and *non*-abstract methods, so Canine, for example, could implement an abstract method from Animal, so that Dog didn't have to. But if Canine says nothing about the abstract methods from Animal, Dog has to implement all of Animal's abstract methods.

When we say "you must implement the abstract method," that means you *must provide a body.* That means you must create a non-abstract method in your class with the same method signature (name and arguments) and a return type that is compatible with the declared return type of the abstract method. What you put *in* that method is up to you. All Java cares about is that the method is *there*, in your concrete subclass.

SHARPEN YOUR PENCIL

Yours to solve.

Abstract versus Concrete classes

Let's put all this abstract rhetoric into some concrete use. In the middle column we've listed some classes. Your job is to imagine applications where the listed class might be concrete, and applications where the listed class might be abstract. We took a shot at the first few to get you going. For example, class Tree would be abstract in a tree nursery program, where differences between an Oak and an Aspen matter. But in a golf simulation program, Tree might be a concrete class (perhaps a subclass of Obstacle), because the program doesn't care about or distinguish between different types of trees. (There's no one right answer; it depends on your design.)

Concrete	Sample class	Abstract
golf course simulation	Tree	tree nursery application
_____	House	architect application
satellite photo application	Town	_____
_____	Football Player	coaching application
_____	Chair	_____
_____	Customer	_____
_____	Sales Order	_____
_____	Book	_____
_____	Store	_____
_____	Supplier	_____
_____	Golf Club	_____
_____	Carburetor	_____
_____	Oven	_____

Polymorphism in action

Let's say that we want to write our *own* kind of list class, one that will hold Dog objects, but pretend for a moment that we don't know about the ArrayList class. For the first pass, we'll give it just an add() method. We'll use a simple Dog array (Dog[]) to keep the added Dog objects, and give it a length of 5. When we reach the limit of 5 Dog objects, you can still call the add() method, but it won't do anything. If we're *not* at the limit, the add() method puts the Dog in the array at the next available index position and then increments that next available index (nextIndex).

Building our own Dog-specific list

(Perhaps the world's worst attempt at making our own ArrayList kind of class, from scratch.)

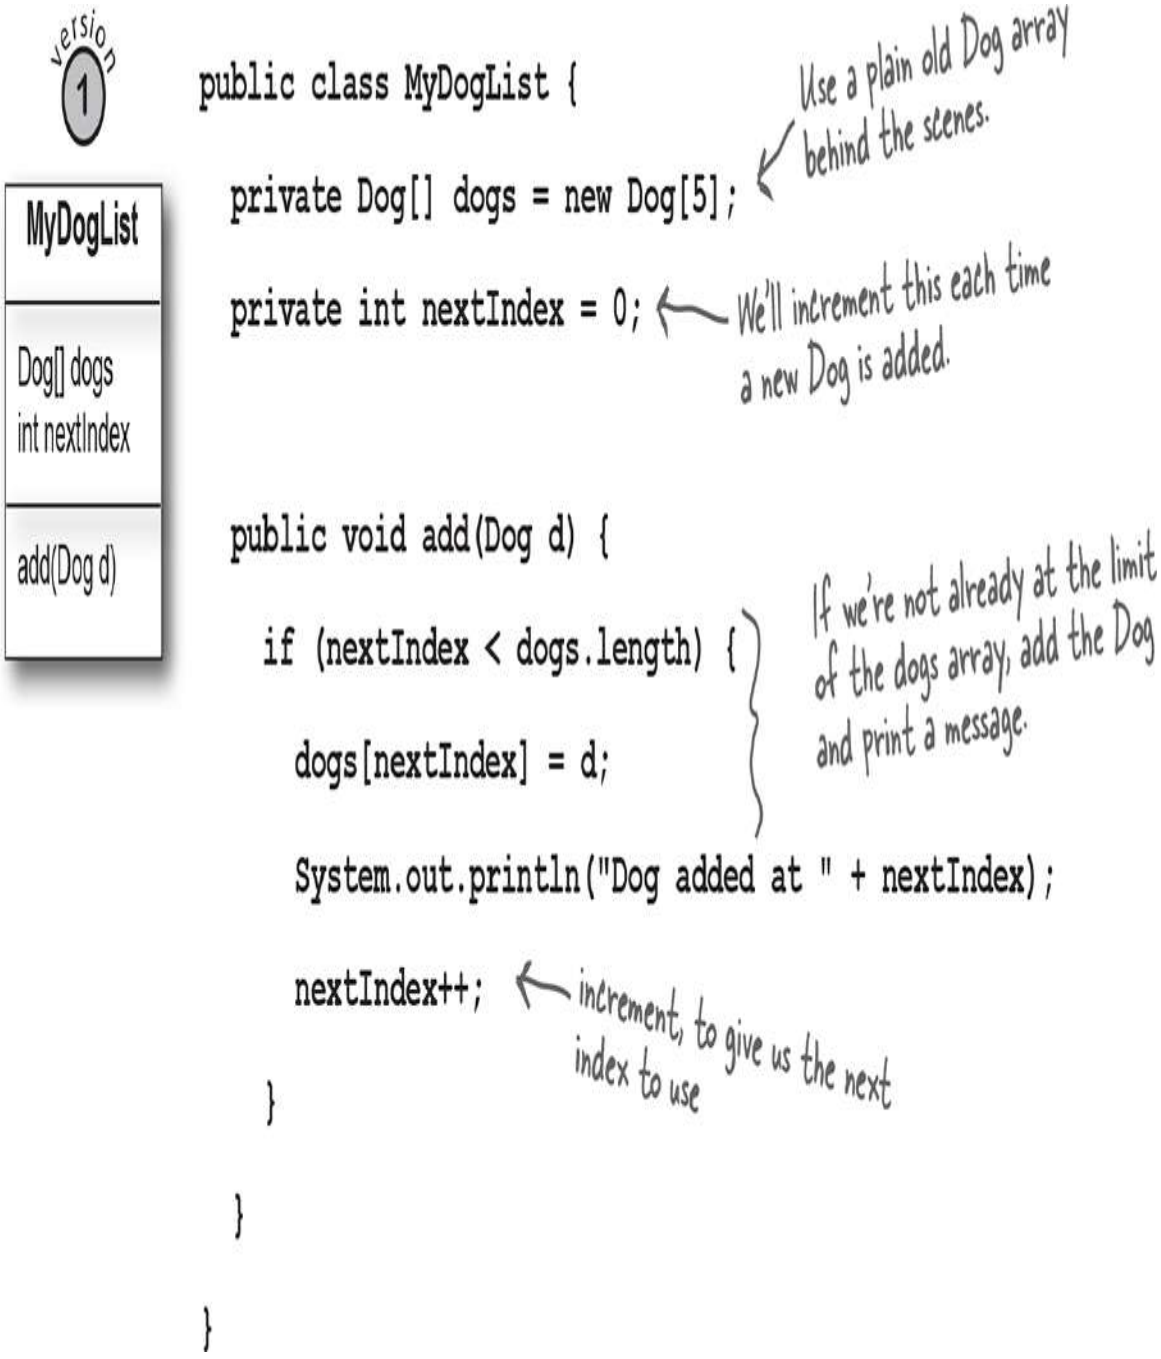

Uh-oh, now we need to keep Cats, too

We have a few options here:

1. Make a separate class, MyCatList, to hold Cat objects. Pretty clunky.

2. Make a single class, DogAndCatList, that keeps two different arrays as instance variables and has two different add() methods: addCat(Cat c) and addDog(Dog d). Another clunky solution.

3. Make a heterogeneous AnimalList class that takes *any* kind of Animal subclass (since we know that if the spec changed to add Cats, sooner or later we'll have some *other* kind of animal added as well). We like this option best, so let's change our class to make it more generic, to take Animals instead of just Dogs. We've highlighted the key changes (the logic is the same, of course, but the type has changed from Dog to Animal everywhere in the code).

Building our own Animal-specific list

version 2

```
public class MyAnimalList {

  private Animal[] animals = new Animal[5];
  private int nextIndex = 0;

  public void add(Animal a) {
    if (nextIndex < animals.length) {
      animals[nextIndex] = a;
      System.out.println("Animal added at " + nextIndex);
      nextIndex++;
    }
  }
}
```

Don't panic. We're not making a new Animal object; we're making a new array object, of type Animal. (Remember, you cannot make a new instance of an abstract type, but you CAN make an array object declared to HOLD that type.)

```
public class AnimalTestDrive {
  public static void main(String[] args) {
    MyAnimalList list = new MyAnimalList();
    Dog dog = new Dog();
    Cat cat = new Cat();
    list.add(dog);
    list.add(cat);
  }
}
```

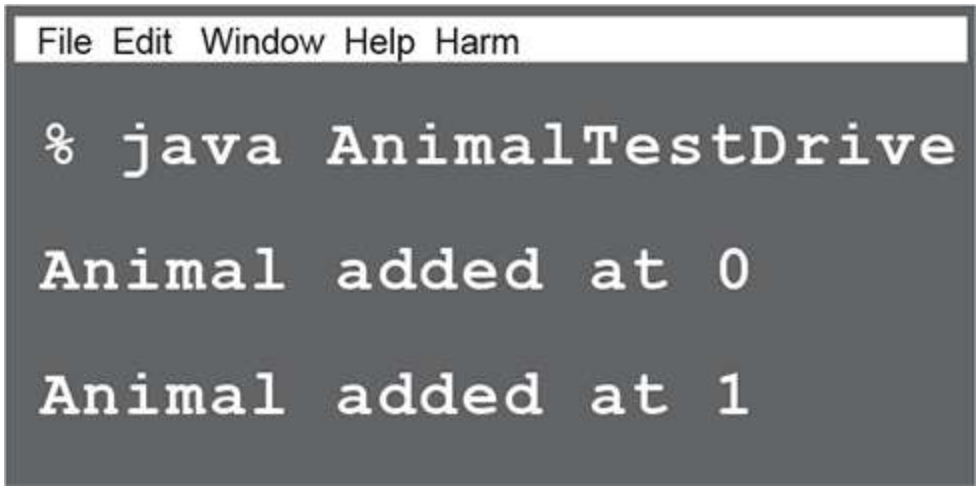

What about non-Animals? Why not make a class generic enough to take anything?

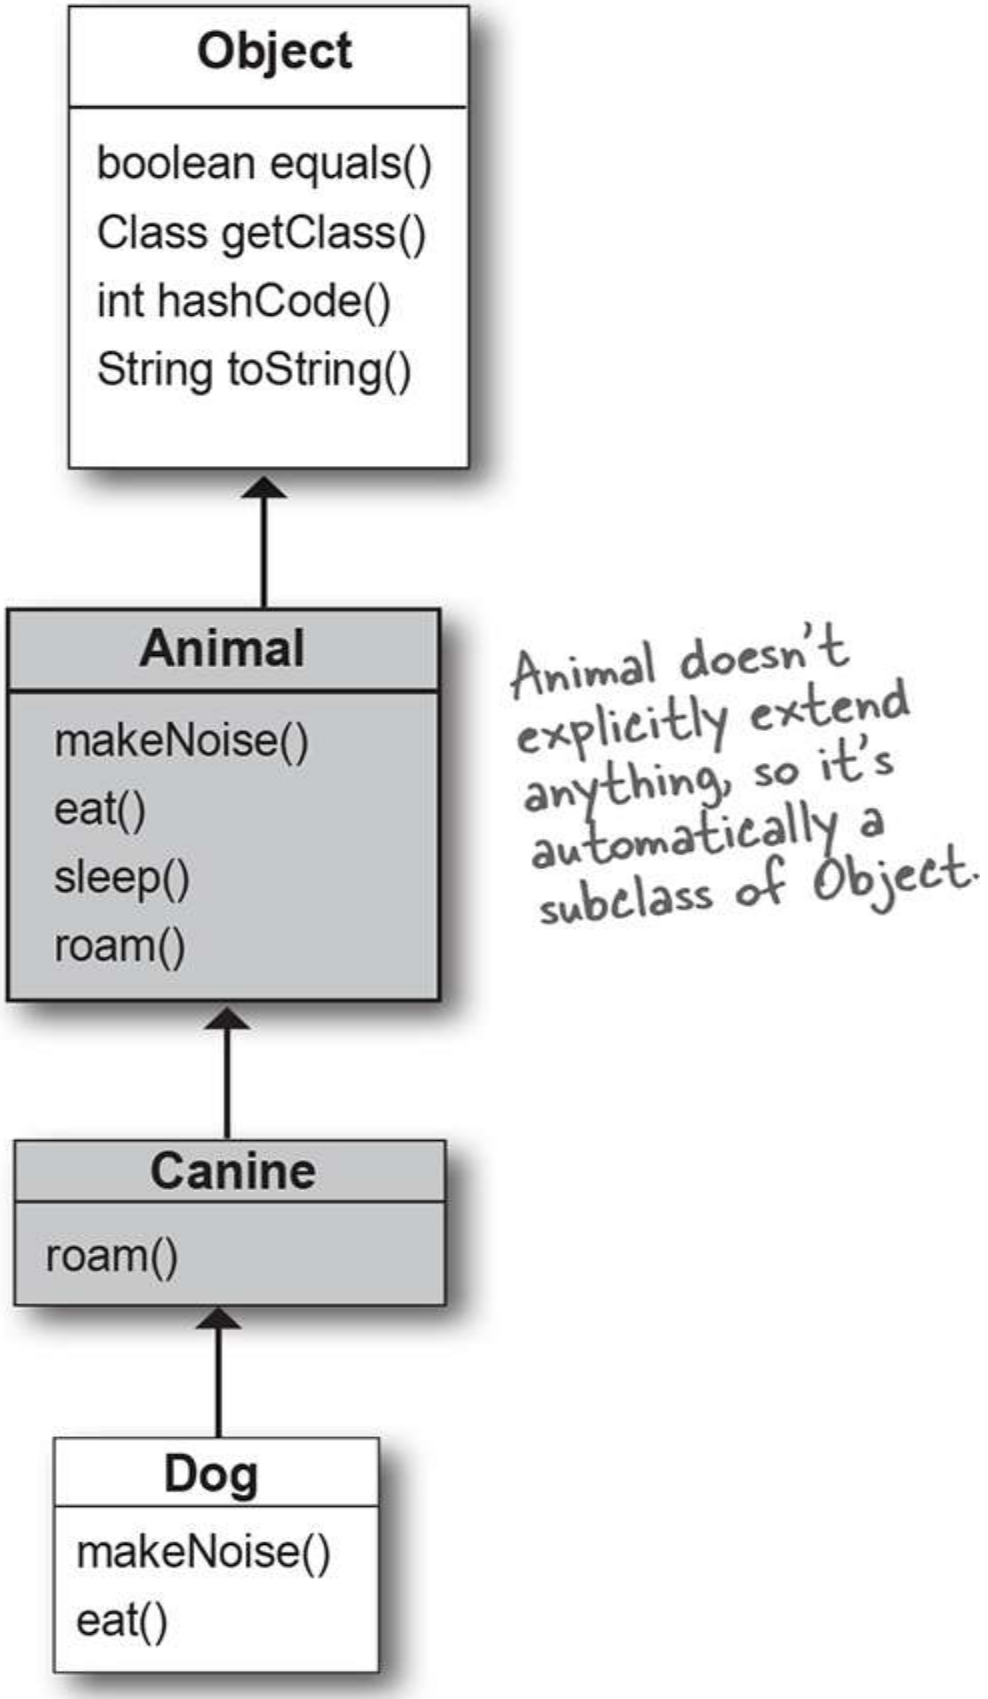
Object
boolean equals()
Class getClass()
int hashCode()
String toString()
Animal
makeNoise()
eat()
sleep()
roam()
Animal doesn't explicitly extend anything, so it's automatically a subclass of Object.
Canine
roam()
Dog
makeNoise()
eat()

You know where this is heading. We want to change the type of the array, along with the add() method argument, to something *above* Animal. Something even *more* generic, *more* abstract than Animal. But how can we do it? We don't *have* a superclass for Animal.

Then again, maybe we do...

Every class in Java extends class Object.

Class Object is the mother of all classes; it's the superclass of *everything.*

Even if you take advantage of polymorphism, you still have to create a class with methods that take and return *your* polymorphic type. Without a common superclass for everything in Java, there'd be no way for the developers of Java to create classes with methods that could take *your* custom types...*types they never knew about when they wrote the library class.*

So you were making subclasses of class Object from the very beginning and you didn't even know it. ***Every class you write extends Object,*** without your ever having to say it. But you can think of it as though a class you write looks like this:

```
public class Dog extends Object { }
```

But wait a minute, Dog *already* extends something, *Canine*. That's OK. The compiler will make *Canine* extend Object instead. Except *Canine* extends Animal. No problem, then the compiler will just make *Animal* extend Object.

Any class that doesn't *explicitly* extend another class, *implicitly* extends Object.

So, since Dog extends Canine, it doesn't *directly* extend Object (although it does extend it indirectly), and the same is true for Canine, but Animal *does* directly extend Object.

So what's in this ultra-super-megaclass Object?

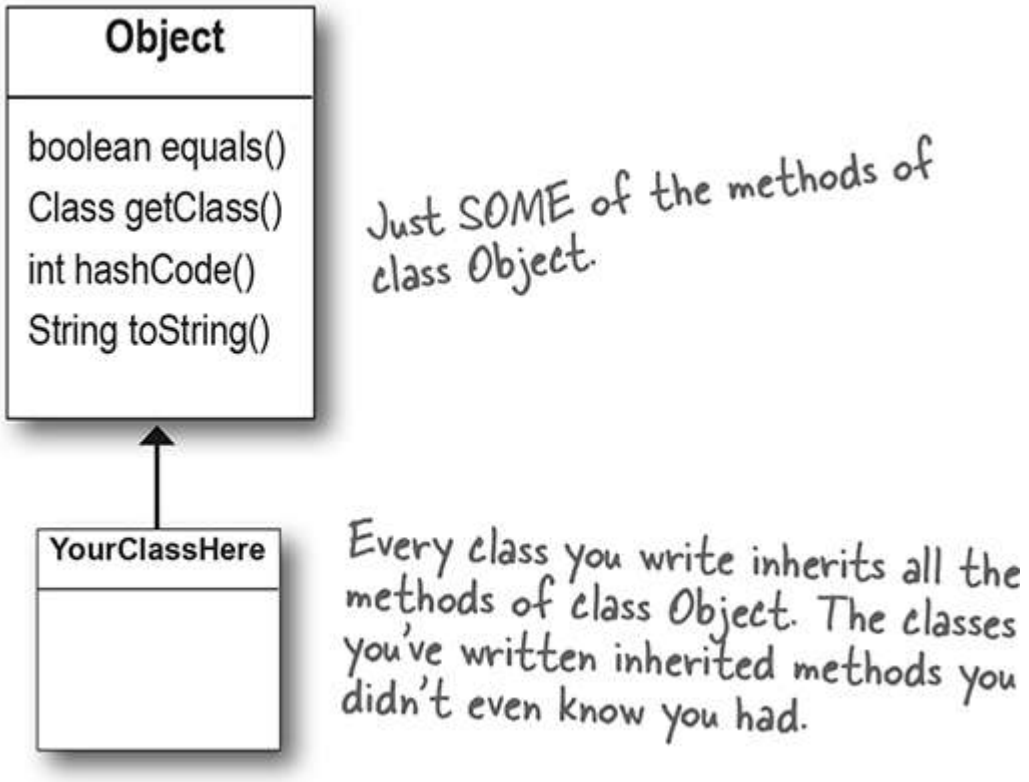

If you were Java, what behavior would you want *every* object to have? Hmmmm...let's see...how about a method that lets you find out if one object is equal to another object? What about a method that can tell you the actual class type of that object? Maybe a method that gives you a hashcode for the object, so you can use the object in hashtables (we'll talk about Java's hashtables later). Oh, here's a good one—a method that prints out a String message for that object.

And what do you know? As if by magic, class Object does indeed have methods for those four things. That's not all, though, but these are the ones we really care about.

① **equals(Object o)**

```
Dog a = new Dog();
Cat c = new Cat();

if (a.equals(c)) {
    System.out.println("true");
} else {
    System.out.println("false");
}
```

Tells you if two objects are considered 'equal'.

② **getClass()**

```
Cat c = new Cat();
System.out.println(c.getClass());
```

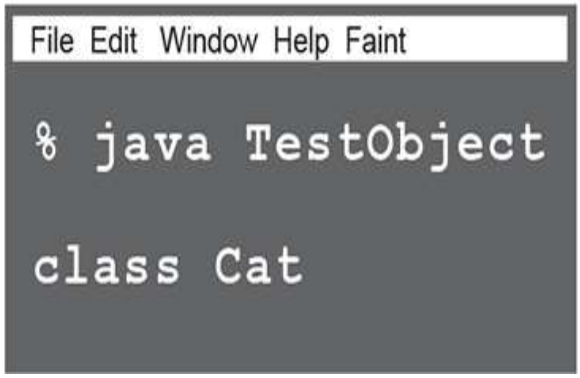

Gives you back the class that object was instantiated from.

③ **hashCode()**

```
Cat c = new Cat();
System.out.println(c.hashCode());
```

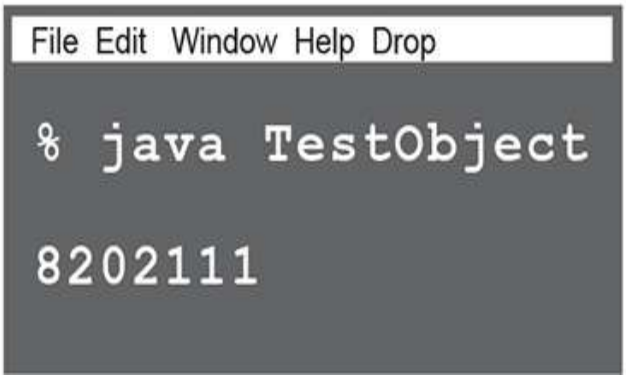

Prints out a hashcode for the object (for now, think of it as a unique ID).

④ **toString()**

```
Cat c = new Cat();
System.out.println(c.toString());
```

Prints out a String message with the name of the class and some other number we rarely care about.

THERE ARE NO DUMB QUESTIONS

Q: Is class Object abstract?

A: No. Well, not in the formal Java sense anyway. Object is a non-abstract class because it's got method implementation code that all classes can inherit and use out of the box, without having to override the methods.

Q: Then *can* you override the methods in Object?

A: Some of them. But some of them are marked `final`, which means you can't override them. You're encouraged (strongly) to override hashCode(), equals(), and toString() in your own classes, and you'll learn how to do that a little later in the book. But some of the methods, like getClass(), do things that must work in a specific, guaranteed way.

Q: HOW can you let somebody make an Object object? Isn't that just as weird as making an Animal object?

A: Good question! Why is it acceptable to make a new Object instance? Because sometimes you just want a generic object to use as, well, as an object. A *lightweight* object. For now, just stick that on the back burner and assume that you will rarely make objects of type Object, even though you *can*.

Q: So is it fair to say that the main purpose for type Object is so that you can use it for a polymorphic argument and return type?

A: The Object class serves *two* main purposes: to act as a polymorphic type for methods that need to work on any class that you or anyone else makes, and to provide *real* method code that all objects in Java need at runtime (and putting them in class Object means all other classes inherit them). Some of the most important methods in Object are related to threads, and we'll see those later in the book.

Q: If it's so good to use polymorphic types, why don't you just make ALL your methods take and return type Object?

A: Ahhhh...think about what would happen. For one thing, you would defeat the whole point of "*type-safety,*" one of Java's greatest protection mechanisms for your code. With type-safety, Java guarantees that you won't ask the wrong object to do something you *meant* to ask of another object type. Like, ask a *Ferrari* (which you think is a *Toaster*) to *cook itself.*

But the truth is, you *don't* have to worry about that fiery Ferrari scenario, even if you *do* use Object references for everything. Because when objects are referred to by an Object reference type, Java *thinks* it's referring to an instance of type Object. And that means the only methods you're allowed to call on that object are the ones declared in class Object! So if you were to say:

```
Object o = new Ferrari();
o.goFast(); //Not legal!
```

You wouldn't even make it past the compiler.

Because Java is a strongly typed language, the compiler checks to make sure that you're calling a method on an object that's actually capable of *responding*. In other words, you can call a method on an object reference *only* if the class of the reference type actually *has* the method. We'll cover this in much greater detail a little later, so don't worry if the picture isn't crystal clear.

Using polymorphic references of type Object has a price...

Before you run off and start using type Object for all your ultra-flexible argument and return types, you need to consider a little issue of using type Object as a reference. And keep in mind that we're not talking about making instances of type Object; we're talking about making instances of some other type, but using a reference of type Object.

When you put an object into an ArrayList<**Dog**>, it goes in as a Dog and comes out as a Dog:

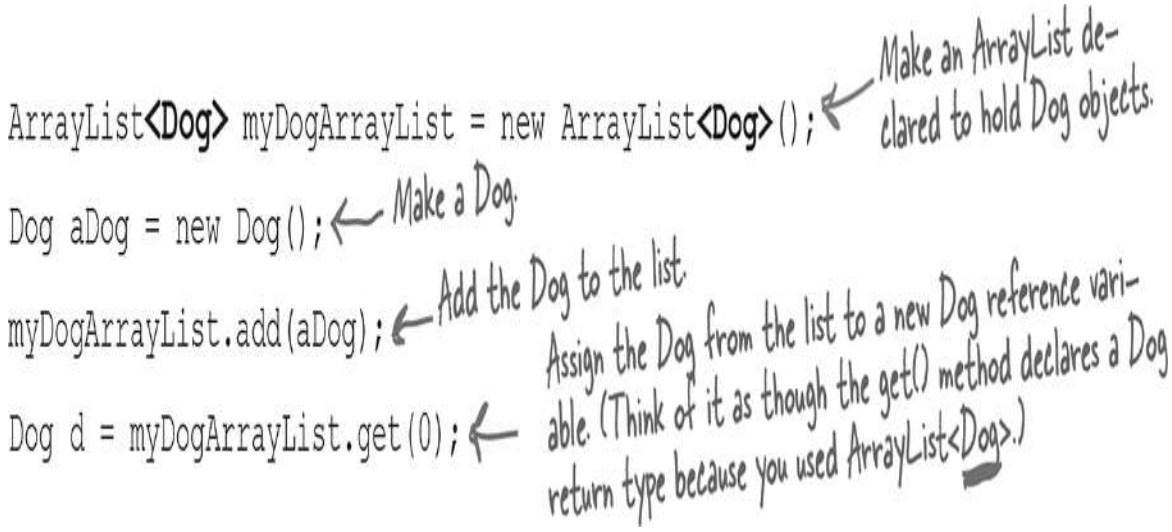

But what happens when you declare it as ArrayList<**Object**>? If you want to make an ArrayList that will literally take any kind of Object, you declare it like this:

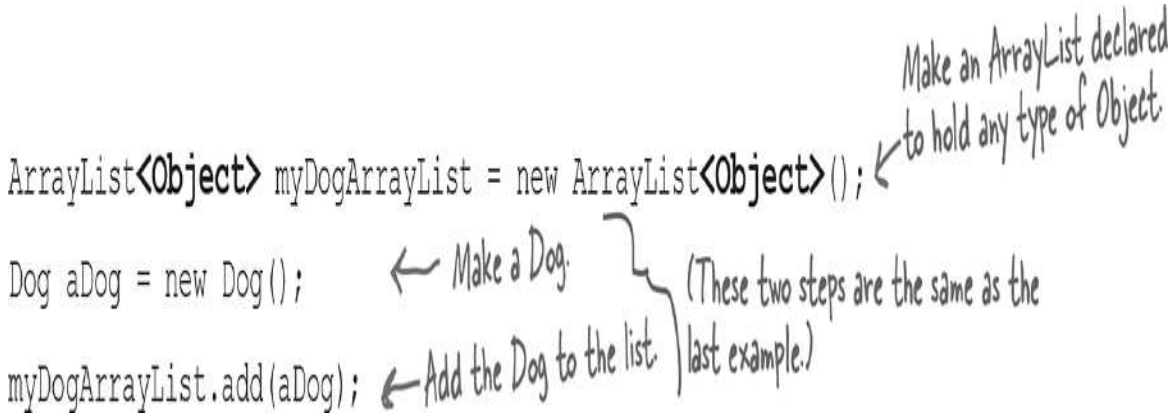

But what happens when you try to get the Dog object and assign it to a Dog reference?

```
Dog d = myDogArrayList.get(0);
```

NO!! Won't compile!! When you use ArrayList<Object>, the get() method returns type Object. The Compiler knows only that the object inherits from Object (somewhere in its inheritance tree) but it doesn't know it's a Dog!!

Everything comes out of an ArrayList<Object> as a reference of type Object, regardless of what the actual object is or what the reference type was when you added the object to the list.

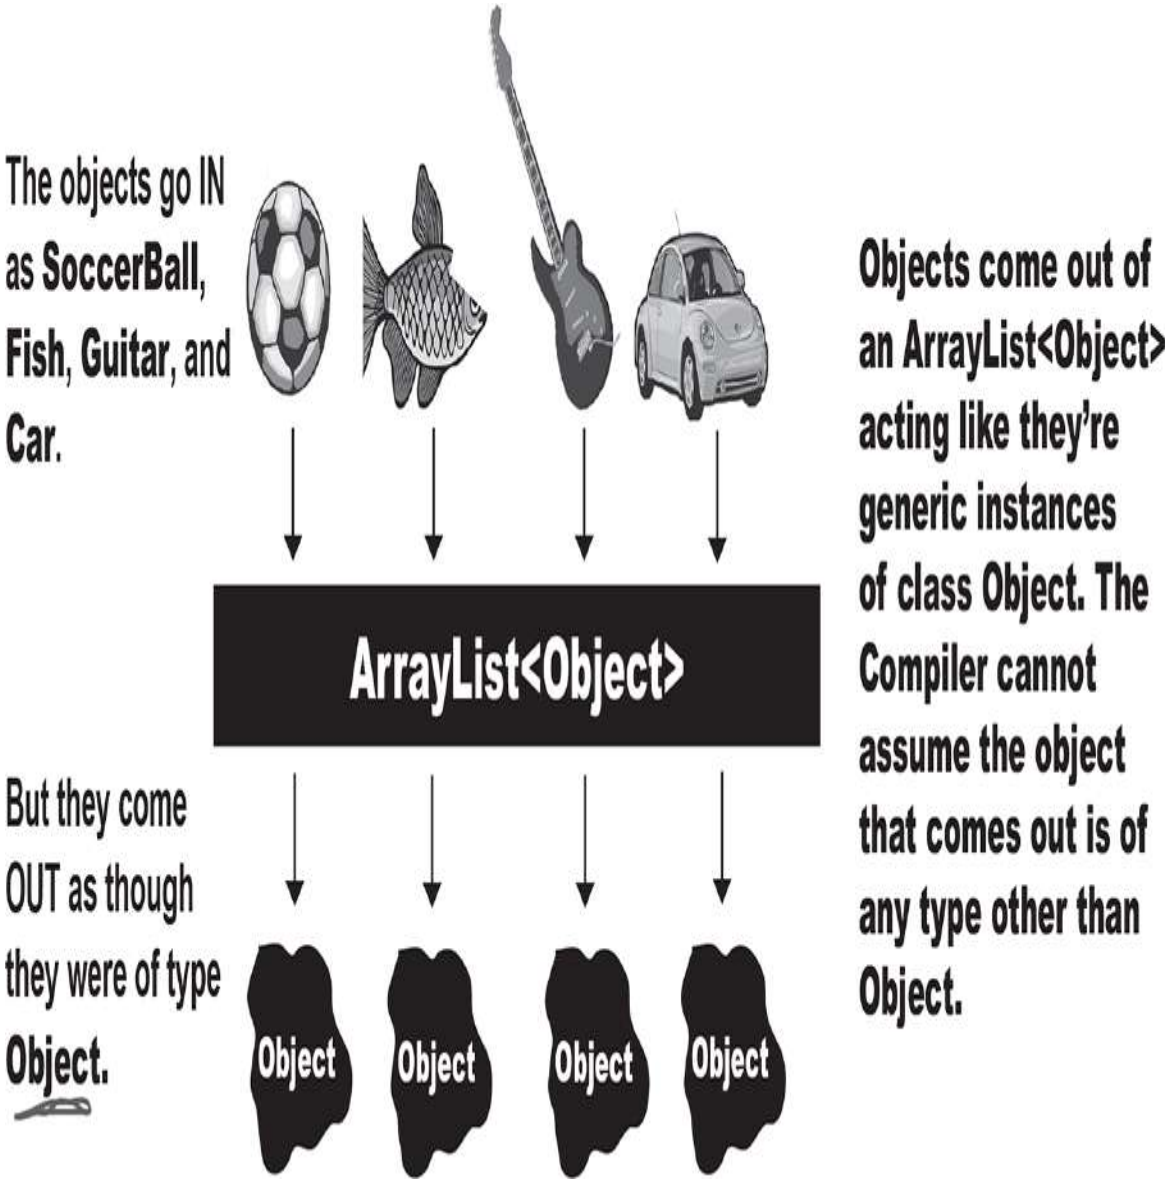

When a Dog won't act like a Dog

The problem with having everything treated polymorphically as an Object is that the objects *appear* to lose (but not permanently) their true essence. *The Dog appears to lose its dogness*. Let's see what happens when we pass a Dog to a method that returns a reference to the same Dog object, but declares the return type as type Object rather than Dog.

BAD ☹

```
public void go() {
  Dog aDog = new Dog();
  Dog sameDog = getObject(aDog);
}

public Object getObject(Object o) {
  return o;
}
```

This line won't work! Even though the method returned a reference to the very same Dog the argument referred to, the return type Object means the compiler won't let you assign the returned reference to anything but Object.

We're returning a reference to the same Dog, but as a return type of Object. This part is perfectly legal. Note: this is similar to how the get() method works when you have an ArrayList<Object> rather than an ArrayList<Dog>.

```
File Edit Window Help Remember

DogPolyTest.java:10: incompatible types
found   : java.lang.Object
required: Dog
      Dog sameDog = getObject(aDog);
1 error                       ^
```

The compiler doesn't know that the thing returned from the method is actually a Dog, so it won't let you assign it to a Dog reference. (You'll see why on the next page.)

GOOD

```
public void go() {
  Dog aDog = new Dog();
  Object sameDog = getObject(aDog);
}

public Object getObject(Object o) {
  return o;
}
```

This works (although it may not be very useful, as you'll see in a moment) because you can assign ANYTHING to a reference of type Object, since every class passes the IS-A test for Object. Every object in Java is an instance of type Object, because every class in Java has Object at the top of its inheritance tree.

Objects don't bark

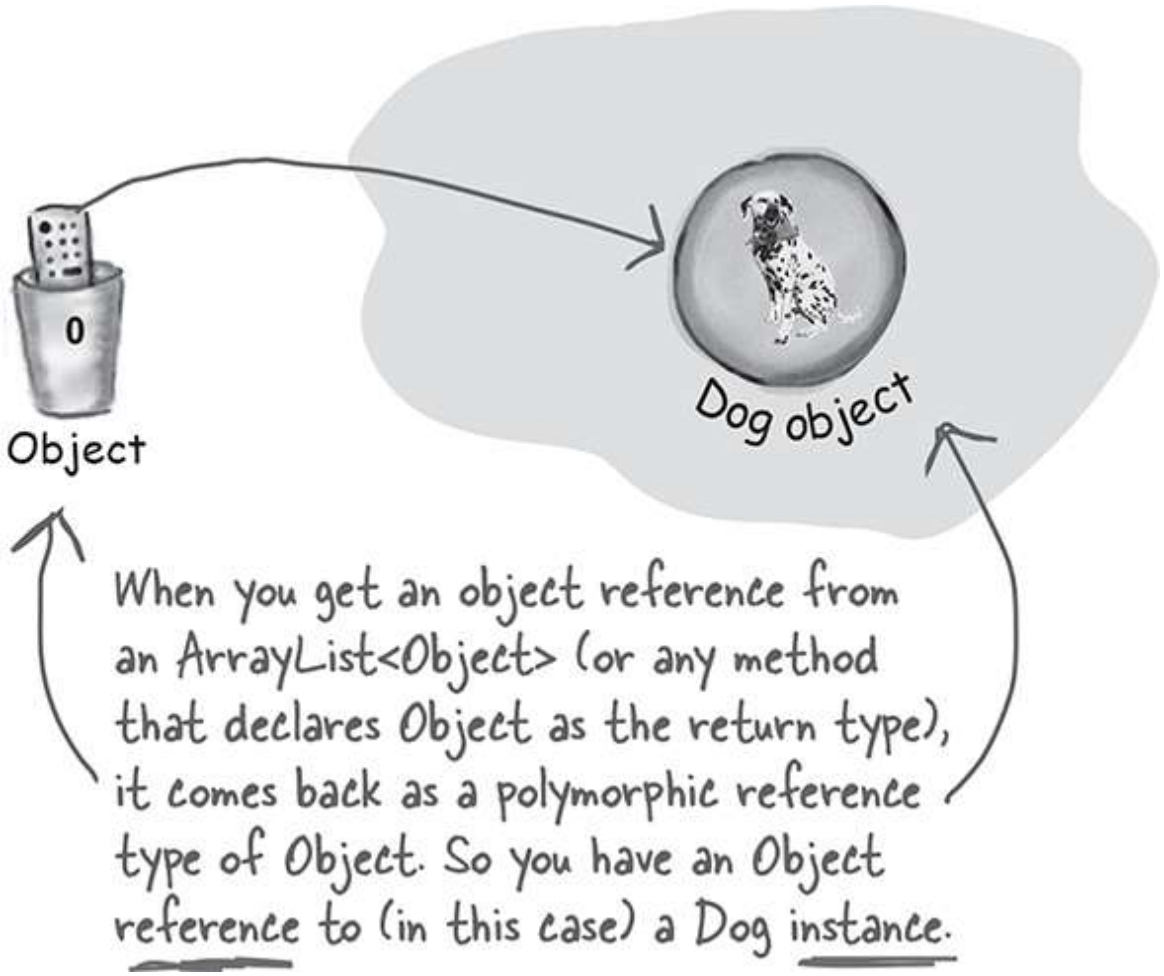

So now we know that when an object is referenced by a variable declared as type Object, it can't be assigned to a variable declared with the actual object's type. And we know that this can happen when a return type or argument is declared as type Object, as would be the case, for example, when the object is put into an ArrayList of type Object using ArrayList<Object>. But what are the implications of this? Is it a problem to have to use an Object reference variable to refer to a Dog object? Let's try to call Dog methods on our Dog-That-Compiler-Thinks-Is-An-Object:

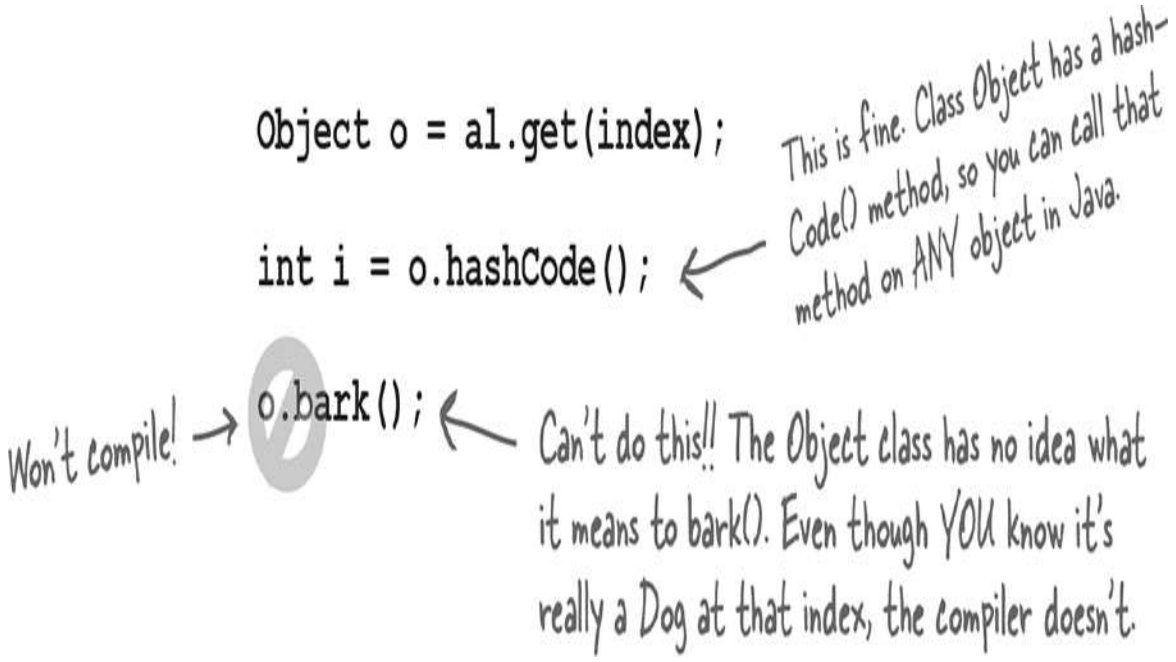

NOTE

The compiler decides whether you can call a method based on the *reference* type, not the actual object type.

Even if you *know* the object is capable ("...but it really *is* a Dog, honest..."), the compiler sees it only as a generic Object. For all the compiler knows, you put a Button object out there. Or a Microwave object. Or some other thing that really doesn't know how to bark.

The compiler checks the class of the *reference* type—not the *object* type—to see if you can call a method using that reference.

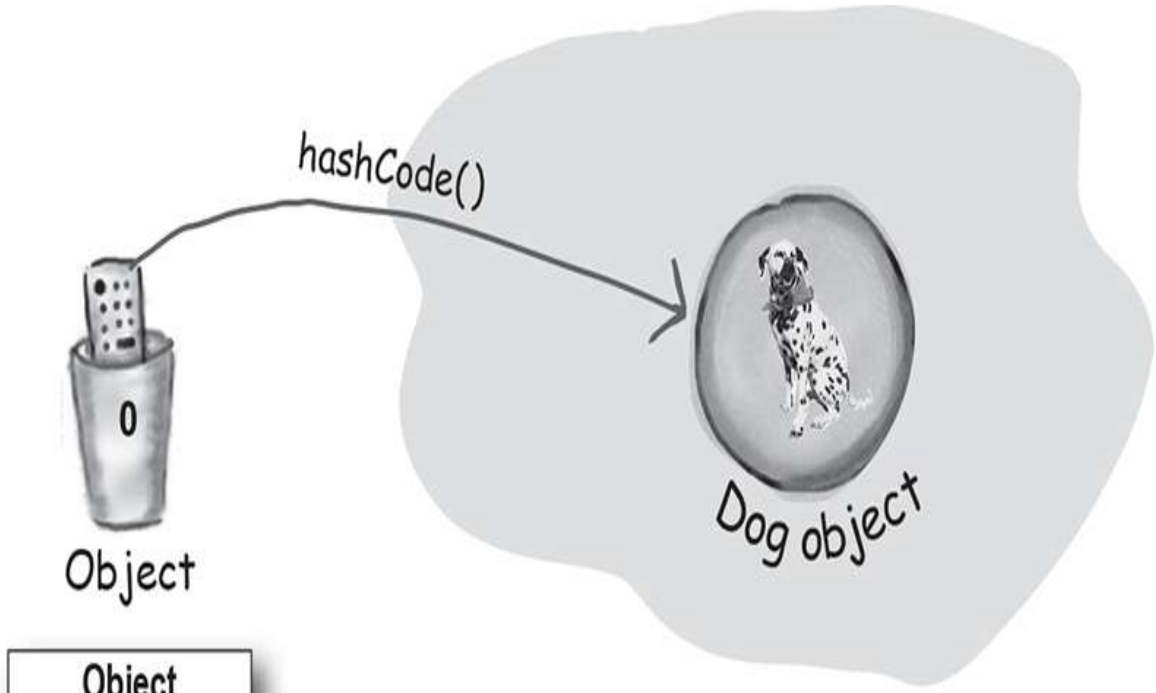

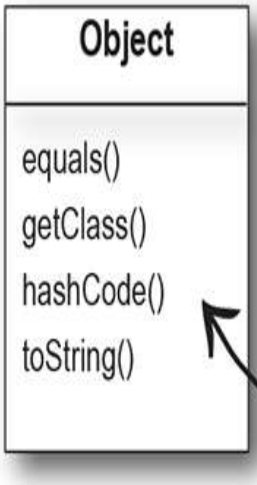

The method you're calling on a reference MUST be in the class of that reference type. Doesn't matter what the actual object is.

```
o.hashCode();
```

The "o" reference was declared as type Object, so you can call methods only if those methods are in class Object.

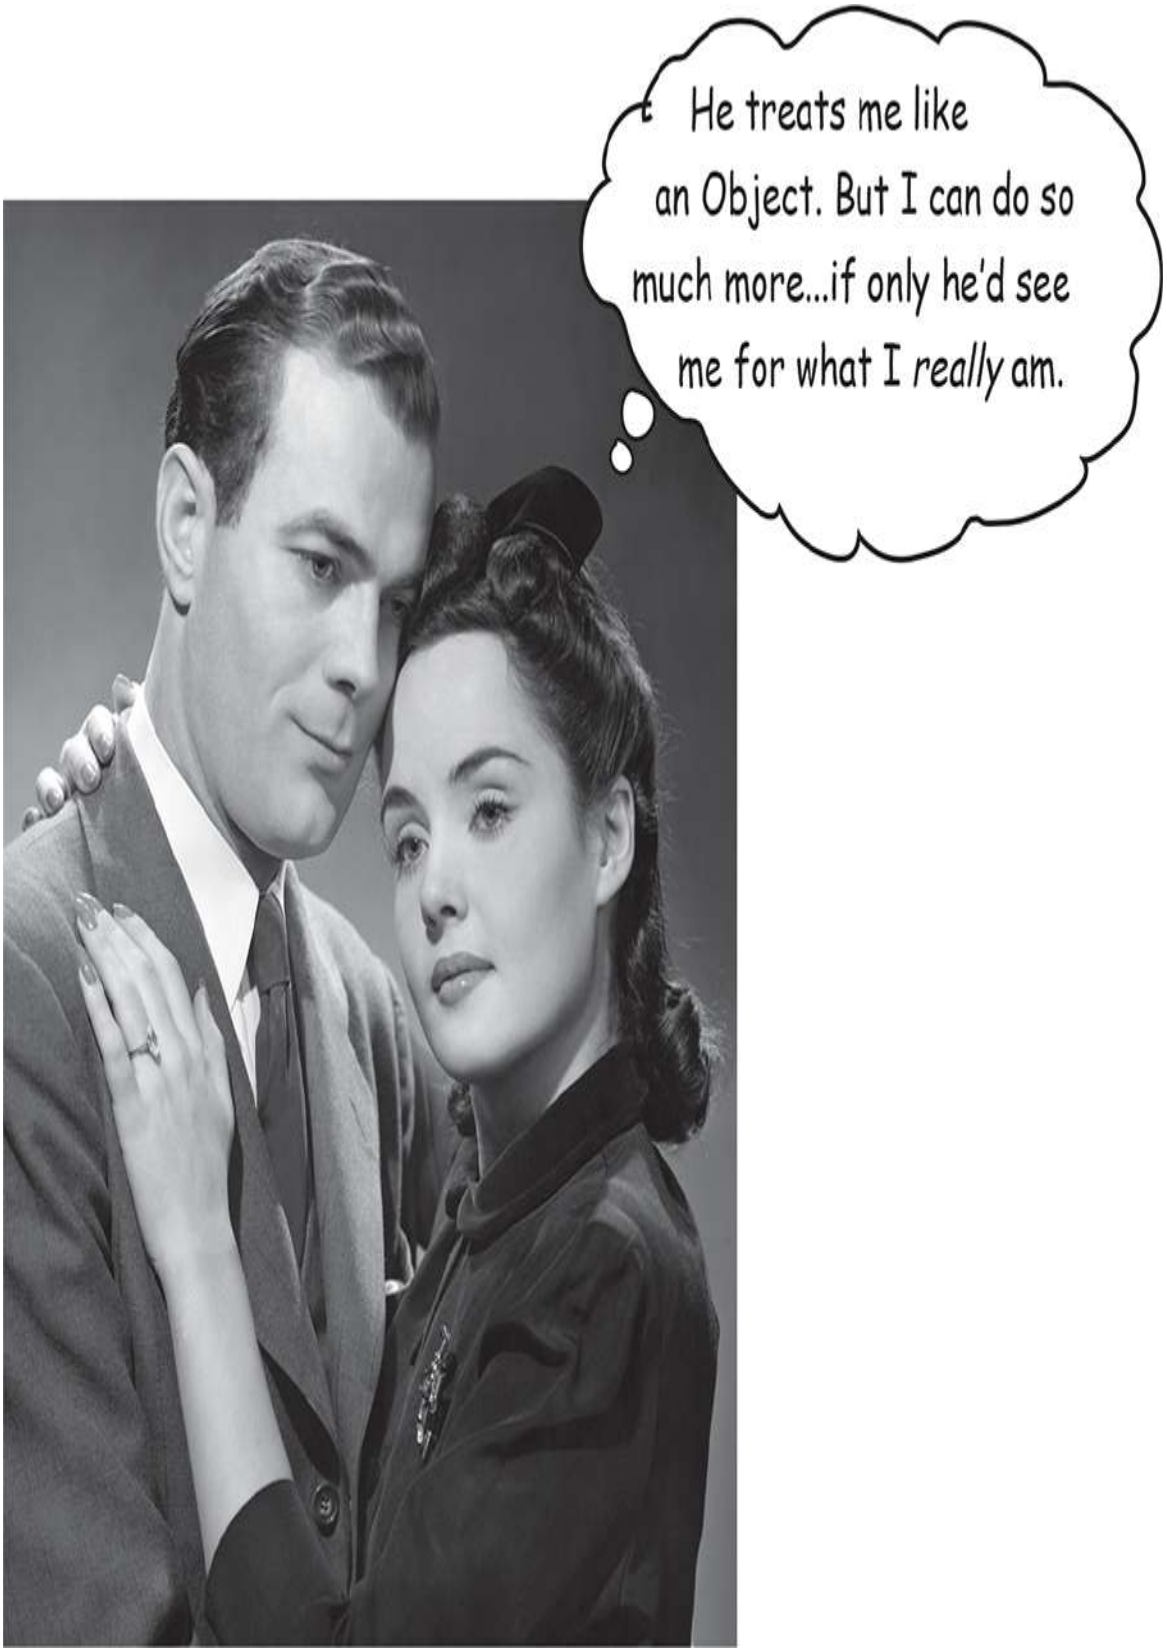
He treats me like an Object. But I can do so much more...if only he'd see me for what I *really* am.

Get in touch with your inner Object

An object contains *everything* it inherits from each of its superclasses. That means *every* object—regardless of its actual class type—is *also* an instance of class Object. That means any object in Java can be treated not just as a Dog, Button, or Snowboard, but also as an Object. When you say **`new Snowboard()`**, you get a single object on the heap—a Snowboard object—but that Snowboard wraps itself around an inner core representing the Object (capital "O") portion of itself.

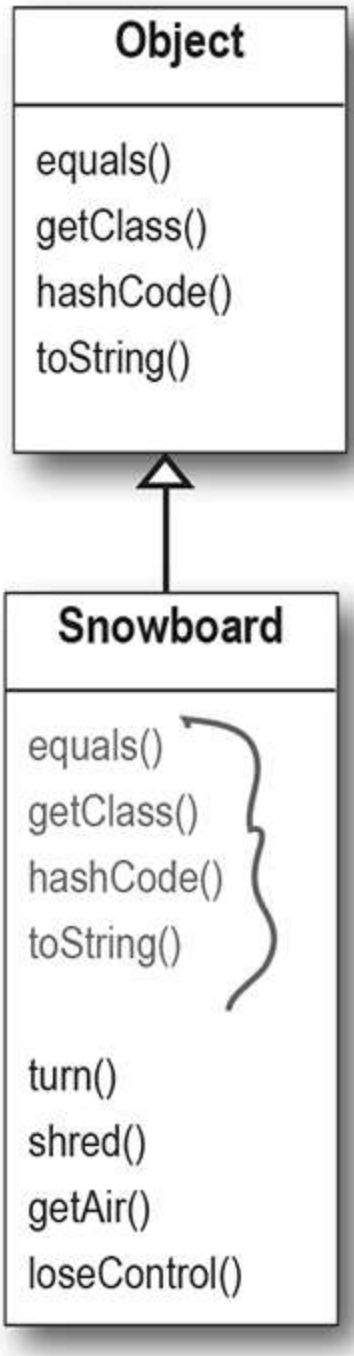

Snowboard inherits methods from superclass Object and adds four more.

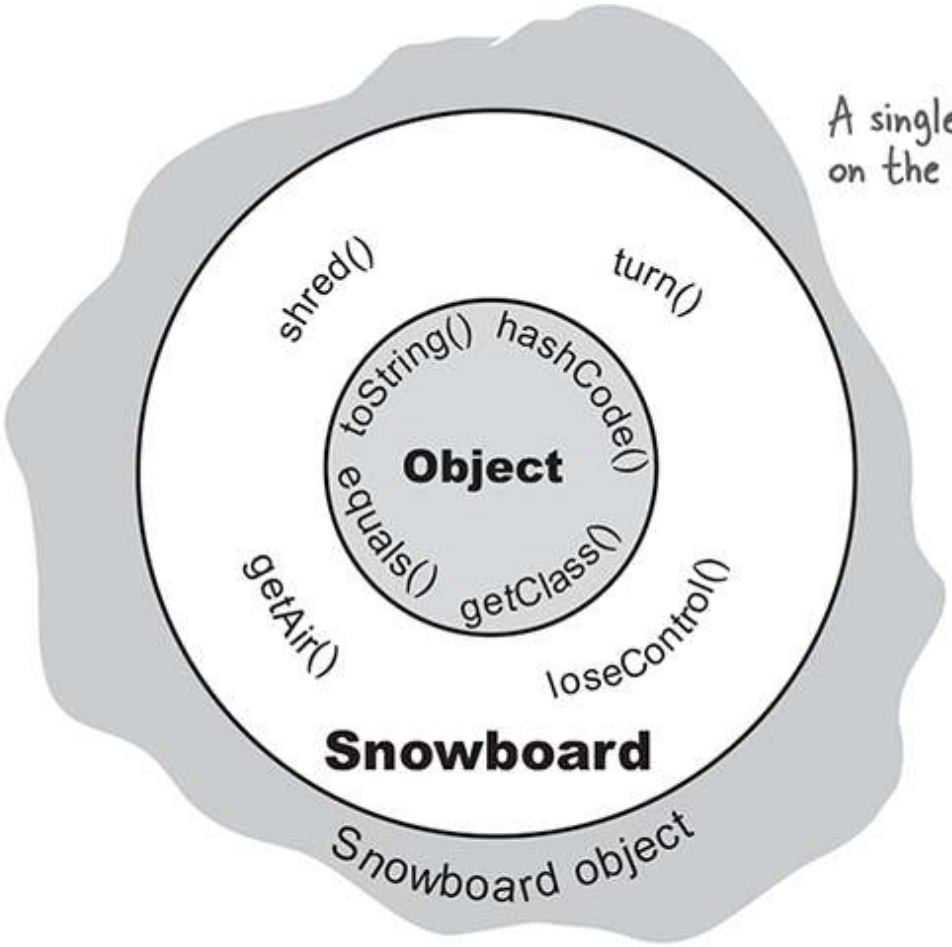

There is only ONE object on the heap here. A Snowboard object. But it contains both the Snowboard class parts of itself and the Object class parts of itself.

Polymorphism means "many forms."

You can treat a Snowboard as a Snowboard or as an Object.

If a reference is like a remote control, the remote control takes on more and more buttons as you move down the inheritance tree. A remote control (reference) of type Object has only a few buttons— the buttons for the exposed methods of class Object. But a remote control of type Snowboard includes all the buttons from class Object, plus any new buttons (for new

methods) of class Snowboard. The more specific the class, the more buttons it may have.

Of course that's not always true; a subclass might not add any new methods, but simply override the methods of its superclass. The key point is that even if the object is of type Snowboard, an Object *reference* to the Snowboard *object* can't see the Snowboardspecific methods.

When you put an object in an ArrayList<Object>, you can treat it only as an Object, regardless of the type it was when you put it in.

When you get a reference from an ArrayList<Object>, the reference is always of type *Object.*

That means you get an *Object* remote control.

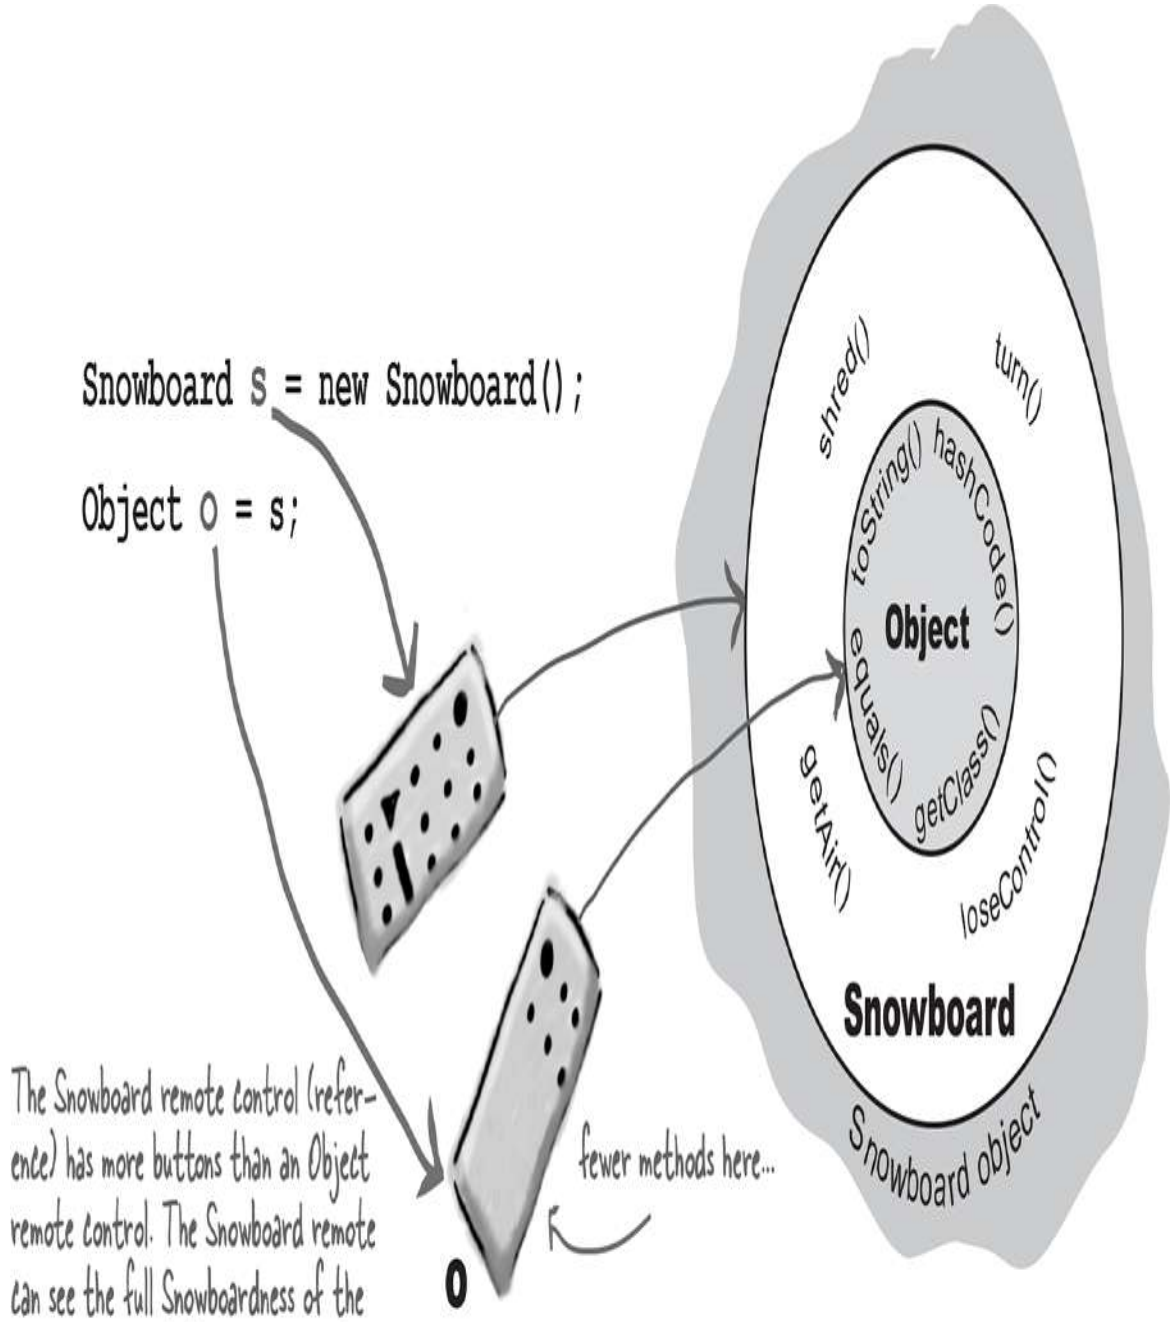

The Snowboard remote control (reference) has more buttons than an Object remote control. The Snowboard remote can see the full Snowboardness of the Snowboard object. It can access all the methods in Snowboard, including both the inherited Object methods and the methods from class Snowboard.

The Object reference can see only the Object parts of the Snowboard object. It can access only the methods of class Object. It has fewer buttons than the Snowboard remote control.

Wait a minute...what good is a Dog if it comes out of an ArrayList<Object> and it can't do any Dog things? There's gotta be a way to get the Dog back to a state of Dogness...

Casting an object reference back to its *real* type.

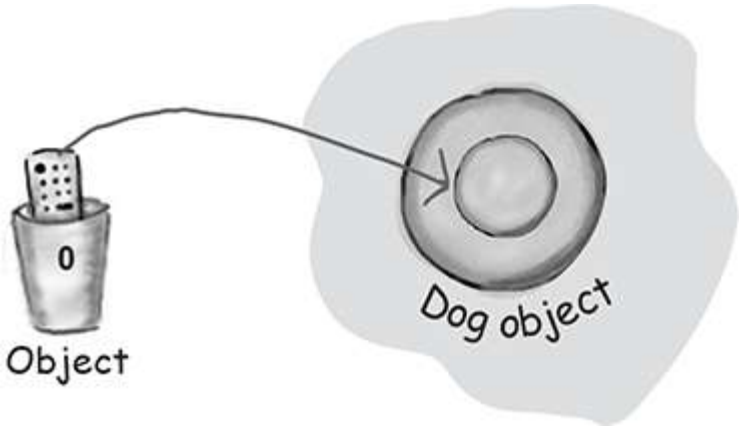

Cast the so-called 'Object' (but we know he's actually a Dog) to type Dog so that you can treat him like the Dog he really is.

It's really still a Dog *object*, but if you want to call Dogspecific methods, you need a *reference* declared as type Dog. If you're *sure** the object is really a Dog, you can make a new Dog reference to it by copying the Object reference, and forcing that copy to go into a Dog reference variable, using a cast (Dog). You can use the new *Dog* reference to call *Dog* methods.

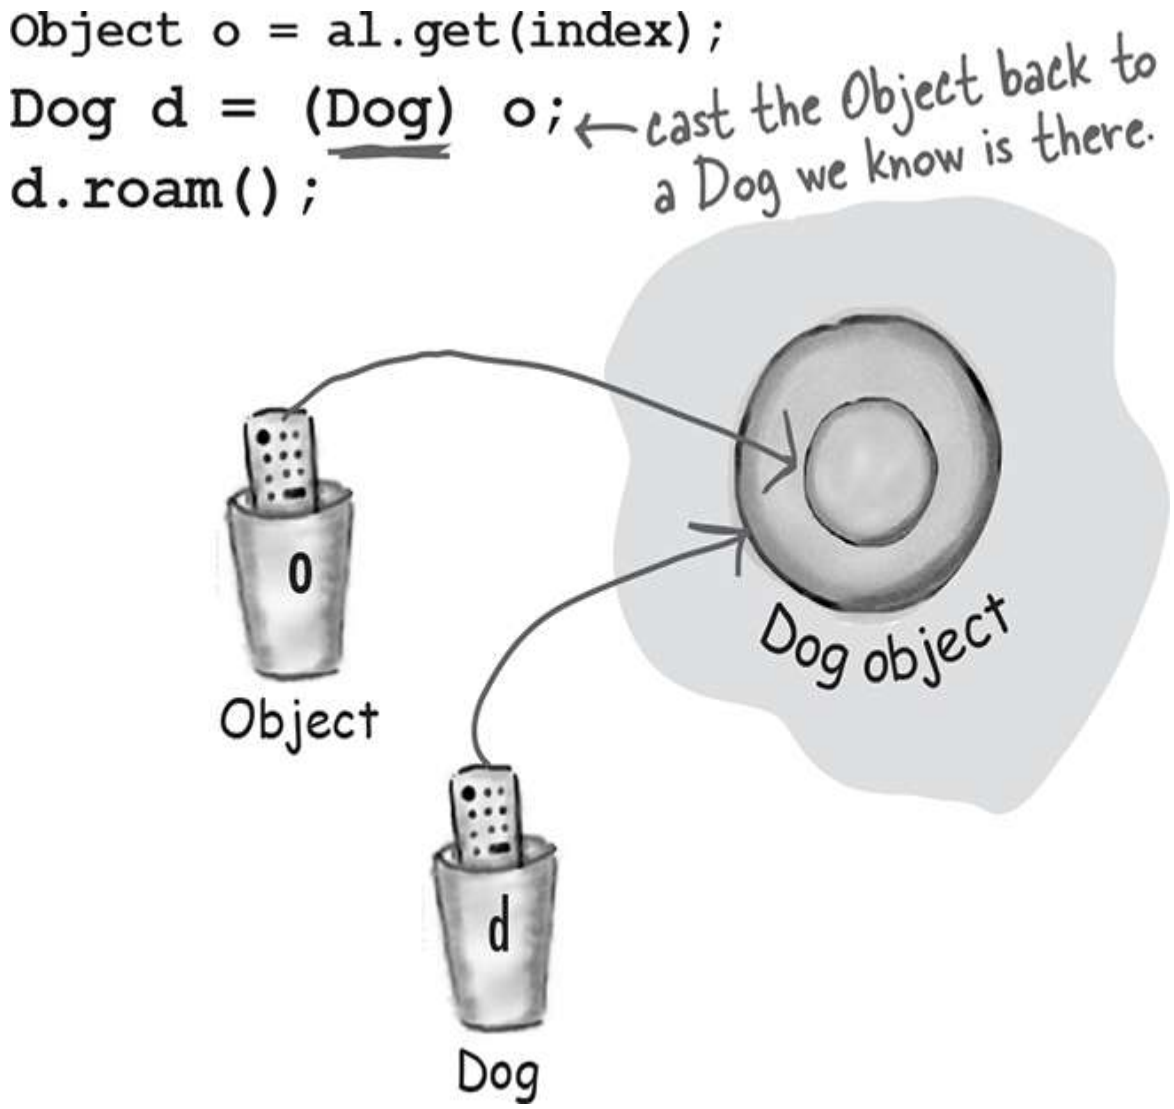

*If you're *not* sure it's a Dog, you can use the `instanceof` operator to check. Because if you're wrong when you do the cast, you'll get a ClassCastException at runtime and come to a grinding halt.

```
if (o instanceof Dog) {
   Dog d = (Dog) o;
}
```

So now you've seen how much Java cares about the methods in the class of the reference variable.

You can call a method on an object only if the class of the reference variable has that method.

Think of the public methods in your class as your contract, your promise to the outside world about the things you can do.

When you write a class, you almost always *expose* some of the methods to code outside the class. To *expose* a method means you make a method *accessible*, usually by marking it public.

Imagine this scenario: you're writing code for a small business accounting program. A custom application for Simon's Surf Shop. The good re-user that you are, you found an Account class that appears to meet your needs perfectly, according to its documentation, anyway. Each account instance represents an individual customer's account with the store. So there you are minding your own business invoking the *credit()* and *debit()* methods on an Account object when you realize you need to get a balance on an account. No problem—there's a *getBalance()* method that should do nicely.

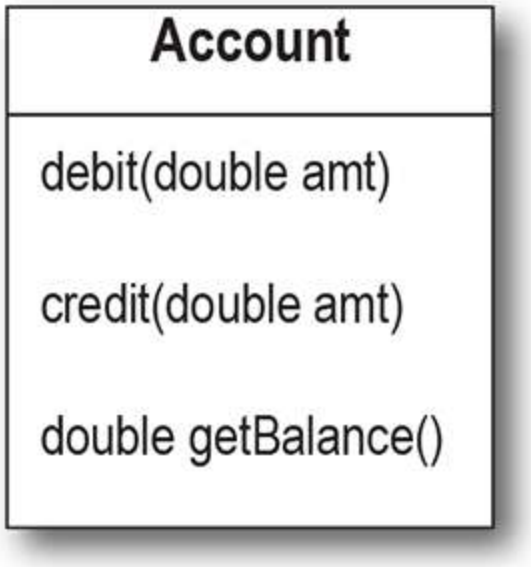

Except...when you invoke the *getBalance()* method, the whole thing blows up at runtime. Forget the documentation, the class does not have that method. Yikes!

But that won't happen to you, because every time you use the dot operator on a reference (a.doStuff()), the compiler looks at the *reference* type (the type "a" was declared to be) and checks that class to guarantee the class has the method, and that the method does indeed take the argument you're passing and return the kind of value you're expecting to get back.

Just remember that the compiler checks the class of the *reference* variable, not the class of the actual *object* at the other end of the reference.

What if you need to change the contract?

OK, pretend you're a Dog. Your Dog class isn't the *only* contract that defines who you are. Remember, you inherit accessible (which usually means *public*) methods from all of your superclasses.

True, your Dog class defines a contract.

But not *all* of your contract.

Everything in class *Canine* is part of your contract.

Everything in class *Animal* is part of your contract.

Everything in class *Object* is part of your contract.

According to the IS-A test, you *are* each of those things—Canine, Animal, and Object.

But what if the person who designed your class had in mind the Animal simulation program, and now he wants to use you (class Dog) for a Science Fair Tutorial on Animal objects.

That's OK, you're probably reusable for that.

But what if later he wants to use you for a PetShop program? *You don't have any **Pet** behaviors.* A Pet needs methods like *beFriendly()* and *play()*.

OK, now pretend you're the Dog class programmer. No problem, right? Just add some more methods to the Dog class. You won't be breaking anyone else's code by *adding* methods, since you aren't touching the *existing* methods that someone else's code might be calling on Dog objects.

Can you see any drawbacks to that approach (adding Pet methods to the Dog class)?

BRAIN POWER



Think about what **YOU** would do if **YOU** were the Dog class programmer and needed to modify the Dog so that it could do Pet things, too. We know that simply adding new Pet behaviors (methods) to the Dog class will work, and won't break anyone else's code.

But...this is a PetShop program. It has more than just Dogs! And what if someone wants to use your Dog class for a program that has *wild* Dogs? What do you think your options might be, and without worrying about how Java handles things, just try to imagine how you'd *like* to solve the problem of modifying some of your Animal classes to include Pet behaviors.

Stop right now and think about it, **before you look at the next page** where we begin to reveal *everything*.*

*(Thus rendering the whole exercise completely useless, robbing you of your One Big Chance to burn some brain calories.)

Let's explore some design options for reusing some of our existing classes in a PetShop program

On the next few pages, we're going to walk through some possibilities. We're not yet worried about whether Java can actually *do* what we come up with. We'll cross that bridge once we have a good idea of some of the trade-offs.

① Option one

We take the easy path and put pet methods in class Animal.

Pros:

All the Animals will instantly inherit the pet behaviors. We won't have to touch the existing Animal subclasses at all, and any Animal subclasses created in the future will also get to take advantage of inheriting those methods. That way, class Animal can be used as the polymorphic type in any program that wants to treat the Animals as pets.

Cons:

So...when was the last time y ou saw a Hippo at a pet shop? Lion? Wolf? Could be dangerous to give nonpets pet methods.

Also, we almost certainly WILL have to touch the pet classes like Dog and Cat, because (in our house, anyway) Dogs and Cats tend to implement pet behaviors VERY differently.

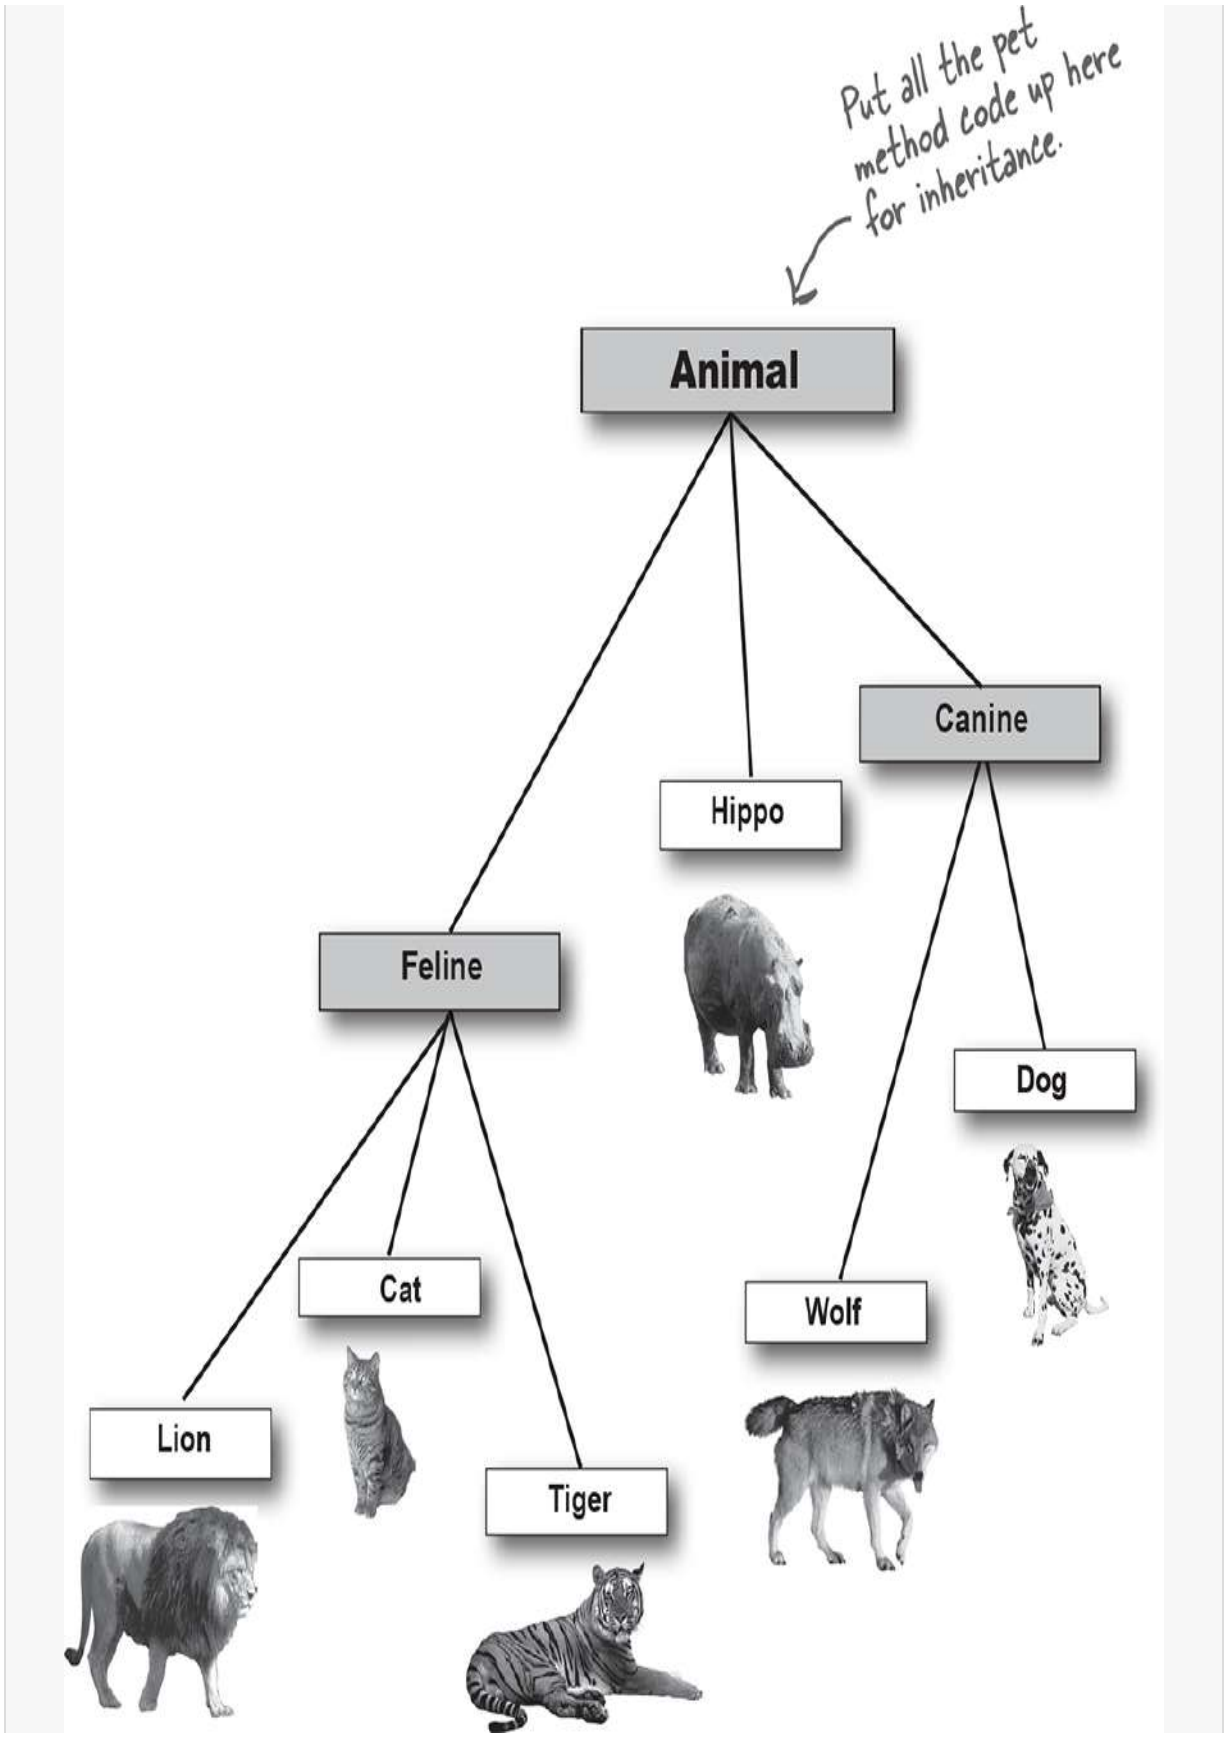
Put all the pet method code up here for inheritance.
Animal
Canine
Hippo
Feline
Dog
Cat
Wolf
Lion
Tiger

② Option two

We start with Option One, putting the pet methods in class Animal, but we make the methods abstract , forcing the Animal subclasses to override them.

Pros:

That would give us all the benefits of option one, but with - out the drawback of having non- pet Animals running around with pet methods (like beFriendly()). All Animal classes would have the method (because it’s in class Animal), but because it’s abstract, the non-pet Animal classes won’t inherit any functionality. All classes MUST override the methods, but they can make the methods “ do-nothings.”

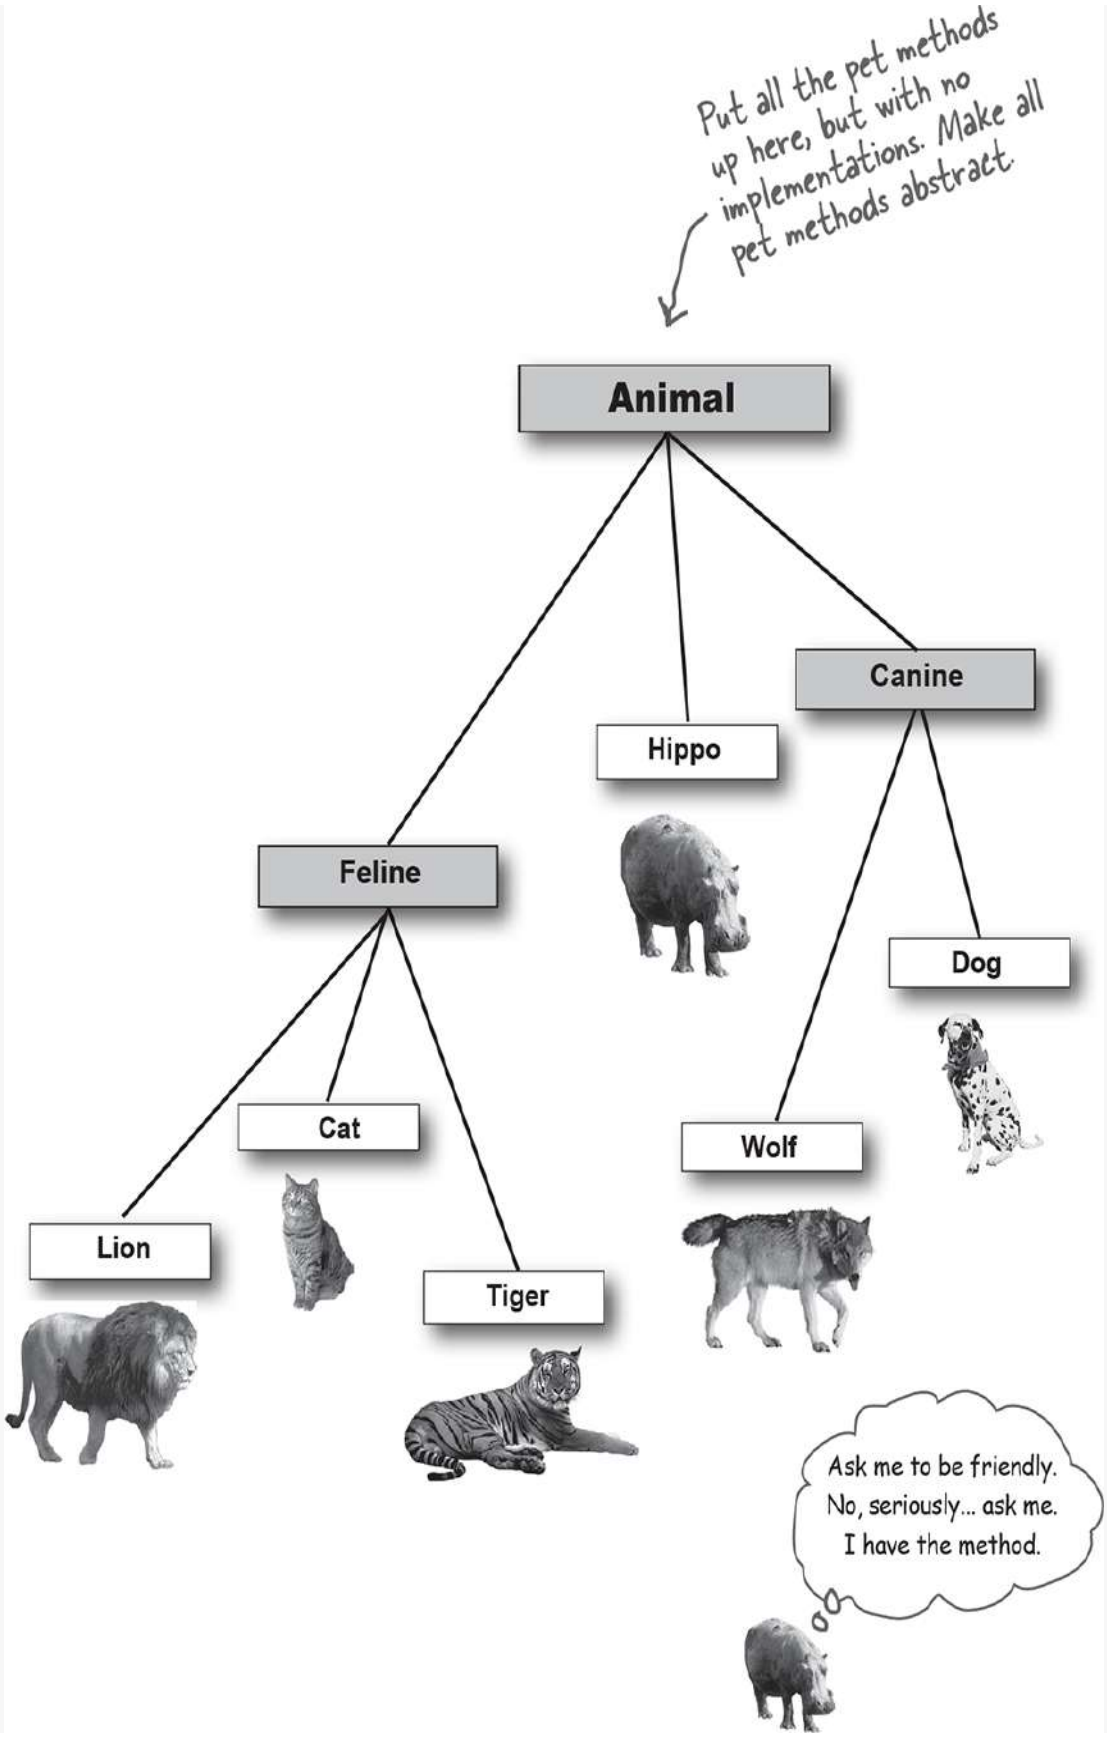
Put all the pet methods up here, but with no implementations. Make all pet methods abstract.
Animal
Feline
Hippo
Canine
Lion
Cat
Tiger
Wolf
Dog
Ask me to be friendly.
No, seriously... ask me.
I have the method.

Cons:

Because the pet methods in the Animal class are all abstract, the concrete Animal subclasses are forced to implement all of them. (Remember, all abstract methods MUST be implemented by the first concrete subclass down the inheritance tree.) What a waste of time! You have to sit there and ty pe in each and every pet method into each and every concrete nonpet class, and all future subclasses as well. And while this does solve the problem of non-pets actually DOING pet things (as they would if they inherited pet functionality from class Animal), the contract is bad. Every non-pet class would be announcing to the world that it, too, has those pet methods, even though the methods wouldn't actually DO anything when called.

This approach doesn't look good at all. It just seems wrong to stuff everything into class Animal that more than one Animal ty pe might need, UNLESS it applies to ALL Animal subclasses.

③ Option three

Put the pet methods ONLY in the classes where they belong.

Pros:

No more worries about Hippos greeting y ou at the door or licking your face. The methods are where they belong, and ONLY where they belong. Dogs can implement the methods and Cats can implement the methods, but nobody else has to know about them.

Put the pet methods ONLY in the Animal classes that can be pets, instead of in Animal.

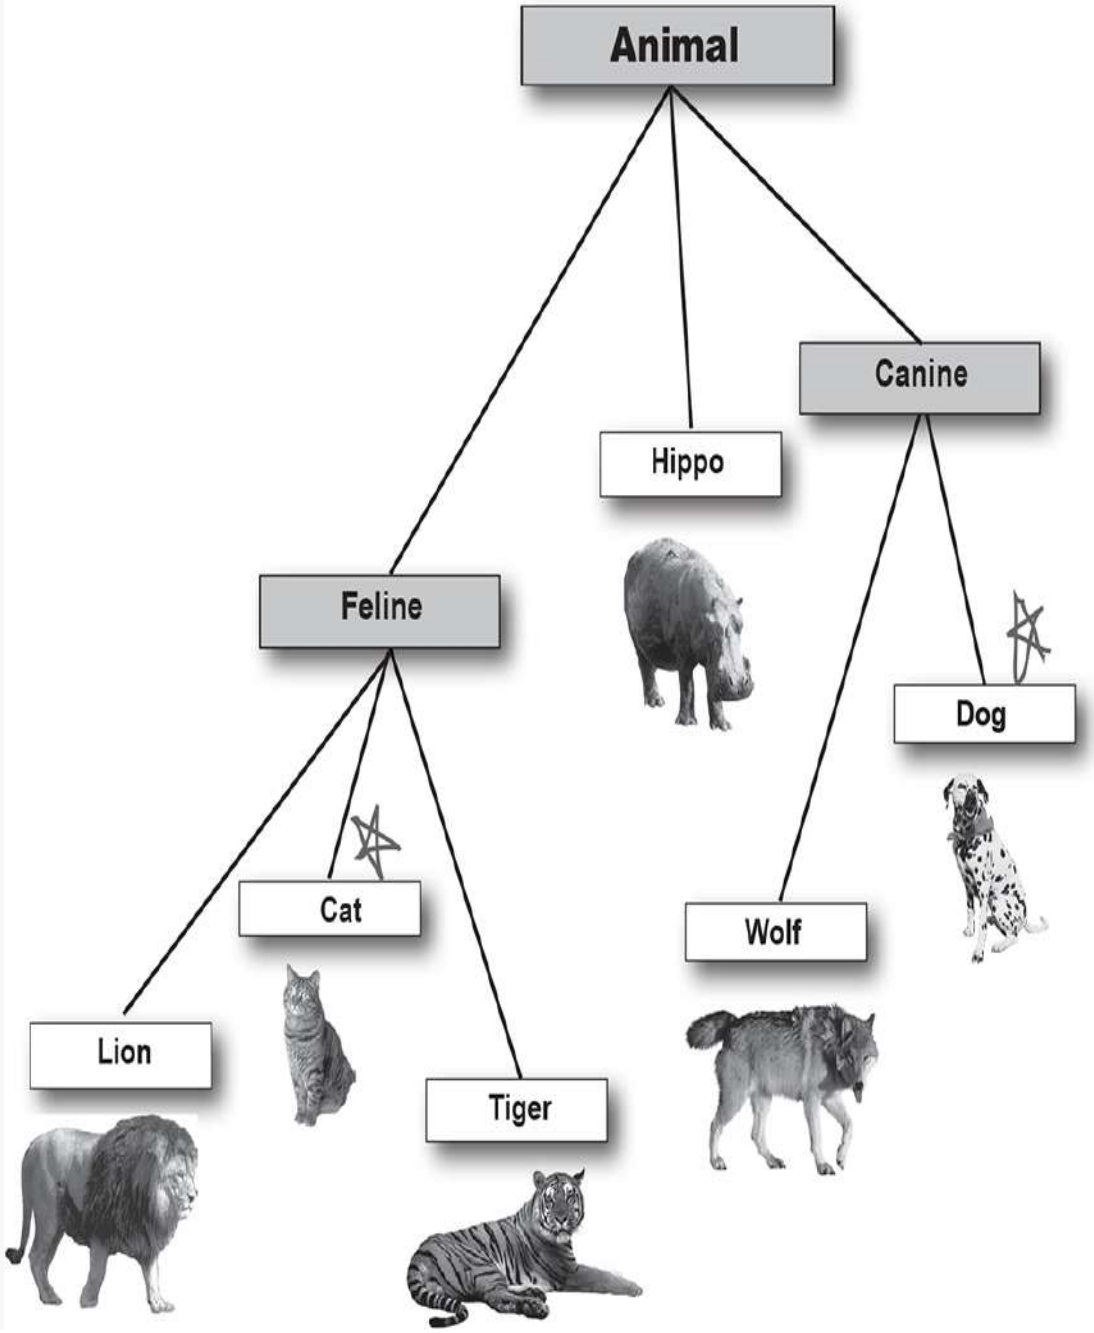

Cons:

Two Big Problems with this approach. First off, you'd have to agree to a protocol, and all programmers of pet Animal classes now and in the future would have to KNOW about the protocol. By protocol, we mean the exact methods that we've decided all pets should have. The pet contract without any thing to back it up. But what if one of the programmers gets it just a tiny bit wrong? Like, a method takes a String when it was supposed to take an int? Or they named it doFriendly() instead of beFriendly()? Since it isn't in a contract, the compiler has no way to check you to see if you've implemented the methods correctly. Someone could easily come along to use the pet Animal classes and find that not all of them work quite right.

And second, you don't get to use polymorphism for the pet methods. Every class that needs to use pet behaviors would have to know about each and every class! In other words, you can't use Animal as the polymorphic type now, because the compiler won't let you call a Pet method on an Animal reference (even if it's really a Dog object) because class Animal doesn't have the method.

So what we REALLY need is:

- A way to have pet behavior in **just** the pet classes
- A way to guarantee that all pet classes have all of the same methods defined (same name, same arguments, same return types, no missing methods, etc.), without having to cross your fingers and hope all the programmers get it right
- A way to take advantage of polymorphism so that all pets can have their pet methods called, without having to use arguments, return types, and arrays for each and every pet class

It looks like we need <u>TWO</u> superclasses at the top.

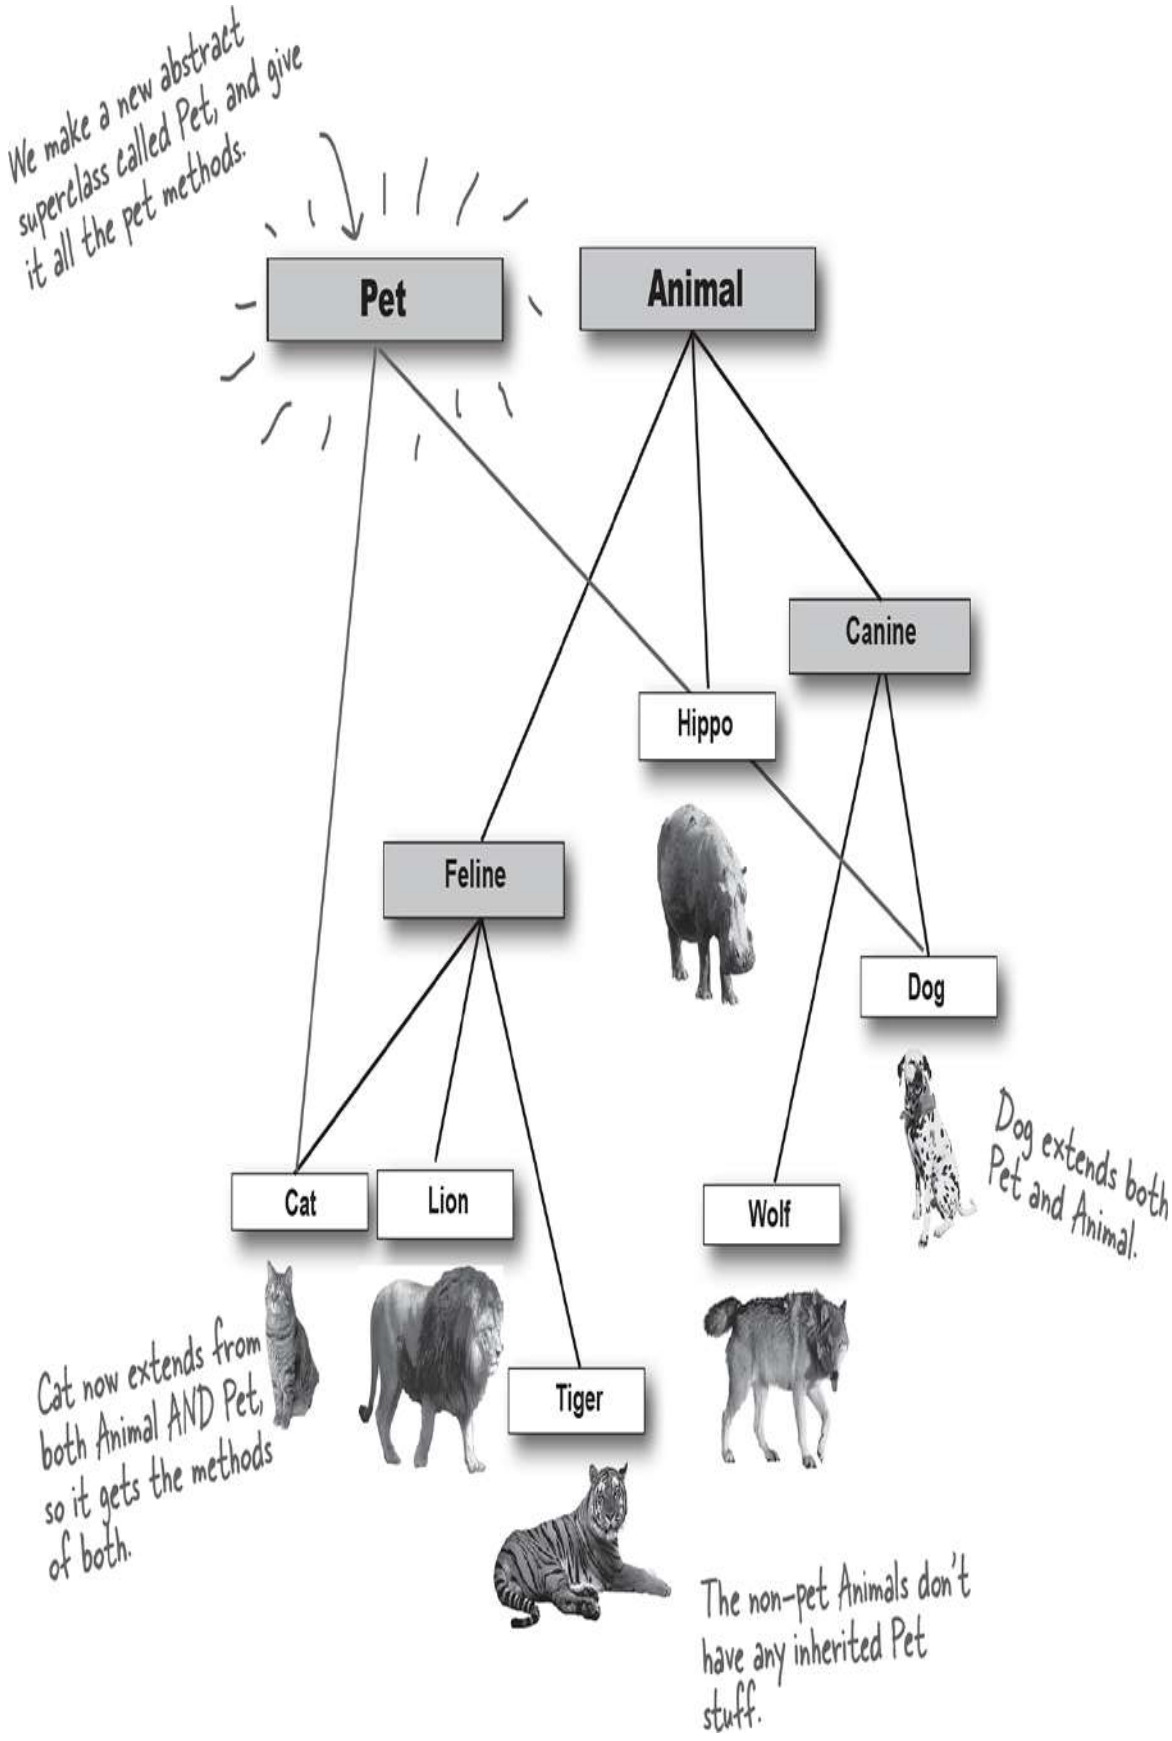
We make a new abstract superclass called Pet, and give it all the pet methods.
Pet
Animal
Canine
Hippo
Feline
Dog
Dog extends both Pet and Animal.
Cat
Lion
Wolf
Cat now extends from both Animal AND Pet, so it gets the methods of both.
Tiger
The non-pet Animals don't have any inherited Pet stuff.

There's just one problem with the "two superclasses" approach...

It's called "multiple inheritance," and it can be a Really Bad Thing.

That is, if it were possible to do in Java.

But it isn't, because multiple inheritance has a problem known as The Deadly Diamond of Death.

Deadly Diamond of Death

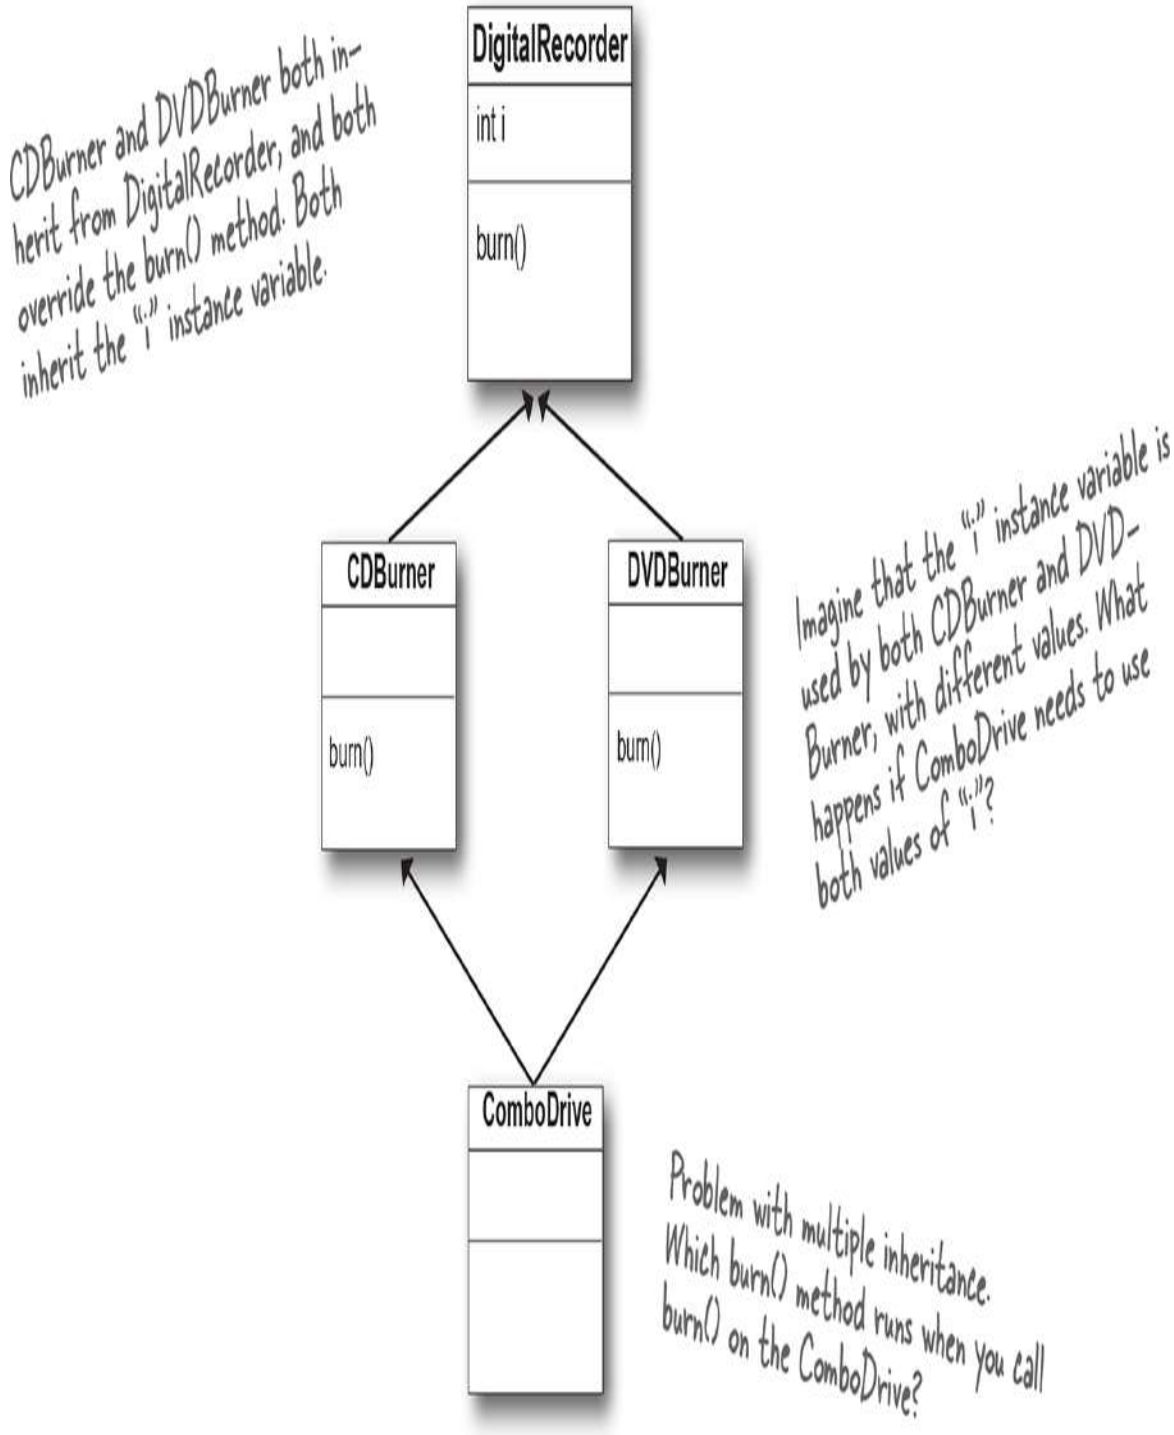

A language that allows the Deadly Diamond of Death can lead to some ugly complexities, because you have to have special rules to deal with the potential ambiguities. And extra rules means extra work for you both in *learning* those rules and watching out for those "special cases." Java is

supposed to be *simple* , with consistent rules that don't blow up under some scenarios. So Java (unlike C++) protects you from having to think about the Deadly Diamond of Death. But that brings us back to the original problem! *How do we handle the Animal/Pet thing?*

Interface to the rescue!

Java gives you a solution. An *interface* . Not a *GUI* interface, not the generic use of the *word* interface as in, "That's the public interface for the Button class API," but the Java *keyword* `interface`.

A Java interface solves your multiple inheritance problem by giving you much of the polymorphic *benefits* of multiple inheritance without the pain and suffering from the Deadly Diamond of Death (DDD).

The way in which interfaces side-step the DDD is surprisingly simple: ***make all the methods abstract!*** That way, the subclass ***must*** implement the methods (remember, abstract methods *must* be implemented by the first concrete subclass), so at runtime the JVM isn't confused about *which* of the two inherited versions it's supposed to call.

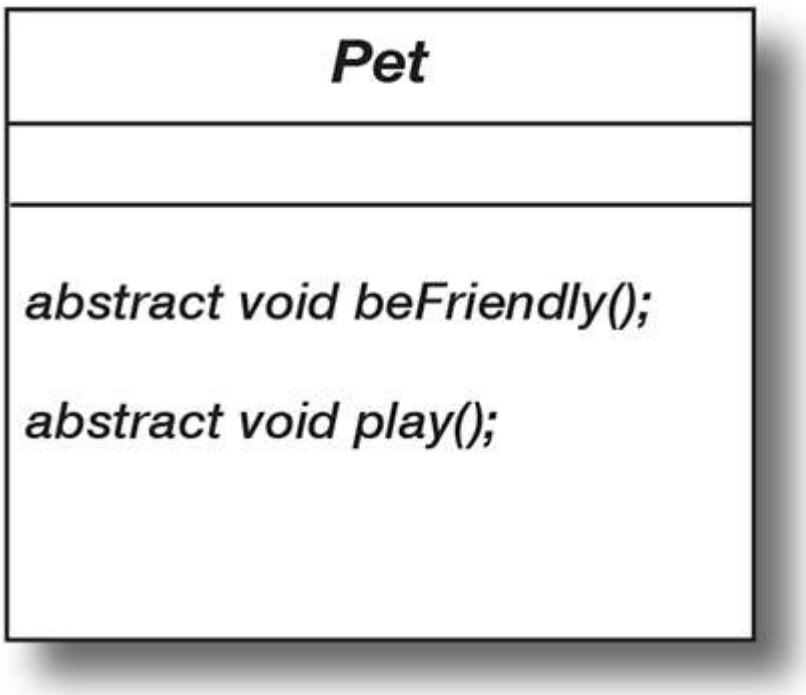

A Java interface is like a 100% pure abstract class.

> **NOTE**
>
> All methods in an interface are abstract, so any class that IS-A Pet MUST implement (i.e., override) the methods of Pet.

To <u>DEFINE</u> an interface:

```
public interface Pet {...}
```

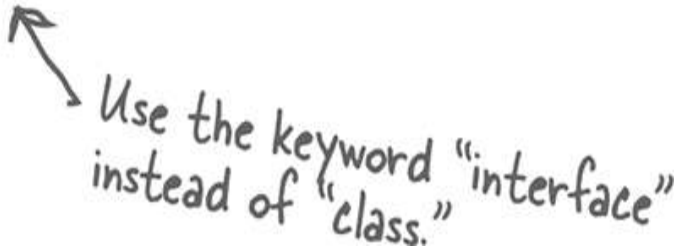

To <u>IMPLEMENT</u> an interface:

```
public class Dog extends Canine implements Pet {...}
```

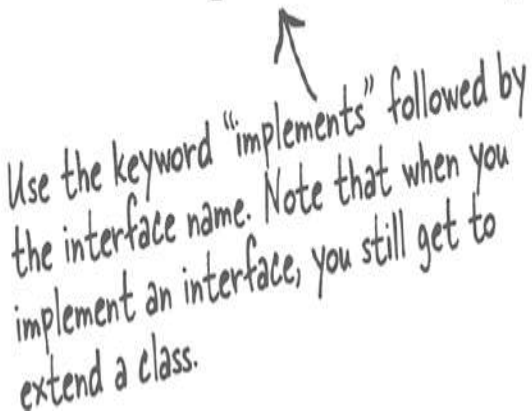

Making and implementing the Pet interface

You say "interface" instead of "class" here.

Interface methods are implicitly public and abstract, so typing in "public" and "abstract" is optional (in fact, it's not considered "good style" to type the words in, but we did here just to reinforce it).

All interface methods are abstract, so they MUST end in semicolons. Remember, they have no body!

```
public interface Pet {

  public abstract void beFriendly();

  public abstract void play();

}
```

Dog IS-A Animal
and Dog IS-A Pet

You say "implements" followed by the name of the interface.

```
public class Dog extends Canine implements Pet {

   public void beFriendly() {...}

   public void play() {..}

   public void roam() {...}

   public void eat() {...}

}
```

You SAID you are a Pet, so you MUST implement the Pet methods. It's your contract. Notice the curly braces instead of semicolons.

These are just normal overriding methods.

THERE ARE NO DUMB QUESTIONS

Q: Wait a minute, interfaces don't really give you multiple inheritance, because you can't put any implementation code in them. If all the methods are abstract, what does an interface really buy you?

A: Well, actually...there are cases where interfaces can have implementation code (static and default methods, for example), but we're not going to go into them here.

The main purpose of interfaces is polymorphism, polymorphism, polymorphism. Interfaces are the ultimate in flexibility, because if you use interfaces instead of concrete classes (or even abstract classes) as arguments and return types, you can pass anything that implements that interface. And with an interface, a class doesn't have to come from just one inheritance tree. A class can extend one class, and implement an interface. But another class might implement the same interface, yet come from a completely different inheritance tree! So you get to treat an object *by the role it plays*, rather than by the class type from which it was instantiated.

In fact, if you write your code using interfaces, you don't even have to give anyone a superclass to extend. You can just give them the interface and say, "Here, I don't care what kind of class inheritance structure you come from, just implement this interface and you'll be good to go."

Classes from *different* inheritance trees can implement the same interface.

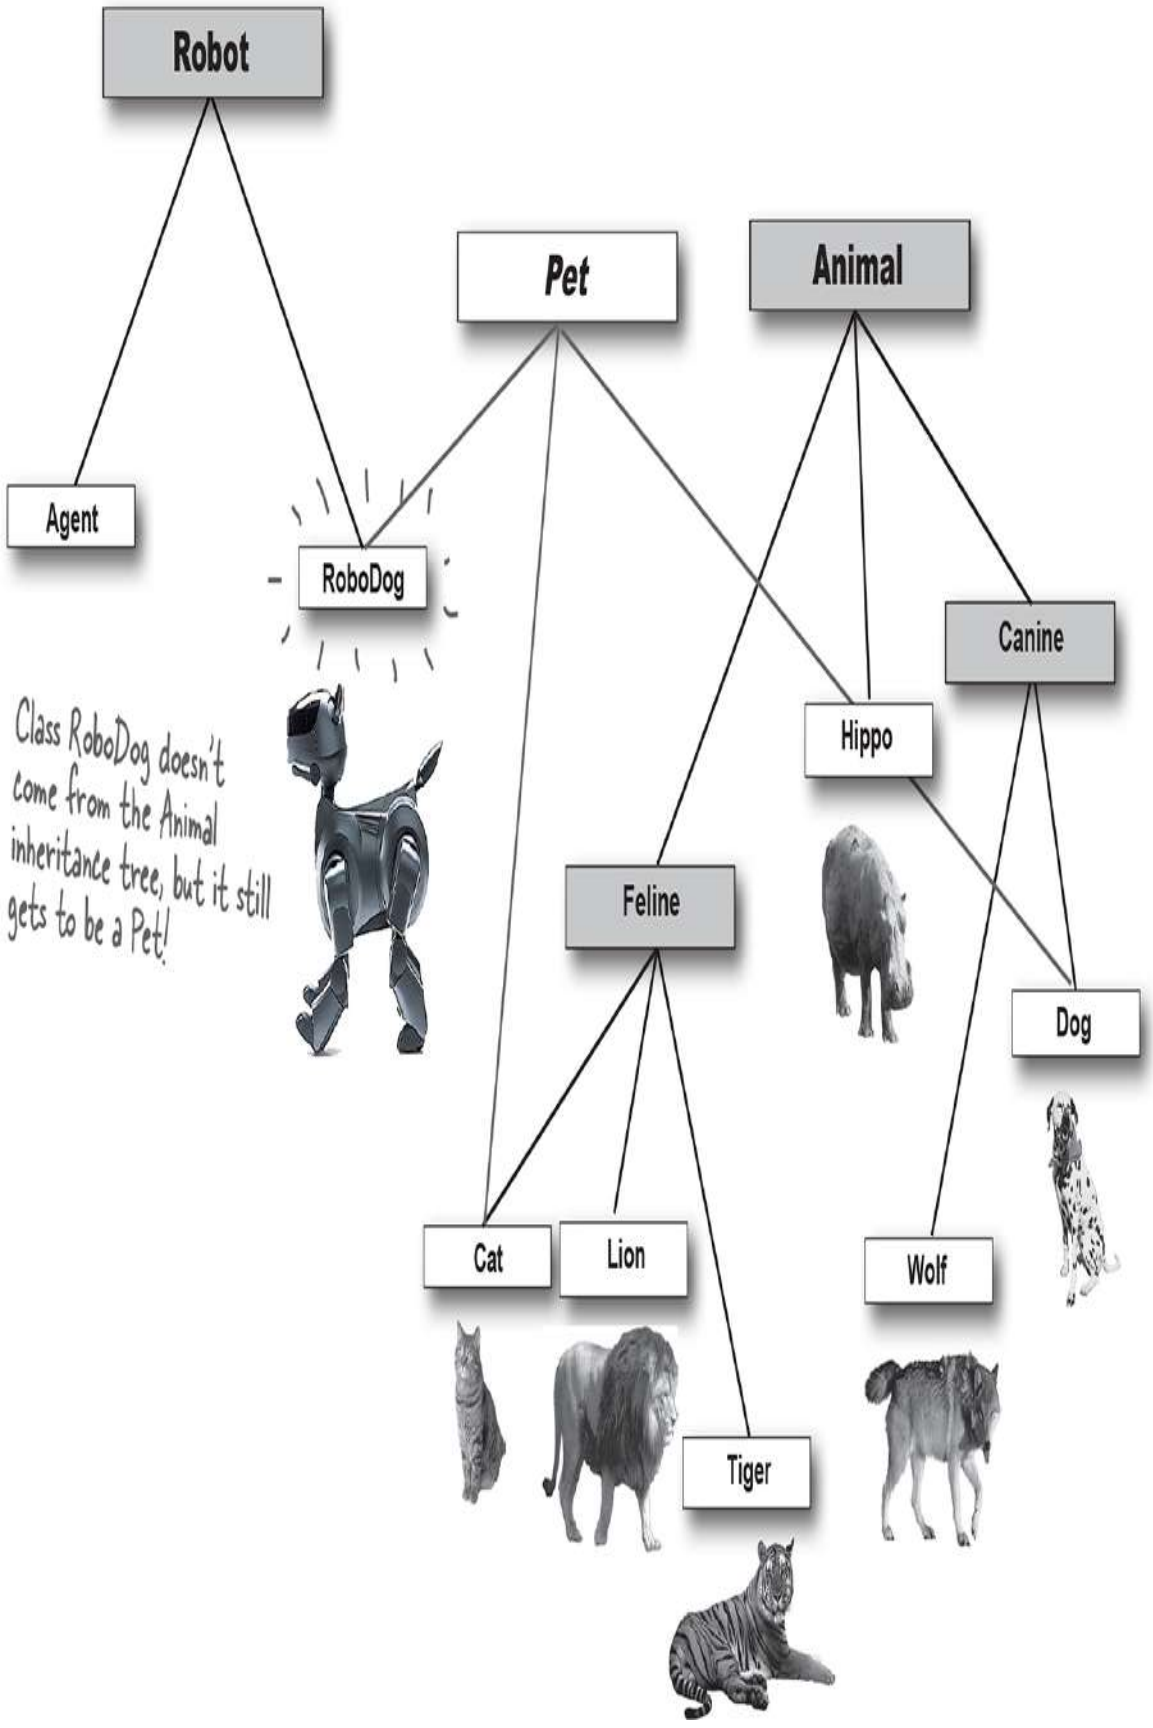
Robot
Pet
Animal
Agent
RoboDog
Canine
Class RoboDog doesn't come from the Animal inheritance tree, but it still gets to be a Pet!
Hippo
Feline
Dog
Cat
Lion
Wolf
Tiger

When you use a *class* as a polymorphic type (like an array of type Animal or a method that takes a Canine argument), the objects you can stick in that type must be from the same inheritance tree. But not just anywhere in the inheritance tree; the objects must be from a class that is a subclass of the polymorphic type. An argument of type Canine can accept a Wolf and a Dog, but not a Cat or a Hippo.

But when you use an ***interface*** as a polymorphic type (like an array of Pets), the objects can be from *anywhere* in the inheritance tree. The only requirement is that the objects are from a class that *implements* the interface. Allowing classes in different inheritance trees to implement a common interface is crucial in the Java API. Do you want an object to be able to save its state to a file? Implement the Serializable interface. Do you need objects to run their methods in a separate thread of execution? Implement Runnable. You get the idea. You'll learn more about Serializable and Runnable in later chapters, but for now, remember that classes from *any* place in the inheritance tree might need to implement those interfaces. Nearly *any* class might want to be saveable or runnable.

Better still, a class can implement *multiple* interfaces!

A Dog object IS-A Canine, and IS-A Animal, and IS-A Object, all through inheritance. But a Dog IS-A Pet through interface implementation, and the Dog might implement other interfaces as well. You could say:

```
public class Dog extends Animal implements
Pet, Saveable, Paintable { ... }
```

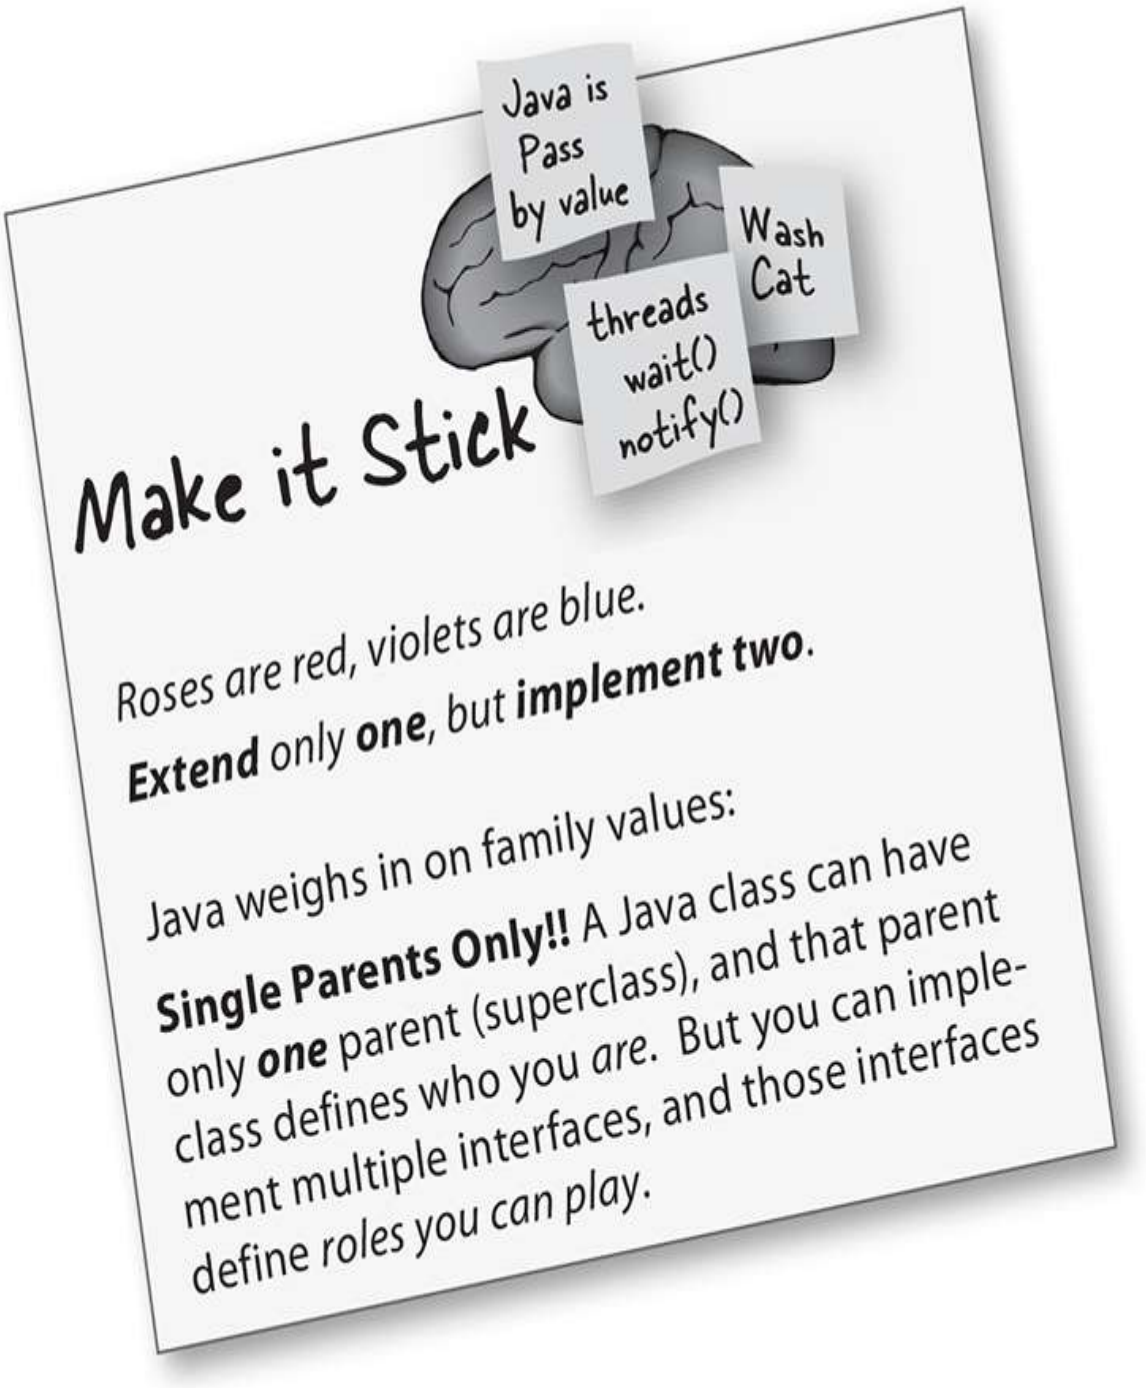

How do you know whether to make a class, a subclass, an *abstract* class, or an interface?

- Make a class that doesn't extend anything (other than Object) when your new class doesn't pass the IS-A test for any other type.

- Make a subclass (in other words, *extend* a class) only when you need to make a ***more specific*** version of a class and need to override or add new behaviors.
- Use an abstract class when you want to define a ***template*** for a group of subclasses, and you have at least *some* implementation code that all subclasses could use. Make the class abstract when you want to guarantee that nobody can make objects of that type.
- Use an interface when you want to define a ***role*** that other classes can play, regardless of where those classes are in the inheritance tree.

Invoking the superclass version of a method

THERE ARE NO DUMB QUESTIONS

Q: What if you make a concrete subclass and you need to override a method, but you want the behavior in the superclass version of the method? In other words, what if you don't need to *replace* the method with an override, but you just want to *add* to it with some additional specific code.

A: Ahhh...think about the meaning of the word *extends*. One area of good OO design looks at how to design concrete code that's *meant* to be overridden. In other words, you write method code in, say, an abstract class, that does work that's generic enough to support typical concrete implementations. But, the concrete code isn't enough to handle *all* of the subclass-specific work. So the subclass overrides the method and *extends* it by adding the rest of the code. The keyword super lets you invoke a superclass version of an overridden method, from within the subclass.

```
abstract class Report {
  void runReport() {
    // set up report
  }
  void printReport() {
    // generic printing
  }
}


class BuzzwordsReport extends Report {
  void runReport() {
    super.runReport();
    buzzwordCompliance();
    printReport();
  }

  void buzzwordCompliance() {...}
}
```

superclass version of the method does important stuff that subclasses could use

call superclass version; then come back and do some subclass-specific stuff

If method code inside a BuzzwordReport subclass says:

```
super.runReport();
```

the runReport() method inside the superclass Report will run

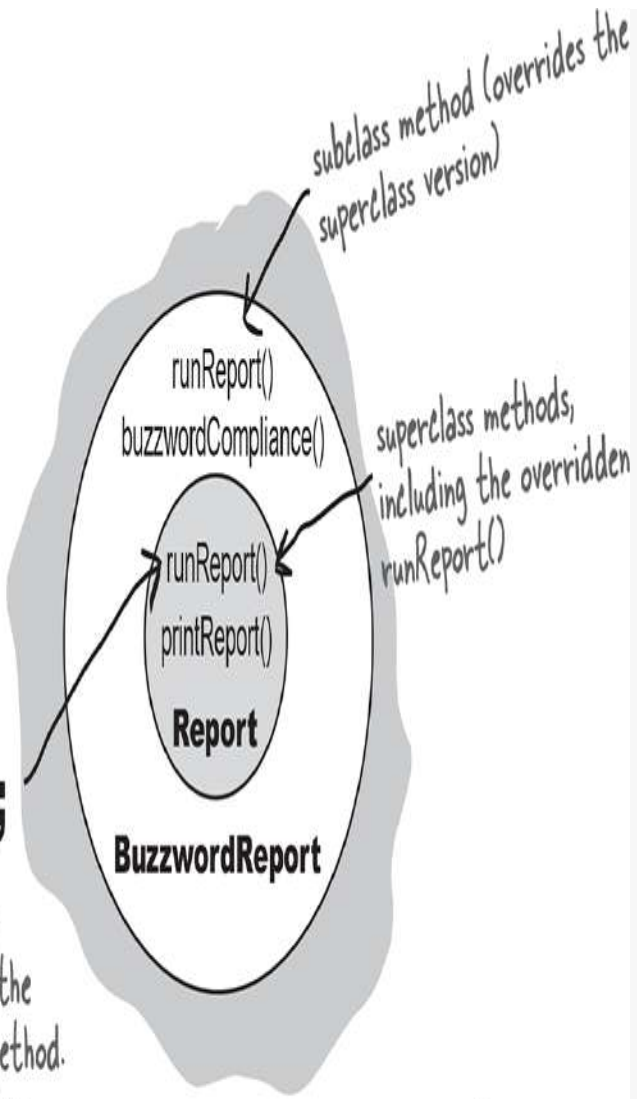

super.runReport();

A reference to the subclass object (BuzzwordReport) will always call the subclass version of an overridden method. That's polymorphism. But the subclass code can call super.runReport() to invoke the superclass version.

The super keyword is really a reference to the superclass portion of an object. When subclass code uses super, as in super.runReport(), the superclass version of the method will run.

BULLET POINTS

- When you don't want a class to be instantiated (in other words, you don't want anyone to make a new object of that class type), mark the class with the **`abstract`** keyword.
- An abstract class can have both abstract and non-abstract methods.
- If a class has even *one* abstract method, the class must be marked abstract.
- An abstract method has no body, and the declaration ends with a semicolon (no curly braces).
- All abstract methods must be implemented in the first concrete subclass in the inheritance tree.
- Every class in Java is either a direct or indirect subclass of class **Object** (java.lang.Object).
- Methods can be declared with Object arguments and/or return types.
- You can call methods on an object *only* if the methods are in the class (or interface) used as the *reference* variable type, regardless of the actual *object* type. So, a reference variable of type Object can be used only to call methods defined in class Object, regardless of the type of the object to which the reference refers.
- When a method is invoked, it will use the object type's implementation of that method.
- A reference variable of type Object can't be assigned to any other reference type without a *cast*. A cast can be used to assign a reference variable of one type to a reference variable of a subtype, but at runtime the cast will fail if the object on the heap is NOT of a type compatible with the cast.

  Example: **`Dog d = (Dog) x.getObject(aDog);`**

- All objects come out of an ArrayList<Object> as type Object (meaning, they can be referenced only by an Object reference variable, unless you use a *cast*).
- Multiple inheritance is not allowed in Java, because of the problems associated with the Deadly Diamond of Death. That means you can extend only one class (i.e., you can have only one immediate superclass).
- Create an interface using the **`interface`** keyword instead of the word **`class`**.
- Implement an interface using the keyword **`implements`**.

  Example: **`Dog implements Pet`**
- Your class can implement multiple interfaces.
- A class that implements an interface *must* implement all the methods of the interface, except default and static methods (which we'll see in Chapter 12).
- To invoke the superclass version of a method from a subclass that's overridden the method, use the **`super`** keyword. Example: **`super`**`.runReport();`

THERE ARE NO DUMB QUESTIONS

Q: There's still something strange here...you never explained how it is that ArrayList<Dog> gives back Dog references that don't need to be cast. What's the special trick going on when you say ArrayList<Dog>?

A: You're right for calling it a special trick. In fact, it is a special trick that ArrayList<Dog> gives back Dogs without you having to do any cast, since it looks like ArrayList methods don't know anything about Dogs, or any type besides Object.

The short answer is that *the compiler puts in the cast for you!* When you say ArrayList<Dog>, there is no special class that has methods to take and return Dog objects, but instead the <Dog> is a signal to the compiler that you want the compiler to let you put ONLY Dog objects in and to stop you if you try to add any other type to the list. And since the compiler stops you from adding anything but Dogs to the ArrayList, the compiler also knows that it's safe to cast anything that comes out of that ArrayList to a Dog reference. In other words, using ArrayList<Dog> saves you from having to cast the Dog you get back. But it's much more important than that... because remember, a cast can fail at runtime, and wouldn't you rather have your errors happen at compile time rather than, say, when your customer is using it for something critical?

But there's a lot more to this story, and we'll get into all the details in Chapter 11, *Data Structures*.

Exercise

Here's your chance to demonstrate your artistic abilities. On the left you'll find sets of class and interface declarations. Your job is to draw the associated class diagrams on the right. We did the first one for you. Use a dashed line for "implements" and a solid line for "extends."

Given:

1.
```
public interface Foo { }

public class Bar implements Foo { }
```

2.
```
public interface Vinn { }

public abstract class Vout implements Vinn { }
```

3.
```
public abstract class Muffie implements Whuffie { }

public class Fluffie extends Muffie { }

public interface Whuffie { }
```

4.
```
public class Zoop { }

public class Boop extends Zoop { }

public class Goop extends Boop { }
```

5.
```
public class Gamma extends Delta implements Epsilon { }

public interface Epsilon { }

public interface Beta { }

public class Alpha extends Gamma implements Beta { }

public class Delta { }
```

What's the Picture?

1.



2.



3.

4.

5.

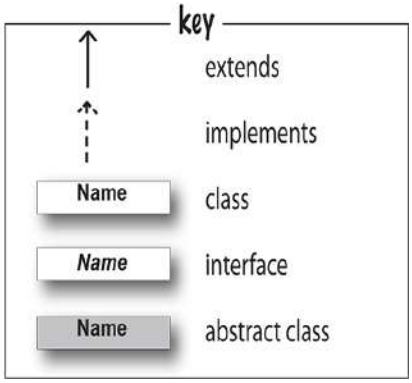

→ **Answers in “What’s the Picture ?”.**

On the left you’ll find sets of class diagrams. Your job is to turn these into valid Java declarations. We did number 1 for you (and it was a tough one).

Given:

1.

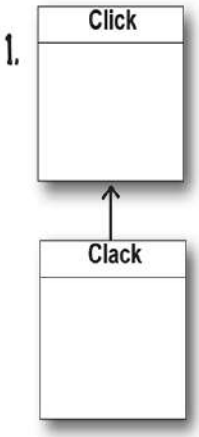

2.

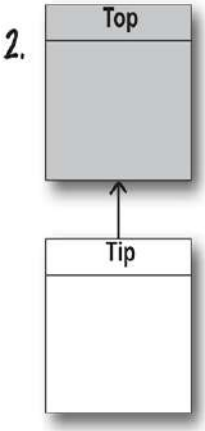

3.

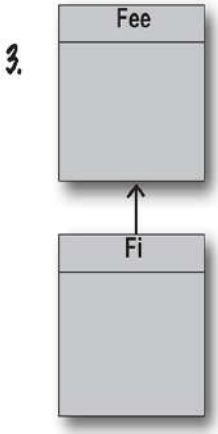

4.

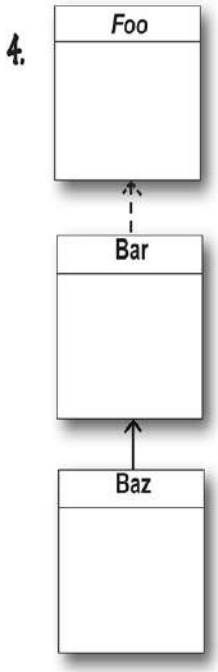

5.

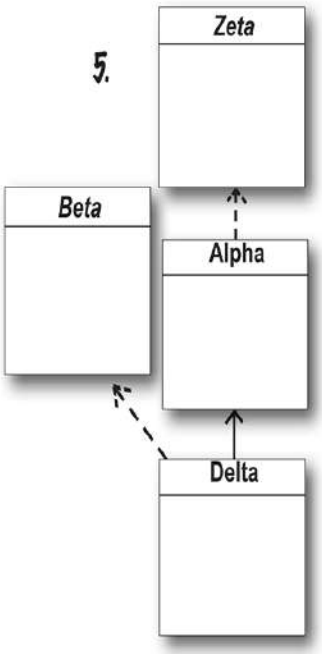

What's the Declaration ?

1. public class Click { }

   public class Clack extends Click { }

2.

3.

4.

5.

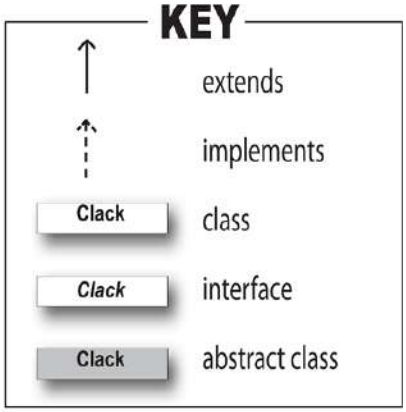

→ **Answers in "What's the Declaration?".**

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code and output. You **may** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make a set of classes that will compile and run and produce the output listed.

```
__________ Nose {

  ____________________

}

abstract class Picasso implements _____{

  ____________________

    return 7;

  }

}

class ________  _______  _________ { }

class ________  _______  _________ {

  ____________________

    return 5;

  }

}
```

```
public _________  _______ extends Clowns {

  public static void main(String[] args) {

    ____________________________

    i[0] = new _________

    i[1] = new _________

    i[2] = new _________

    for (int x = 0; x < 3; x++) {

      System.out.println(_________________

              + " " + _______.getClass());

    }

  }

}
```

Output

```
File  Edit  Window  Help  BeAfraid
%java _____________
5 class Acts
7 class Clowns
_______Of76
```

Note: Each snippet from the pool can be used more than once!

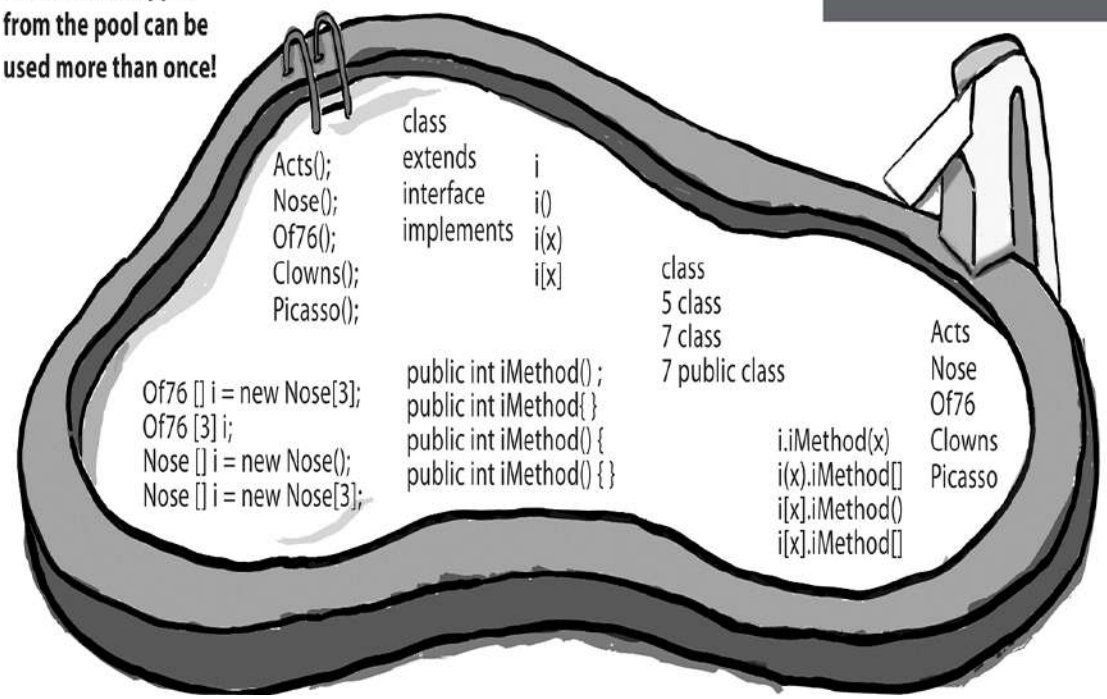

→ **Answers in "Pool Puzzle".**

Exercise Solutions

What's the Picture ?

(from "Exercise")

2.

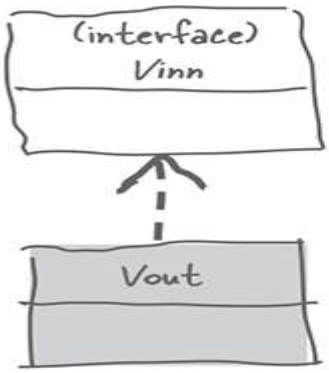
(interface)
Vinn
Vout

3.

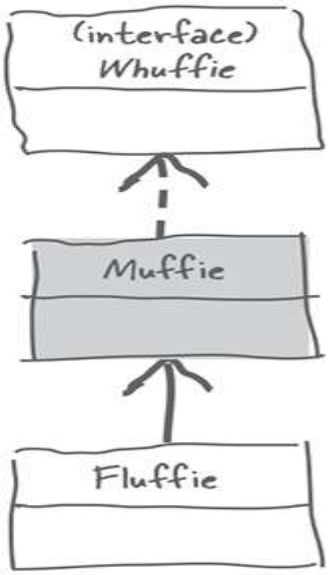
(interface)
Whuffie
Muffie
Fluffie

4.

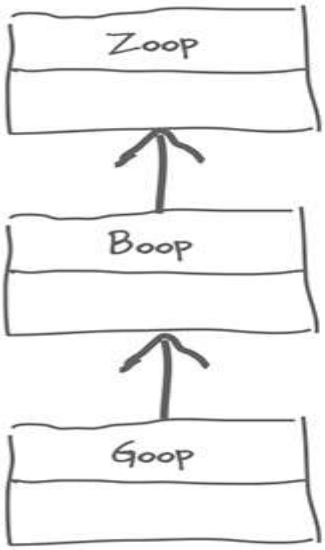
Zoop
Boop
Goop

5.

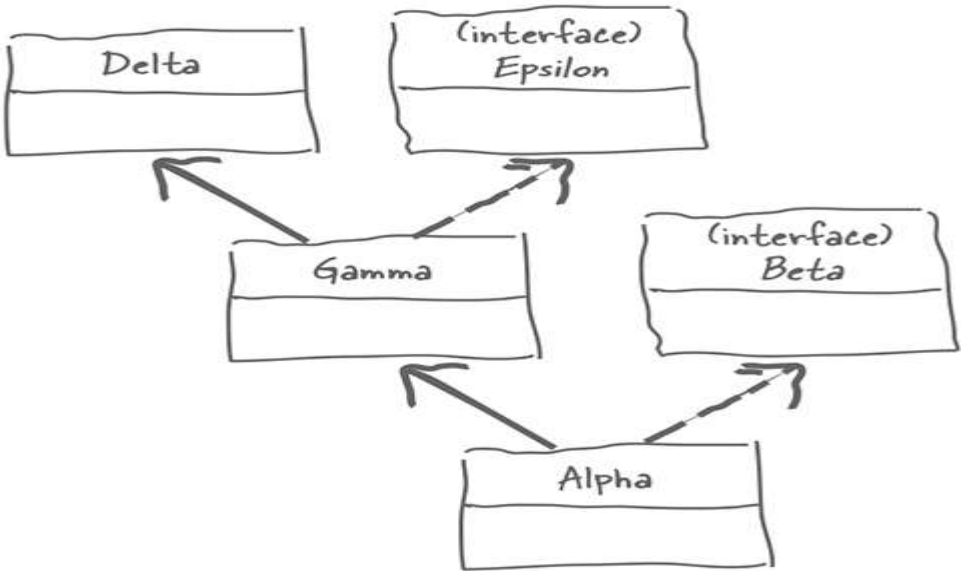
Delta
(interface)
Epsilon
Gamma
(interface)
Beta
Alpha

What's the Declaration?

(from Figure)

2. public abstract class Top { }

public class Tip extends Top { }

3. public abstract class Fee { }

public abstract class Fi extends Fee { }

4. public interface Foo { }

public class Bar implements Foo { }

public class Baz extends Bar { }

5. public interface Zeta { }

public class Alpha implements Zeta { }

public interface Beta { }

public class Delta extends Alpha implements Beta { }

key

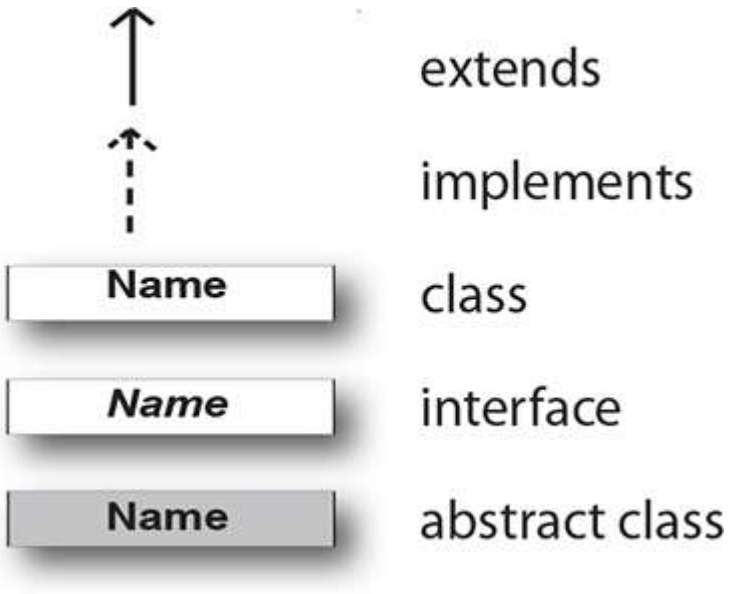

Pool Puzzle

(from "Pool Puzzle")

```
interface Nose {
    public int iMethod() ;
}

abstract class Picasso implements Nose {
  public int iMethod() {
    return 7;
  }
}

class Clowns extends Picasso { }

class Acts extends Picasso {
  public int iMethod() {
   return 5;
 }
}
```

```
public class Of76 extends Clowns {
  public static void main(String[] args) {
    Nose[] i = new Nose [3] ;
    i[0] = new Acts() ;
    i[1] = new Clowns() ;
    i[2] = new Of76() ;
    for (int x = 0; x < 3; x++) {
      System.out.println(i[x].iMethod()
            + " " + i[x].getClass());
    }
  }
}
```

Output

File Edit Window Help KillTheMime
%java Of76
5 class Acts
7 class Clowns
7 class Of76

Chapter 9. Life and Death of an Object: Constructors and Garbage Collection

...then he said,
"I can't feel my legs!"
and I said "Joe! Stay with me
Joe!" But it was...too late. The garbage
collector came and...he was gone. Best
object I ever had. Gone.

Objects are born and objects die. You're in charge of an object's lifecycle. You decide when and how to **construct** it. You decide when to **destroy** it. Except you don't actually *destroy* the object yourself, you simply *abandon* it. But once it's abandoned, the heartless **Garbage Collector (gc)** can vaporize it, reclaiming the memory that object was using. If you're gonna write Java, you're gonna create objects. Sooner or later, you're gonna have to let some of them go, or risk running out of RAM. In this chapter we look at how objects are created, where they live while they're alive, and how to keep or abandon them efficiently. That means we'll talk about the heap, the stack, scope, constructors, superclass constructors, null references, and more. Warning: this chapter contains material about object death that some may find disturbing. Best not to get too attached.

The Stack and the Heap: where things live

Before we can understand what really happens when you create an object, we have to step back a bit. We need to learn more about where everything lives (and for how long) in Java. That means we need to learn more about two areas of memory—the Stack and the Heap. When a JVM starts up, it gets a chunk of memory from the underlying OS and uses it to run your Java program. How *much* memory, and whether or not you can tweak it, is dependent on which version of the JVM (and on which platform) you're running. But usually you *won't* have any say in the matter. And with good programming, you probably won't care (more on that a little later).

In Java, we (programmers) care about the area of memory where objects live (the heap) and the one where method invocations and local variables live (the stack).

We know that all *objects* live on the garbage-collectible heap, but we haven't yet looked at where *variables* live. And where a variable lives depends on what *kind* of variable it is. And by "kind," we don't mean *type* (i.e., primitive or object reference). The two *kinds* of variables whose lives we

care about now are *instance* variables and *local* variables. Local variables are also known as *stack* variables, which is a big clue for where they live.

The Stack

Where method invocations and local variables live

The Heap

Where ***ALL*** objects live

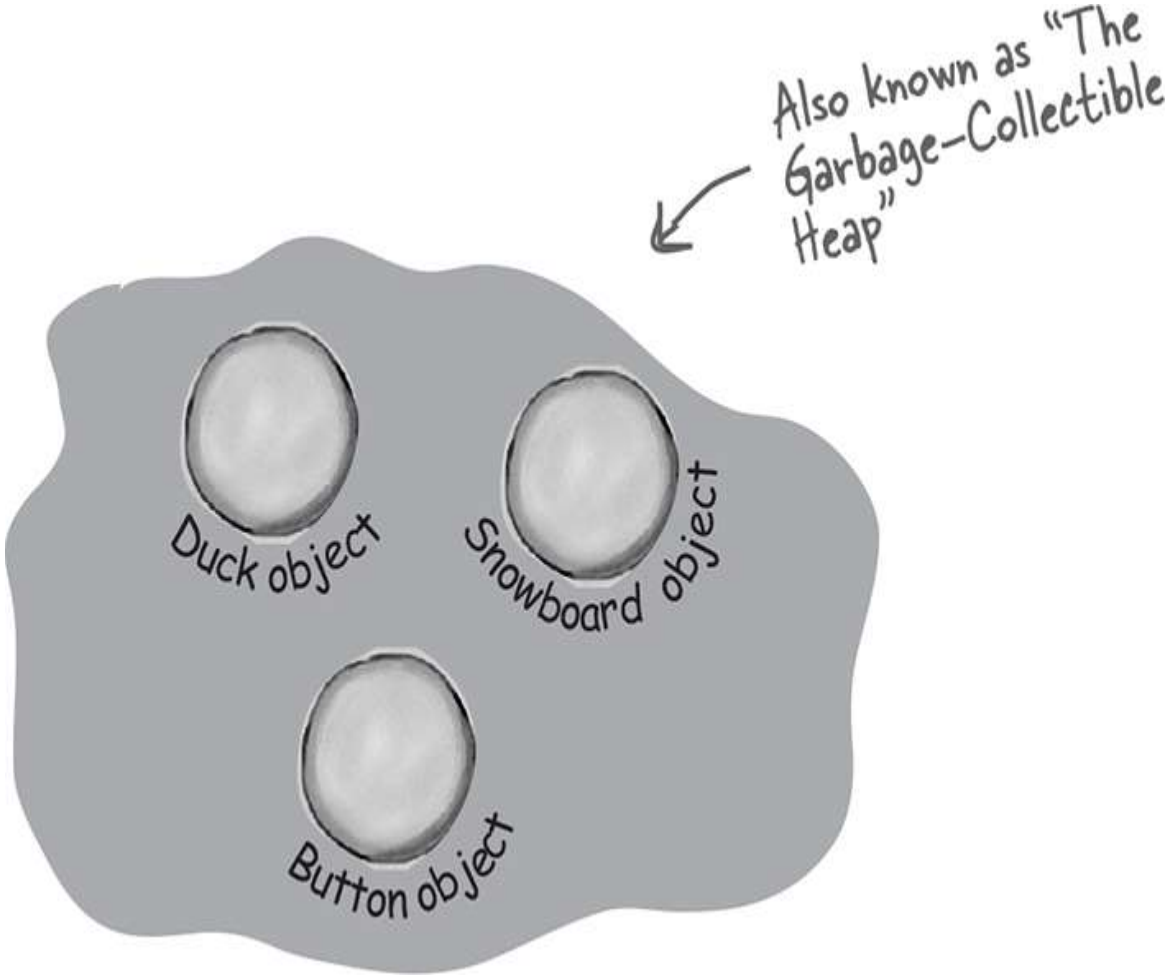
Also known as "The Garbage-Collectible Heap"
Duck object
Snowboard object
Button object

INSTANCE VARIABLES

Instance variables are declared inside a class but not inside a method. They represent the "fields" that each individual object has (which can be filled with different values for each instance of the class). Instance variables live inside the object they belong to.

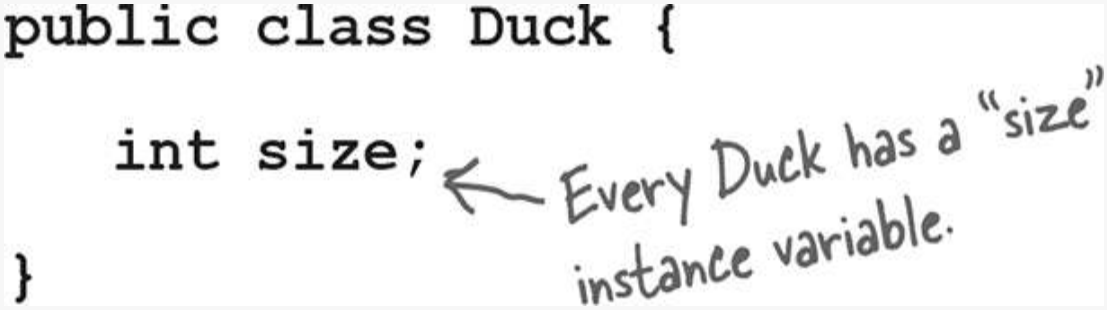

Local Variables

Local variables are declared inside a method, including method parameters. They're temporary and live only as long as the method is on the stack (in other words, as long as the method has not reached the closing curly brace).

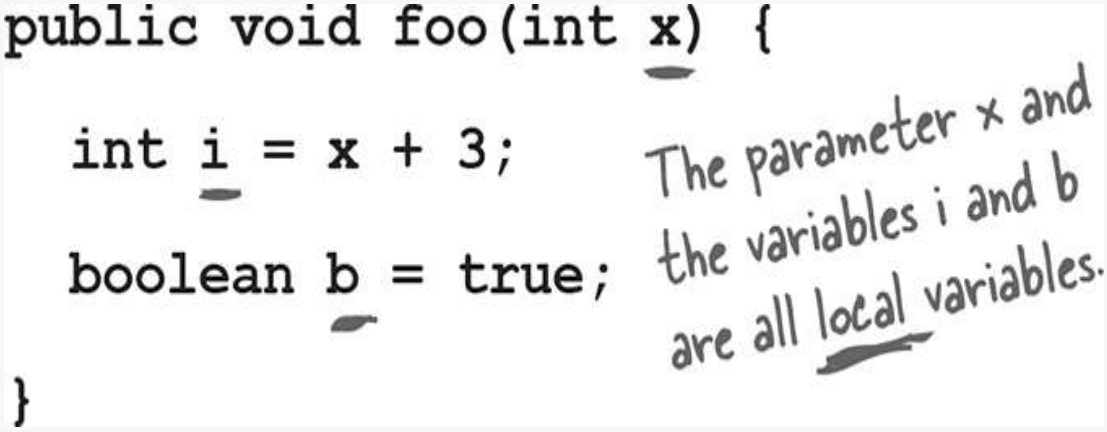

Methods are stacked

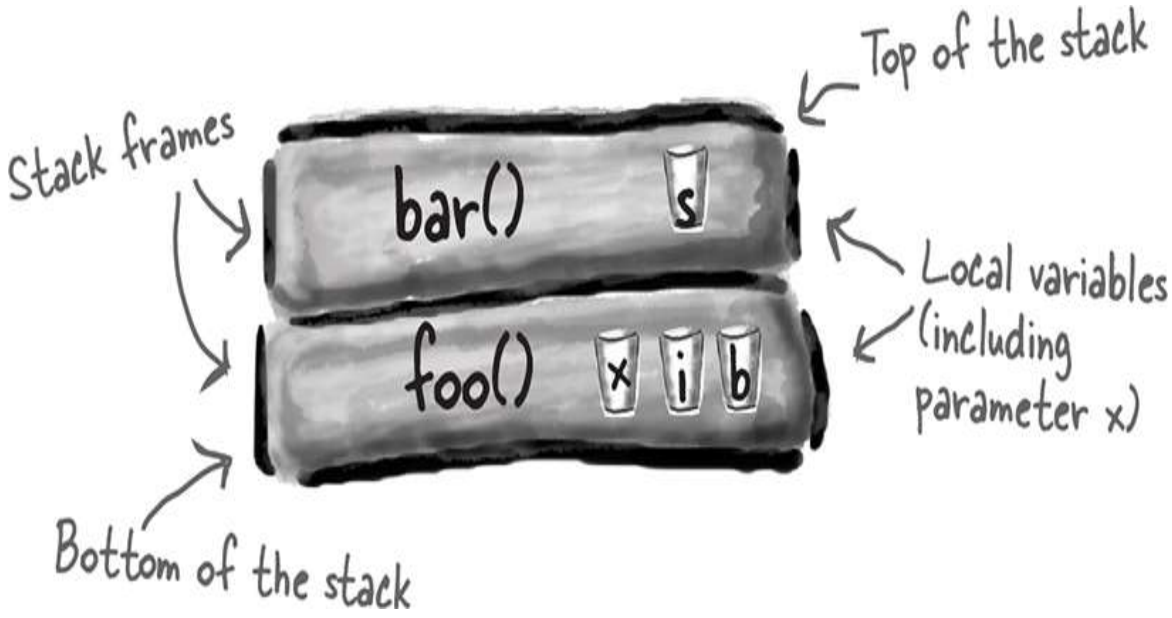

When you call a method, the method lands on the top of a call stack. That new thing that's actually pushed onto the stack is the stack *frame*, and it holds the state of the method including which line of code is executing, and the values of all local variables.

The method at the *top* of the stack is always the currently running method for that stack (for now, assume there's only one stack, but in Chapter 14, *A Very Graphic Story*, we'll add more.) A method stays on the stack until the method hits its closing curly brace (which means the method's done). If method foo() calls method bar(), method bar() is stacked on top of method foo().

A call stack with two methods

The method on the top of the stack is always the currently executing method.

```
public void doStuff() {
  boolean b = true;
  go(4);
}

public void go(int x) {
  int z = x + 24;
  crazy();
```

```
  // imagine more code here
}

public void crazy() {
  char c = 'a';
}
```

A stack scenario

The code on the left is a snippet (we don't care what the rest of the class looks like) with three methods. The first method (doStuff()) calls the second method (go()), and the second method calls the third (crazy()). Each method declares one local variable within the body of the method (*b*, *z*, and *c*), and method go() also declares a parameter variable (which means go() has two local variables, *x* and *z*).

- ① Code from another class calls **`doStuff(),`** and **`doStuff()`** goes into a stack frame at the top of the stack. The boolean variable named **"b"** goes on the **`doStuff()`** stack frame.

- ② **`doStuff()`** calls **`go()`**, and **`go()`** is *pushed* on top of the stack. Variables "**`x`**" and "**`z`**" are in the **`go()`** stack frame.

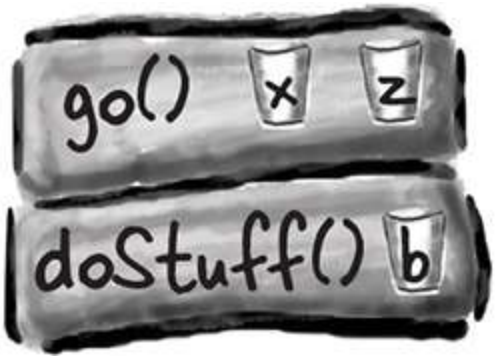

- ③ `go()` calls `crazy()`, `crazy()` is now on the top of the stack, with variable "`c`" in the frame.

- ④ `crazy()` completes, and its stack frame is *popped* off the stack. Execution goes back to the **`go()`** method and picks up at the line following the call to **`crazy()`.**

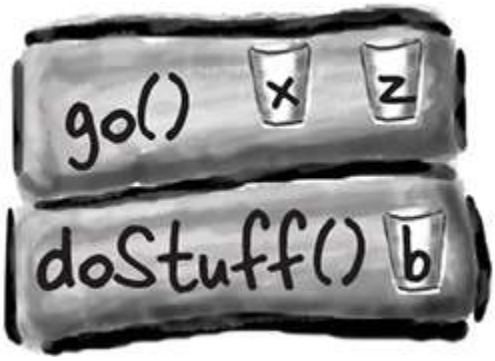

What about local variables that are objects?

Remember, a non-primitive variable holds a reference to an object, not the object itself. You already know where objects live—on the heap. It doesn't matter where they're declared or created. ***If the local variable is a reference to an object, only the variable (the reference/remote control) goes on the stack.***

```
public class StackRef {
   public void foof() {
      barf();
   }

   public void barf() {
      Duck d = new Duck();
   }
}
```

barf() declares and creates a new Duck reference variable "d" (since it's declared inside the method, it's a local variable and goes on the stack).

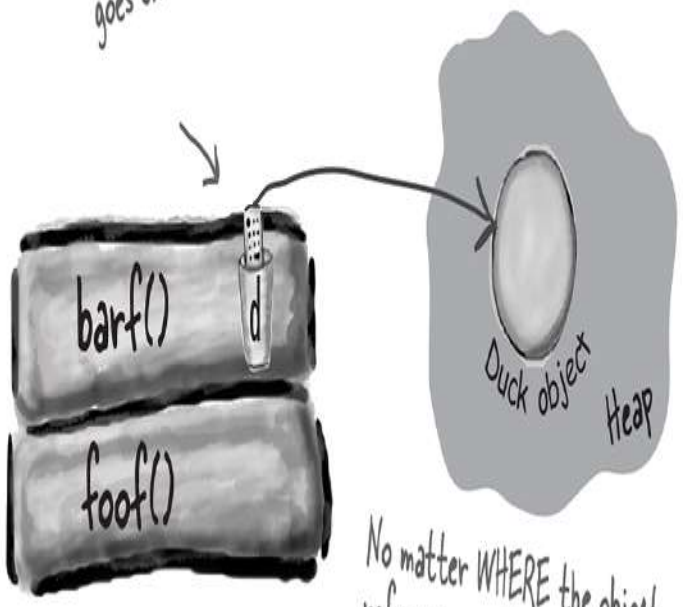

No matter WHERE the object reference variable is declared (inside a method vs. as an instance variable of a class), the object always, always, always goes on the heap.

THERE ARE NO DUMB QUESTIONS

Q: One more time, WHY are we learning the whole stack/heap thing? How does this help me? Do I really need to learn about it?

A: Knowing the fundamentals of the Java Stack and Heap is crucial if you want to understand variable scope, object creation issues, memory management, threads, and exception handling. We cover threads and exception handling in later chapters. You do not need to know anything about how the Stack and Heap are implemented in any particular JVM and/or platform. Everything you need to know about the Stack and Heap is on this page and the previous one. If you nail these pages, all the other topics that depend on your knowing this stuff will go much, much, much easier. Once again, some day you will SO thank us for shoving Stacks and Heaps down your throat.

BULLET POINTS

- Java has two areas of memory we care about: the Stack and the Heap.
- Instance variables are variables declared inside a class but outside any method.
- Local variables are variables declared inside a method or method parameter.
- All local variables live on the stack, in the frame corresponding to the method where the variables are declared.
- Object reference variables work just like primitive variables.if the reference is declared as a local variable, it goes on the stack.
- All objects live in the heap, regardless of whether the reference is a local or instance variable.

If local variables live on the stack, where do instance variables live?

When you say new CellPhone(), Java has to make space on the Heap for that CellPhone. But how *much* space? Enough for the object, which means enough to house all of the object's instance variables. That's right, instance variables live on the Heap, *inside* the object they belong to.

Remember that the *values* of an object's instance variables live inside the object. If the instance variables are all primitives, Java makes space for the instance variables based on the primitive type. An int needs 32 bits, a long 64 bits, etc. Java doesn't care about the value inside primitive variables; the bit-size of an int variable is the same (32 bits) whether the value of the int is 32,000,000 or 32.

But what if the instance variables are *objects*? What if CellPhone HAS-A Antenna? In other words, CellPhone has a reference variable of type Antenna.

When the new object has instance variables that are object references rather than primitives, the real question is: does the object need space for all of the objects it holds references to? The answer is, *not exactly*. No matter what, Java has to make space for the instance variable values. But remember that a reference variable value is not the whole *object*, but merely a *remote control* to the object. So if CellPhone has an instance variable declared as the non-primitive type Antenna, Java makes space within the CellPhone object only for the Antenna's *remote control* (i.e., reference variable) but not the Antenna *object*.

Well, then, when does the Antenna *object* get space on the Heap? First we have to find out *when* the Antenna object itself is created. That depends on the instance variable declaration. If the instance variable is declared but no object is assigned to it, then only the space for the reference variable (the remote control) is created.

```
private Antenna ant;
```

No actual Antenna object is made on the heap unless or until the reference variable is assigned a new Antenna object.

```
private Antenna ant = new Antenna();
```

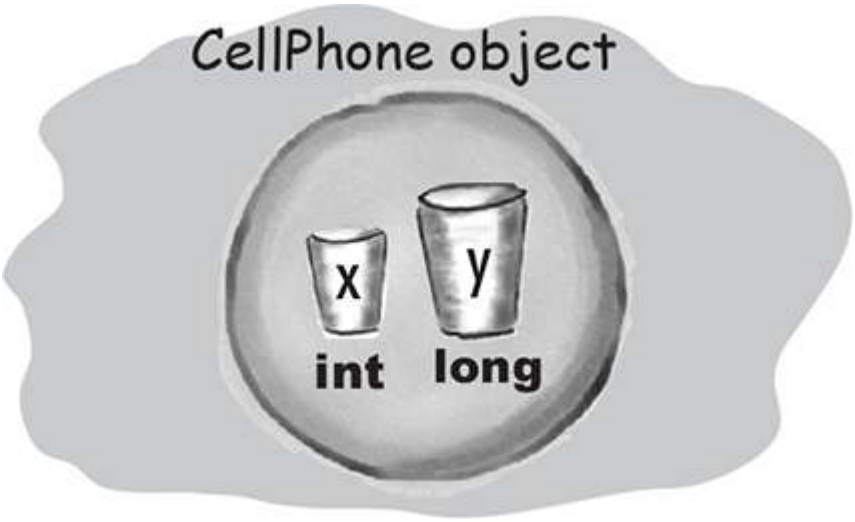

Object with two primitive instance variables. Space for the variables lives in the object.

Object with one non-primitive instance variable—a reference to an Antenna object, but no actual Antenna object. This is what you get if you declare the variable but don't initialize it with an actual Antenna object.

```
public class CellPhone {
  private Antenna ant;
}
```

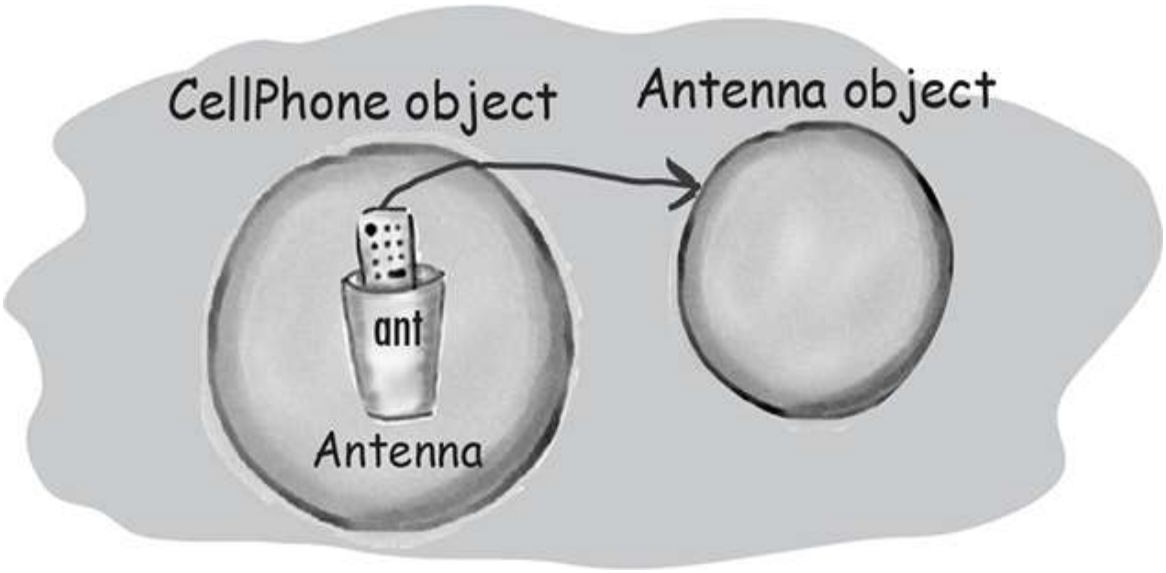

Object with one non-primitive instance variable, and the Antenna variable is assigned a new Antenna object.

```
public class CellPhone {
  private Antenna ant = new Antenna();
}
```

The miracle of object creation

Now that you know where variables and objects live, we can dive into the mysterious world of object creation. Remember the three steps of object declaration and assignment: declare a reference variable, create an object, and assign the object to the reference.

But until now, step two—where a miracle occurs and the new object is "born"—has remained a Big Mystery. Prepare to learn the facts of object life. *Hope you're not squeamish.*

Let's review the 3 steps of object declaration, creation and assignment:

1 Declare a reference variable

Make a new reference variable of a class or interface type.

```
Duck myDuck = new Duck();
```

Duck reference

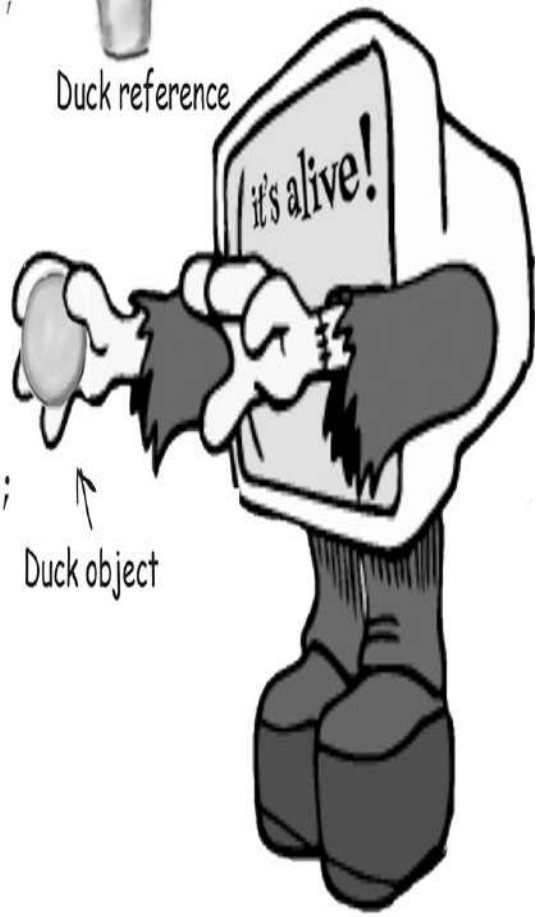

2 Create an object

A miracle occurs here.

```
Duck myDuck = new Duck();
```

Duck object

3 Link the object and the reference

Assign the new object to the reference.

```
Duck myDuck = new Duck();
```

Duck object

Duck reference

Are we calling a method named Duck()? Because it sure *looks* like it.

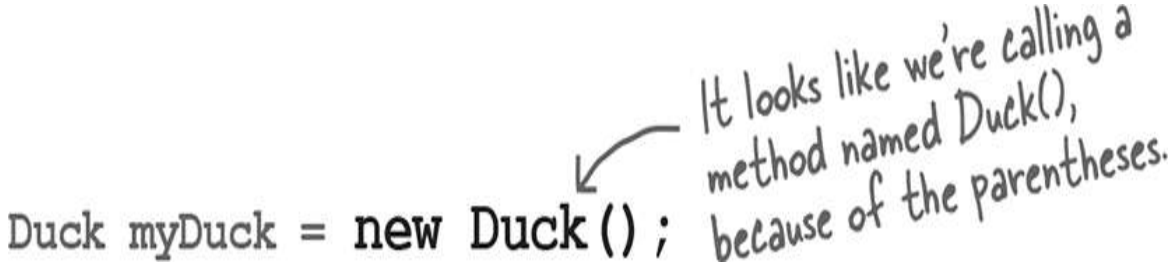

No.

We're calling the Duck *constructor.*

A constructor *does* look and feel a lot like a method, but it's not a method. It's got the code that runs when you say `new`. In other words, *the code that runs when you instantiate an object.*

The only way to invoke a constructor is with the keyword `new` followed by the class name. The JVM finds that class and invokes the constructor in that class. (OK, technically this isn't the *only* way to invoke a constructor. But it's the only way to do it from *outside* a constructor. You *can* call a constructor from within another constructor, with restrictions, but we'll get into all that later in the chapter.)

But where is the constructor?

If we didn't write it, who did?

> **A constructor has the code that runs when you instantiate an object. In other words, the code that runs when you say `new` on a class type.**
>
> **Every class you write has a constructor, even if you don't write it yourself.**

You can write a constructor for your class (we're about to do that), but if you don't, ***the compiler writes one for you!***

Here's what the compiler's default constructor looks like:

```
public Duck() {

}
```

Notice something missing? How is this different from a method?

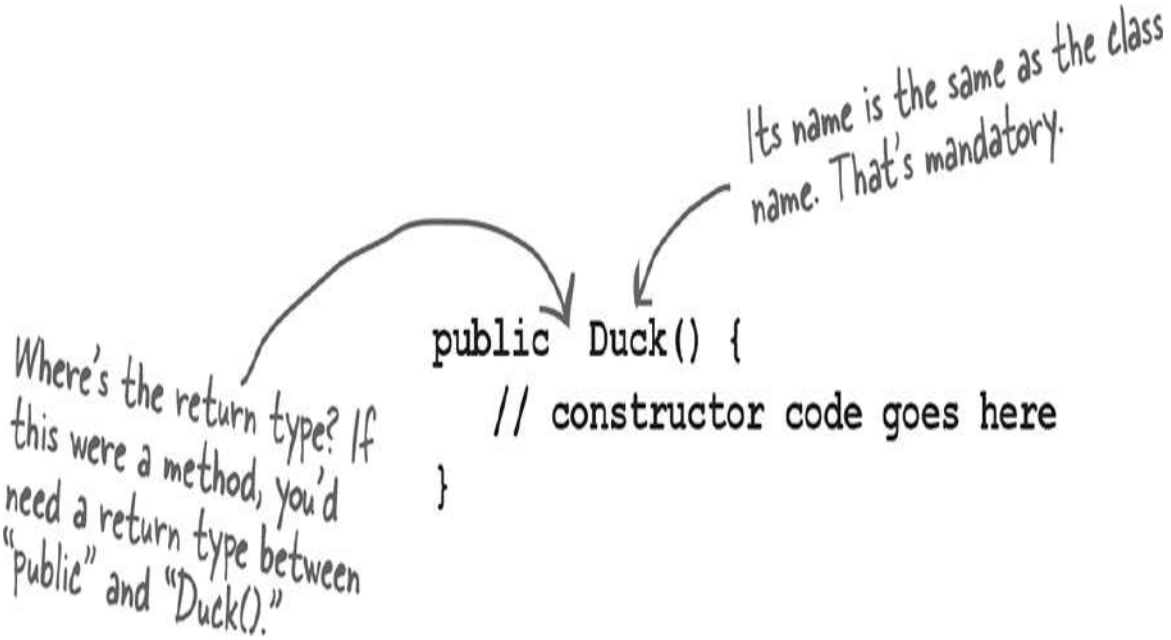

Construct a Duck

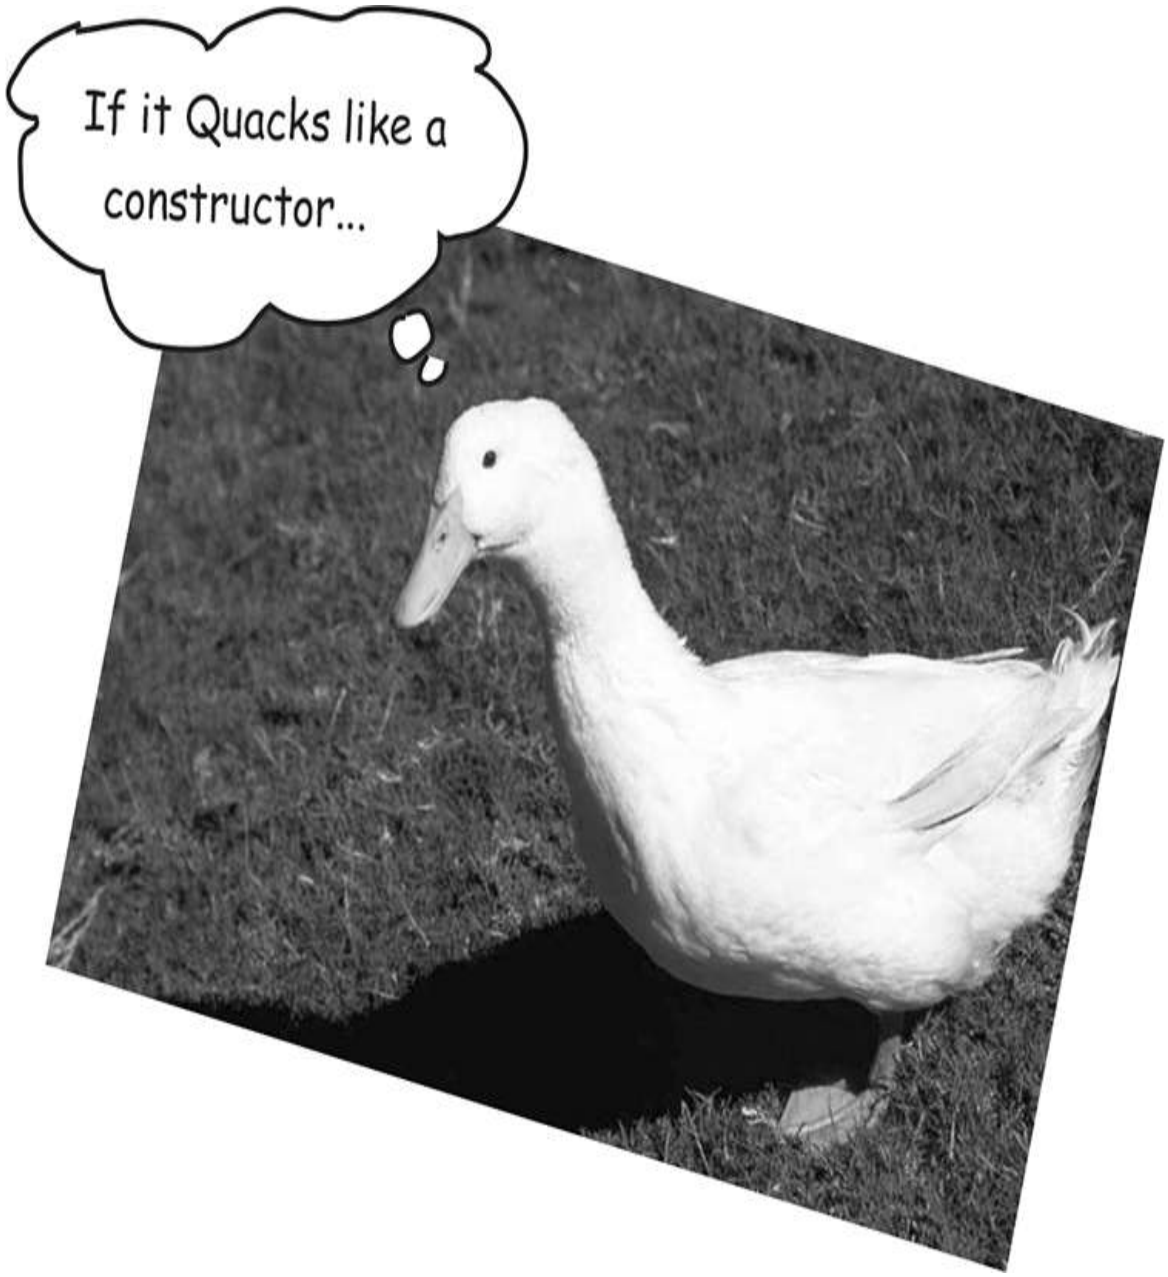

The key feature of a constructor is that it runs *before* the object can be assigned to a reference. That means you get a chance to step in and do things to get the object ready for use. In other words, before anyone can use the remote control for an object, the object has a chance to help construct itself. In our Duck constructor, we're not doing anything useful, just demonstrating the sequence of events.

The constructor gives you a chance to step into the middle of `new`.

```
public class Duck {

    public Duck() {
        System.out.println("Quack");
    }
}
```

Constructor code.

```
public class UseADuck {

    public static void main (String[] args) {
        Duck d = new Duck();
    }
}
```

This calls the Duck constructor.

```
File Edit Window Help Quack
% java UseADuck
Quack
```

→ **Yours to solve.**

SHARPEN YOUR PENCIL

A constructor lets you jump into the middle of the object creation step—into the middle of **`new`**. Can you imagine conditions where that would be useful? Which of the actions on the right might be useful in a Car class constructor, if the Car is part of a Racing Game? Check off the ones that you came up with a scenario for.

- Increment a counter to track how many objects of this class type have been made.
- Assign runtime-specific state (data about what's happening NOW).
- Assign values to the object's important instance variables.
- Get and save a reference to the object that's creating the new object.
- Add the object to an ArrayList.
- Create HAS-A objects.
- _____ (your idea here)

Initializing the state of a new Duck

Most people use constructors to initialize the state of an object. In other words, to make and assign values to the object's instance variables.

```
public Duck() {
   size = 34;
```

```
}
```

That's all well and good when the Duck class *developer* knows how big the Duck object should be. But what if we want the programmer who is *using* Duck to decide how big a particular Duck should be?

Imagine the Duck has a size instance variable, and you want the programmer using your Duck class to set the size of the new Duck. How could you do it?

Well, you could add a setSize() setter method to the class. But that leaves the Duck temporarily without a size* and forces the Duck user to write *two* statements—one to create the Duck, and one to call the setSize() method. The code below uses a setter method to set the initial size of the new Duck.

```
public class Duck {
  int size;

  public Duck() {
    System.out.println("Quack");
  }

  public void setSize(int newSize) {
    size = newSize;
  }
}
```

Instance variable

Constructor

Setter method

```
public class UseADuck {

  public static void main(String[] args) {
    Duck d = new Duck();

    d.setSize(42);
  }
}
```

There's a bad thing here. The Duck is alive at this point in the code, but without a size! /* And then you're relying on the Duck user to KNOW that Duck creation is a two-part process: one to call the constructor and one to call the setter.

THERE ARE NO DUMB QUESTIONS

Q: Why do you need to write a constructor if the compiler writes one for you?

A: If you need code to help initialize your object and get it ready for use, you'll have to write your own constructor. You might, for example, be dependent on input from the user before you can finish making the object ready. There's another reason you might have to write a constructor, even if you don't need any constructor code yourself. It has to do with your superclass constructor, and we'll talk about that soon.

Q: How can you tell a constructor from a method? Can you also have a method that's the same name as the class?

A: Java lets you declare a method with the same name as your class. That doesn't make it a constructor, though. The thing that separates a method from a constructor is the return type. Methods must have a return type, but constructors cannot have a return type.

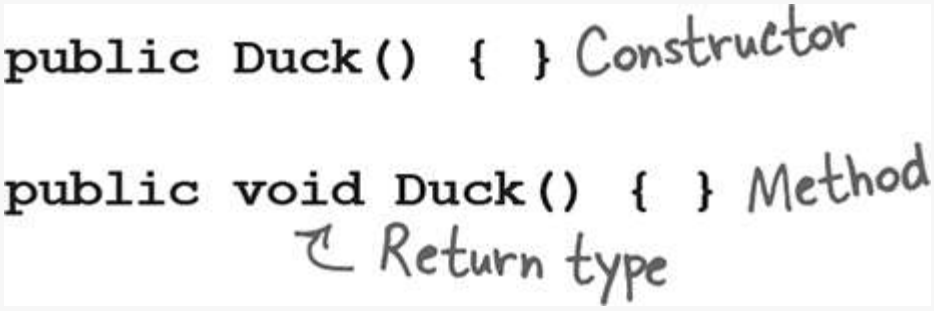

The compiler will allow these methods but **don't do this.** It's against normal naming conventions (methods start with a lowercase letter) but more importantly it's super confusing.

Q: Are constructors inherited? If you don't provide a constructor but your superclass does, do you get the superclass constructor instead of the default?

A: Nope. Constructors are not inherited. We'll look at that in just a few pages.

*Instance variables do have a default value. 0 or 0.0 for numeric primitives, false for booleans, and null for references.

Using the constructor to initialize important Duck state*

If an object shouldn't be used until one or more parts of its state (instance variables) have been initialized, don't let anyone get hold of a Duck object

until you're finished initializing! It's usually way too risky to let someone make—and get a reference to—a new Duck object that isn't quite ready for use until that someone turns around and calls the setSize() method. How will the Duck user even *know* that he's required to call the setter method after making the new Duck?

The best place to put initialization code is in the constructor. And all you need to do is make a constructor with arguments.

```
public class Duck {
  int size;

  public Duck(int duckSize) {
    System.out.println("Quack");

    size = duckSize;

    System.out.println("size is " + size);
  }
}
```

Add an int parameter to the Duck constructor.

Use the argument value to set the size instance variable. We could have called the setSize method instead.

```
public class UseADuck {

  public static void main (String[] args) {
    Duck d = new Duck(42);
  }
}
```

Pass a value to the constructor.

This time there's only one statement. We make the new Duck and set its size in one statement.

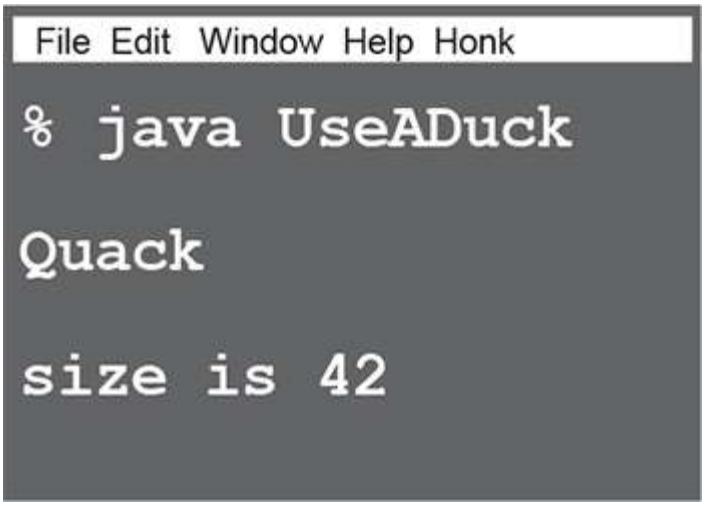

*Not to imply that not all Duck state is not unimportant.

Make it easy to make a Duck

Be sure you have a no-arg constructor

What happens if the Duck constructor takes an argument? Think about it. On the previous page, there's only *one* Duck constructor—and it takes an int argument for the size of the Duck. That might not be a big problem, but it does make it harder for a programmer to create a new Duck object, especially if the programmer doesn't *know* what the size of a Duck should be. Wouldn't it be helpful to have a default size for a Duck so that if the user doesn't know an appropriate size, they can still make a Duck that works?

Imagine that you want Duck users to have TWO options for making a Duck—one where they supply the Duck size (as the constructor argument) and one where they don't specify a size and thus get your default Duck size.

You can't do this cleanly with just a single constructor. Remember, if a method (or constructor—same rules) has a parameter, you *must* pass an appropriate argument when you invoke that method or constructor. You can't just say, "If someone doesn't pass anything to the constructor, then use the

default size" because they won't even be able to compile without sending an int argument to the constructor call. You *could* do something clunky like this:

```
public class Duck {
  int size;

  public Duck(int newSize) {
    if (newSize == 0) {
      size = 27;
    } else {
      size = newSize;
    }
  }
}
```

If the parameter value is zero, give the new Duck a default size; otherwise, use the parameter value for the size. NOT a very good solution.

But that means the programmer making a new Duck object has to *know* that passing a "0" is the protocol for getting the default Duck size. Pretty ugly. What if the other programmer doesn't know that? Or what if they really *do* want a zero-sized Duck? (Assuming a zerosized Duck is allowed. If you don't want zero-sized Duck objects, put validation code in the constructor to prevent it.) The point is, it might not always be possible to distinguish between a genuine "I want zero for the size" constructor argument and a "I'm sending zero so you'll give me the default size, whatever that is" constructor argument.

You really want TWO ways to make a new Duck:

```
public class Duck2 {
  int size;

  public Duck2() {
    // supply default size
    size = 27;
  }

  public Duck2(int duckSize) {
    // use duckSize parameter
    size = duckSize;
  }
}
```

To make a Duck when you know the size:

```
Duck2 d = new Duck2(15);
```

To make a Duck when you do not know the size:

```
Duck2 d2 = new Duck2();
```

So this two-options-to-make-a-Duck idea needs two constructors. One that takes an int and one that doesn't. ***If you have more than one constructor in a class, it means you have overloaded constructors.***

Doesn't the compiler always make a no-arg constructor for you? No!

OK, let's see here... "You have the right to your own constructor." Makes sense.
"If you cannot afford a constructor, one will be provided for you by the compiler." Good to know.

You might think that if you write *only* a constructor with arguments, the compiler will see that you don't have a no-arg constructor and stick one in for you. But that's not how it works. The compiler gets involved with constructor-making *only if you don't say anything at all about constructors.*

If you write a constructor that takes arguments and you *still* want a no-arg constructor, you'll have to build the no-arg constructor yourself!

As soon as you provide a constructor, ANY kind of constructor, the compiler backs off and says, "OK fair enough, looks like you're in charge of constructors now."

If you have more than one constructor in a class, the constructors MUST have different argument lists.

The argument list includes the order and types of the arguments. As long as they're different, you can have more than one constructor. You can do this with methods as well, but we'll get to that in another chapter.

Overloaded constructors means you have more than one constructor in your class.

To compile, each constructor must have a *different* argument list!

The class below is legal because all five constructors have different argument lists. If you had two constructors that took only an int, for example, the class wouldn't compile. What you name the parameter variable doesn't count. It's the variable *type* (int, Dog, etc.) and *order* that matters. You *can* have two constructors that have identical types, ***as long as the order is different.*** A constructor that takes a String followed by an int is not the same as one that takes an int followed by a String.

Five different constructors means five different ways to make a new mushroom.

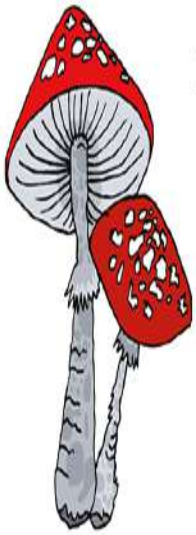

```
public class Mushroom {

  public Mushroom(int size) { }

  public Mushroom( ) { }

  public Mushroom(boolean isMagic) { }

  public Mushroom(boolean isMagic, int size) { }

  public Mushroom(int size, boolean isMagic) { }

}
```

When you know the size, but you don't know if it's magic

When you don't know anything

When you know if it's magic or not, but don't know the size

These two have the same args, but in a different order, so it's OK*

When you know whether or not it's magic, AND you know the size as well

*If the arguments were the same type, how would the compiler know they were two different things?

BULLET POINTS

- Instance variables live within the object they belong to, on the Heap.
- If the instance variable is a reference to an object, both the reference and the object it refers to are on the Heap.
- A constructor is the code that runs when you say new on a class type.
- A constructor must have the same name as the class, and must not have a return type.
- You can use a constructor to initialize the state (i.e., the instance variables) of the object being constructed.
- If you don't put a constructor in your class, the compilerwill put in a default constructor.
- The default constructor is always a no-arg constructor.
- If you put a constructor.any constructor.in your class, the compiler will not build the default constructor.
- If you want a no-arg constructor and you've already put in a constructor with arguments, you'll have to build the no-arg constructor yourself.
- Always provide a no-arg constructor if you can, to make it easy for programmers to make a working object. Supply default values.
- Overloaded constructors means you have more than one constructor in your class.
- Overloaded constructors must have different argument lists.
- You cannot have two constructors with the same argument lists. An argument list includes the order and type of arguments.

- Instance variables are assigned a default value, even when you don’t explicitly assign one. The default values are 0/0.0/false for primitives, and null for references.

SHARPEN YOUR PENCIL

Yours to solve.

Match the `new Duck()` call with the constructor that runs when that Duck is instantiated. We did the easy one to get you started.

```
public class TestDuck {

  public static void main(String[] args) {
    int weight = 8;
    float density = 2.3F;
    String name = "Donald";
    long[] feathers = {1, 2, 3, 4, 5, 6};
    boolean canFly = true;
    int airspeed = 22;

    Duck[] d = new Duck[7];

    d[0] = new Duck();

    d[1] = new Duck(density, weight);

    d[2] = new Duck(name, feathers);

    d[3] = new Duck(canFly);

    d[4] = new Duck(3.3F, airspeed);

    d[5] = new Duck(false);

    d[6] = new Duck(airspeed, density);
  }
}
```

```
class Duck {
  private int kilos = 6;
  private float floatability = 2.1F;
  private String name = "Generic";
  private long[] feathers = {1, 2, 3,
                             4, 5, 6, 7};
  private boolean canFly = true;
  private int maxSpeed = 25;

  public Duck() {
    System.out.println("type 1 duck");
  }

  public Duck(boolean fly) {
    canFly = fly;
    System.out.println("type 2 duck");
  }

  public Duck(String n, long[] f) {
    name = n;
    feathers = f;
    System.out.println("type 3 duck");
  }

  public Duck(int w, float f) {
    kilos = w;
    floatability = f;
    System.out.println("type 4 duck");
  }

  public Duck(float density, int max) {
    floatability = density;
    maxSpeed = max;
    System.out.println("type 5 duck");
  }
}
```

THERE ARE NO DUMB QUESTIONS

Q: Earlier you said that it's good to have a no-argument constructor so that if people call the no-arg constructor, we can supply default values for the "missing" arguments. But aren't there times when it's impossible to come up with defaults? Are there times when you should not have a no-arg constructor in your class?

A: You're right. There are times when a no-arg constructor doesn't make sense. You'll see this in the Java API—some classes don't have a no-arg constructor. The Color class, for example, represents a...color. Color objects are used to, for example, set or change the color of a screen font or GUI button. When you make a Color instance, that instance is of a particular color (you know, Death-by-Chocolate Brown, Blue-Screen-of-Death Blue, Scandalous Red, etc.).

If you make a Color object, you must specify the color in some way.

```
Color c = new Color(3,45,200);
```

(We're using three ints for RGB values here. We'll get into using Color later, in Chapter 15, *Work on Your Swing*.) Otherwise, what would you get? The Java API programmers could have decided that if you call a no-arg Color constructor you'll get a lovely shade of mauve. But good taste prevailed. If you try to make a Color without supplying an argument:

```
Color c = new Color();
```

the compiler freaks out because it can't find a matching no-arg constructor in the Color class.

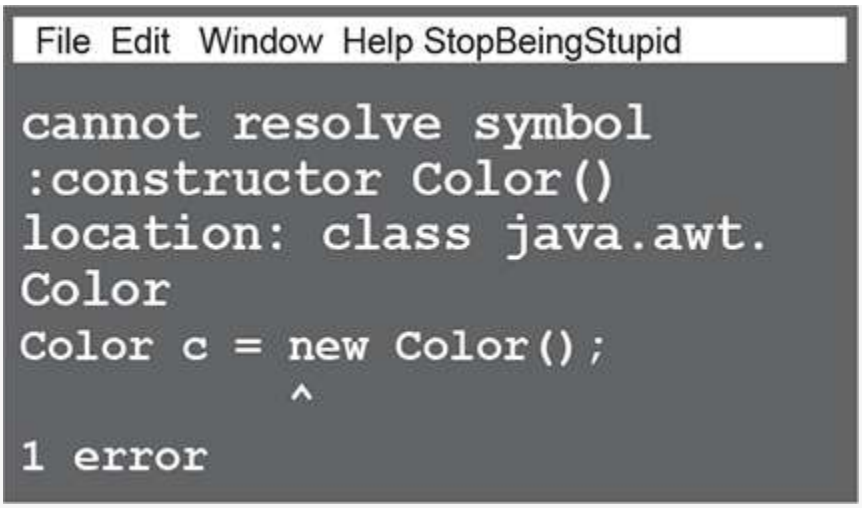

Nanoreview: four things to remember about constructors

- ① A constructor is the code that runs when somebody says `new` on a class type:

```
Duck d = new Duck();
```

- ② A constructor must have the same name as the class, and **`no`** return type:

```
public Duck(int size) { }
```

- ③ If you don't put a constructor in your class, the compiler puts in a default constructor. The default constructor is always a no-arg constructor.

```
public Duck() { }
```

- ④ You can have more than one constructor in your class, as long as the argument lists are different. Having more than one constructor in a class means you have overloaded constructors.

```
public Duck() { }

public Duck(int size) { }

public Duck(String name) { }

public Duck(String name, int size) { }
```

BRAIN POWER



What about superclasses?

When you make a Dog, should the Canine constructor run too?

If the superclass is abstract, should it even *have* a constructor?

We'll look at this on the next few pages, so stop now and think about the implications of constructors and superclasses.*

THERE ARE NO DUMB QUESTIONS

Q: Do constructors have to be `public`?

A: No. Constructors can be `public`, `protected`, `private`, or *default* (which means no access modifier at all). We'll look more at *default* access in Appendix B.

Q: How could a private constructor ever be useful? Nobody could ever call it, so nobody could ever make a new object!

A: Not exactly right. Marking something `private` doesn't mean *nobody* can access it; it just means that *nobody outside the class* can access it. Bet you're thinking Catch 22. Only code from the *same* class as the class-with-private-constructor can make a new object from that class, but without first making an object, how do you ever get to run code from that class in the first place? How do you ever get to anything in that class? *Patience grasshopper.* We'll get there in the next chapter.

*Doing all the Brain Power exercises has been shown to produce a 42% increase in neuron size. And you know what they say, "Big neurons..."

Wait a minute...we never DID talk about superclasses and inheritance and how that all fits in with constructors

Here's where it gets fun. Remember in the previous chapter we looked at the Snowboard object wrapping around an inner core representing the Object portion of the Snowboard class? The Big Point there was that every object holds not just its *own* declared instance variables, but also *everything from its superclasses* (which, at a minimum, means class Object, since *every* class extends Object).

So when an object is created (because somebody said `new`; there is ***no other way*** to create an object other than someone, somewhere saying **`new`** on the

class type), the object gets space for *all* the instance variables, from all the way up the inheritance tree. Think about it for a moment... a superclass might have setter methods encapsulating a private variable. But that variable has to live *somewhere*. When an object is created, it's almost as though *multiple* objects materialize—the object being new'd and one object per each superclass. Conceptually, though, it's much better to think of it like the picture below, where the object being created has *layers* of itself representing each superclass.

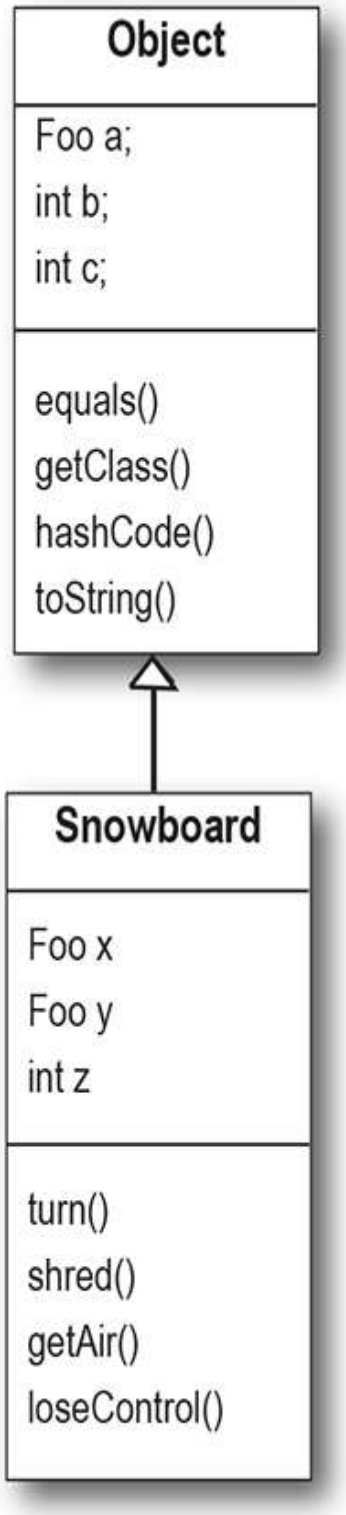

Object has instance variables encapsulated by access methods. Those instance variables are created when any subclass is instantiated. (These aren't the *REAL* Object variables, but we don't care what they are since they're encapsulated.)

Snowboard also has instance variables of its own, so to make a Snowboard object we need space for the instance variables of **both** classes.

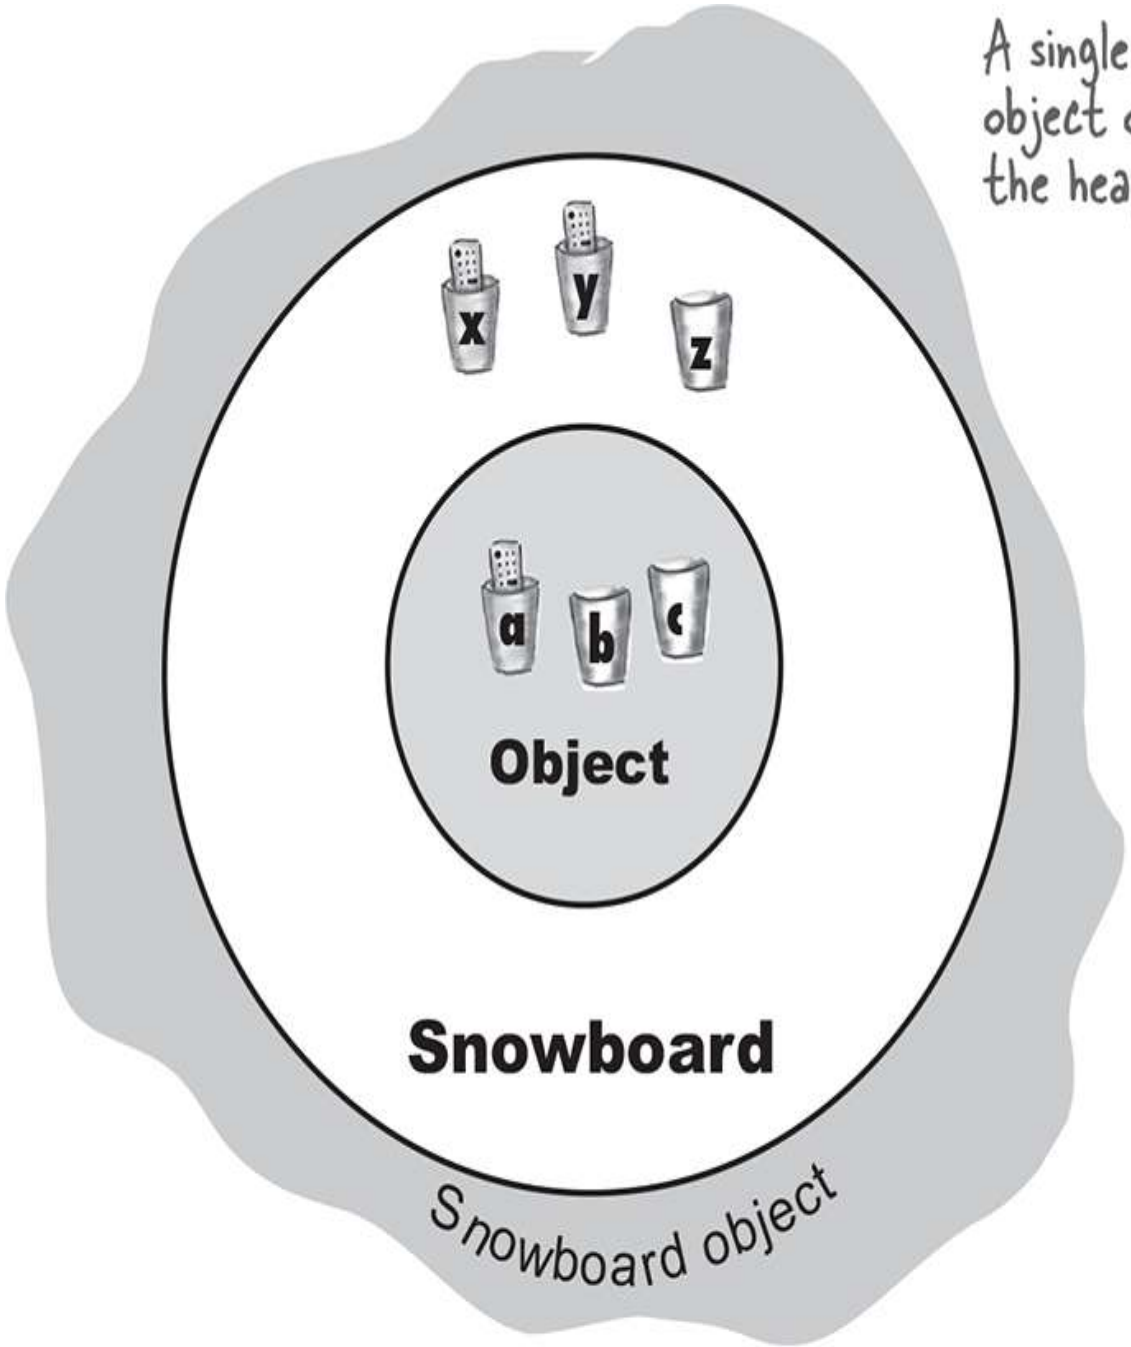

There is only *ONE* object on the heap here. A Snowboard object. But it contains both the Snowboard parts of itself and the Object parts of itself. All instance variables from both classes have to be here.

The role of superclass constructors in an object's life

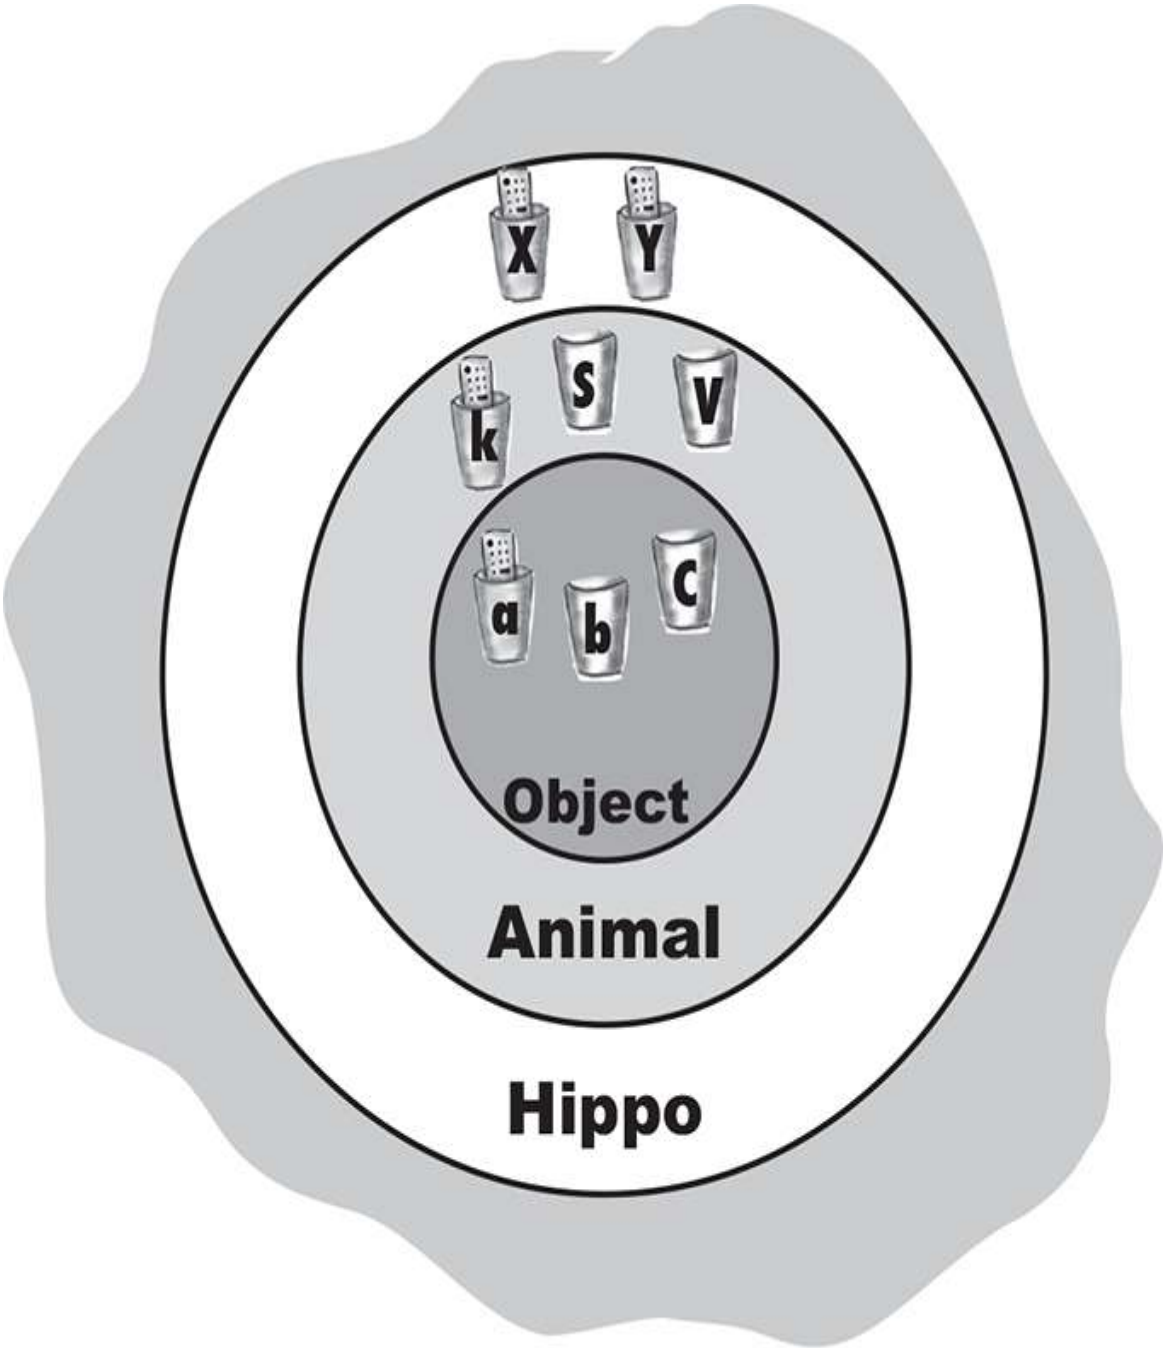

A single Hippo object on the heap

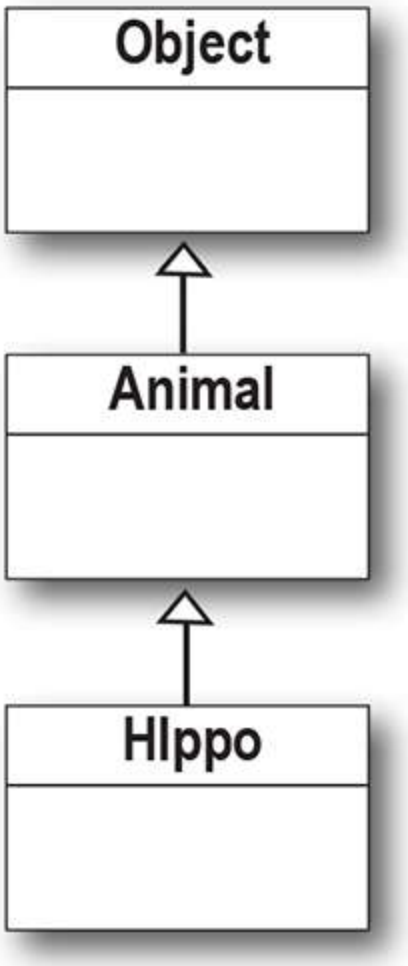

All the constructors in an object's inheritance tree must run when you make a new object.

Let that sink in.

That means every superclass has a constructor (because every class has a constructor), and each constructor up the hierarchy runs at the time an object of a subclass is created.

Saying **`new`** is a Big Deal. It starts the whole constructor chain reaction. And yes, even abstract classes have constructors. Although you can never say new on an abstract class, an abstract class is still a superclass, so its constructor runs when someone makes an instance of a concrete subclass.

The superclass constructors run to build out the superclass parts of the object. Remember, a subclass might inherit methods that depend on

superclass state (in other words, the value of instance variables in the superclass). For an object to be fully formed, all the superclass parts of itself *must* be fully formed, and that's why the superclass constructor must run. All instance variables from every class in the inheritance tree have to be declared and initialized. Even if Animal has instance variables that Hippo doesn't inherit (if the variables are private, for example), the Hippo still depends on the Animal methods that *use* those variables.

When a constructor runs, it immediately calls its superclass constructor, all the way up the chain until you get to the class Object constructor.

On the next few pages, you'll learn how superclass constructors are called, and how you can call them yourself. You'll also learn what to do if your superclass constructor has arguments!

A new Hippo object also IS-A Animal and IS-A Object. If you want to make a Hippo, you must also make the Animal and Object parts of the Hippo.

This all happens in a process called Constructor Chaining.

Making a Hippo means making the Animal and Object parts too...

```
public class Animal {
   public Animal() {
      System.out.println("Making an Animal");
   }
}
```

```
public class Hippo extends Animal {
  public Hippo() {
    System.out.println("Making a Hippo");
  }
}
```

```
public class TestHippo {
  public static void main(String[] args) {
    System.out.println("Starting...");
    Hippo h = new Hippo();
  }
}
```

Given the class hierarchy in the code above, we can step through the process of creating a new Hippo object.

SHARPEN YOUR PENCIL

What's the real output? Given the code on the left, what prints out when you run TestHippo? A or B?

(The answer is at the bottom of the page.)

A

```
File Edit Window Help Swear
% java TestHippo
Starting...
Making an Animal
Making a Hippo
```

B

```
File Edit Window Help Swear
% java TestHippo
Starting...
Making a Hippo
Making an Animal
```

- ① Code from another class calls new **`Hippo()`**, and the **`Hippo()`** constructor goes into a stack frame at the top of the stack.

- ② **`Hippo()`** invokes the superclass constructor, which pushes the **`Animal()`** constructor onto the top of the stack.

- ③ **`Animal()`** invokes the superclass constructor, which pushes the **`Object()`** constructor onto the top of the stack, since Object is the superclass of Animal.

- ④ **`Object()`** completes, and its stack frame is popped off the stack. Execution goes back to the **`Animal()`** constructor and picks up at the line following Animal's call to its superclass constructor.

The first one, A. The Hippo() constructor is invoked first, but it's the Animal constructor that finishes first.

How do you invoke a superclass constructor?

You might think that somewhere in, say, a Duck constructor, if Duck extends Animal you'd call Animal(). But that's not how it works:

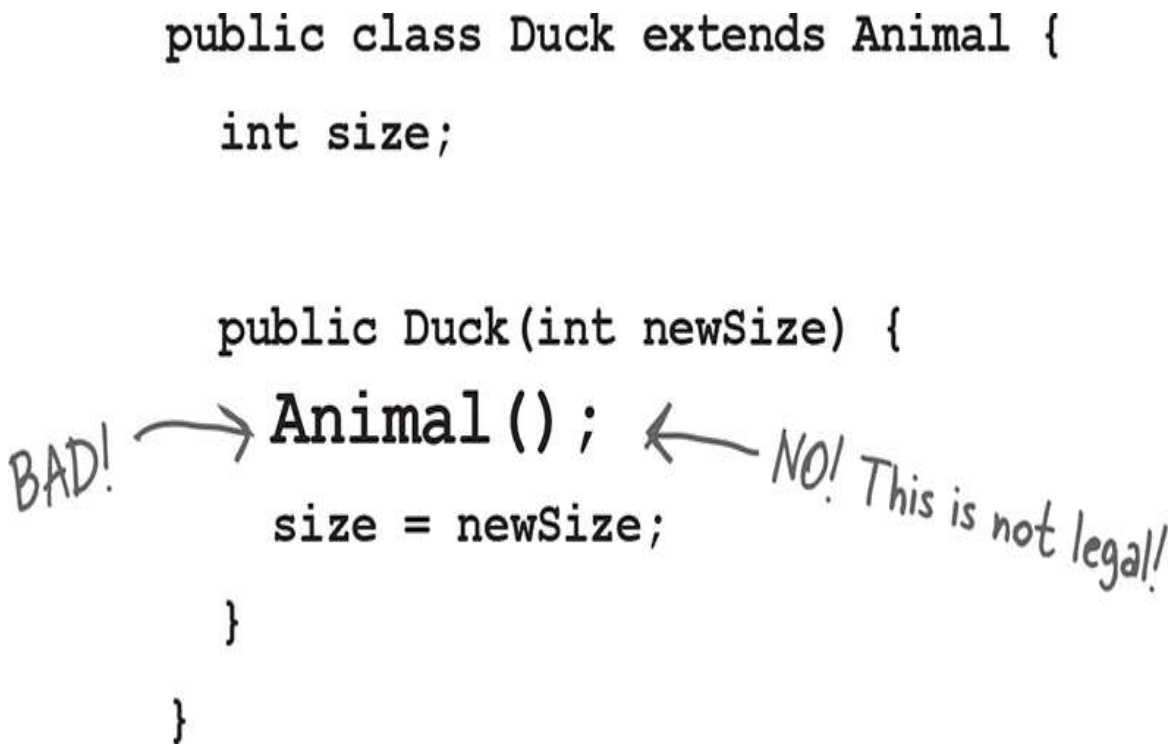

The only way to call a superclass constructor is by calling ***super().*** That's right—***super()*** calls the ***superclass constructor.***

What are the odds?

```
public class Duck extends Animal {

  int size;


  public Duck(int newSize) {
    super();
    size = newSize;
  }
}
```

A call to super() in your constructor puts the superclass constructor on the top of the Stack. And what do you think that superclass constructor does? *Calls its superclass constructor.* And so it goes until the Object constructor is on the top of the Stack. Once Object() finishes, it's popped off the Stack, and the next thing down the Stack (the subclass constructor that called Object()) is now on top. *That* constructor finishes and so it goes until the original constructor is on the top of the Stack, where it can now finish.

And how is it that we've gotten away without calling super() before?

You probably figured that out.

Our good friend the compiler puts in a call to *super()* if you don't.

So the compiler gets involved in constructor-making in *two* ways:

- ① **If you *don't* provide a constructor**

  The compiler puts one in that looks like:

  ```
  public ClassName() {
    super();
  }
  ```

- ② **If you do provide a constructor but you do not put in the call to super()**

  The compiler will put a call to super() in each of your overloaded constructors.* The compiler-supplied call looks like:

  ```
  super();
  ```

  It always looks like that. The compilerinserted call to super() is always a no-arg call. If the superclass has overloaded constructors, only the no-arg constructor is called.

  *Unless the constructor calls another overloaded constructor (you'll see that in a few pages).

Can the child exist before the parents?

Eewwww...that is SO creepy. There's **no** way I could have been born before my parents. That's just *wrong*.

If you think of a superclass as the parent to the subclass child, you can figure out which has to exist first. ***The superclass parts of an object have to be fully formed (completely built) before the subclass parts can be constructed.*** Remember, the subclass object might depend on things it inherits from the superclass, so it's important that those inherited things be finished. No way around it. The superclass constructor must finish before its subclass constructor.

Look at the Stack series in "Making a Hippo means making the Animal and Object parts too..." again, and you can see that while the Hippo constructor is the *first* to be invoked (it's the first thing on the Stack), it's the *last* one to complete! Each subclass constructor immediately invokes its own superclass constructor, until the Object constructor is on the top of the Stack. Then Object's constructor completes, and we bounce back down the Stack to Animal's constructor. Only after Animal's constructor completes do we finally come back down to finish the rest of the Hippo constructor. For that reason:

The call to super() must be the *first* statement in each constructor!*

Possible constructors for class Boop

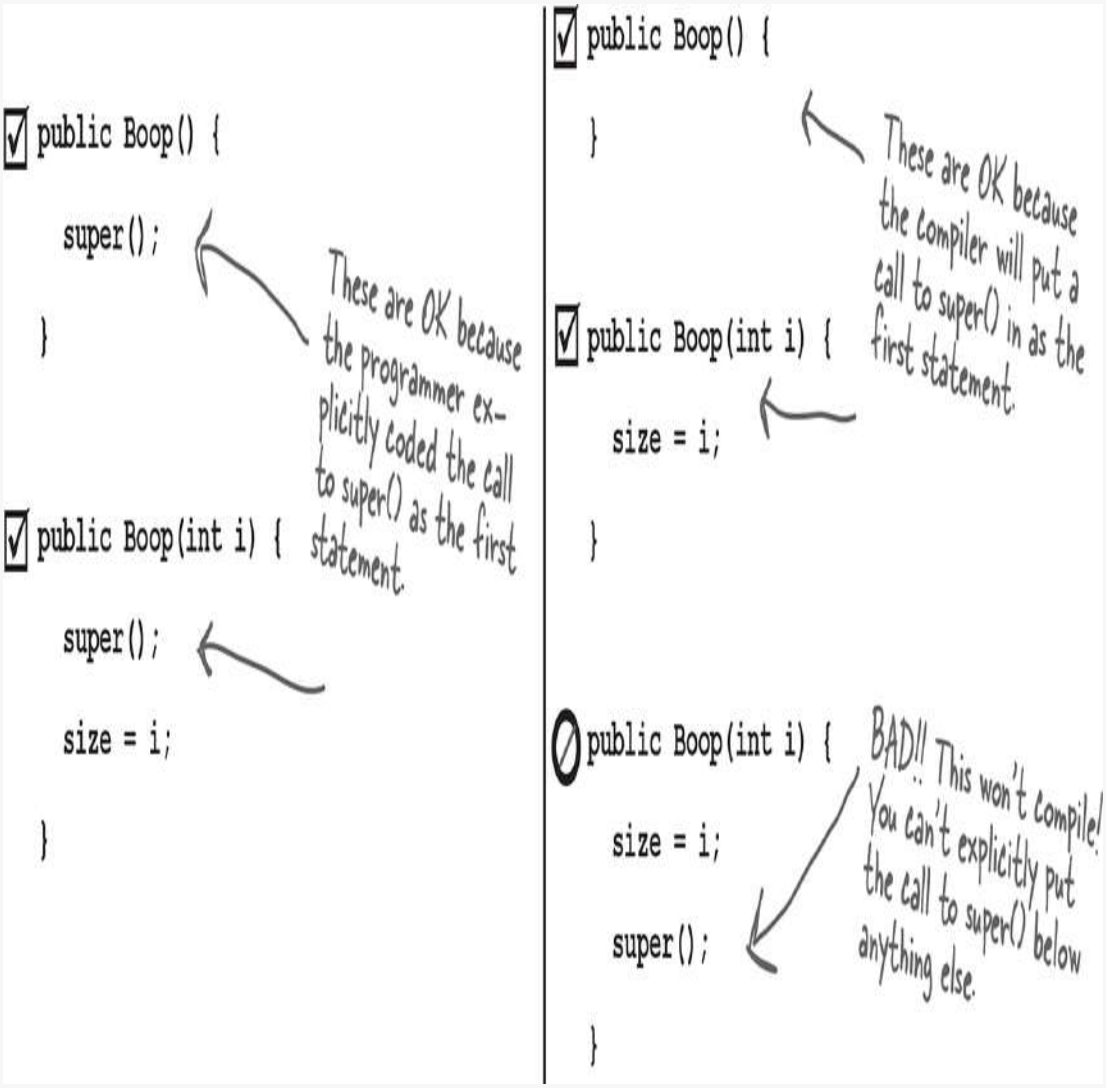

*There's an exception to this rule; you'll learn it in "Invoking one overloaded constructor from another".

Superclass constructors with arguments

What if the superclass constructor has arguments? Can you pass something in to the super() call? Of course. If you couldn't, you'd never be able to extend

a class that didn't have a no-arg constructor. Imagine this scenario: all animals have a name. There's a getName() method in class Animal that returns the value of the name instance variable. The instance variable is marked private, but the subclass (in this case, Hippo) inherits the getName() method. So here's the problem: Hippo has a getName() method (through inheritance) but does not have the name instance variable. Hippo has to depend on the Animal part of himself to keep the name instance variable, and return it when someone calls getName() on a Hippo object. But...how does the Animal part get the name? The only reference Hippo has to the Animal part of himself is through super(), so that's the place where Hippo sends the Hippo's name up to the Animal part of himself, so that the Animal part can store it in the private name instance variable.

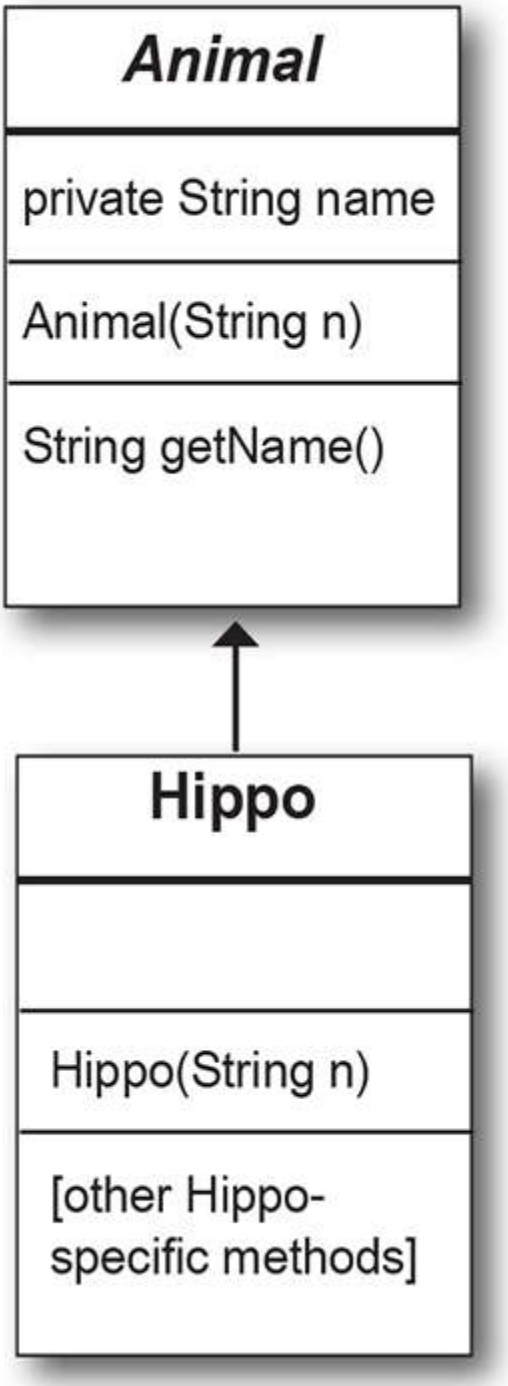
Animal
private String name
Animal(String n)
String getName()
Hippo
Hippo(String n)
[other Hippo-specific methods]

```
public abstract class Animal {
  private String name;

  public String getName() {
    return name;
  }

  public Animal(String theName) {
    name = theName;
  }
}
```

All animals (including subclasses) have a name.

A getter method that Hippo inherits.

The constructor that takes the name and assigns it the name instance variable.

```
public class Hippo extends Animal {
  public Hippo(String name) {
    super(name);
  }
}
```

Hippo constructor takes a name.

It sends the name up the Stack to the Animal constructor.

```
public class MakeHippo {
  public static void main(String[] args) {
    Hippo h = new Hippo("Buffy");
    System.out.println(h.getName());
  }
}
```

Make a Hippo, passing the name "Buffy" to the Hippo constructor. Then call the Hippo's inherited getName().

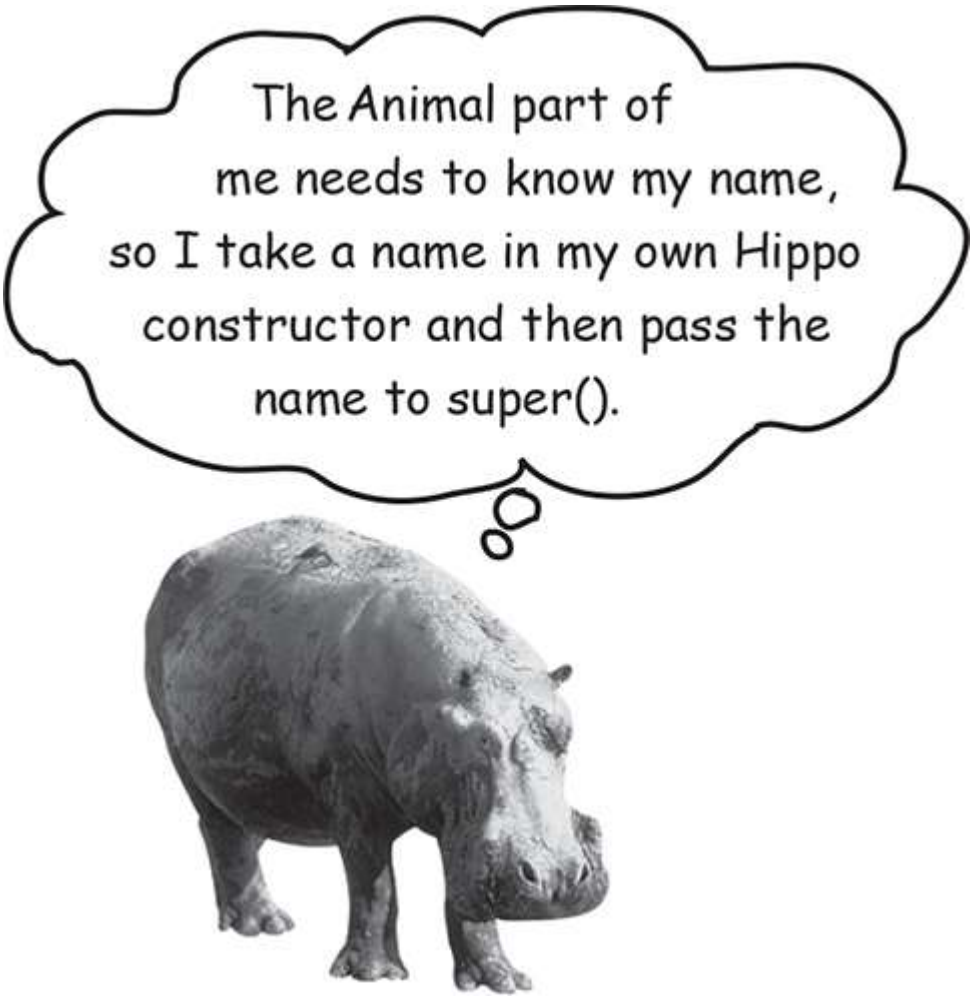


```
File Edit Window Help Hide
%java MakeHippo
Buffy
```

Invoking one overloaded constructor from another

Use this() to call a constructor from another overloaded constructor in the same class.

The call to this() can be used only in a constructor, and must be the first statement in a constructor.

A constructor can have a call to super() OR this(), but never both!

What if you have overloaded constructors that, with the exception of handling different argument types, all do the same thing? You know that you don't want *duplicate* code sitting in each of the constructors (pain to maintain, etc.), so you'd like to put the bulk of the constructor code (including the call to super()) in only *one* of the overloaded constructors. You want whichever constructor is first invoked to call The Real Constructor and let The Real Constructor finish the job of construction. It's simple: just say *this()*. Or *this(aString)*. Or *this(27, x)*. In other words, just imagine that the keyword *this* is a reference to **the current object.**

You can say *this()* only within a constructor, and it must be the first statement in the constructor!

But that's a problem, isn't it? Earlier we said that super() must be the first statement in the constructor. Well, that means you get a choice.

Every constructor can have a call to super() or this(), but never both!

You'll need to choose which to call based on which values you have, which ones you need to set, and which constructors are provided in this class or the superclass.

```
import java.awt.Color;

class Mini extends Car {
  private Color color;

  public Mini() {
    this(Color.RED);
  }

  public Mini(Color c) {
    super("Mini");
    color = c;
    // more initialization
  }

  public Mini(int size) {
    this(Color.RED);
    super(size);
  }
}
```

The no-arg constructor supplies a default Color and calls the overloaded Real Constructor (the one that calls super()).

This is The Real Constructor that does The Real Work of initializing the object (including the call to super()).

Won't work!! Can't have super() and this() in the same constructor, because they each must be the first statement!

```
File Edit Window Help Drive

javac Mini.java

Mini.java:16: call to super must
be first statement in constructor

     super();
     ^
```

SHARPEN YOUR PENCIL

Yours to solve.

Some of the constructors in the SonOfBoo class will not compile. See if you can recognize which constructors are not legal. Match the compiler errors with the SonOfBoo constructors that caused them, by drawing a line from the compiler error to the “bad” constructor.

```
public class Boo {
  public Boo(int i) { }
  public Boo(String s) { }
  public Boo(String s, int i) { }
}
```

```
class SonOfBoo extends Boo {
  public SonOfBoo() {
    super("boo");
  }

  public SonOfBoo(int i) {
    super("Fred");
  }

  public SonOfBoo(String s) {
    super(42);
  }

  public SonOfBoo(int i, String s) {
  }

  public SonOfBoo(String a, String b, String c) {
    super(a, b);
  }

  public SonOfBoo(int i, int j) {
    super("man", j);
  }

  public SonOfBoo(int i, int x, int y) {
    super(i, "star");
  }
}
```

```
File Edit Window Help
%javac SonOfBoo.java
cannot resolve symbol
symbol : constructor Boo
(java.lang.String,java.
lang.String)
```

```
File Edit Window Help Yadayadayada
%javac SonOfBoo.java
cannot resolve symbol
symbol   : constructor Boo
(int,java.lang.String)
```

```
File Edit Window Help ImNotListening
%javac SonOfBoo.java
cannot resolve symbol
symbol:constructor Boo()
```

Now we know how an object is born, but how long does an object *live*?

An *object's* life depends entirely on the life of references referring to it. If the reference is considered "alive," the object is still alive on the Heap. If the reference dies (and we'll look at what that means in just a moment), the object will die.

So if an object's life depends on the reference variable's life, how long does a *variable* live?

That depends on whether the variable is a *local* variable or an *instance* variable. The code below shows the life of a local variable. In the example, the variable is a primitive, but variable lifetime is the same whether it's a primitive or reference variable.

```
public class TestLifeOne {

  public void read() {
    int s = 42;
    sleep();
  }

  public void sleep() {
    s = 7;
  }
}
```

"s" is scoped to the read() method, so it can't be used anywhere else.

BAD!! Not legal to use "s" here!

sleep() can't see the "s" variable. Since it's not in sleep()'s own Stack frame, sleep() doesn't know anything about it.

The variable "s" is alive, but in scope only within the read() method. When sleep() completes and read() is on top of the Stack and running again, read() can still see "s." When read() completes and is popped off the Stack, "s" is dead. Pushing up digital daisies.

- ① **A <u>local</u> variable lives only within the method that declared the variable.**

```
public void read() {
  int s = 42;
  // ‘s’ can be used only
  // within this method.
  // When this method ends,
  // ‘s’ disappears completely.
}
```

Variable “**s**” can be used only within the read() method. In other words, ***the variable is in scope only within its own method.*** No other code in the class (or any other class) can see “**s.**”

- ② **An <u>instance</u> variable lives as long as the object does. If the object is still alive, so are its instance variables.**

```
public class Life {
  int size;

  public void setSize(int s) {
    size = s;
    // ‘s’ disappears at the
    // end of this method,
    // but ‘size’ can be used
    // anywhere in the class
  }
}
```

Variable ‘**s**’ (this time a method parameter) is in scope only within the setSize() method. But instance variable size is scoped to the life of the object as opposed to the life of the *method.*

The difference between life and scope for local variables:

Life

A local variable is *alive* as long as its Stack frame is on the Stack. In other words, *until the method completes.*

Scope

A local variable is in *scope* only within the method in which the variable was declared. When its own method calls another, the variable is alive, but not in scope until its method resumes. ***You can use a variable only when it is in scope.***

Let's walk through what happens on the stack when something calls the doStuff() method.

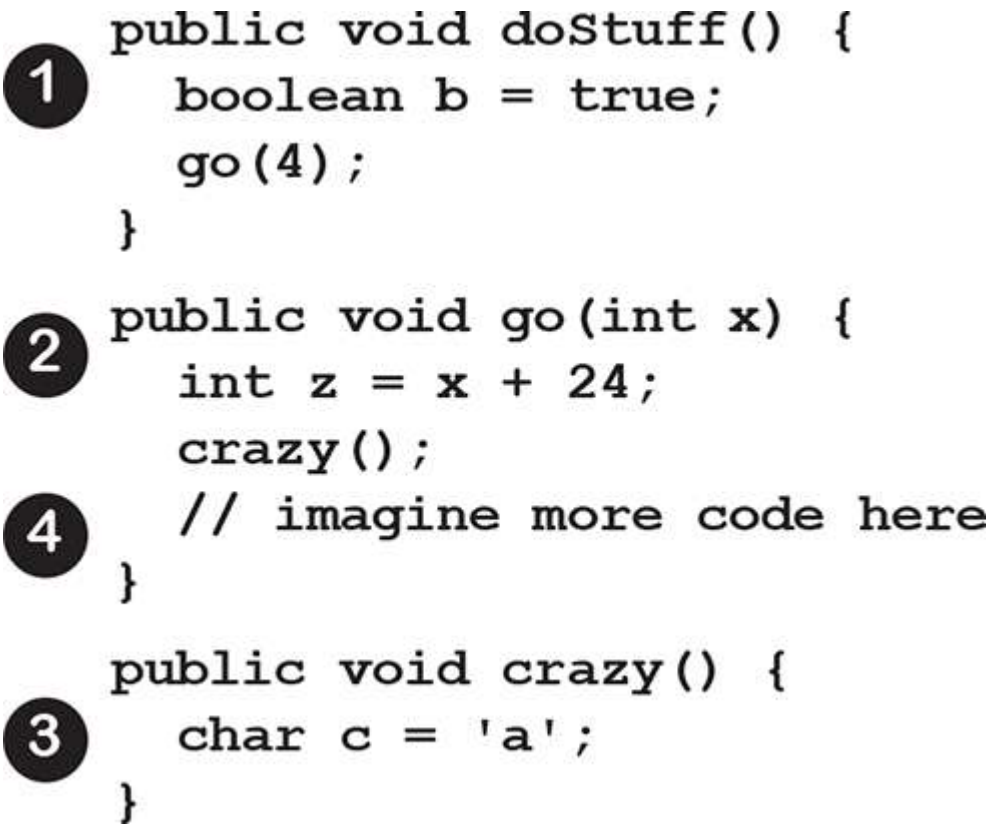

❶ ***doStuff()*** **goes on the Stack. Variable "b" is alive and in scope.**

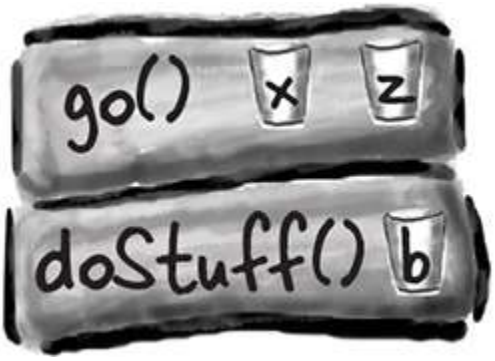

❷ ***go()*** **plops on top of the Stack. "x" and "z" are alive and in scope, and "b" is alive but not in scope.**

❸ ***crazy()*** **is pushed onto the Stack, with "c" now alive and in scope. The other three variables are alive but out of scope.**

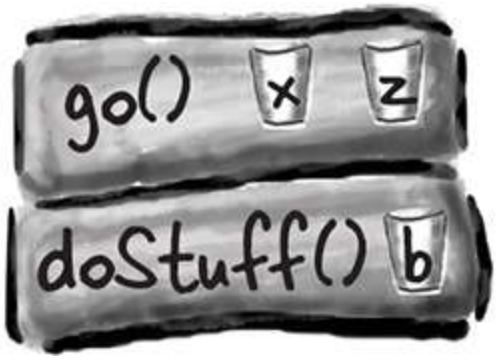

❹ ***crazy()*** **completes and is popped off the Stack, so 'c' is out of scope and dead. When go() resumes where it left off, "x" and "x" are both alive and back in scope. Variable "b" is still alive but out of scope (until go() completes).**

While a local variable is alive, its state persists. As long as method doStuff() is on the Stack, for example, the "b" variable keeps its value. But the "b" variable can be used only while doStuff()'s Stack frame is at the top. In other words, you can use a local variable *only* while that local variable's method is actually running (as opposed to waiting for higher Stack frames to complete).

What about reference variables?

The rules are the same for primitives and references. A reference variable can be used only when it's in scope, which means you can't use an object's remote control unless you've got a reference variable that's in scope. The *real* question is:

"How does *variable* life affect *object* life?"

An object is alive as long as there are live references to it. If a reference variable goes out of scope but is still alive, the object it *refers* to is still alive on the Heap. And then you have to ask..."What happens when the Stack frame holding the reference gets popped off the Stack at the end of the method?"

If that was the *only* live reference to the object, the object is now abandoned on the Heap. The reference variable disintegrated with the Stack frame, so the abandoned object is now, *officially*, toast. The trick is to know the point at which an object becomes ***eligible for garbage collection.***

Once an object is eligible for garbage collection (GC), you don't have to worry about reclaiming the memory that object was using. If your program gets low on memory, GC will destroy some or all of the eligible objects, to keep you from running out of RAM. You can still run out of memory, but *not* before all eligible objects have been hauled off to the dump. Your job is to make sure that you abandon objects (i.e., make them eligible for GC) when you're done with them, so that the garbage collector has something to reclaim. If you hang on to objects, GC can't help you, and you run the risk of your program dying a painful out-of-memory death.

An object's life has no value, no meaning, no point, unless somebody has a reference to it.

If you can't get to it, you can't ask it to do anything and it's just a big fat waste of bits.

But if an object is unreachable, the Garbage Collector will figure that out. Sooner or later, that object's goin' down.

An object becomes eligible for GC when its last live reference disappears.

Three ways to get rid of an object's reference:

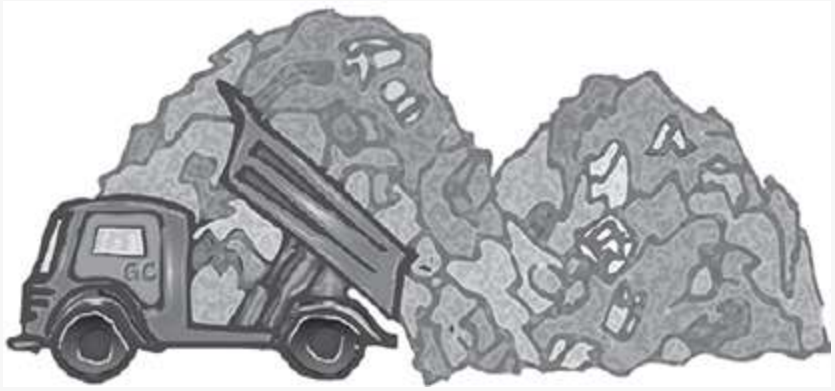

1. The reference goes out of scope, permanently

```
void go() {
  Life z = new Life();
}
```

reference 'z' dies at end of method.

2. The reference is assigned another object

```
Life z = new Life();
z = new Life();
```

the first object is abandoned when z is 'reprogrammed' to a new object.

3. The reference is explicitly set to null

```
Life z = new Life();
z = null;
```

the first object is abandoned when z is 'deprogrammed.'

Object-killer #1

Reference goes out of scope, permanently.

```
public class StackRef {
  public void foof() {
     barf();
  }

  public void barf() {
     Duck d = new Duck();
 }
}
```

- ❶ ***foof()*** **is pushed onto the Stack; no variables are declared.**

- ❷ **2** ***barf()*** **is pushed onto the Stack, where it declares a reference variable, and creates a new object assigned to that reference. The object is created on the Heap, and the reference is alive and in scope.**

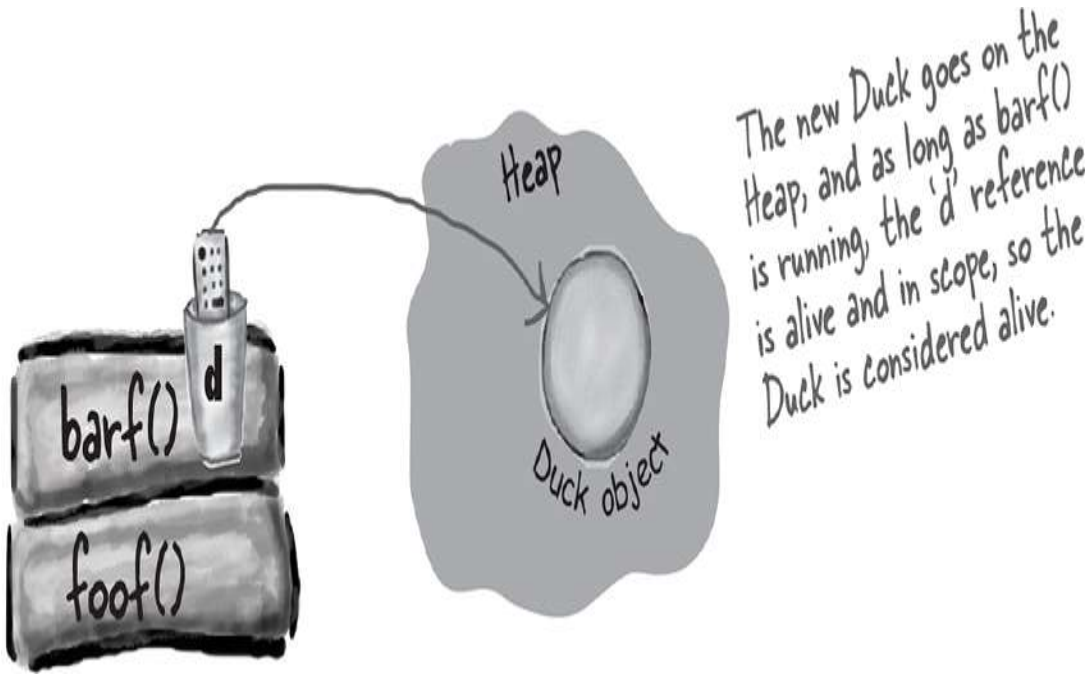

- **3 *barf()* completes and pops off the Stack. Its frame disintegrates, so "d" is now dead and gone. Execution returns to foof(), but foof() can't use "d."**

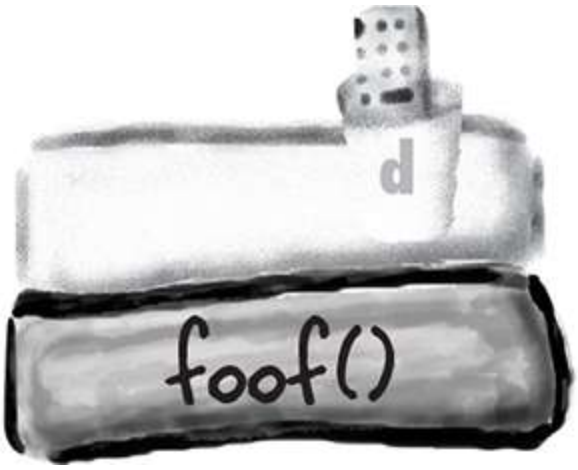

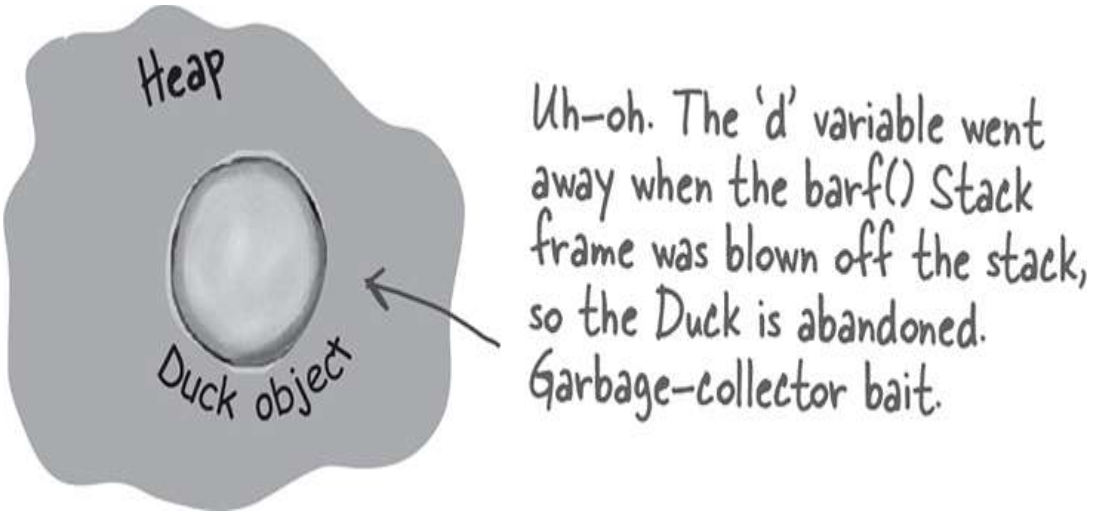

Object-killer #2

Assign the reference to another object

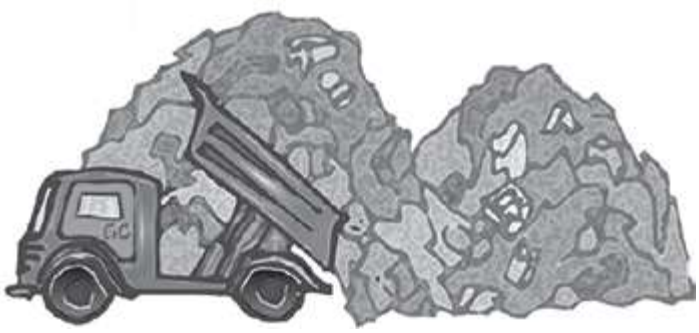

```
public class ReRef {
  Duck d = new Duck();

  public void go() {
    d = new Duck();
 }
}
```

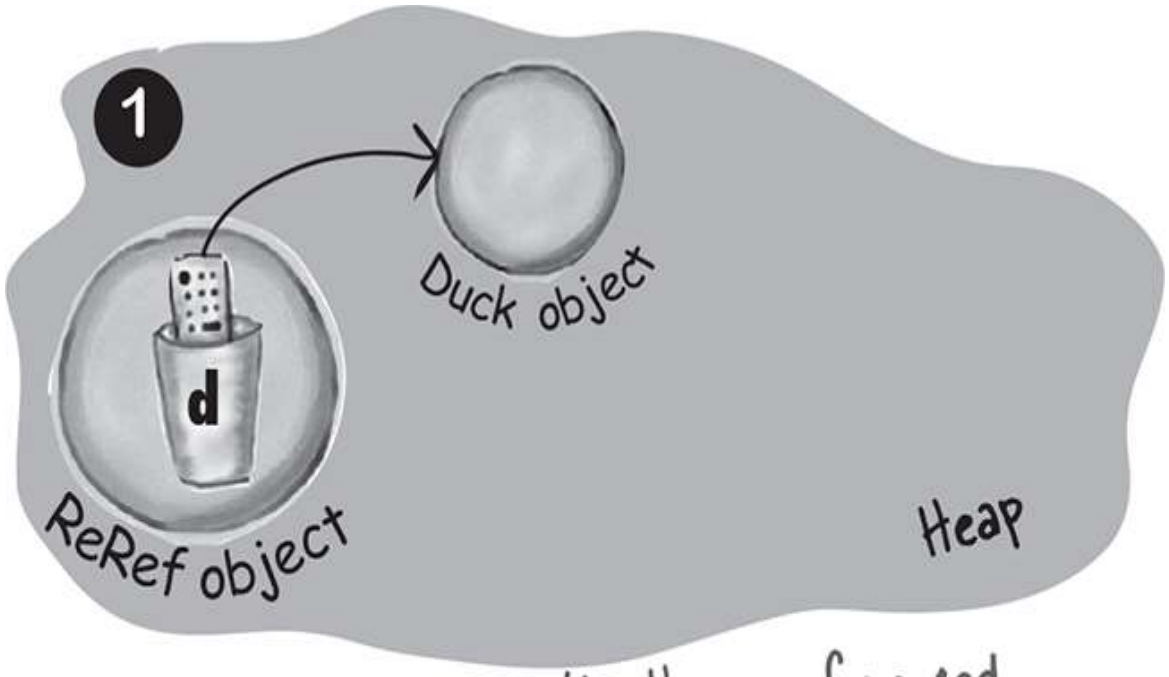

The new Duck goes on the Heap, referenced by "d." Since "d" is an instance variable, the Duck will live as long as the ReRef object that instantiated it is alive. Unless...

When someone calls the go() method, this Duck is abandoned. Its only reference has been reprogrammed for a different Duck.

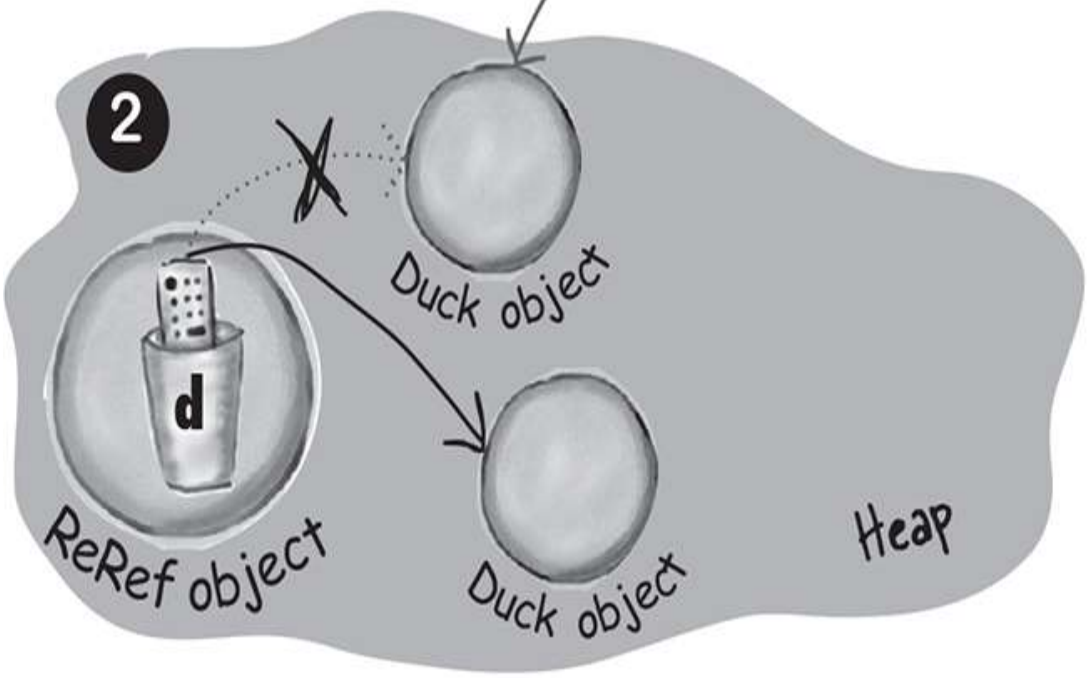

'd' is assigned a new Duck object, leaving the original (first) Duck object abandoned. That first Duck is now as good as dead.

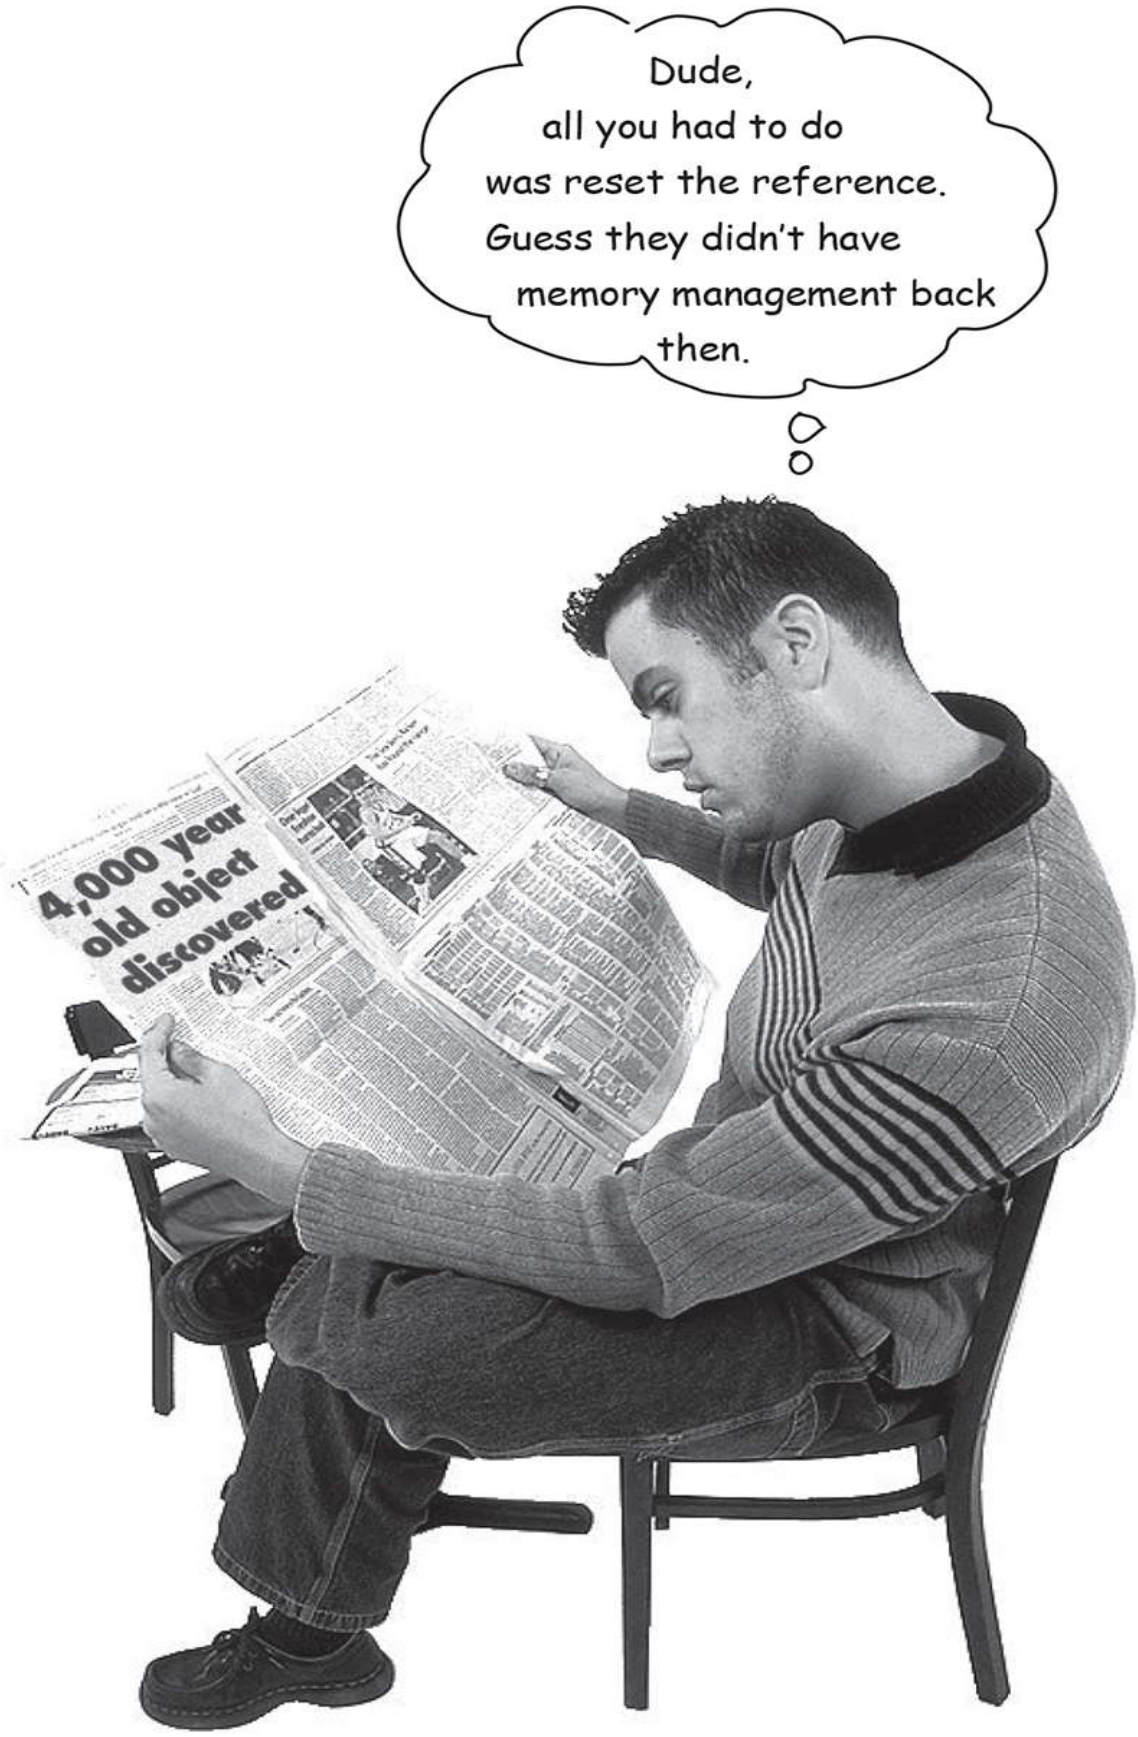
Dude,
all you had to do
was reset the reference.
Guess they didn't have
memory management back
then.
4,000 year
old object
discovered

Object-killer #3

Explicitly set the reference to null

```
public class ReRef {
  Duck d = new Duck();

  public void go() {
    d = null;
  }
}
```

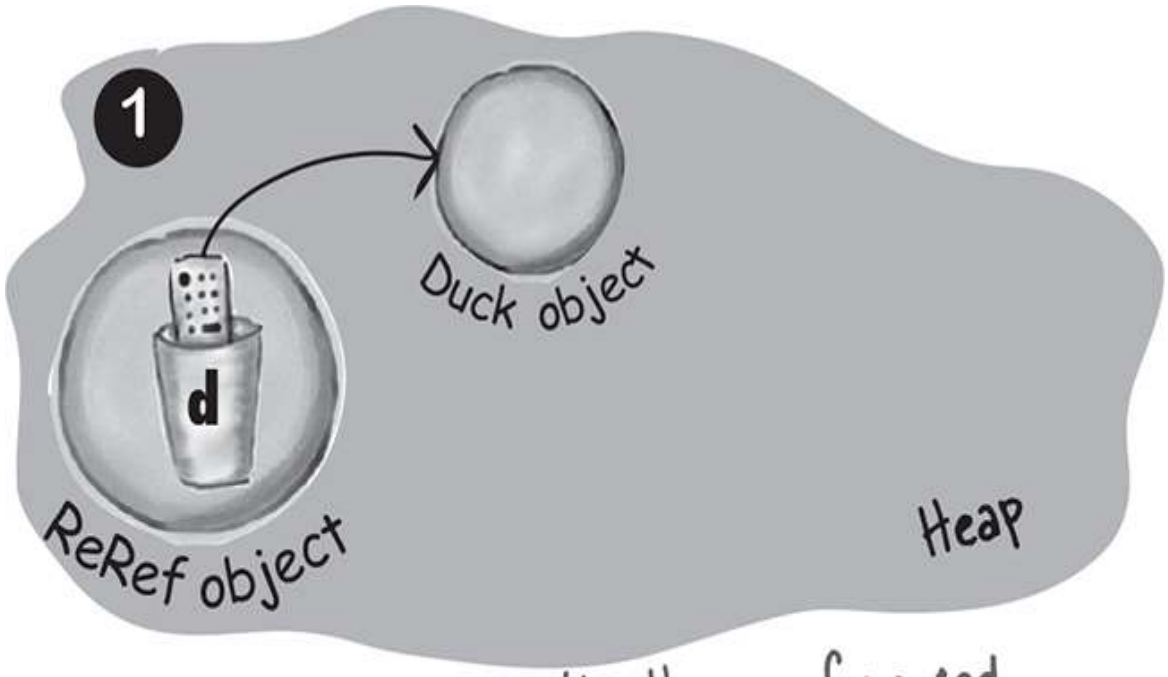

The new Duck goes on the Heap, referenced by "d." Since "d" is an instance variable, the Duck will live as long as the ReRef object that instantiated it is alive. Unless...

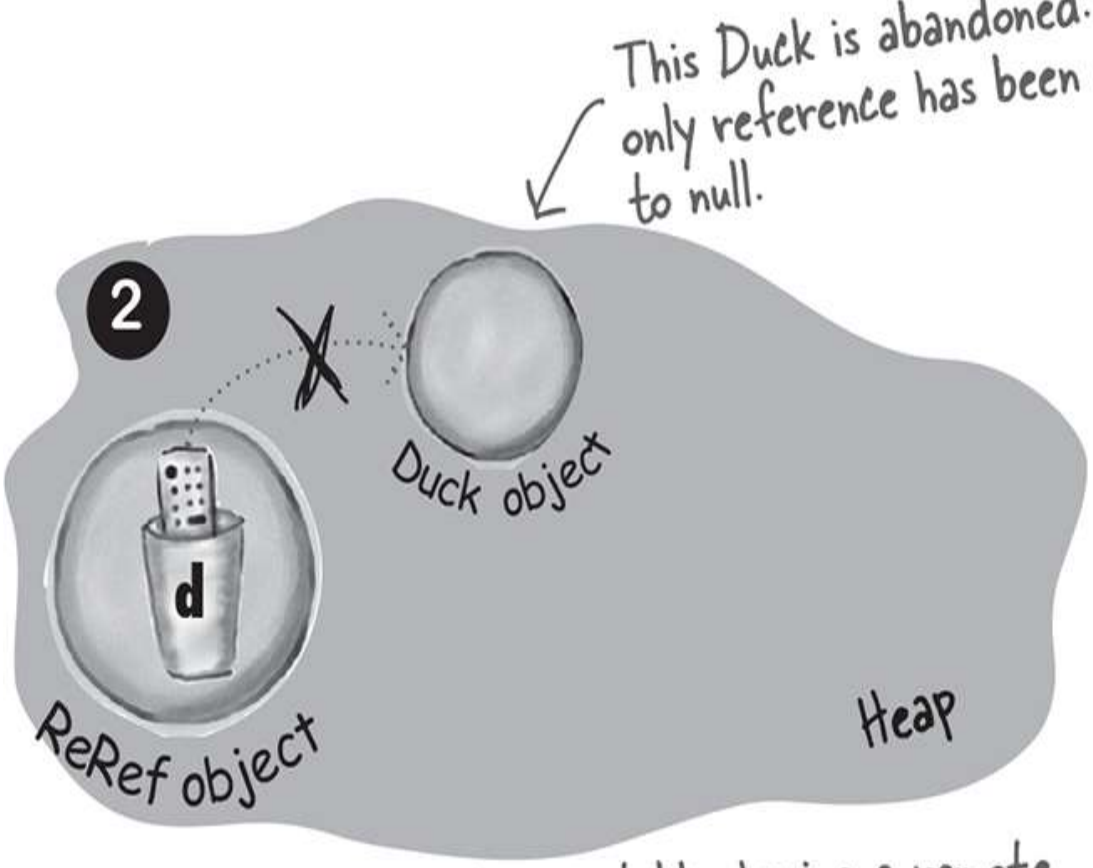

'd' is set to null, which is just like having a remote control that isn't programmed to anything. You're not even allowed to use the dot operator on 'd' until it's reprogrammed (assigned an object).

The meaning of `null`

When you set a reference to `null`, you're deprogramming the remote control. In other words, you've got a remote control, but no TV at the other end. A null reference has bits representing "null" (we don't know or care what those bits are, as long as the JVM knows).

If you have an unprogrammed remote control, in the real world, the buttons don't do anything when you press them. But in Java, you can't press the buttons (i.e., use the dot operator) on a null reference, because the JVM knows (this is a runtime issue, not a compiler error) that you're expecting a bark, but there's no Dog there to do it!

If you use the dot operator on a null reference, you'll get a NullPointerException at runtime. You'll learn all about exceptions in Chapter 13, *Risky Behavior*.

FIRESIDE CHATS

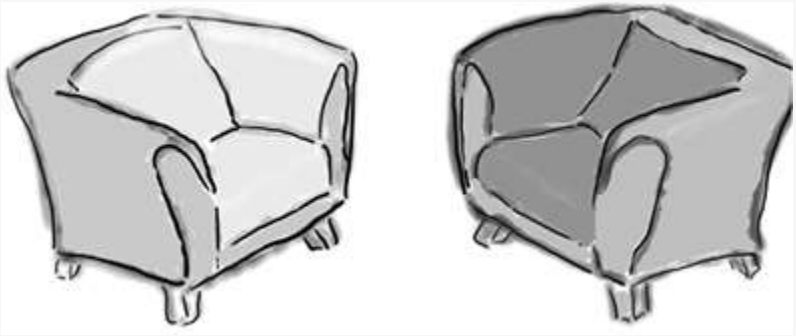

Tonight's Talk: **An instance variable and a local variable discuss life and death (with remarkable civility)**

Instance Variable	Local Variable
I'd like to go first, because I tend to be more important to a program than a local variable. I'm there to support an object, usually throughout the object's entire life. After all, what's an object without state? And what is state? Values kept in ***instance variables.***	I appreciate your point of view, and I certainly appreciate the value of object state and all, but I don't want folks to be misled. Local variables are *really* important. To use your phrase, "After all, what's an object without *behavior?"* And what is behavior? Algorithms in methods. And you can bet your bits there'll be some *local variables* in there to make those algorithms work.
No, don't get me wrong, I do understand your role in a method; it's just that your life is so short. So temporary. That's why they call you guys "temporary variables."	Within the local-variable community, the phrase "temporary variable" is considered derogatory. We prefer "local," "stack," "automatic," or "Scope-challenged."
My apologies. I understand completely.	Anyway, it's true that we don't have a long life, and it's not a particularly *good* life either. First, we're shoved into a Stack frame with all the other local variables. And then, if the method we're part of calls another method, another frame is pushed on top of us. And if that method calls another method...and so on. Sometimes we have to wait forever for all the other methods on top of the Stack to complete so that our method can run again.
I never really thought about it like that. What are you doing while the other methods are running and you're waiting for your frame to be the top of the Stack again?	Nothing. Nothing at all. It's like being in stasis— that thing they do to people in science-fiction movies when they have to travel long distances. Suspended animation, really. We just sit there on hold. As long as our frame is still there, we're safe and the value we hold is secure, but it's a mixed blessing when our frame gets to run again. On the one hand, we get to be active again. On the other hand, the clock starts ticking again on our short lives. The more time our method spends running, the closer we get to the end of the method. We *all* know what happens then.
We saw an educational video about it once. Looks like a pretty brutal ending. I mean, when that method hits its ending curly brace, the frame is literally *blown* off the Stack! Now *that's* gotta hurt.	Tell me about it. In computer science they use the term *popped* as in "the frame was popped off the Stack." That makes it sound fun, or maybe like an extreme sport. But, well, *you* saw the footage. So why don't we talk about you? I know what my little Stack frame looks like, but where do you live?
I live on the Heap, with the objects. Well, not *with* the objects, actually *in* an object. The object whose state I	But you don't *always* live as long as the object who declared you, right? Say there's a Dog object with a Collar instance variable. Imagine *you're* an instance variable of the *Collar* object, maybe a reference to a Buckle or something, sitting there all happy inside

store. I have to admit life can be pretty luxurious on the Heap. A lot of us feel guilty, especially around the holidays.	the *Collar* object who's all happy inside the *Dog* object. But...what happens if the Dog wants a new Collar or *nulls* out its Collar instance variable? That makes the Collar object eligible for GC. So...if *you're* an instance variable inside the *Collar* and the whole Collar is abandoned, what happens to *you?*
OK, hypothetically, yes, if I'm an instance variable of the Collar and the Collar gets GC'd, then the Collar's instance variables would indeed be tossed out like so many pizza boxes. But I was told that this almost never happens.	And you believed it? That's what they say to keep us motivated and productive. But aren't you forgetting something else? What if you're an instance variable inside an object, and that object is referenced only by a local variable? If I'm the only reference to the object you're in, when I go, you're coming with me. Like it or not, our fates may be connected. So I say we forget about all this and go get a drink while we still can. Carpe RAM and all that.

They let us *drink?*

Exercise

BE the Garbage Collector

Which of the lines of code on the right, if added to the class on the left at point A, would cause exactly one additional object to be eligible for the Garbage Collector? (Assume that point A (//call more methods) will execute for a long time, giving the Garbage Collector time to do its stuff.)

```
public class GC {
 public static GC doStuff() {
   GC newGC = new GC();
   doStuff2(newGC);
   return newGC;
}

public static void main(String[] args) {
  GC gc1;
  GC gc2 = new GC();
  GC gc3 = new GC();
  GC gc4 = gc3;
  gc1 = doStuff();

  A

  // call more methods
}

public static void doStuff2(GC copyGC) {
  GC localGC = copyGC;
 }
}
```

→ **Answers in "Be the Garbage Collector".**

1 `copyGC = null;`

2 `gc2 = null;`

3 `newGC = gc3;`

4 `gc1 = null;`

5 `newGC = null;`

6 `gc4 = null;`

```
7 gc3 = gc2;
8 gc1 = gc4;
9 gc3 = null;
```

Popular Objects

In this code example, several new objects are created. Your challenge is to find the object that is "most popular," i.e., the one that has the most reference variables referring to it. Then list how many total references there are for that object, and what they are! We'll start by pointing out one of the new objects and its reference variable.

Good luck!

→ **Answers in "Popular Objects".**

```
class Bees {
  Honey[] beeHoney;
}

class Raccoon {
  Kit rk;
  Honey rh;
}

class Kit {
  Honey honey;
}

class Bear {
  Honey hunny;
}

public class Honey {
  public static void main(String[] args) {
    Honey honeyPot = new Honey();
    Honey[] ha = {honeyPot, honeyPot, honeyPot, honeyPot};
    Bees bees = new Bees();
    bees.beeHoney = ha;
    Bear[] bears = new Bear[5];
    for (int i = 0; i < 5; i++) {
      bears[i] = new Bear();
      bears[i].hunny = honeyPot;
    }
    Kit kit = new Kit();
    kit.honey = honeyPot;
    Raccoon raccoon = new Raccoon();

    raccoon.rh = honeyPot;
    raccoon.rk = kit;
    kit = null;
  } //  end of main
}
```

Here's a new Raccoon object!

Here's its reference variable 'raccoon.'

“We’ve run the simulation four times, and the main module’s temperature consistently drifts out of nominal toward cold,” Sarah said, exasperated. “We installed the new temp-bots last week. The readings on the radiator bots, designed to cool the living quarters, seem to be within spec, so we’ve focused our analysis on the heat retention bots, the bots that help to warm the quarters.” Tom sighed, at first it had seemed that nanotechnology was going to really put them ahead of schedule. Now, with only five weeks left until launch, some of the orbiter’s key life support systems were still not passing the simulation gauntlet.

“What ratios are you simulating?” Tom asked.

Five-Minute Mystery

“Well, if I see where you’re going, we already thought of that,” Sarah replied. “Mission control will not sign off on critical systems if we run them out of spec. We are required to run the v3 radiator bot’s SimUnits in a 2:1 ratio with the v2 radiator’s SimUnits,” Sarah continued. “Overall, the ratio of retention bots to radiator bots is supposed to run 4:3.”

“How’s power consumption, Sarah?” Tom asked. Sarah paused, “Well, that’s another thing, power consumption is running higher than anticipated. We’ve got a team tracking that down too, but because the nanos are wireless, it’s been hard to isolate the power consumption of the radiators from the retention bots.” “Overall power consumption ratios,” Sarah continued, “are

designed to run 3:2 with the radiators pulling more power from the wireless grid."

"OK, Sarah," Tom said. "Let's take a look at some of the simulation initiation code. We've got to find this problem, and find it quick!"

```
import java.util.ArrayList;

class V2Radiator {
  V2Radiator(ArrayList<SimUnit> list) {
    for (int x = 0; x < 5; x++) {
      list.add(new SimUnit("V2Radiator"));
    }
  }
}

class V3Radiator extends V2Radiator {
  V3Radiator(ArrayList<SimUnit> lglist) {
    super(lglist);
    for (int g = 0; g < 10; g++) {
      lglist.add(new SimUnit("V3Radiator"));
    }
  }
}

class RetentionBot {
  RetentionBot(ArrayList<SimUnit> rlist) {
    rlist.add(new SimUnit("Retention"));
  }
}
import java.util.ArrayList;

public class TestLifeSupportSim {
  public static void main(String[] args) {
    ArrayList<SimUnit> aList = new ArrayList<SimUnit>();
    V2Radiator v2 = new V2Radiator(aList);
    V3Radiator v3 = new V3Radiator(aList);
    for (int z = 0; z < 20; z++) {
      RetentionBot ret = new RetentionBot(aList);
    }
  }
}

class SimUnit {
  String botType;
```

```
  SimUnit(String type) {
    botType = type;
  }

  int powerUse() {
    if ("Retention".equals(botType)) {
      return 2;
    } else {
      return 4;
    }
  }
}
```

Tom gave the code a quick look, and a small smile crept across his lips. “I think I’ve found the problem, Sarah, and I bet I know by what percentage your power usage readings are off too!”

What did Tom suspect? How could he guess the power readings errors, and what few lines of code could you add to help debug this program?

→ **Answers in “Five-Minute Mystery”.**

Exercise Solutions

Be the Garbage Collector

(from “Exercise”)

1	`copyGC = null;`	No—this line attempts to access a variable that is out of scope.
2	`gc2 = null;`	OK—gc2 was the only reference variable referring to that object.
3	`newGC = gc3;`	No—another out of scope variable.
4	`gc1 = null;`	OK—gc1 had the only reference because newGC is out of scope.
5	`newGC = null;`	No—newGC is out of scope.
6	`gc4 = null;`	No—gc3 is still referring to that object.
7	`gc3 = gc2;`	No—gc4 is still referring to that object.
8	`gc1 = gc4;`	OK—Reassigning the only reference to that object.
9	`gc3 = null;`	No—gc4 is still referring to that object.

Popular Objects

(from "Popular Objects")

It probably wasn't too hard to figure out that the Honey object first referred to by the honeyPot variable is by far the most "popular" object in this class.

But maybe it was a little trickier to see that all of the variables that point from the code to the Honey object refer to the ***same object!*** There are a total of 12 active references to this object right before the main( ) method completes. The *kit.honeyPot* variable is valid for a while, but kit gets nulled at the end. Since *raccoon.rk* still refers to the Kit object, *raccoon.kit.honeyPot* (although never explicitly declared) refers to the object!

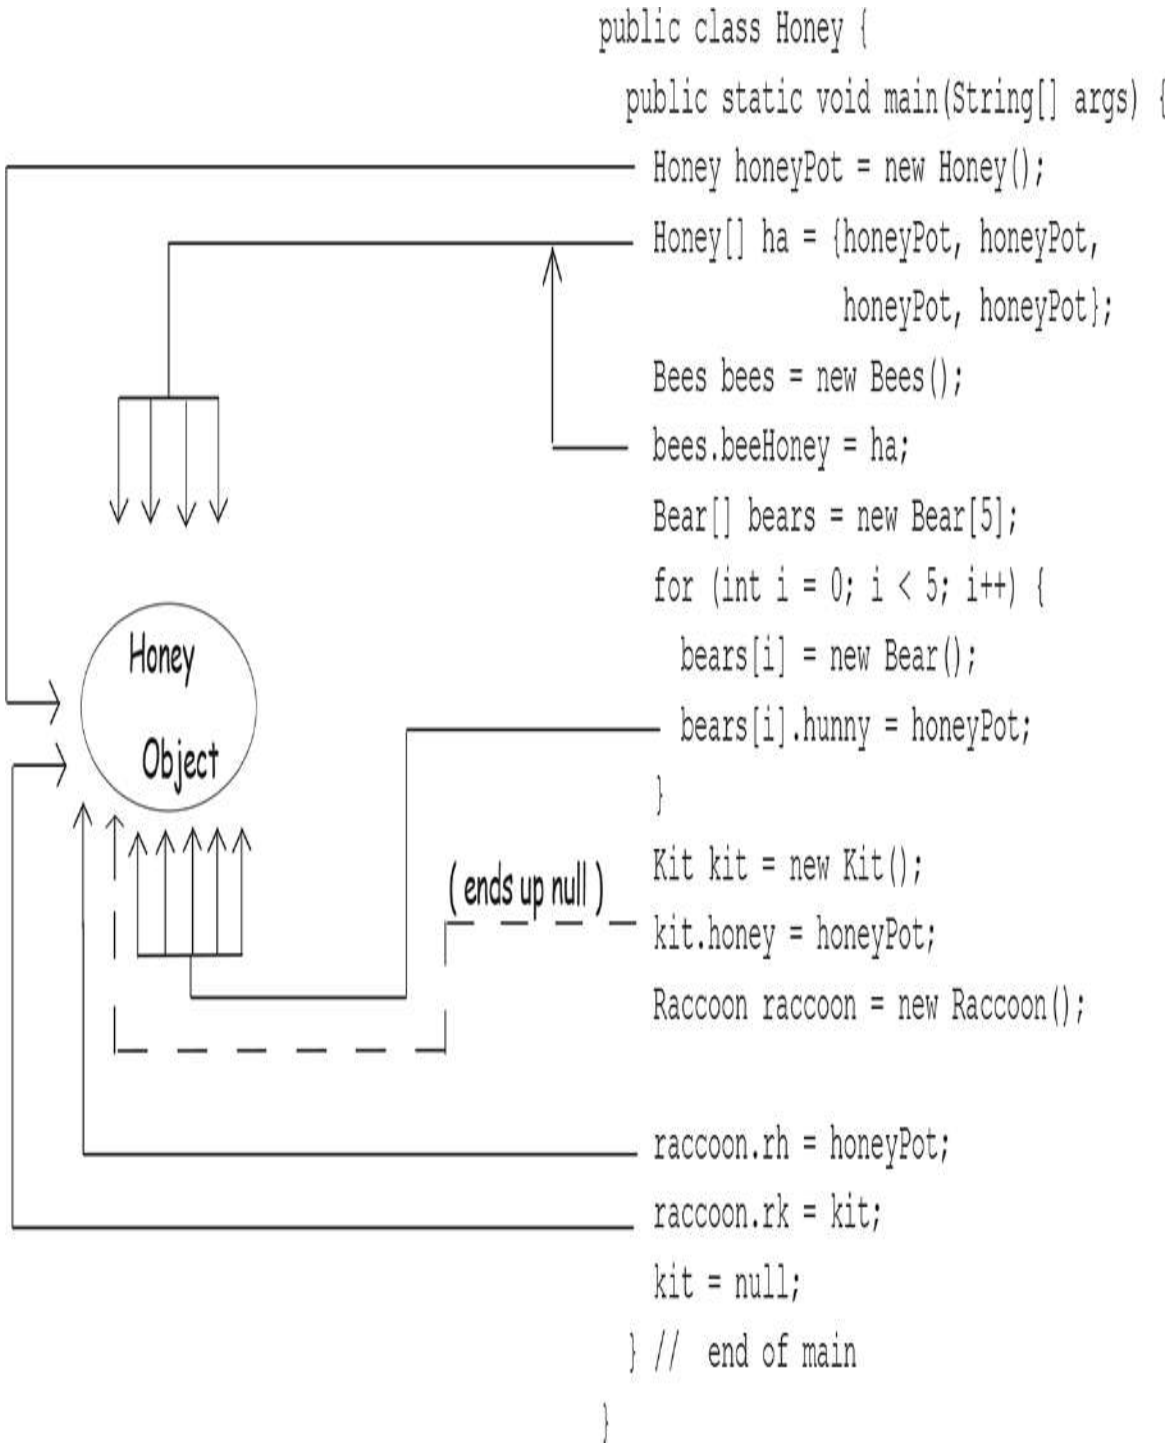

Five-Minute Mystery

(from "Five-Minute Mystery")

Tom noticed that the constructor for the V2Radiator class took an ArrayList. That meant that every time the V3Radiator constructor was called, it passed an ArrayList in its super() call to the V2Radiator constructor. That meant that an extra five V2Radiator SimUnits were created. If Tom was right, total power use would have been 120, not the 100 that Sarah's expected ratios predicted.

Since all the Bot classes create SimUnits, writing a constructor for the SimUnit class, which printed out a line every time a SimUnit was created, would have quickly highlighted the problem!

Chapter 10. Numbers Matter: Numbers and Statics

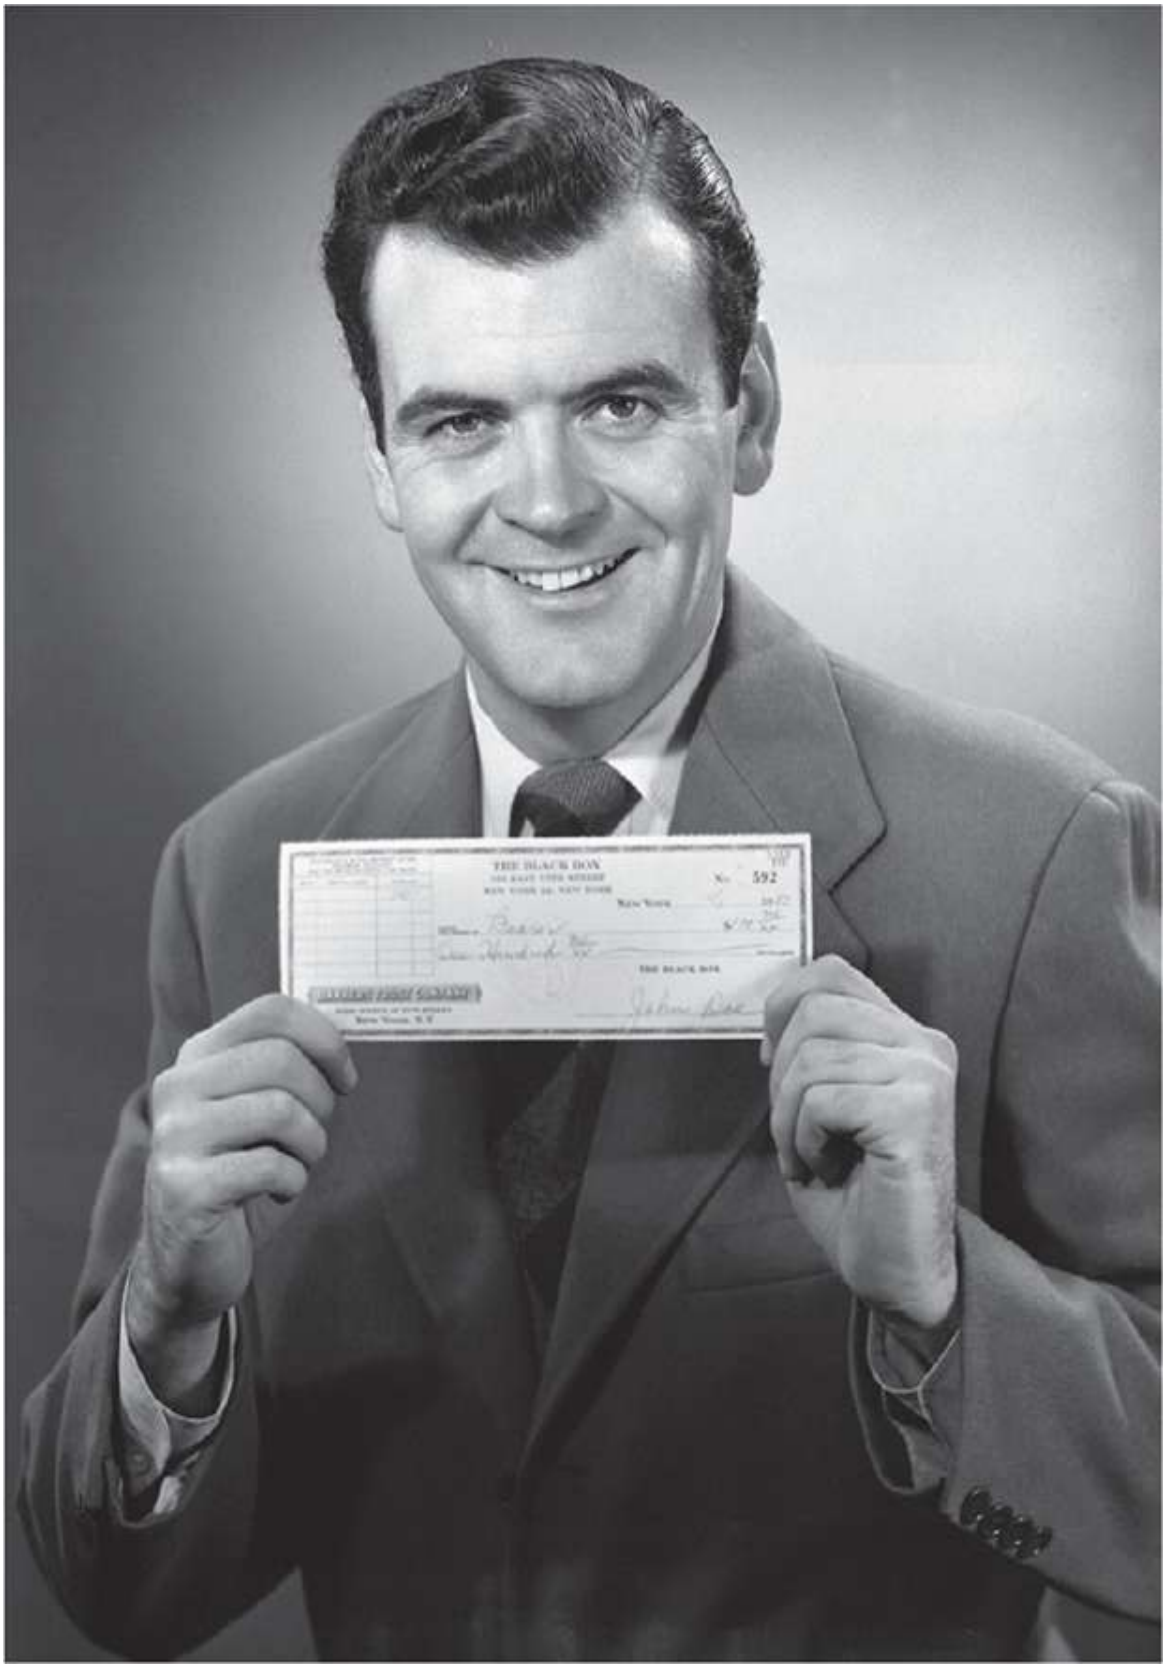
THE BLACK BOX
No. 592

Do the Math. But there's more to working with numbers than just doing primitive arithmetic. You might want to get the absolute value of a number, or round a number, or find the larger of two numbers. You might want your numbers to print with exactly two decimal places, or you might want to put commas into your large numbers to make them easier to read. And what about parsing a String into a number? Or turning a number into a String? Someday you're gonna want to put a bunch of numbers into a collection like ArrayList that takes only objects. You're in luck. Java and the Java API are full of handy number-tweaking capabilities and methods, ready and easy to use. But most of them are **static**, so we'll start by learning what it means for a variable or method to be static, including constants in Java, also known as static *final* variables.

MATH methods: as close as you'll ever get to a *global* method

Except there's no global *anything* in Java. But think about this: what if you have a method whose behavior doesn't depend on an instance variable value. Take the round() method in the Math class, for example. It does the same thing every time—rounds a floating-point number (the argument to the method) to the nearest integer. Every time. If you had 10,000 instances of class Math, and ran the round(42.2) method, you'd get an integer value of 42. Every time. In other words, the method acts on the argument but is never affected by an instance variable state. The only value that changes the way the round() method runs is the argument passed to the method!

Doesn't it seem like a waste of perfectly good heap space to make an instance of class Math simply to run the round() method? And what about *other* Math methods like min(), which takes two numerical primitives and returns the smaller of the two? Or max(). Or abs(), which returns the absolute value of a number.

These methods never use instance variable values. In fact, the Math class doesn't *have* any instance variables. So there's nothing to be gained by

making an instance of class Math. So guess what? You don't have to. As a matter of fact, you can't.

If you try to make an instance of class Math:

```
Math mathObject = new Math();
```

You'll get this error:

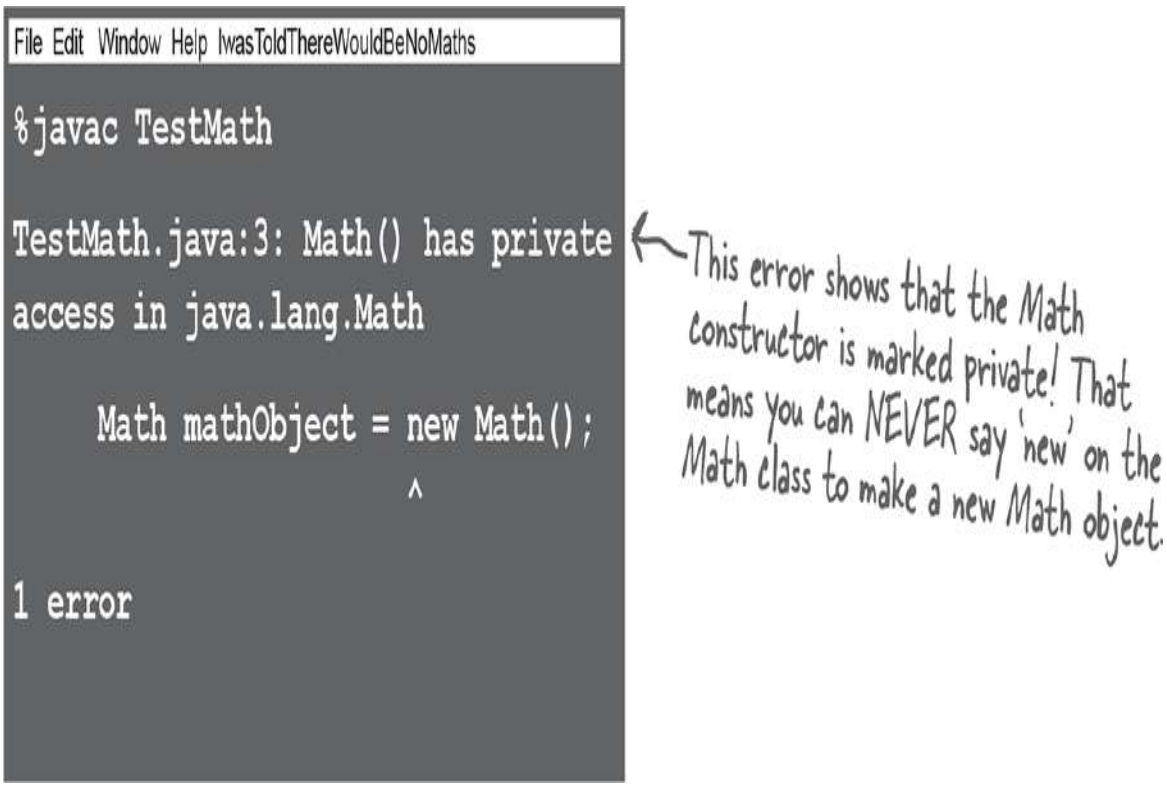

NOTE

Methods in the Math class don't use any instance variable values. And because the methods are "static," you don't need to have an instance of Math. All you need is the Math class.

```
long x = Math.round(42.2);
int y = Math.min(56, 12);
int z = Math.abs(-343);
```

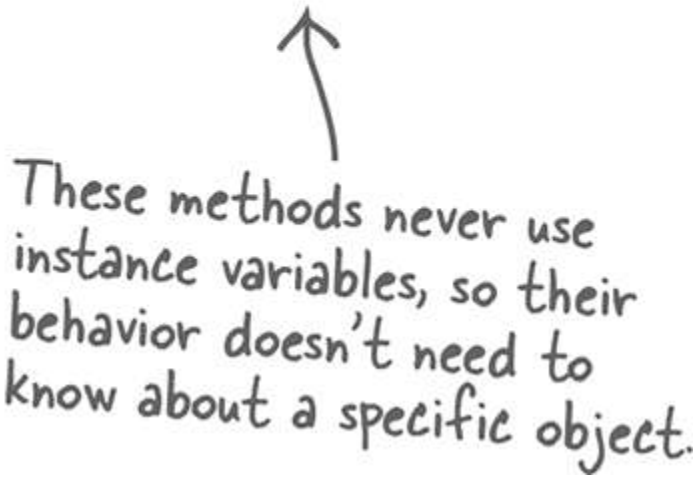

The difference between regular (non-static) and static methods

Java is object-oriented, but once in a while you have a special case, typically a utility method (like the Math methods), where there is no need to have an instance of the class. The keyword **`static`** lets a method run ***without any instance of the class***. A static method means "behavior not dependent on an instance variable, so no instance/object is required. Just the class."

regular (non-static) method

```
public class Song {
  String title;

  public Song(String t) {
    title = t;
  }

  public void play() {
    SoundPlayer player = new SoundPlayer();
    player.playSound(title);
  }
}
```

Instance variable value affects the behavior of the play() method.

The current value of the 'title' instance variable is the song that plays when you call play().

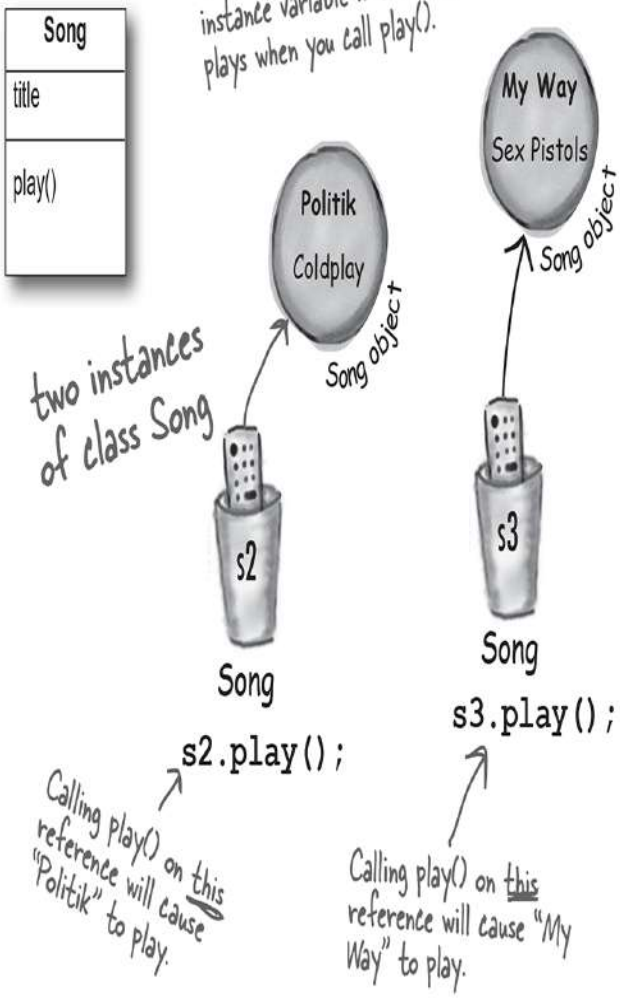

static method

```
public static int min(int a, int b) {
  //returns the smallest of a and b
}
```

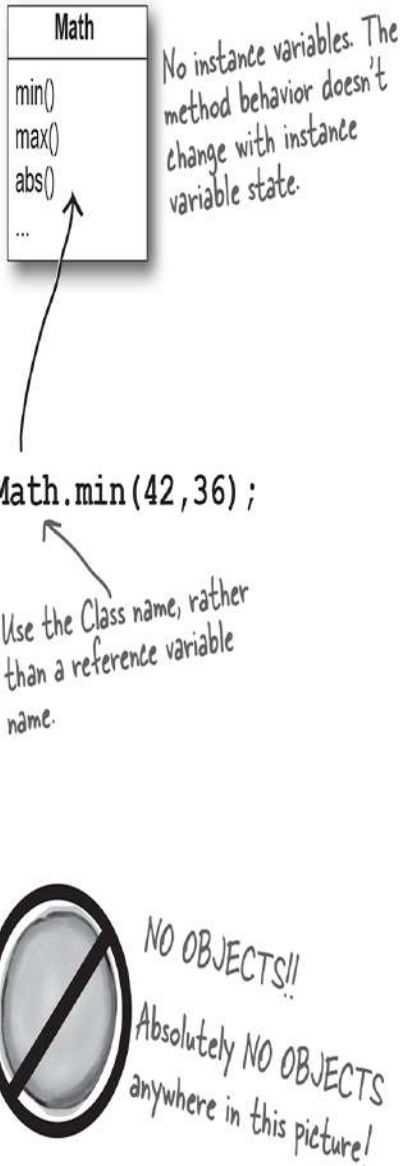

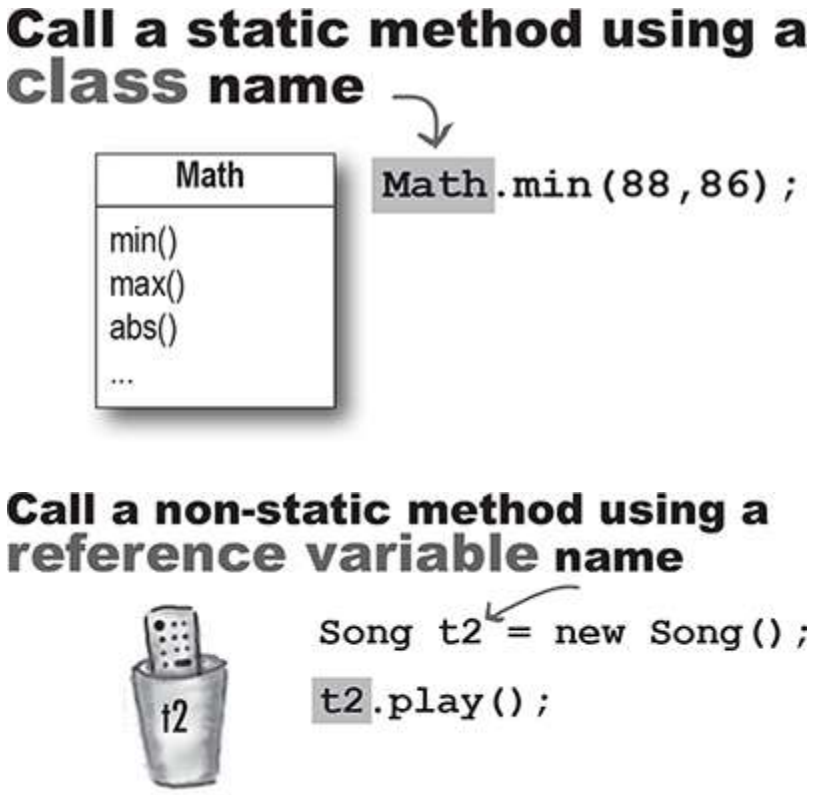

What it means to have a class with static methods

Often (although not always), a class with static methods is not meant to be instantiated. In Chapter 8, *Serious Polymorphism*, we talked about abstract classes, and how marking a class with the **`abstract`** modifier makes it impossible for anyone to say "new" on that class type. In other words, ***it's impossible to instantiate an abstract class.***

But you can restrict other code from instantiating a *non*-abstract class by marking the constructor **`private`**. Remember, a *method* marked private means that only code from within the class can invoke the method. A *constructor* marked private means essentially the same thing—only code from within the class can invoke the constructor. Nobody can say "new" from *outside* the class. That's how it works with the Math class, for example. The constructor is private; you cannot make a new instance of Math. The

compiler knows that your code doesn't have access to that private constructor.

This does *not* mean that a class with one or more static methods should never be instantiated. In fact, every class you put a main() method in is a class with a static method in it!

Typically, you make a main() method so that you can launch or test another class, nearly always by instantiating a class in main and then invoking a method on that new instance.

So you're free to combine static and non-static methods in a class, although even a single non-static method means there must be *some* way to make an instance of the class. The only ways to get a new object are through "new" or deserialization (or something called the Java Reflection API that we don't go into). No other way. But exactly *who* says new can be an interesting question, and one we'll look at a little later in this chapter.

Static methods can't use non-static (instance) variables!

Static methods run without knowing about any particular instance of the static method's class. And as you saw on the previous pages, there might not even *be* any instances of that class. Since a static method is called using the *class* (***Math***.random()) as opposed to an *instance reference* (***t2***.play()), a static method can't refer to any instance variables of the class. The static method doesn't know *which* instance's variable value to use.

If you try to compile this code:

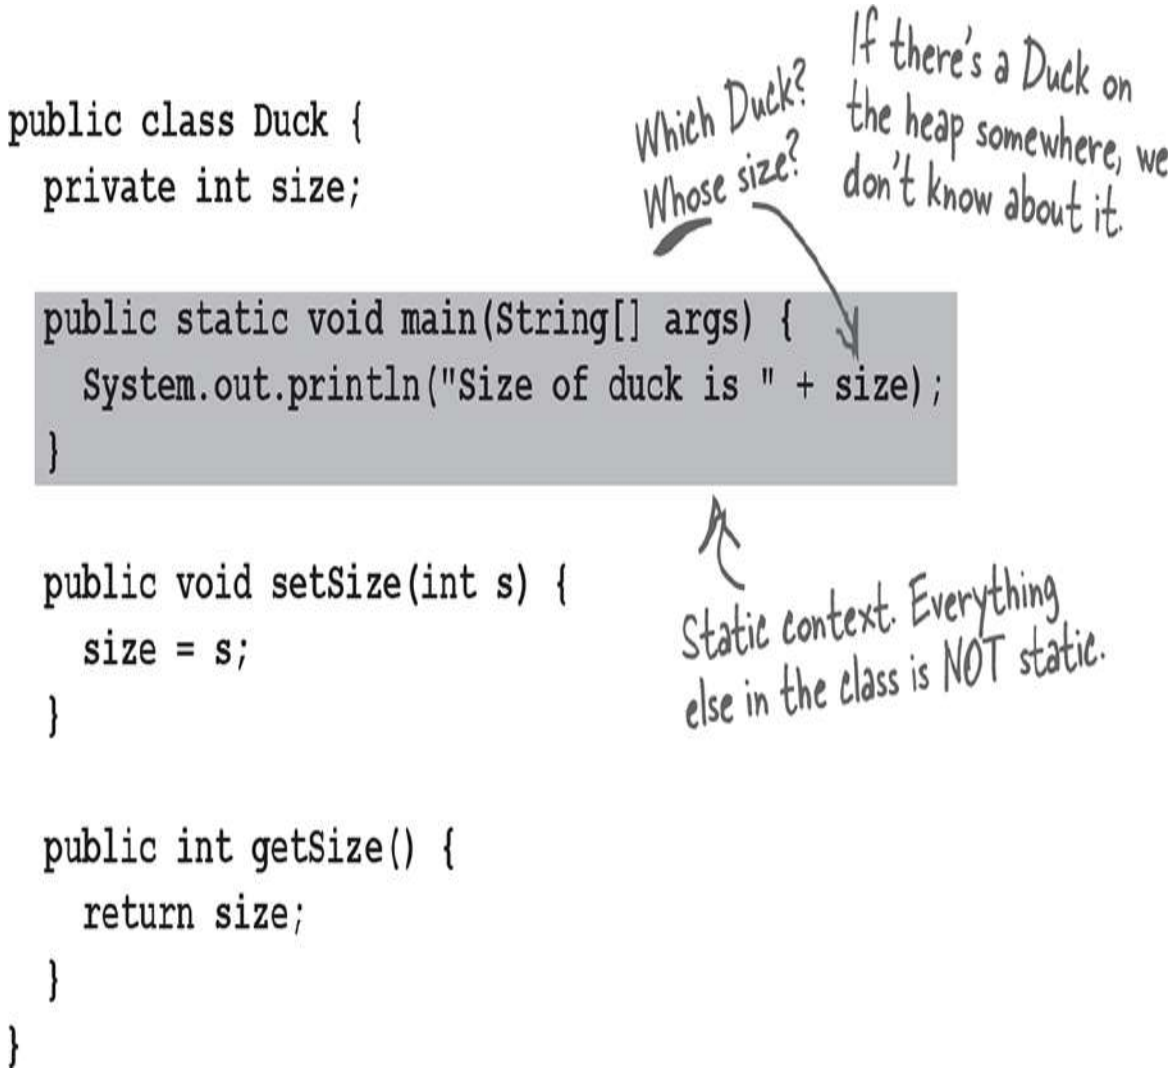

You'll get this error:

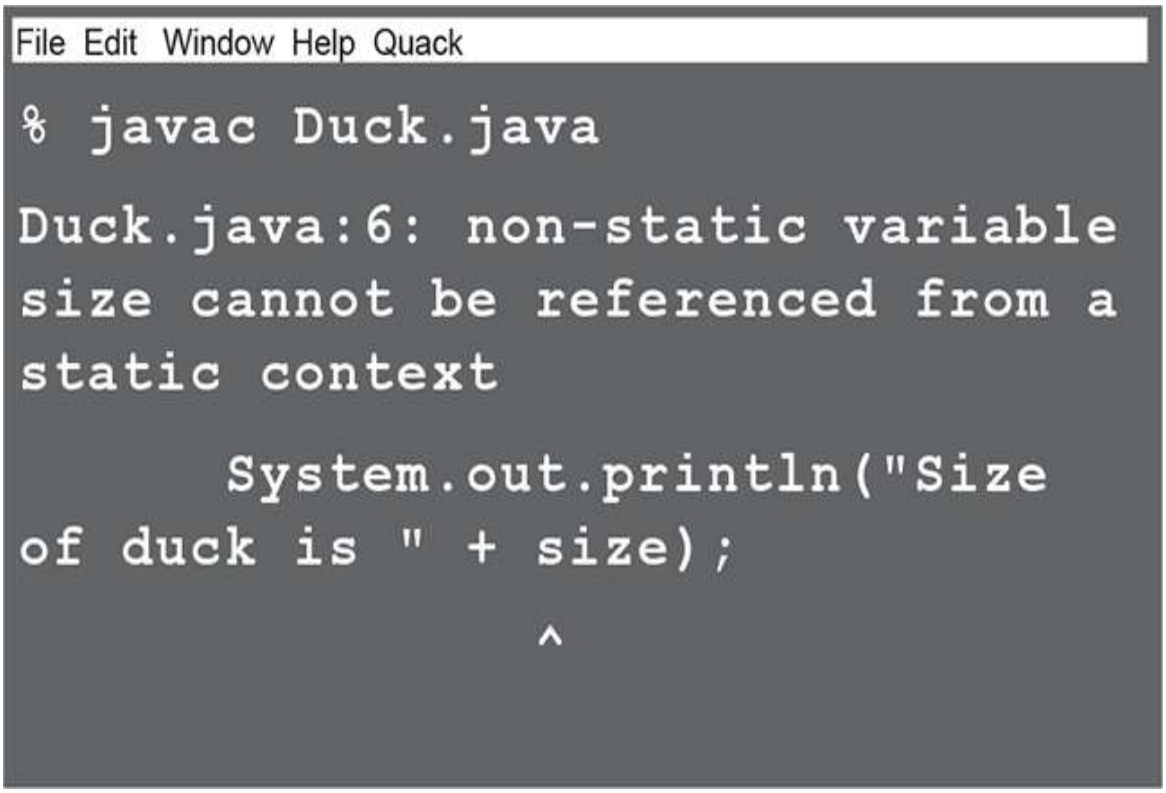

NOTE

If you try to use an instance variable from inside a static method, the compiler thinks, "I don't know which object's instance variable you're talking about!" If you have ten Duck objects on the heap, a static method doesn't know about any of them.

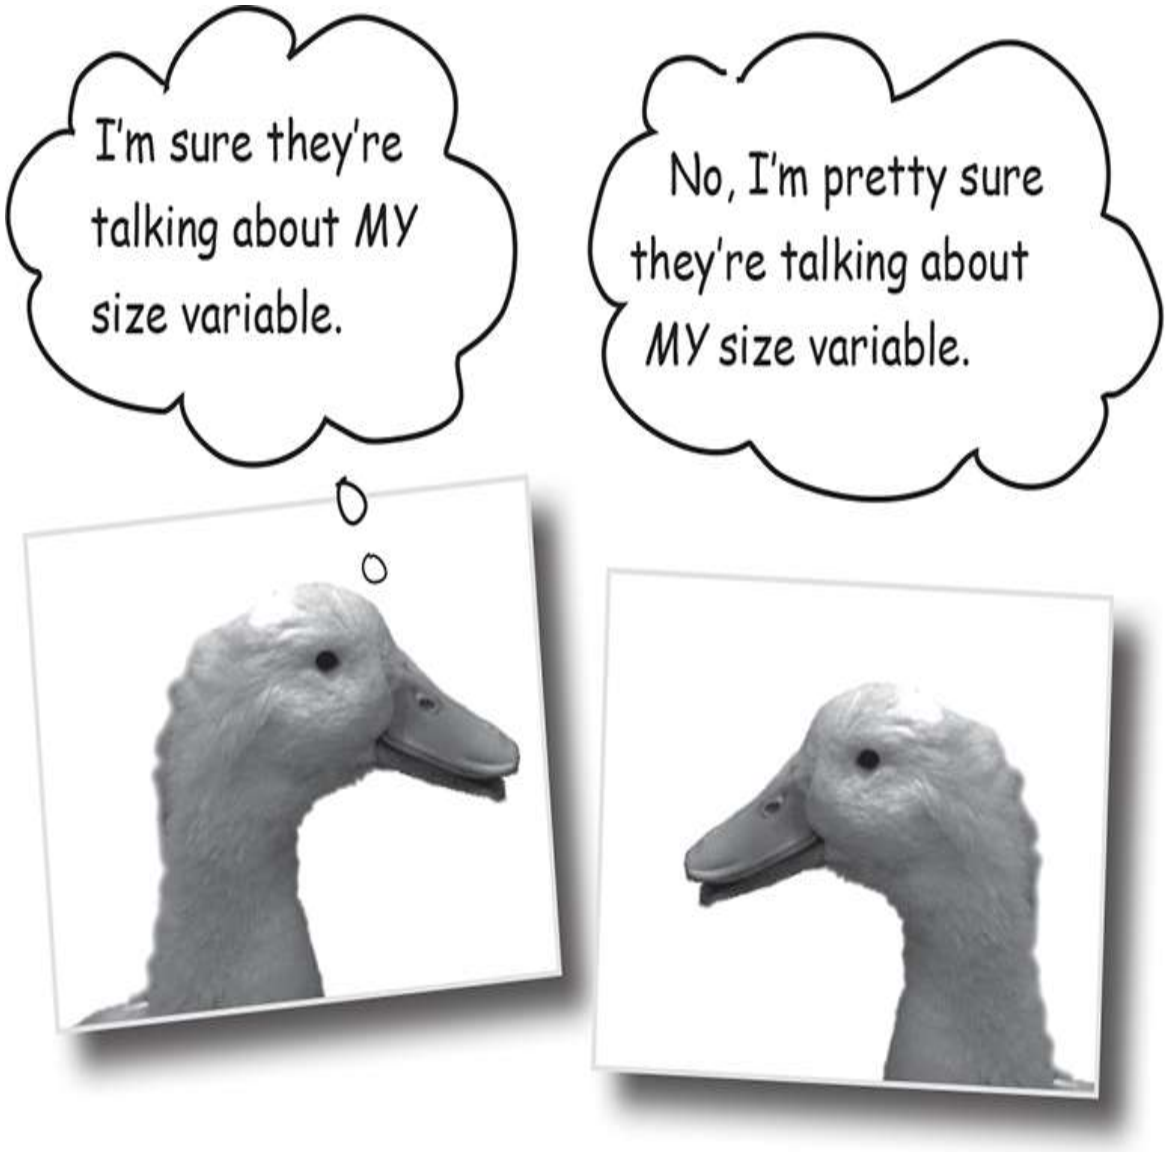

Static methods can't use non-static methods, either!

What do non-static methods do? ***They usually use instance variable state to affect the behavior of the method.*** A getName() method returns the value of the name variable. Whose name? The object used to invoke the getName() method.

This won't compile:

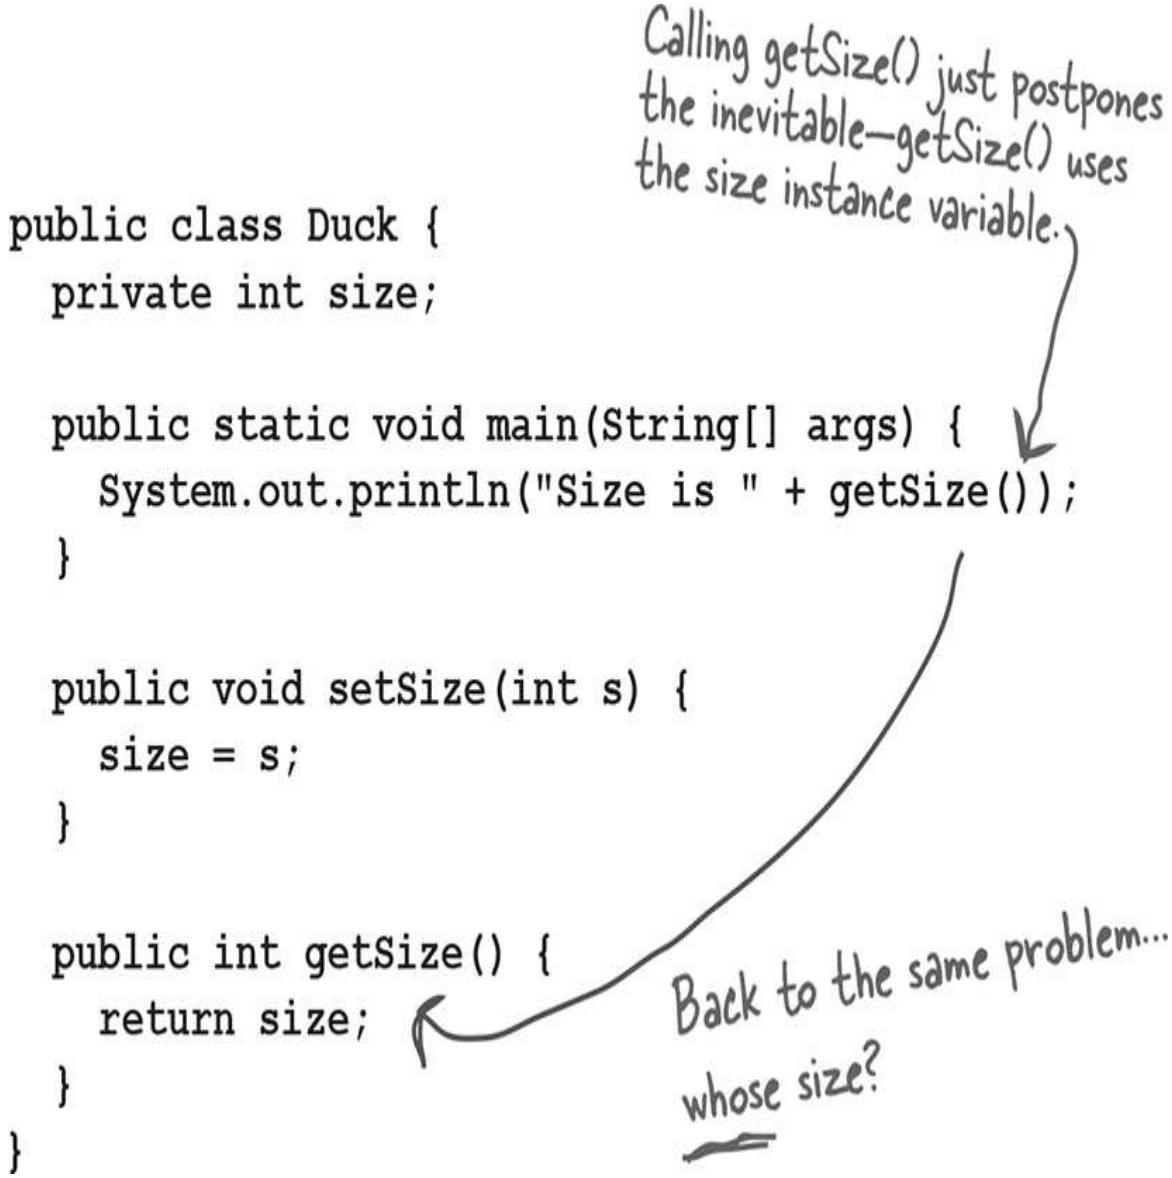
Calling getSize() just postpones the inevitable—getSize() uses the size instance variable.
public class Duck {
private int size;
public static void main(String[] args) {
System.out.println("Size is " + getSize());
}
public void setSize(int s) {
size = s;
}
public int getSize() {
return size;
}
}
Back to the same problem...
whose size?

File Edit Window Help Jack-in

```
% javac Duck.java

Duck.java:5: error: non-static
method getSize() cannot be refer-
enced from a static context

    System.out.println("Size is " +
getSize());


^

1 error
```

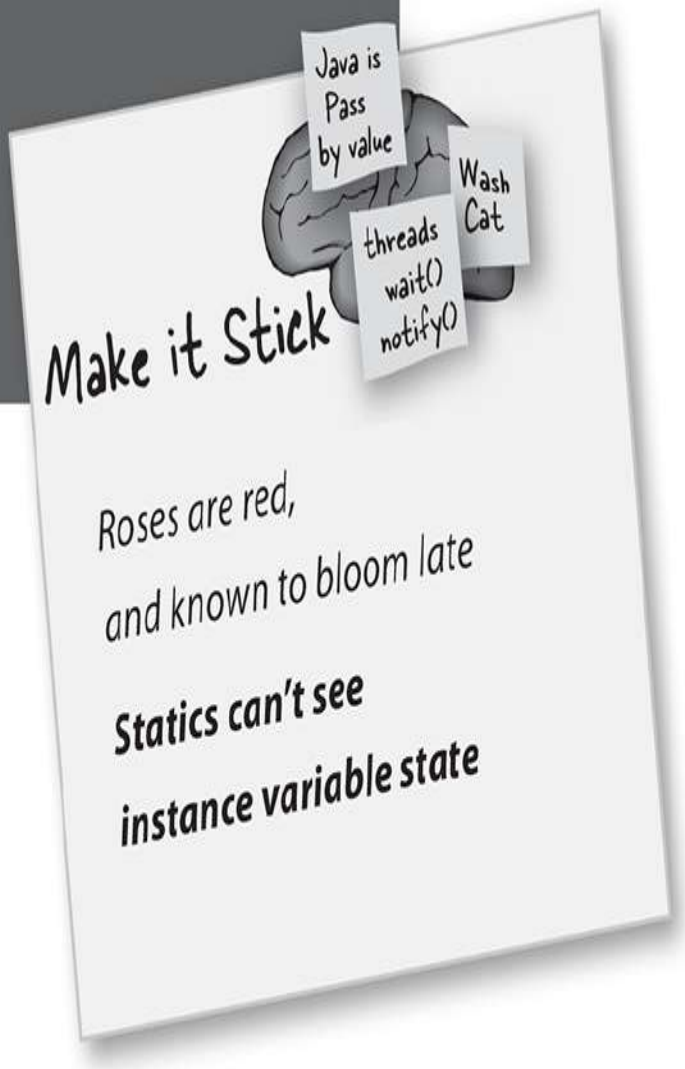

THERE ARE NO DUMB QUESTIONS

Q: What if you try to call a non-static method from a static method, but the non-static method doesn't use any instance variables. Will the compiler allow that?

A: No. The compiler knows that whether you do or do not use instance variables in a non-static method, you *can*. And think about the implications...if you were allowed to compile a scenario like that, then what happens if in the future you want to change the implementation of that non-static method so that one day it *does* use an instance variable? Or worse, what happens if a subclass *overrides* the method and uses an instance variable in the overriding version?

Q: I could swear I've seen code that calls a static method using a reference variable instead of the class name.

A: You *can* do that, but as your mother always told you, "Just because it's legal doesn't mean it's good." Although it *works* to call a static method using any instance of the class, it makes for misleading (less-readable) code. You *can* say,

```
Duck d = new Duck();
String[] s = {};
ed.main(s);
```

This code is legal, but the compiler just resolves it back to the real class anyway ("OK, *d* is of type Duck, and main() is static, so I'll call the static main() in class Duck"). In other words, using *d* to invoke main() doesn't imply that main() will have any special knowledge of the object that *d* is referencing. It's just an alternate *way* to invoke a static method, but the method is still static!

Static variable: value is the same for ALL instances of the class

Imagine you wanted to count how many Duck instances are being created while your program is running. How would you do it? Maybe an instance variable that you increment in the constructor?

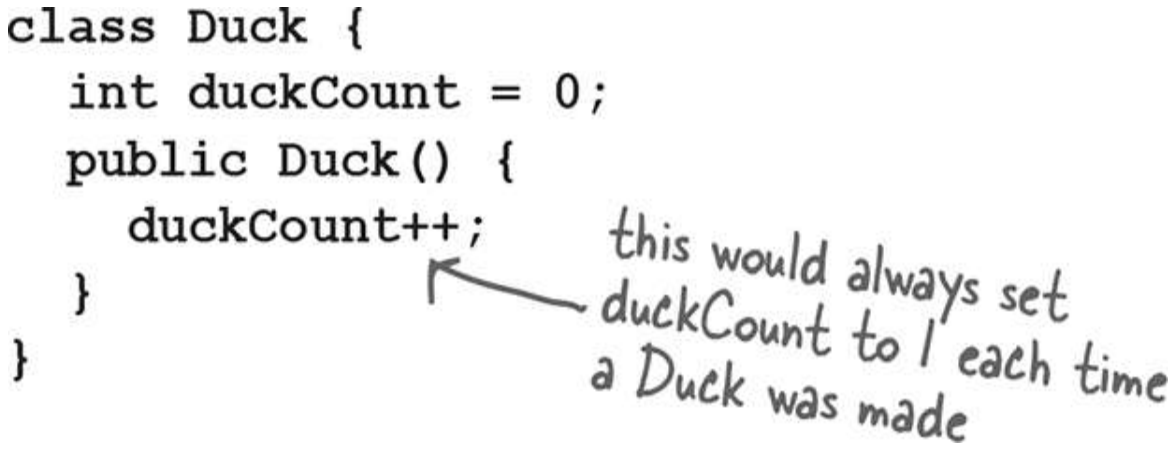

No, that wouldn't work because duckCount is an instance variable, and starts at 0 for each Duck. You could try calling a method in some other class, but that's kludgey. You need a class that's got only a single copy of the variable, and all instances share that one copy.

That's what a static variable gives you: a value shared by all instances of a class. In other words, one value per *class*, instead of one value per *instance*.

The static duckCount variable is initialized ONLY when the class is first loaded, NOT each time a new instance is made.

```
public class Duck {
  private int size;
  private static int duckCount = 0;

  public Duck() {
    duckCount++;
  }

  public void setSize(int s) {
    size = s;
  }

  public int getSize() {
    return size;
  }
}
```

Now it will keep incrementing each time the Duck constructor runs, because duckCount is static and won't be reset to 0.

A Duck object doesn't keep its own copy of duckCount

Because duckCount is static, Duck objects all share a single copy of it. You can think of a static variable as a variable that lives in a CLASS instead of in an object.

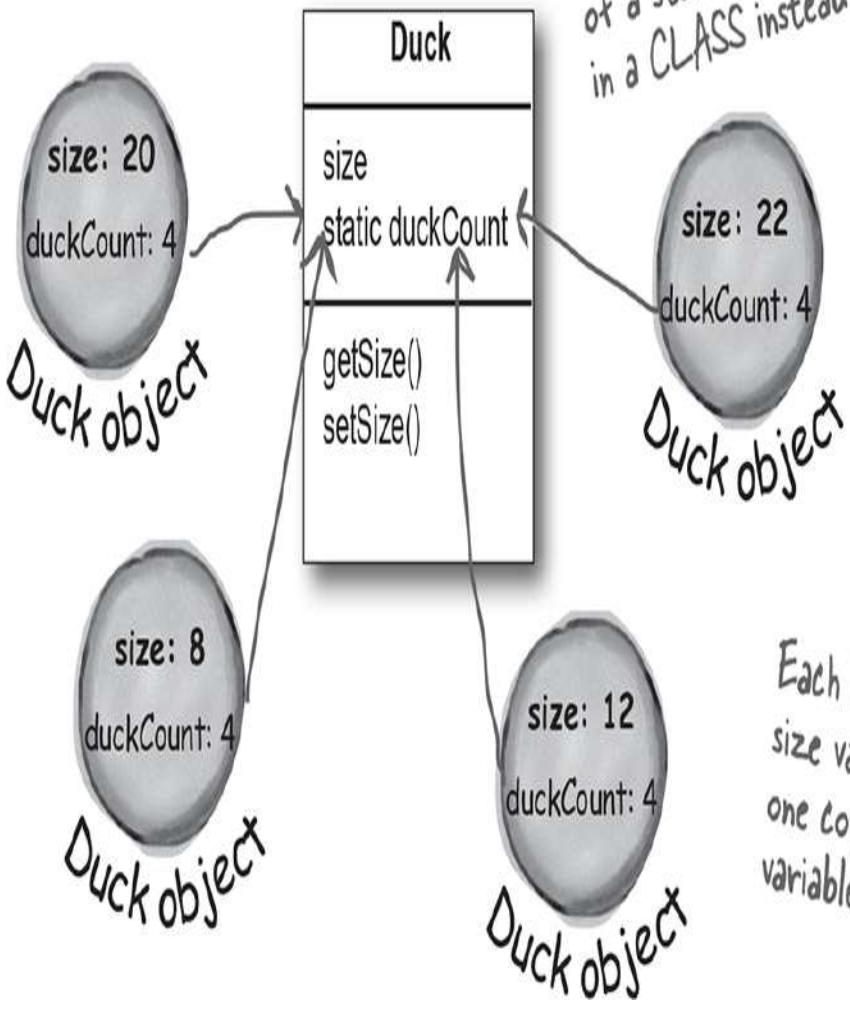

Each Duck object has its own size variable, but there's only one copy of the duckCount variable—the one in the class.

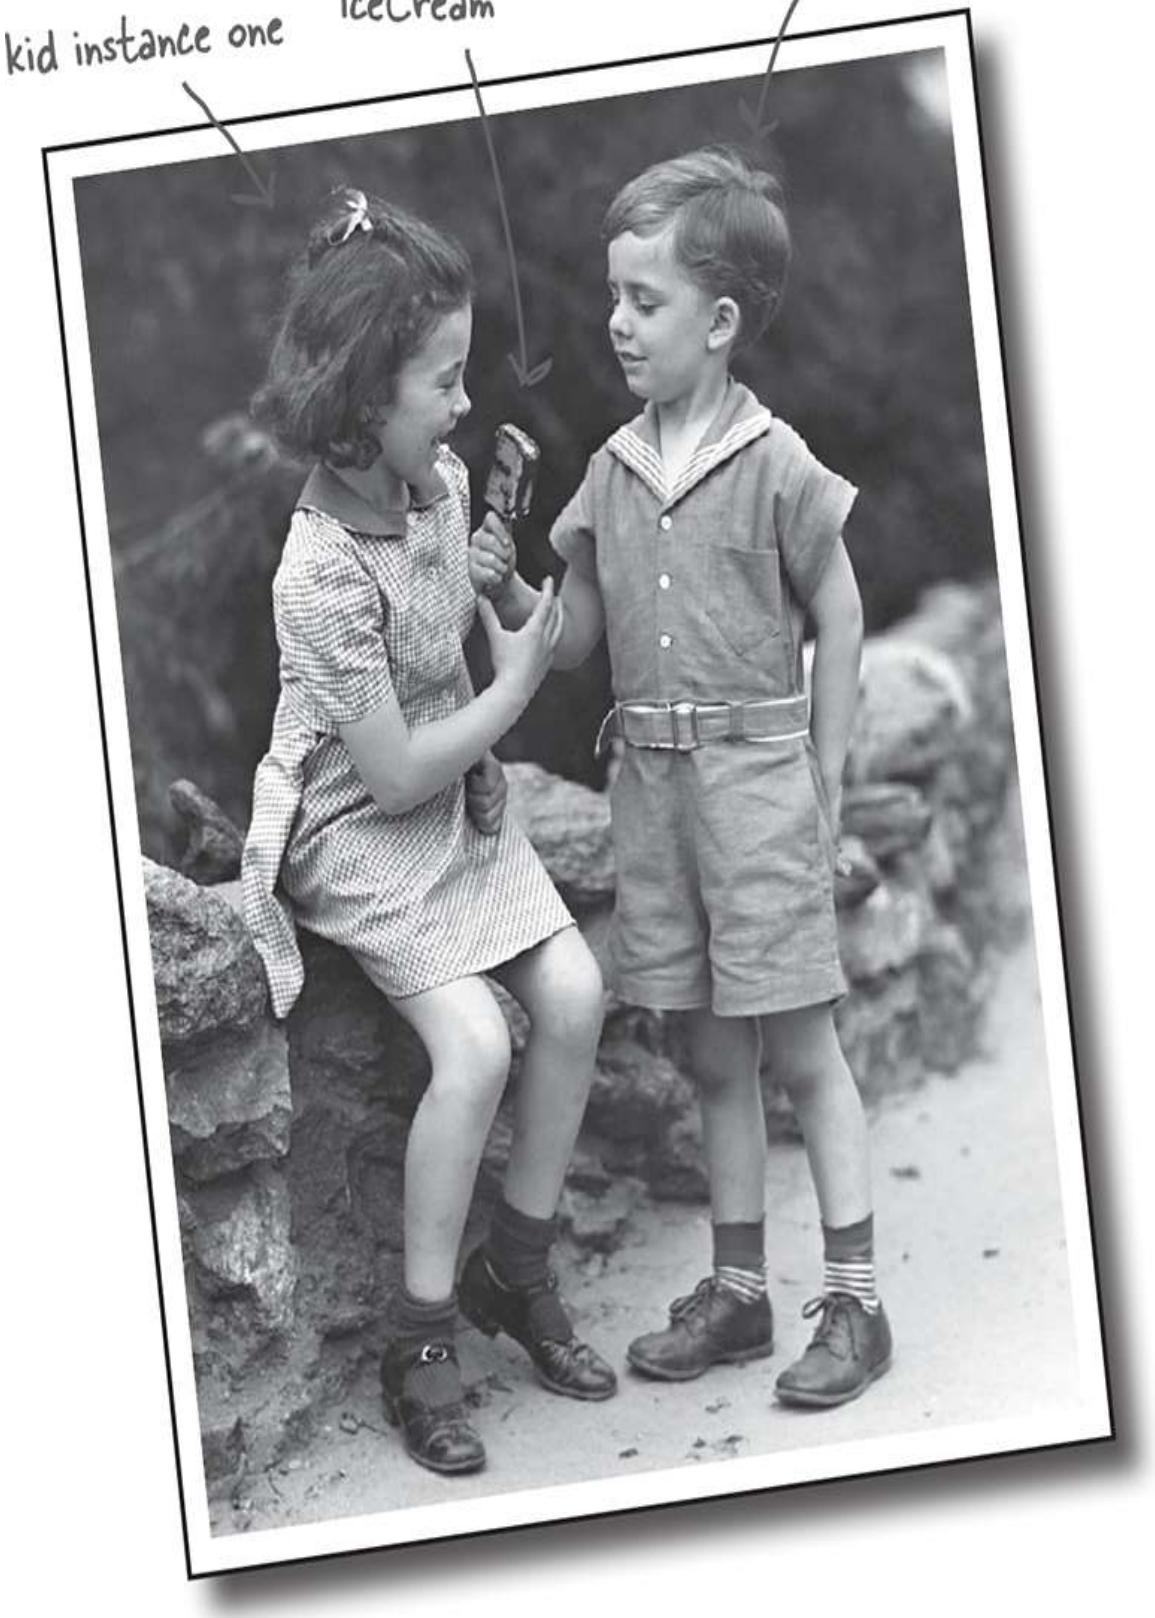
kid instance one
static variable:
iceCream
kid instance two

Static variables are shared.

All instances of the same class share a single copy of the static variables.

instance variables: 1 per **instance**

static variables: 1 per **class**

BRAIN BARBELL

Earlier in this chapter, we saw that a private constructor means that the class can't be instantiated from code running outside the class. In other words, only code from within the class can make a new instance of a class with a private constructor. (There's a kind of chicken-and-egg problem here.)

What if you want to write a class in such a way that only ONE instance of it can be created, and anyone who wants to use an instance of the class will always use that one, single instance?

Initializing a static variable

Static variables are initialized when a *class is loaded*. A class is loaded because the JVM decides it's time to load it. Typically, the JVM loads a class because somebody's trying to make a new instance of the class, for the first time, or use a static method or variable of the class. As a programmer, you also have the option of telling the JVM to load a class, but you're not likely to need to do that. In nearly all cases, you're better off letting the JVM decide when to *load* the class.

And there are two guarantees about static initialization:

- Static variables in a class are initialized before any *object* of that class can be created.
- Static variables in a class are initialized before any *static method* of the class runs.

```
class Player {

  static int playerCount = 0;

  private String name;

  public Player(String n) {

    name = n;

    playerCount++;

  }

}


public class PlayerTestDrive {

  public static void main(String[] args) {

    System.out.println(Player.playerCount);

    Player one = new Player("Tiger Woods");

    System.out.println(Player.playerCount);

  }

}
```

The playerCount is initialized when the class is loaded. We explicitly initialized it to 0, but we don't need to since 0 is the default value for ints. Static variables get default values just like instance variables.

Default values for declared but uninitialized static and instance variables are the same:

primitive integers (long, short, etc.): 0

primitive floating points (float, double): 0.0

boolean: false

object references: null

Access a static variable just like a static method—with the class name.

If you don't explicitly initialize a static variable (by assigning it a value at the time you declare it), it gets a default value, so int variables are initialized to zero, which means we didn't need to explicitly say playerCount = 0.

Declaring, but not initializing, a static variable means the static variable will get the default value for that variable type, in exactly the same way that instance variables are given default values when declared.

All static variables in a class are initialized *before* any object of that class can be created.

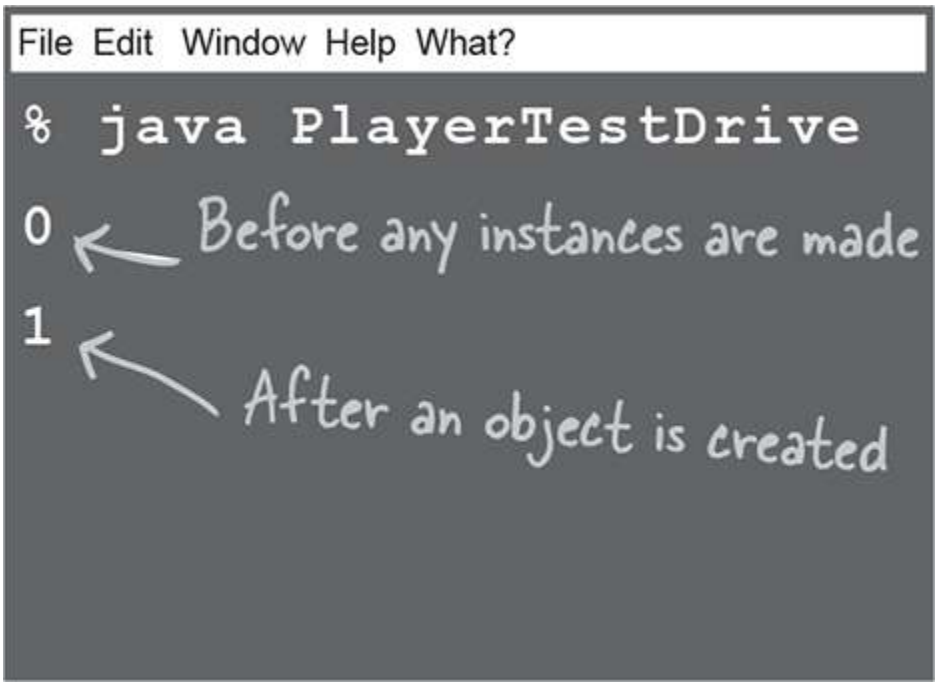

static final variables are constants

A variable marked **`final`** means that—once initialized—it can never change. In other words, the value of the static final variable will stay the same as long as the class is loaded. Look up Math.PI in the API, and you'll find:

```
public static final double PI = 3.141592653589793;
```

The variable is marked **`public`** so that any code can access it.

The variable is marked **`static`** so that you don't need an instance of class Math (which, remember, you're not allowed to create).

The variable is marked **`final`** because PI doesn't change (as far as Java is concerned).

There is no other way to designate a variable as a constant, but there is a naming convention that helps you to recognize one. ***Constant variable names are usually in all caps!***

A *static initializer* is a block of code that runs when a class is loaded, before any other code can use the class, so it's a great place to initialize a static final variable.

```
class ConstantInit1 {
   final static int X;
   static {
     X = 42;
   }
}
```

Initialize a *final* static variable:

- ① **At the time you declare it:**

```
public class ConstantInit2 {
   public static final int X_VALUE = 25;
}
```

Notice the naming convention—static final variables are constants, so the name should be all uppercase, with an underscore separating the words.

OR

- ② **In a static initializer:**

```
public class ConstantInit3 {
  public static final double VAL;

  static {
    VAL = Math.random();
  }
}
```

This code runs as soon as the class is loaded, before any static method is called and even before any static variable can be used.

If you don't give a value to a final variable in one of those two places:

```
public class ConstantInit3 {
  public static final double VAL;
}
```

no initialization!

The compiler will catch it:

```
File Edit Window Help Init?
% javac ConstantInit3.java
ConstantInit3.java:2: error: vari-
able VAL not initialized in the
default constructor
  public static final double VAL;
                             ^
1 error
```

final isn't just for static variables...

You can use the keyword **`final`** to modify non-static variables too, including instance variables, local variables, and even method parameters. In each case, it means the same thing: the value can't be changed. But you can also use final to stop someone from overriding a method or making a subclass.

non-static final variables

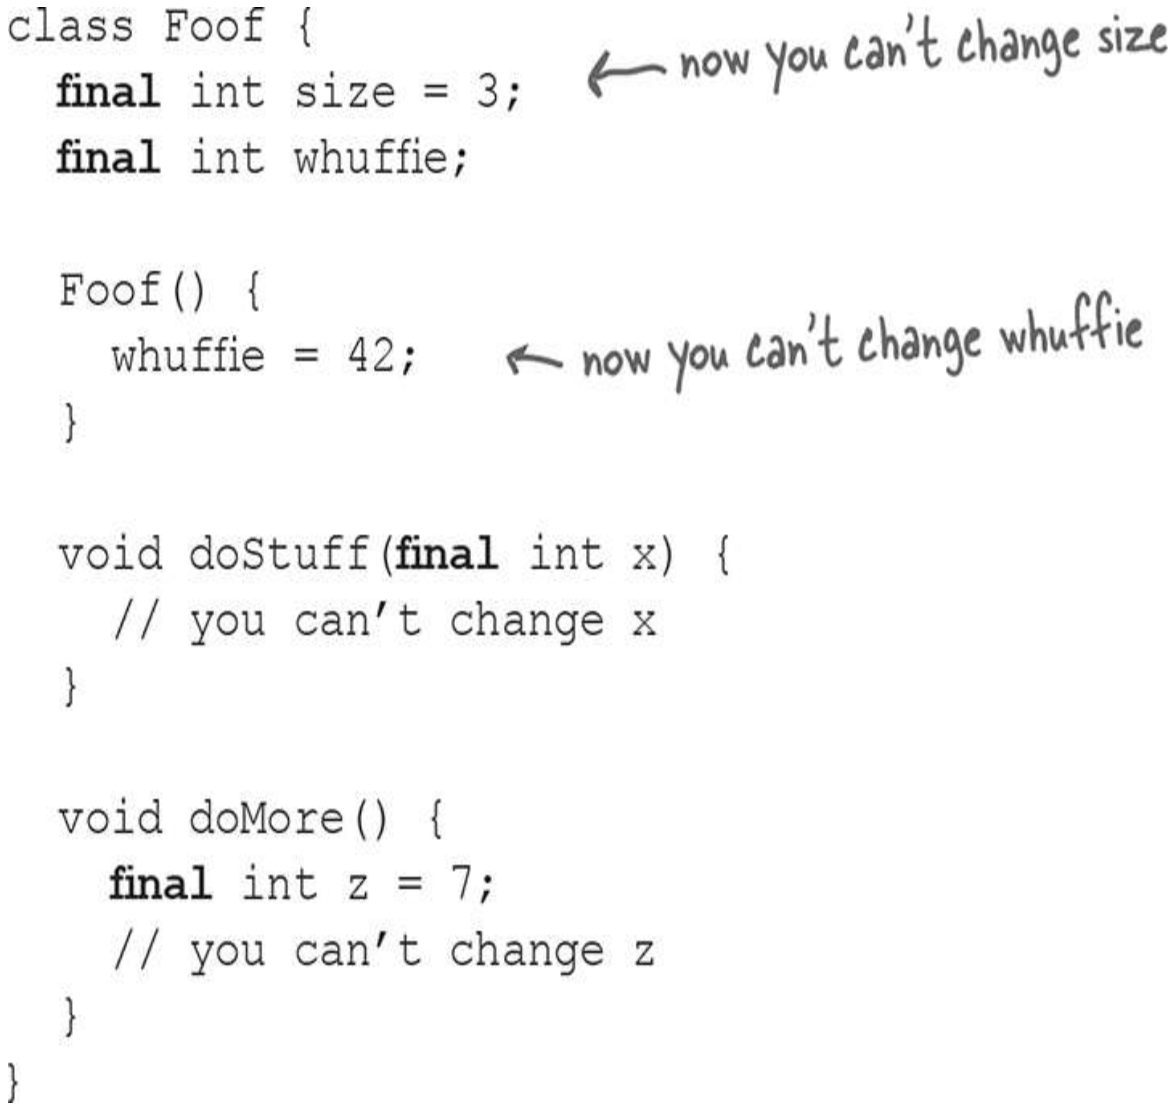

final method

```
class Poof {
  final void calcWhuffie() {
    // important things
    // that must never be overridden
  }
}
```

final class

```
final class MyMostPerfectClass {
   // cannot be extended
```

```
}
```

*A final **variable** means you can't **change** its value.*

*A final **method** means you can't **override** the method.*

*A final **class** means you can' **extend** the class (i.e., you can't make a subclass).*

It's all so...so *final*.
I mean, if I'd *known*
I wouldn't be able to
change things...

THERE ARE NO DUMB QUESTIONS

Q: A static method can't access a non-static variable. But can a non-static method access a static variable?

A: Of course. A non-static method in a class can always call a static method in the class or access a static variable of the class.

Q: Why would I want to make a class final? Doesn't that defeat the whole purpose of OO?

A: Yes and no. A typical reason for making a class final is for security. You can't, for example, make a subclass of the String class. Imagine the havoc if someone extended the String class and substituted their own String subclass objects, polymorphically, where String objects are expected. If you need to count on a particular implementation of the methods in a class, make the class final.

Q: Isn't it redundant to have to mark the methods final if the class is final?

A: If the class is final, you don't need to mark the methods final. Think about it—if a class is final, it can never be subclassed, so none of the methods can ever be overridden.

On the other hand, if you *do* want to allow others to extend your class and you want them to be able to override some, but not all, of the methods, then don't mark the class final, but go in and selectively mark specific methods as final. A final method means that a subclass can't override that particular method.

BULLET POINTS

- A ***static method*** should be called using the class name rather than an object reference variable:

```
Math.random() versus myFoo.go()
```

- A static method can be invoked without any instances of the method's class on the heap.
- A static method is good for a utility method that does not (and will never) depend on a particular instance variable value.
- A static method is not associated with a particular instance—only the class—so it cannot access any instance variable values of its class. It wouldn't know *which* instance's values to use.
- A static method cannot access a non-static method, since non-static methods are usually associated with instance variable state.
- If you have a class with only static methods and you do not want the class to be instantiated, you can mark the constructor private.
- A ***static variable*** is a variable shared by all members of a given class. There is only one copy of a static variable in a class, rather than one copy *per each object* for instance variables.
- A static method can access a static variable.
- To make a constant in Java, mark a variable as both static and final.
- A final static variable must be assigned a value either at the time it is declared or in a static initializer:

```
static {
  DOG_CODE = 420;
}
```

- The naming convention for constants (final static variables) is to make the name all uppercase and use underscores (_) to separate the words.
- A final variable value cannot be changed once it has been assigned.
- Assigning a value to a final *instance* variable must be either at the time it is declared or in the constructor.
- A final method cannot be overridden.
- A final class cannot be extended (subclassed).

SHARPEN YOUR PENCIL

What's Legal?

Given everything you've just learned about static and final, which of these would compile?

- ①

```
public class Foo {
  static int x;

  public void go() {
    System.out.println(x);
  }
}
```

- ②

```
public class Foo2 {
  int x;

  public static void go() {
    System.out.println(x);
  }
}
```

- ③

```
public class Foo3 {
  final int x;

  public void go() {
    System.out.println(x);
  }
}
```

- ④

```
public class Foo4 {
  static final int x = 12;

  public void go() {
    System.out.println(x);
  }
}
```

- ⑤

```
public class Foo5 {
  static final int x = 12;
```

```
  public void go(final int x) {
    System.out.println(x);
  }
}
```

- ⑥

```
public class Foo6 {
  int x = 12;

  public static void go(final int x) {
    System.out.println(x);
  }
}
```

Answers in "Sharpen your pencil".

Math methods

Now that we know how static methods work, let's look at some static methods in class Math. This isn't all of them, just the highlights. Check your API for the rest including cos(), sin(), tan(), ceil(), floor(), and asin().

All Methods | Static Methods | Concrete Methods

Modifier and Type	Method	Description
static double	abs(double a)	Returns the absolute value of a do
static float	abs(float a)	Returns the absolute value of a fl
static int	abs(int a)	Returns the absolute value of an i
static long	abs(long a)	Returns the absolute value of a lo
static int	absExact(int a)	Returns the mathematical absolut ArithmeticException if the resul
static long	absExact(long a)	Returns the mathematical absolut ArithmeticException if the resul
static double	acos(double a)	Returns the arc cosine of a value;
static int	addExact(int x, int y)	Returns the sum of its arguments,
static long	addExact(long x, long y)	Returns the sum of its arguments,
static double	asin(double a)	Returns the arc sine of a value; th
static double	atan(double a)	Returns the arc tangent of a value
static double	atan2(double y, double x)	Returns the angle *theta* from the
static double	cbrt(double a)	Returns the cube root of a double
static double	ceil(double a)	Returns the smallest (closest to ne a mathematical integer.
static double	copySign(double magnitude, double sign)	Returns the first floating-point arg
static float	copySign(float magnitude, float sign)	Returns the first floating-point arg
static double	cos(double a)	Returns the trigonometric cosine
static double	cosh(double x)	Returns the hyperbolic cosine of a

Math.abs()

Returns a double that is the absolute value of the argument. The method is overloaded, so if you pass it an int, it returns an int. Pass it a double, it returns a double.

```
int x = Math.abs(-240);      // returns 240
double d = Math.abs(240.45); // returns 240.45
```

Math.random()

Returns a double between (and including) 0.0 through (but not including) 1.0.

```
double r1 = Math.random();
int r2 = (int) (Math.random() * 5);
```

> **NOTE**
>
> We've been using this method so far, but there's also java.util.Random, which is a bit nicer to use.

Math.round()

Returns an int or a long (depending on whether the argument is a float or a double) rounded to the nearest integer value.

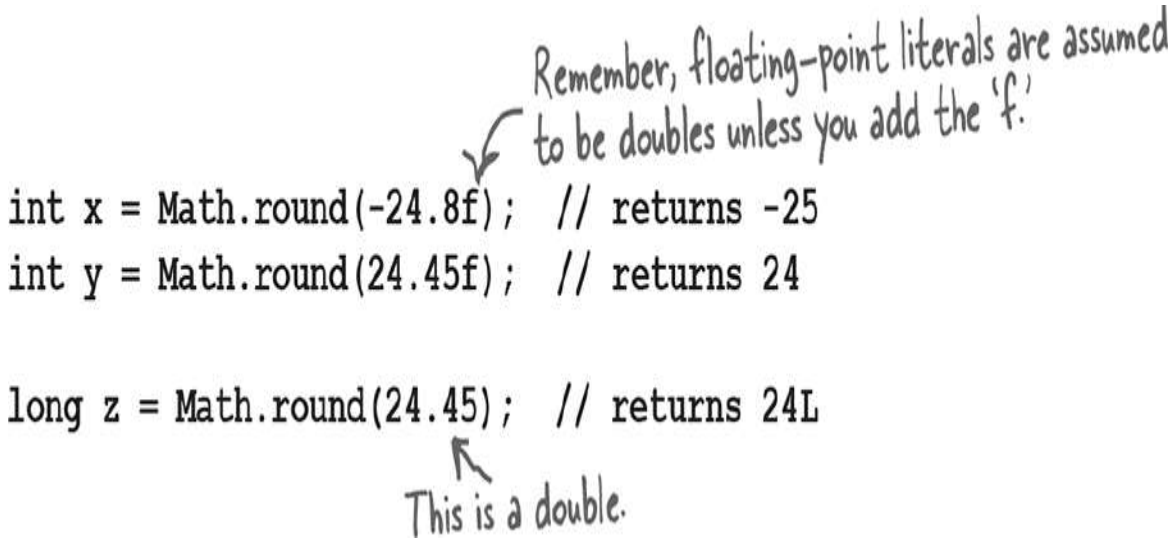

Math.min()

Returns a value that is the minimum of the two arguments. The method is overloaded to take ints, longs, floats, or doubles.

```
int x = Math.min(24,240);                  // returns 24
double y = Math.min(90876.5, 90876.49); // returns 90876.49
```

Math.max()

Returns a value that is the maximum of the two arguments. The method is overloaded to take ints, longs, floats, or doubles.

```
int x = Math.max(24,240);                  // returns 240
double y = Math.max(90876.5, 90876.49); // returns 90876.5
```

Math.sqrt()

Returns the positive square root of the argument. The method takes a double, but of course you can pass in anything that fits in a double.

```
double x = Math.sqrt(9);     //return 3
double y = Math.sqrt(42.0); // returns 6.48074069840786
```

Wrapping a primitive

Sometimes you want to treat a primitive like an object. For example, collections like ArrayList only work with Objects:

There's a wrapper class for every primitive type, and since the wrapper classes are in the java.lang package, you don't need to import them. You can recognize wrapper classes because each one is named after the primitive

type it wraps, but with the first letter capitalized to follow the class naming convention.

Oh yeah, for reasons absolutely nobody on the planet is certain of, the API designers decided not to map the names *exactly* from primitive type to class type. You'll see what we mean:

Boolean

Character

Byte

Short

Integer

Long

Float

Double

Watch out! The names aren't mapped exactly to the primitive types. The class names are fully spelled out.

Give the primitive to the wrapper constructor. That's it.

wrapping a value

```
int i = 288;
Integer iWrap = new Integer(i);
```

All the wrappers work like this. Boolean has a booleanValue(), Character has a charValue(), etc.

*un*wrapping a value

```
int unWrapped = iWrap.intValue();
```

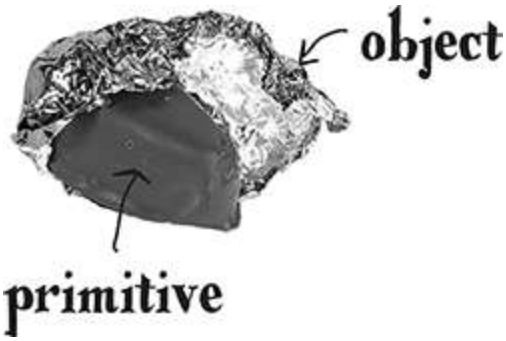

NOTE

When you need to treat a primitive like an object, wrap it.

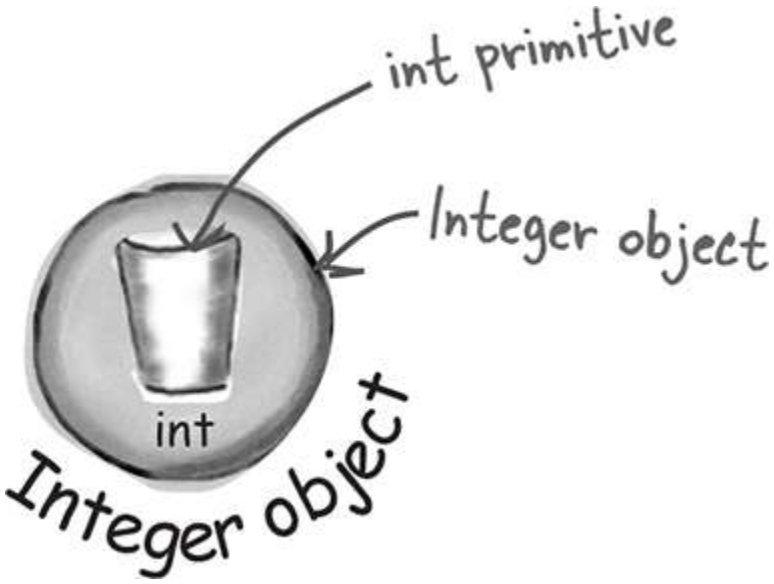

Note: the picture at the top is a chocolate in a foil wrapper. Get it? Wrapper? Some people think it looks like a baked potato, but that works too.

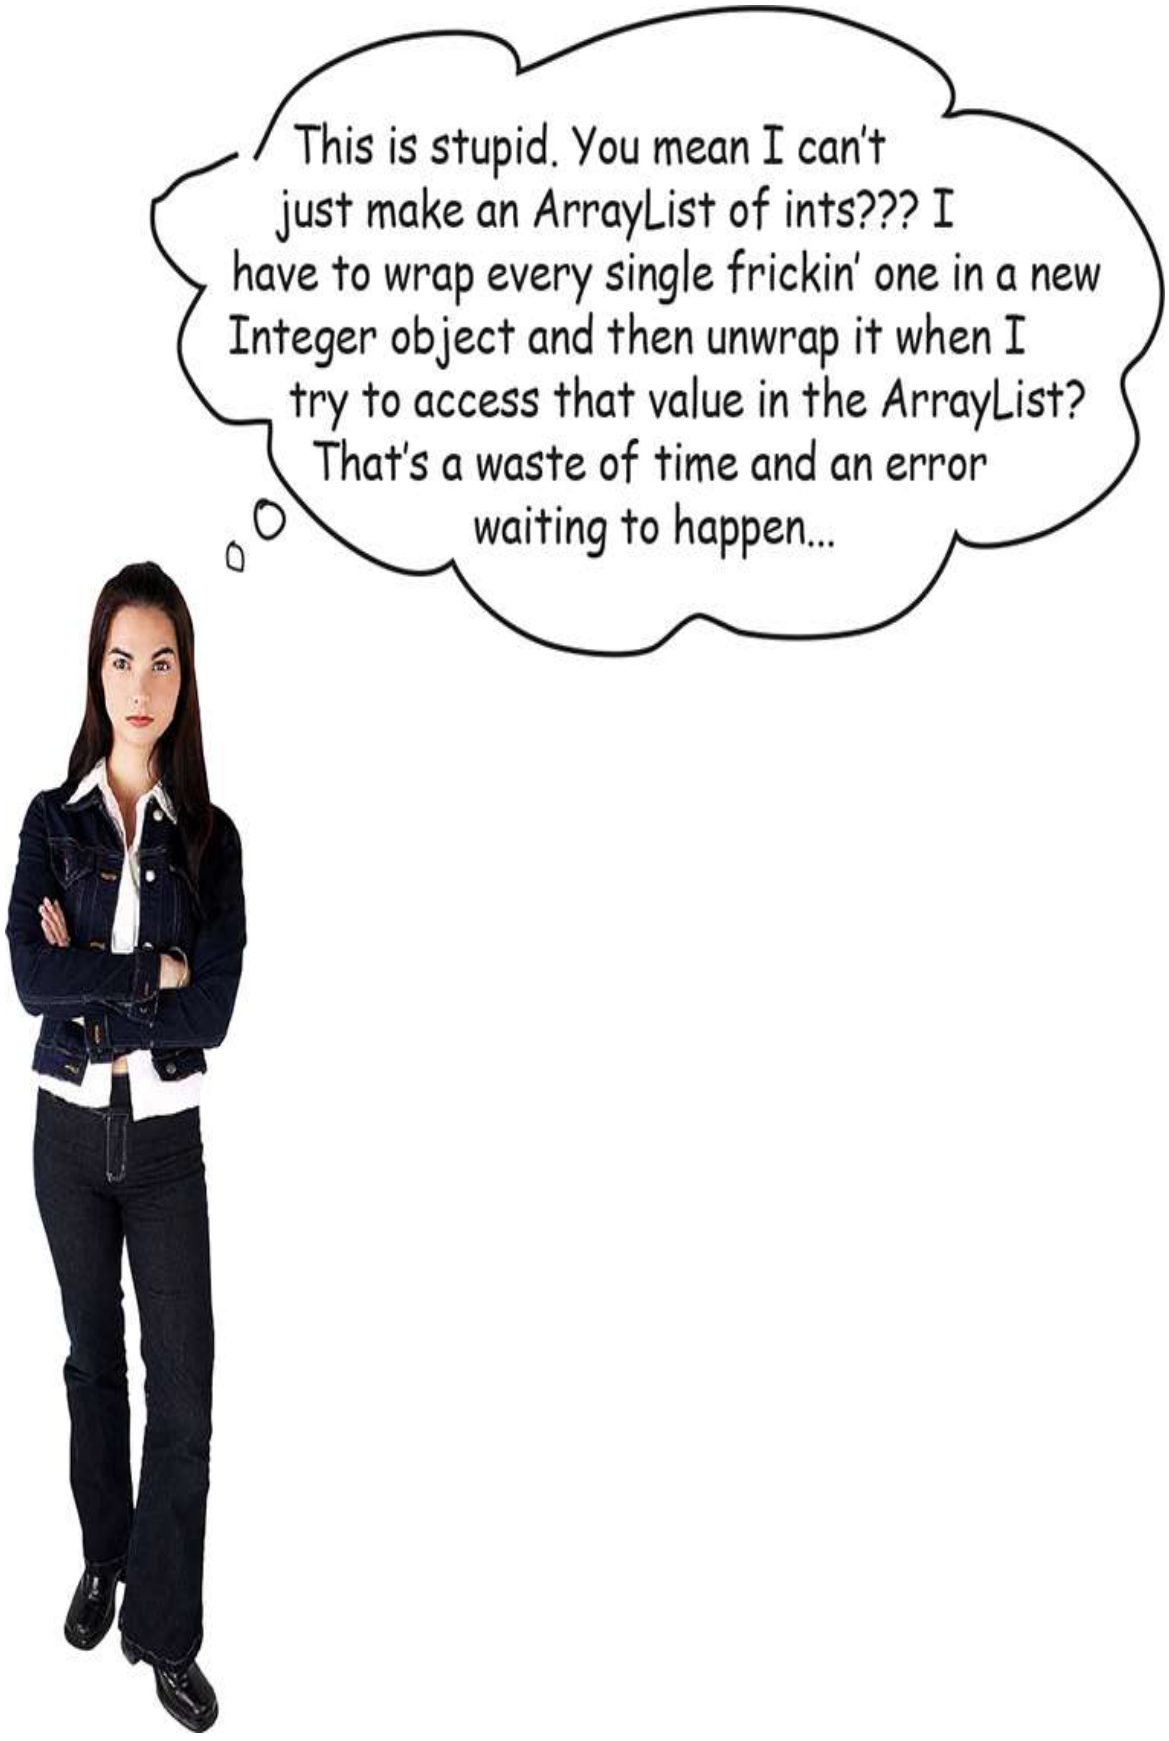
This is stupid. You mean I can't just make an ArrayList of ints??? I have to wrap every single frickin' one in a new Integer object and then unwrap it when I try to access that value in the ArrayList? That's a waste of time and an error waiting to happen...

Java will Autobox primitives for you

In The Olden Days (pre–Java 5), we did have to do all this ourselves, manually wrapping and unwrapping primitives. Fortunately, now it's all done for us *automatically*.

Let's see what happens when we want to make an ArrayList to hold ints.

An ArrayList of primitive ints

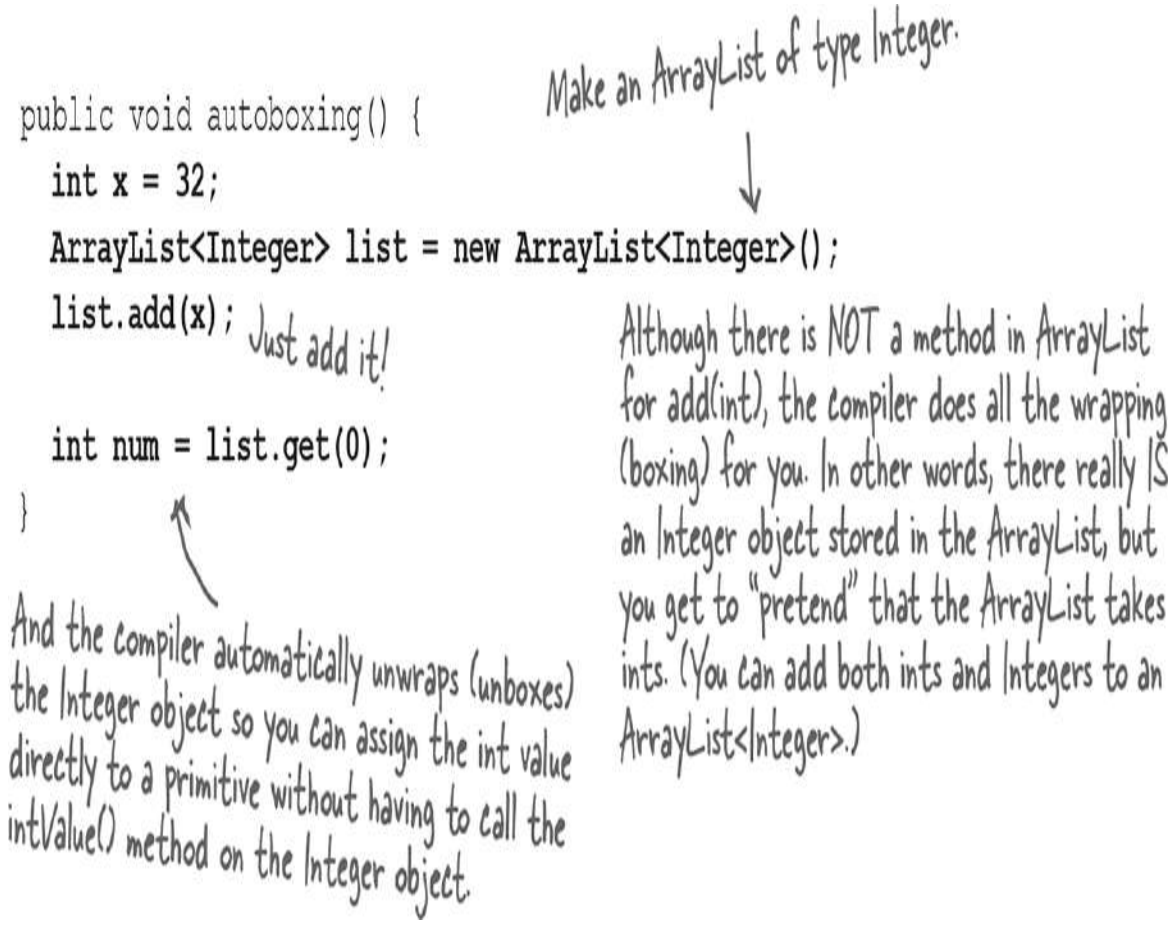

THERE ARE NO DUMB QUESTIONS

Q: Why not declare an ArrayList<int> if you want to hold ints?

A: Because... *you can't.* At least, not in the versions of Java this book covers (the language is constantly evolving and things may change!). Remember, the rule for generic types is that you can specify only class or interface types, *not primitives*. So ArrayList<int> will not compile. But as you can see from the code above, it doesn't really matter, since the compiler lets you put ints into the ArrayList<Integer>. In fact, there's really no way to *prevent* you from putting primitives into an ArrayList where the type of the list is the type of that primitive's wrapper, since autoboxing will happen automatically. So, you can put boolean primitives in an ArrayList<Boolean> and chars into an ArrayList<Character>.

Autoboxing works almost everywhere

Autoboxing lets you do more than just the obvious wrapping and unwrapping to use primitives in a collection...it also lets you use either a primitive or its wrapper type virtually anywhere one or the other is expected. Think about that!

Fun with autoboxing

Method arguments
If a method takes a wrapper type, you can pass a reference to a wrapper or a primitive of the matching type. And of course the reverse is true—if a method takes a primitive, you can pass in either a compatible primitive or a reference to a wrapper of that primitive type.

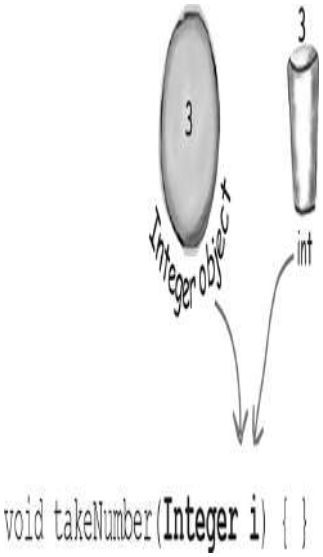

Return values
If a method declares a primitive return type, you can return either a compatible primitive or a reference to the wrapper of that primitive type. And if a method declares a wrapper return type, you can return either a reference to the wrapper type or a primitive of the matching type.

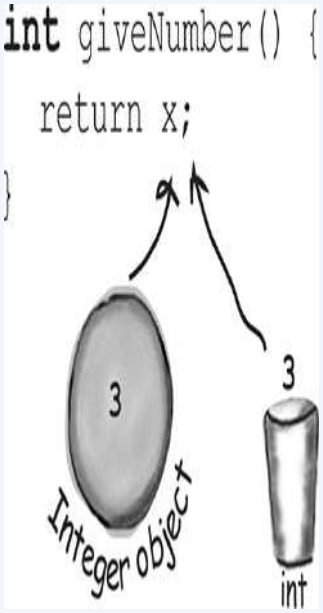

Boolean expressions
Any place a boolean value is expected, you can use either an expression that evaluates to a boolean (4 > 2), a primitive boolean, or a reference to a Boolean wrapper.

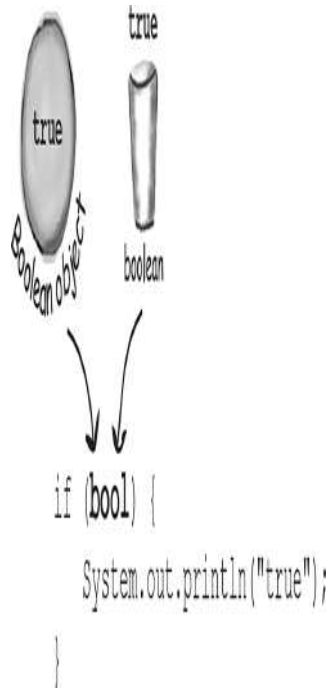

Operations on numbers

This is probably the strangest one—yes, you can use a wrapper type as an operand in operations where the primitive type is expected. That means you can apply, say, the increment operator against a reference to an Integer object!

But don't worry—this is just a compiler trick. The language wasn't modified to make the operators work on objects; the compiler simply converts the object to its primitive type before the operation. It sure looks weird, though.

Integer i = new Integer(42); i++;

And that means you can also do things like:

Integer j = new Integer(5); Integer k = j + 3;

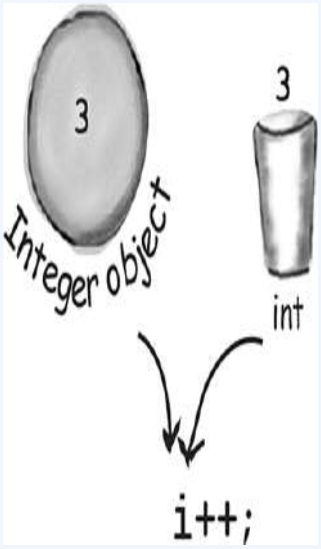

Assignments

You can assign either a wrapper or primitive to a variable declared as a matching wrapper or primitive. For example, a primitive int variable can be assigned to an Integer reference variable, and vice versa—a reference to an Integer object can be assigned to a variable declared as an int primitive.

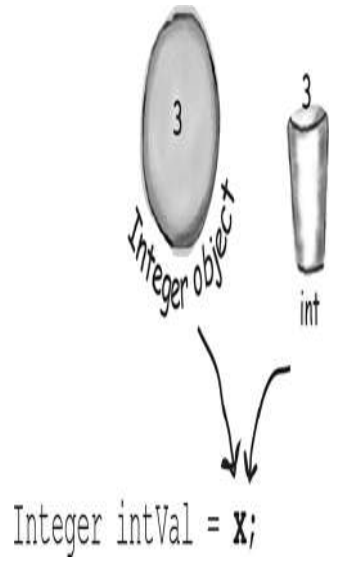
3
3
Integer object
int
Integer intVal = x;

SHARPEN YOUR PENCIL

Will this code compile? Will it run? If it runs, what will it do?

Take your time and think about this one; it brings up an implication of autoboxing that we didn't talk about.

You'll have to go to your compiler to find the answers. (Yes, we're forcing you to experiment, for your own good, of course.)

```
public class TestBox {
  private Integer i;
  private int j;

  public static void main(String[] args) {
    TestBox t = new TestBox();
    t.go();
  }

  public void go() {
    j = i;
    System.out.println(j);
    System.out.println(i);
  }
}
```

→ **Yours to solve.**

But wait! There's more! Wrappers have static utility methods too!

Besides acting like a normal class, the wrappers have a bunch of really useful static methods.

For example, the *parse* methods take a String and give you back a primitive value.

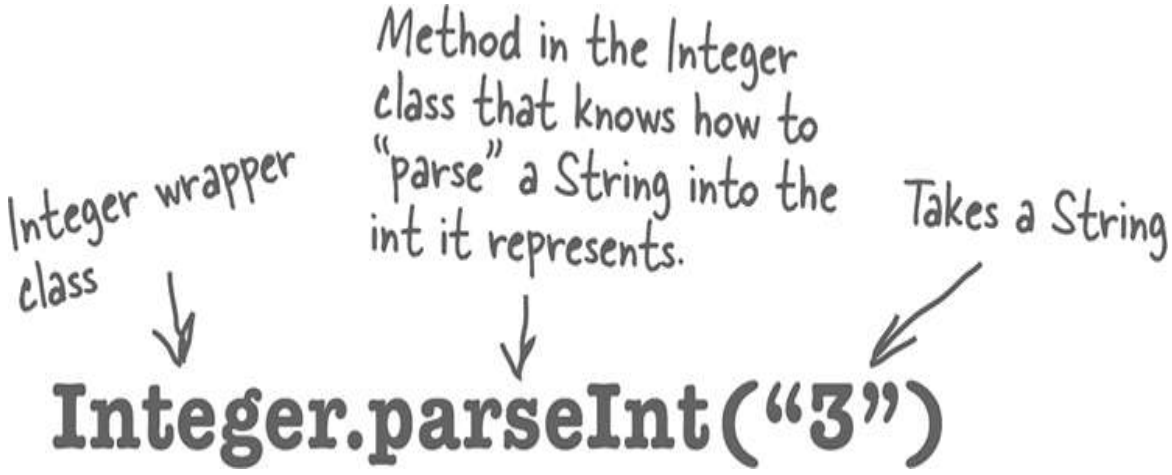

Converting a String to a primitive value is easy:

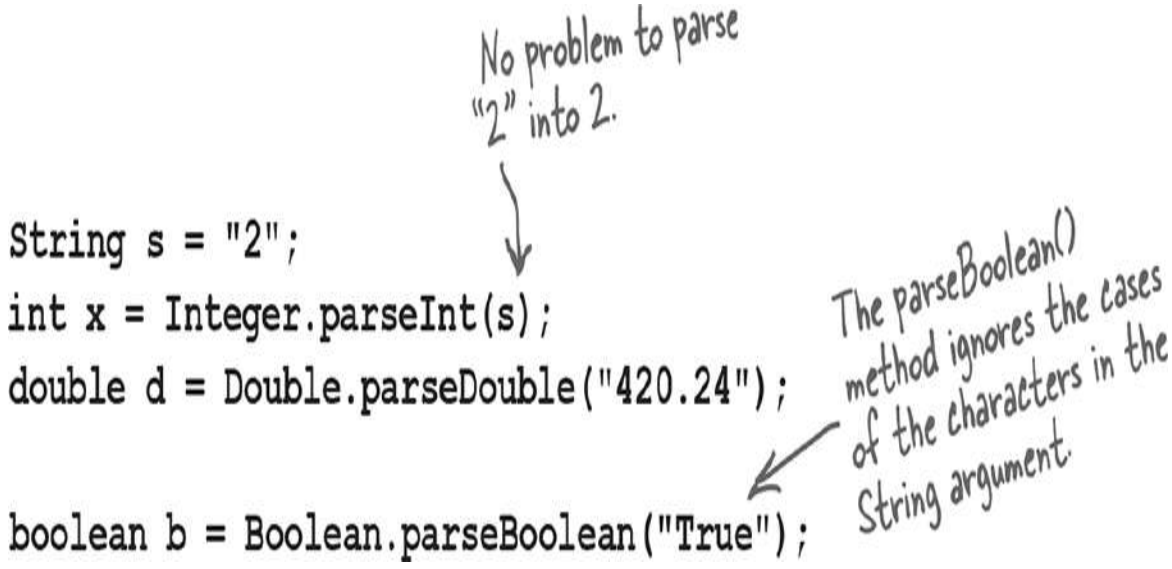

But if you try to do this:

```
String t = "two";
int y = Integer.parseInt(t);
```

Uh-oh. This compiles just fine, but at runtime it blows up. Anything that can't be parsed as a number will cause a NumberFormatException.

You'll get a runtime exception:

```
File Edit Window Help Clue

% java Wrappers

Exception in thread "main" java.lang.NumberFormatException:
For input string: "two"

   at java.base/java.lang.NumberFormatException.forInputStri
ng(NumberFormatException.java:65)

   at java.base/java.lang.Integer.parseInt(Integer.java:652)

   at java.base/java.lang.Integer.parseInt(Integer.java:770)

   at Snippets.badParse(Snippets.java:48)

   at Snippets.main(Snippets.java:54)
```

Every method or constructor that parses a String can throw a NumberFormatException. It's a runtime exception, so you don't have to handle or declare it. But you might want to.

(We'll talk about exceptions in Chapter 13, *Risky Behavior*.)

And now in reverse...turning a primitive number into a String

You may want to turn a number into a String, for example when you want to show this number to a user or put it into a message. There are several ways to turn a number into a String. The easiest is to simply concatenate the number to an existing String.

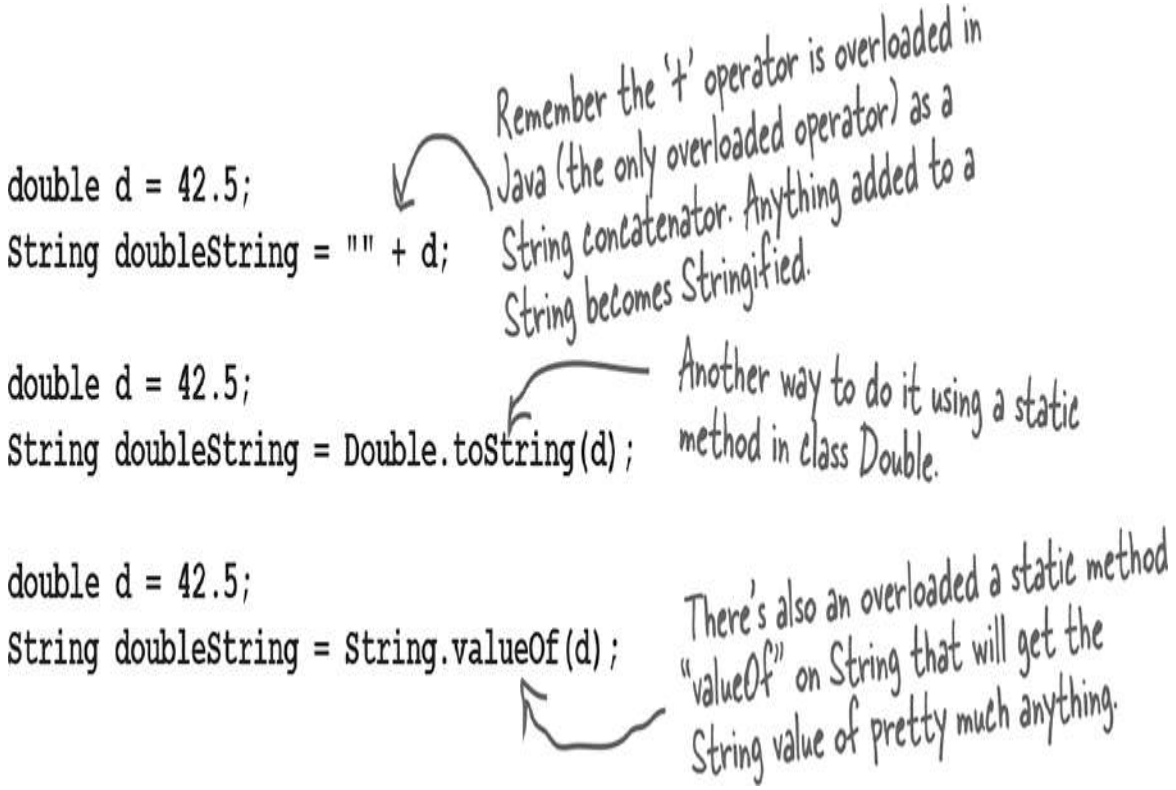

Yeah,
but how do I make
it look like money? With a
dollar sign and two decimal
places like $56.87 or what if I
want commas like 45,687,890
or what if I want it in...

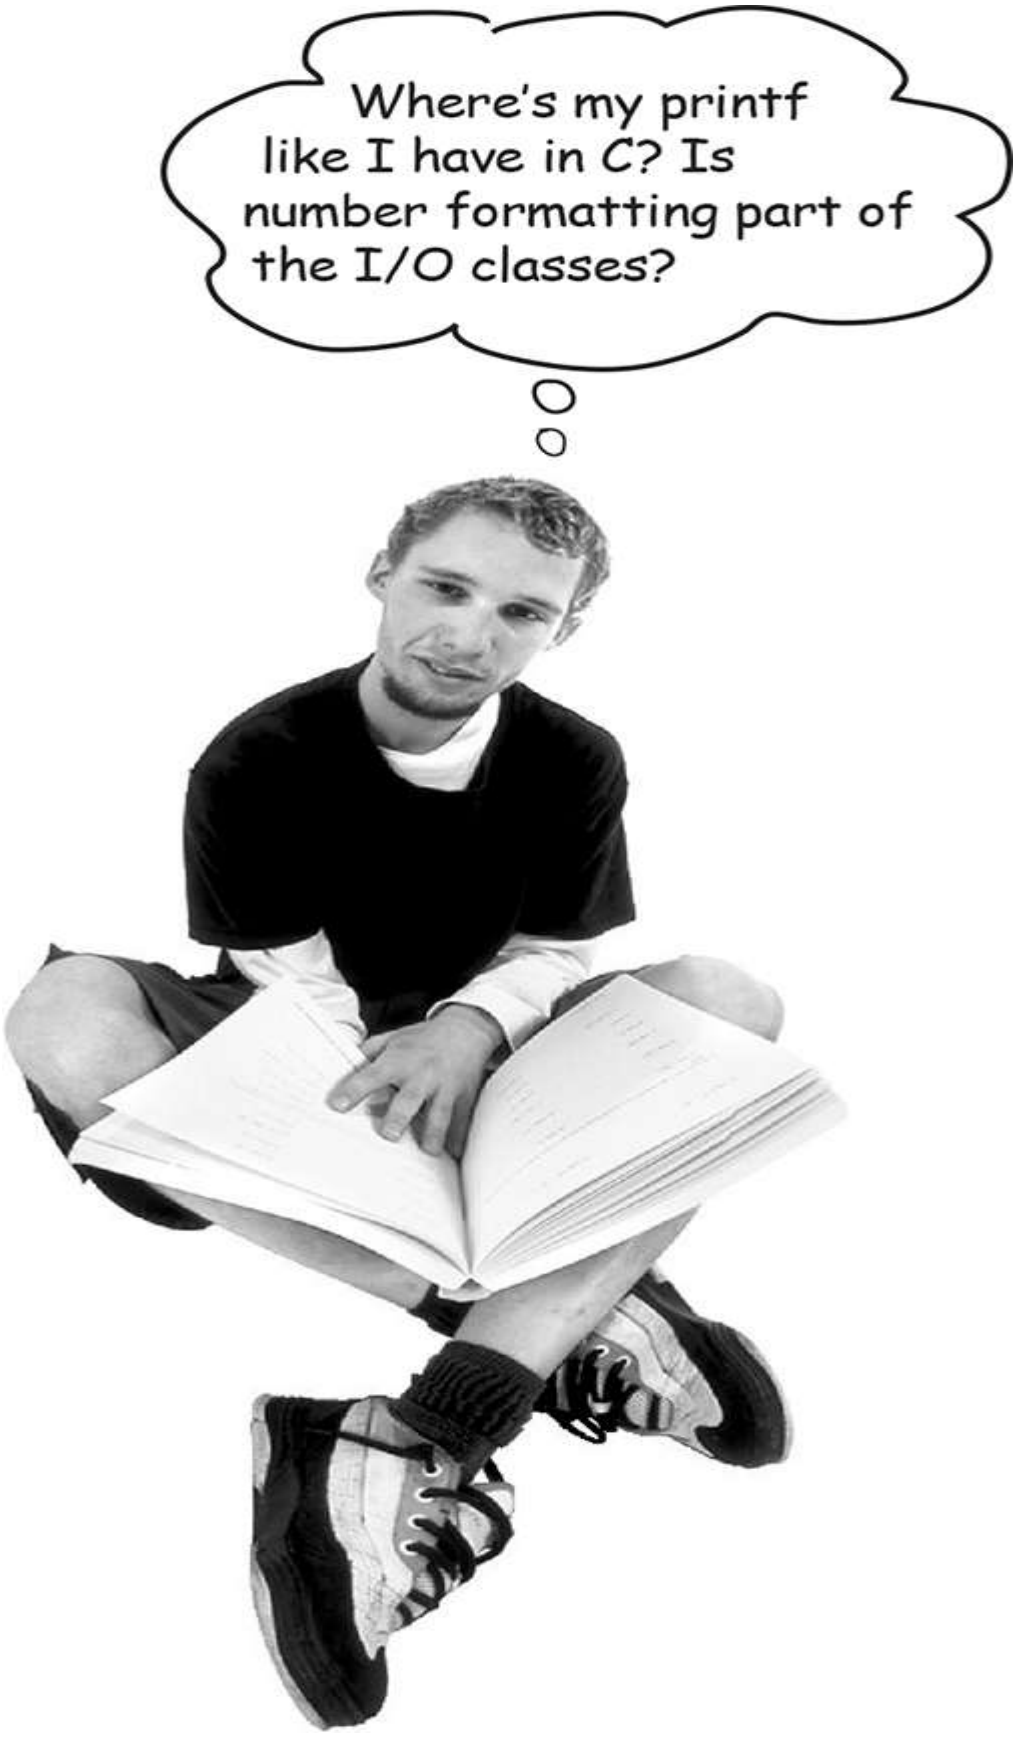
Where's my printf like I have in C? Is number formatting part of the I/O classes?

Number formatting

In Java, formatting numbers and dates doesn't have to be coupled with I/O. Think about it. One of the most typical ways to display numbers to a user is through a GUI. You put Strings into a scrolling text area, or maybe a table. If formatting was built only into print statements, you'd never be able to format a number into a nice String to display in a GUI.

The Java API provides powerful and flexible formatting using the Formatter class in java.util. But often you don't need to create and call methods on the Formatter class yourself, because the Java API has convenience methods in some of the I/O classes (including printf()) and the String class. So it can be a simple matter of calling a static String.format() method and passing it the thing you want formatted along with formatting instructions.

Of course, you do have to know how to supply the formatting instructions, and that takes a little effort unless you're familiar with the ***printf()*** function in C/C++. Fortunately, even if you *don't* know printf(), you can simply follow recipes for the most basic things (that we're showing in this chapter). But you *will* want to learn how to format if you want to mix and match to get *anything* you want.

We'll start here with a basic example and then look at how it works. (Note: we'll revisit formatting again in Chapter 16, *Saving Objects*.)

Making big numbers more readable with underscores, a quick detour

Before we get into formatting numbers, let's take a small, useful detour. Sometimes you'll want to declare variables with large initial values. Let's look at three declarations that assign the same large value, a billion, to long primitives:

```
long hardToRead = 1000000000;
long easierToRead = 1_000_000_000;
long legalButSilly = 10_0000_0000;
```

When you're assigning large values, properly located underscores will make your life easier!

Formatting a number to use commas

```
public class TestFormats {
  public static void main(String[] args) {
    long myBillion = 1_000_000_000;
    String s = String.format("%,d", myBillion);
    System.out.println(s);
  }
}
```

The number to format (we want it to have commas).

The formatting instructions for how to format the second argument (which in this case is an int value). Remember, there are only two arguments to this method here—the first comma is INSIDE the String literal, so it isn't separating arguments to the format method.

```
1,000,000,000
```

Now we get commas inserted into the number.

Formatting deconstructed...

At the most basic level, formatting consists of two main parts (there is more, but we'll start with this to keep it cleaner):

- ① **Formatting instructions**

  You use special format specifiers that describe how the argument should be formatted.

- ② **The argument to be formatted.**

  Although there can be more than one argument, we'll start with just one. The argument type can't be just *anything*...it has to be something that can be formatted using the format specifiers in the formatting instructions. For example, if your formatting instructions specify a *floating-point number*, you can't pass in a Dog or even a String that looks like a floating-point number.

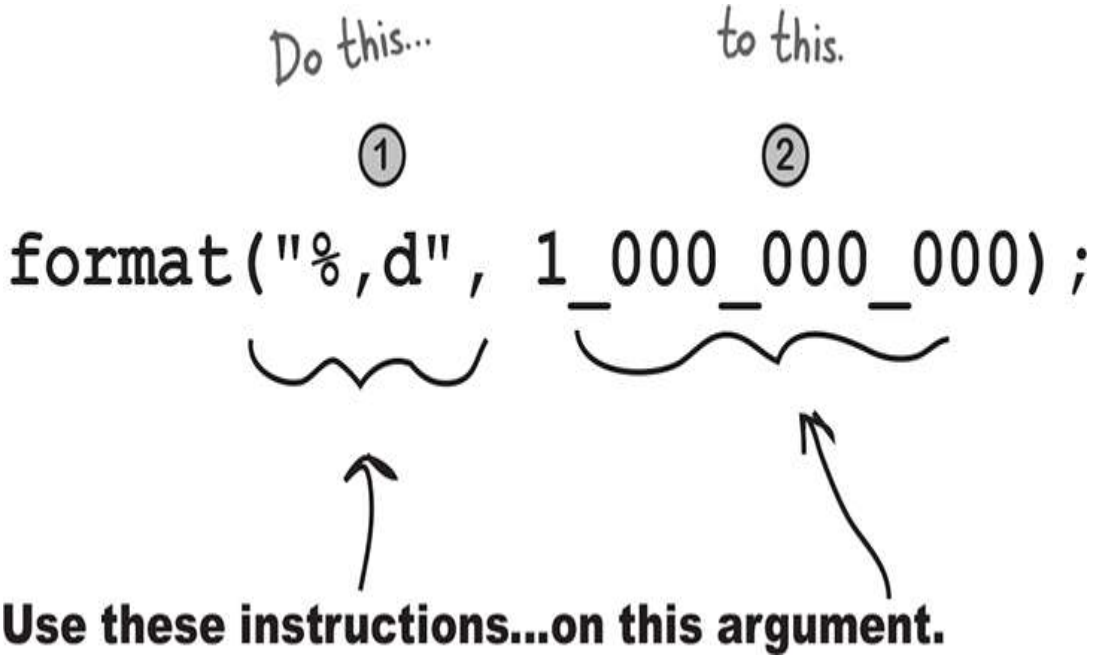

What do these instructions actually say?

"Take the second argument to this method, and format it as a **d**ecimal integer and insert **commas**."

How do they say that?

On the next page we'll look in more detail at what the syntax "%,d" actually means, but for starters, any time you see the percent sign (%) in a format String (which is always the first argument to a format() method), think of it as representing a variable, and the variable is the other argument to the method. The rest of the characters after the percent sign describe the formatting instructions for the argument.

NOTE

Note: if you already know printf() from c/C++, you can probably just skim the next few pages. Otherwise, read carefully!

The percent (%) says, "insert argument here" (and format it using these instructions)

The first argument to a format() method is called the format String, and it can actually include characters that you just want printed as-is, without extra formatting. When you see the % sign, though, think of the percent sign as a variable that represents the other argument to the method.

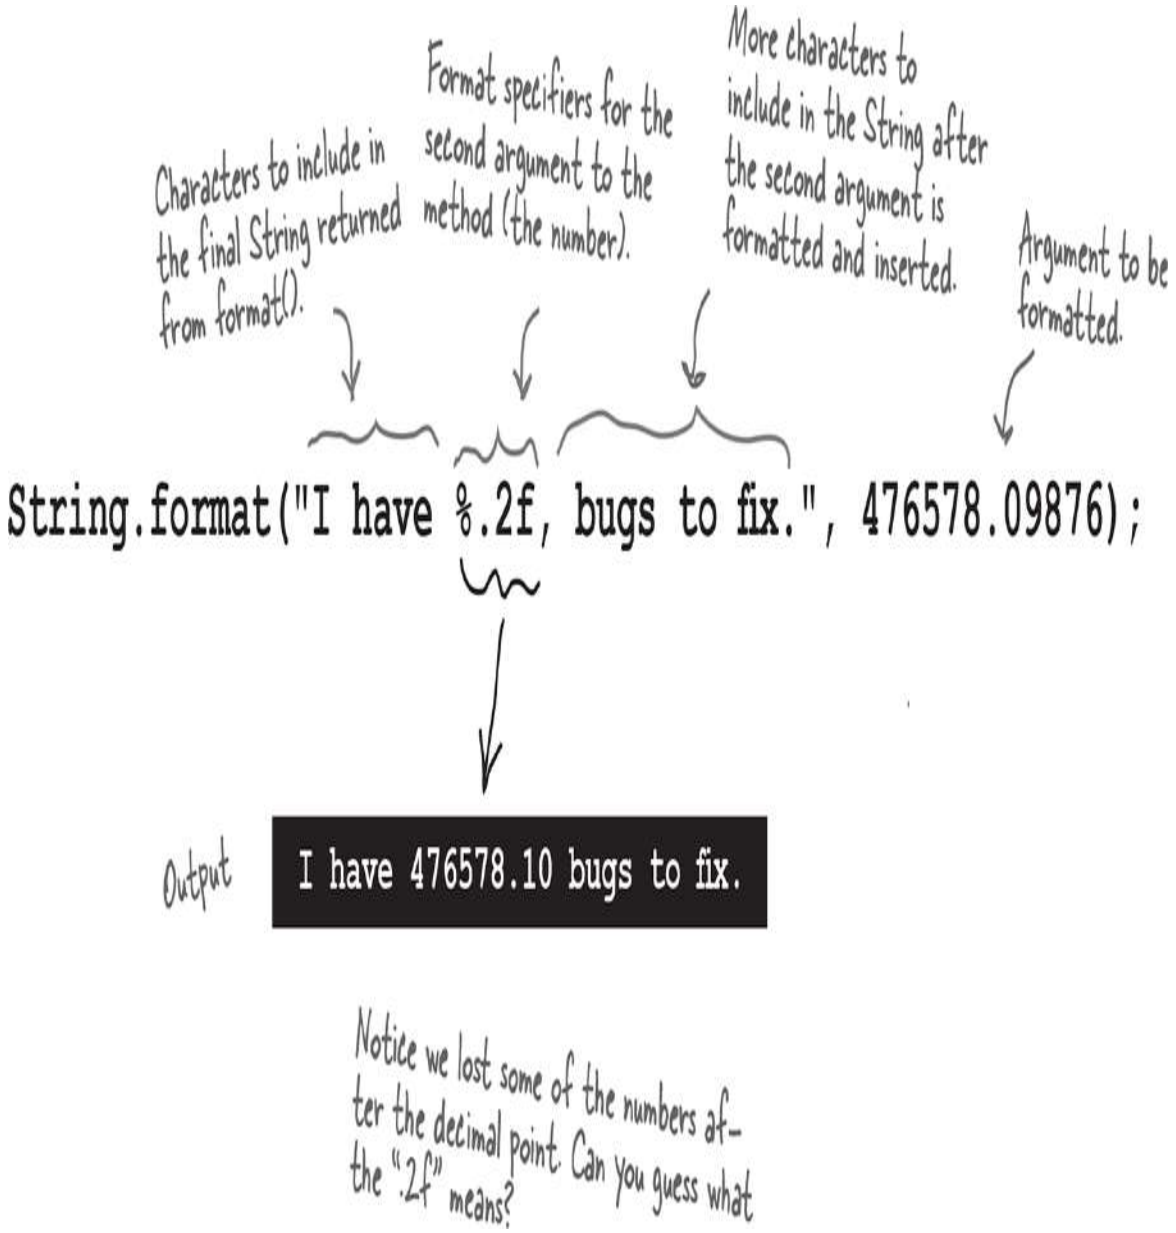

The "%" sign tells the formatter to insert the other method argument (the second argument to format(), the number) here, AND format it using the ".2f" characters after the percent sign. Then the rest of the format String, "bugs to fix," is added to the final output.

Adding a comma

```
String.format("I have %,.2f bugs to fix.", 476578.09876);
```

```
I have 476,578.10 bugs to fix.
```

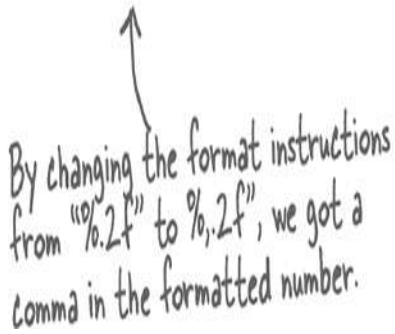

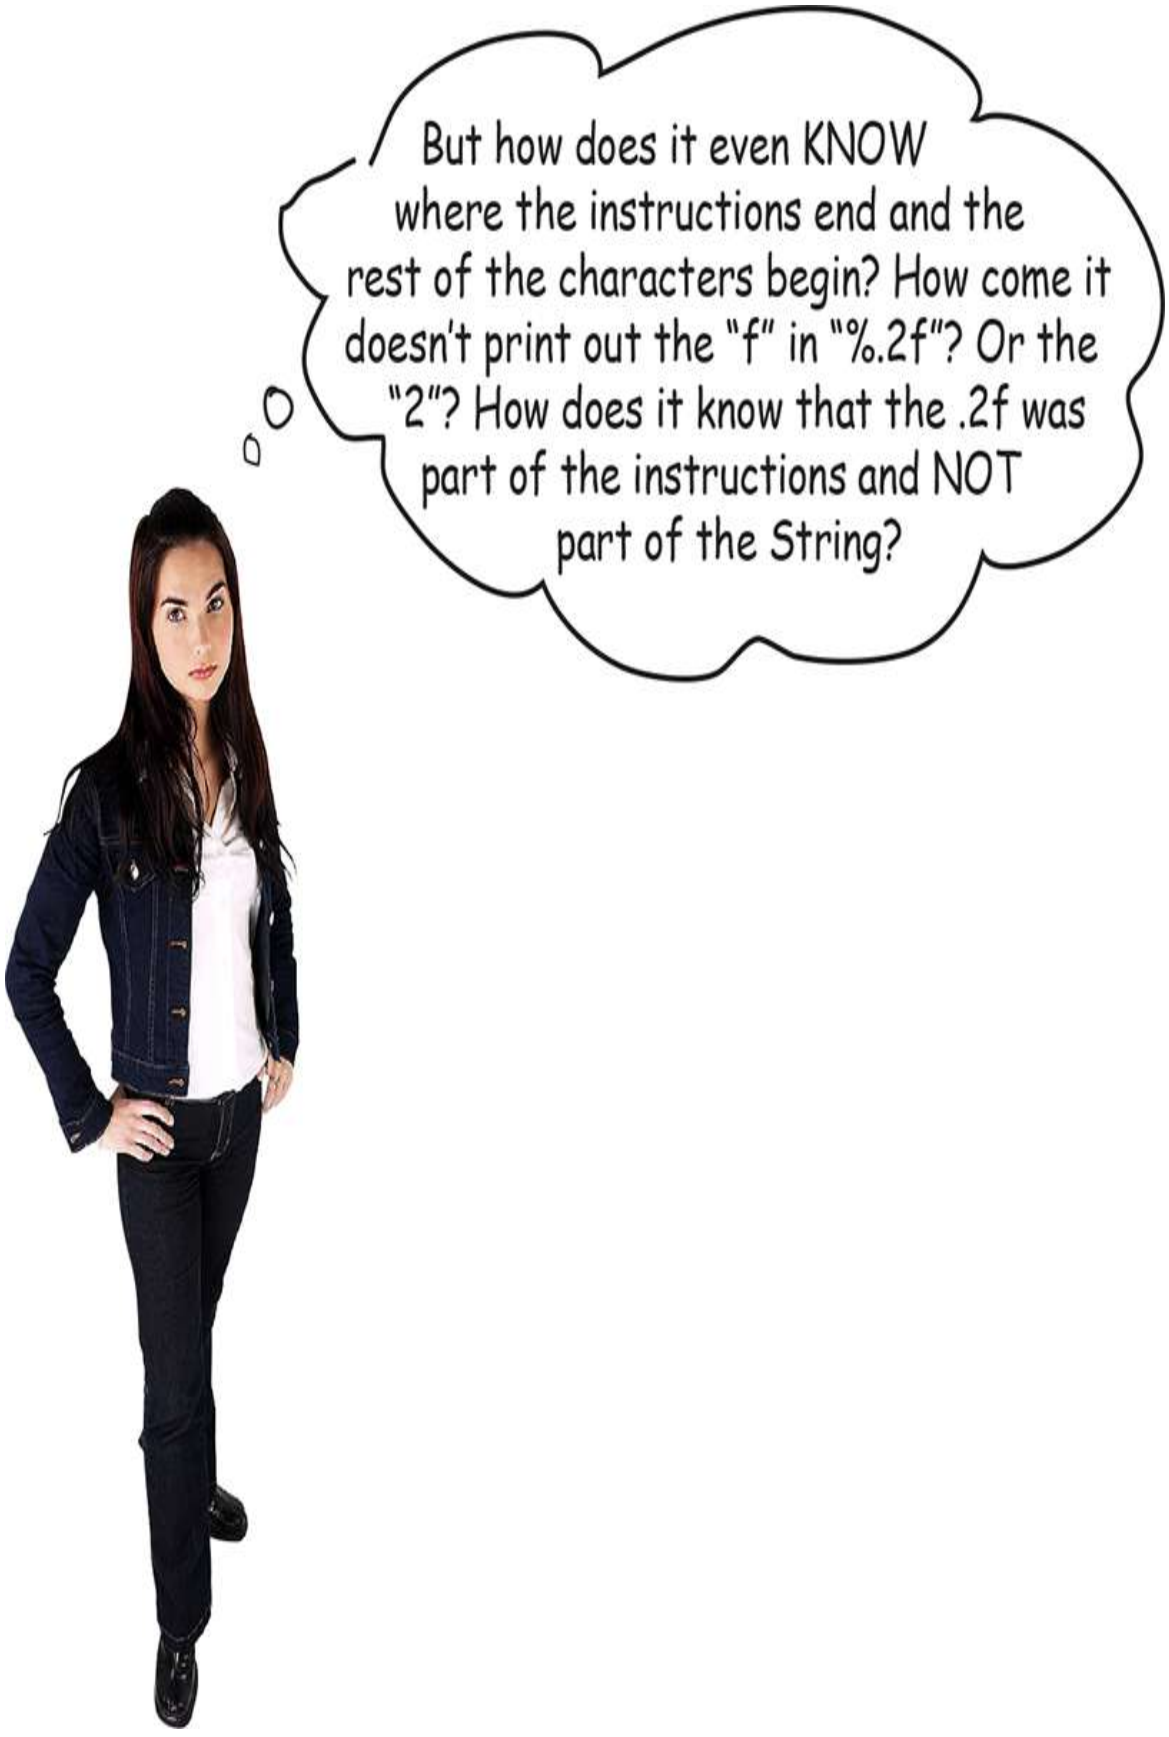
But how does it even KNOW where the instructions end and the rest of the characters begin? How come it doesn't print out the "f" in "%.2f"? Or the "2"? How does it know that the .2f was part of the instructions and NOT part of the String?

The format String uses its own little language syntax

You obviously can't put just *anything* after the "%" sign. The syntax for what goes after the percent sign follows very specific rules, and describes how to format the argument that gets inserted at that point in the result (formatted) String.

You've already seen some examples:

%,d means "insert commas and format the number as a decimal integer."

and

%.2f means "format the number as a floating point with a precision of two decimal places."

and

%,.2f means "insert commas and format the number as a floating point with a precision of two decimal places."

Really the question is: "How do I know what to put after the percent sign to get it to do what I want?" And that includes knowing the symbols (like "d" for decimal and "f" for floating point) as well as the order in which the instructions must be placed following the percent sign. For example, if you put the comma after the "d" like "%d," instead of "%,d" it won't work!

Or will it? What do you think this will do:

```
String.format("I have %.2f, bugs to fix.", 476578.09876);
```

(We'll answer that on the next page.)

The format specifier

Everything after the percent sign up to and including the type indicator (like "d" or "f") is part of the formatting instructions. After the type indicator, the formatter assumes the next set of characters is meant to be part of the output String, until or unless it hits another percent (%) sign. Hmmmm...is that even possible? Can you have more than one formatted argument variable? Put that thought on hold for right now; we'll come back to it in a few minutes. For now, let's look at the syntax for the format specifiers—the things that go after the percent (%) sign and describe how the argument should be formatted.

A format specifier can have up to five different parts (not including the "%"). Everything in brackets [ ] below is optional, so only the percent (%) and the type are required. But the order is also mandatory, so any parts you DO use must go in this order.

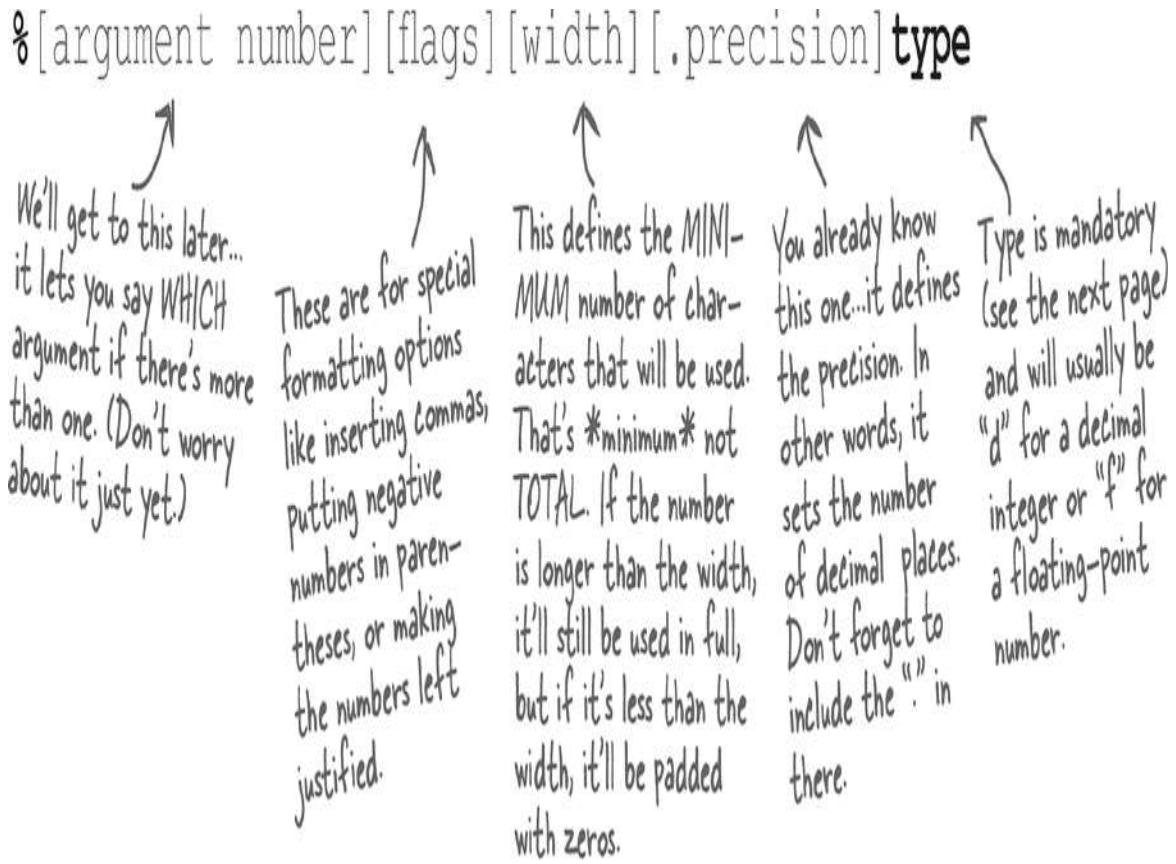

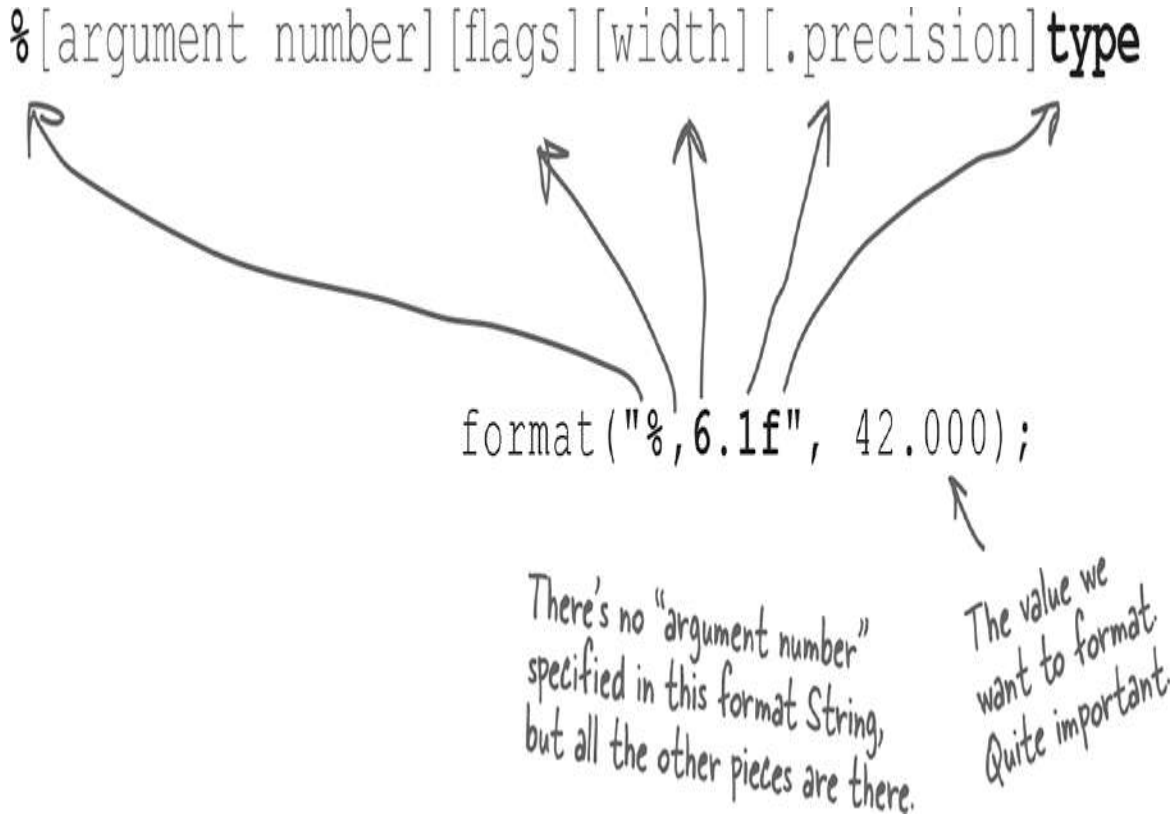

The only required specifier is for TYPE

Although type is the only required specifier, remember that if you *do* put in anything else, type must always come last! There are more than a dozen different type modifiers (not including dates and times; they have their own set), but most of the time you'll probably use %d (decimal) or %f (floating point). And typically you'll combine %f with a precision indicator to set the number of decimal places you want in your output.

The TYPE is mandatory, everything else is optional.

%d ***decimal***

```
format("%d", 42);
```

```
42
```

A 42.25 would not work! It would be the same as trying to directly assign a double to an int variable.

The argument must be compatible with an int, so that means only byte, short, int, and char (or their wrapper types).

%f ***floating point***

```
format("%.3f", 42.000000)
```

```
42.000
```

Here we combined the "f" with a precision indicator ".3" so we ended up with three zeros.

The argument must be of a floating-point type, so that means only a float or double (primitive or wrapper) as well as something called BigDecimal (which we don't look at in this book).

%x ***hexadecimal***

```
format("%x", 42)
```

```
2a
```

The argument must be a byte, short, int, long (including both primitive and wrapper types), and BigInteger.

%c ***character***

```
format("%c", 42)
```

```
*
```

The number 42 represents the char "*".

NOTE

You must include a type in your format instructions, and if you specify things besides type, the type must always come last. Most of the time, you'll probably format numbers using either "d" for decimal or "f" for floating point.

The argument must be a byte, short, char, or int (including both primitive and wrapper types).

What happens if I have more than one argument?

Imagine you want a String that looks like this:

"The rank is ***20,456,654*** out of ***100,567,890.24***."

But the numbers are coming from variables. What do you do? You simply add *two* arguments after the format String (first argument), so that means your call to format() will have three arguments instead of two. And inside that first argument (the format String), you'll have two different format specifiers (two things that start with "%"). The first format specifier will insert the second argument to the method, and the second format specifier will insert the third argument to the method. In other words, the variable insertions in the format String use the order in which the other arguments are passed into the format() method.

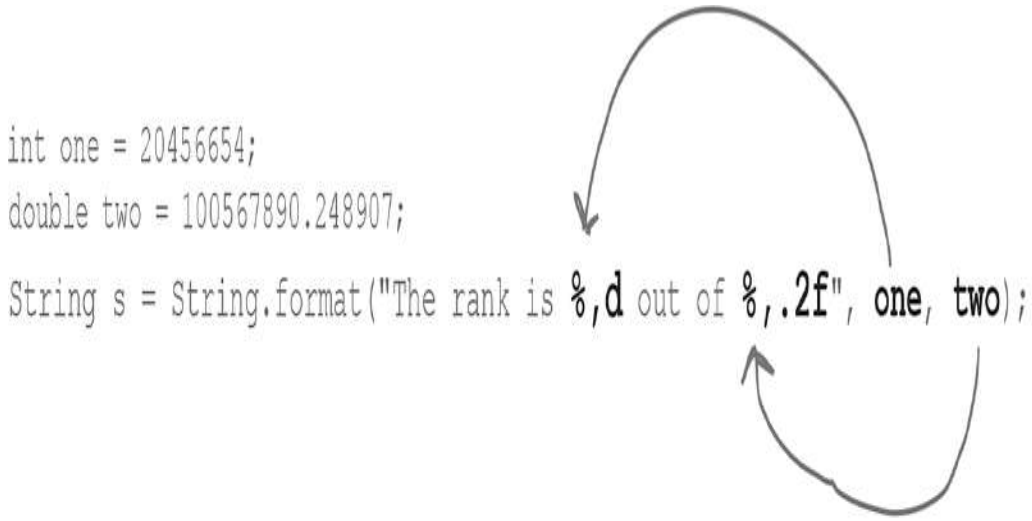


```
The rank is 20,456,654 out of 100,567,890.25
```

When you have more than one argument, they're inserted using the order in which you pass them to the format() method.

We added commas to both variables and restricted the floating-point number (the second variable) to two decimal places.

As you'll see when we get to date formatting, you might actually want to apply different formatting specifiers to the same argument. That's probably hard to imagine until you see how *date* formatting (as opposed to the *number* formatting we've been doing) works. Just know that in a minute, you'll see how to be more specific about which format specifiers are applied to which arguments.

THERE ARE NO DUMB QUESTIONS

Q: Um, there's something REALLY strange going on here. Just how many arguments *can* I pass? I mean, how many overloaded format() methods are IN the String class? So, what happens if I want to pass, say, ten different arguments to be formatted for a single output String?

A: Good catch. Yes, there *is* something strange going on, and no there are *not* a bunch of overloaded format() methods to take a different number of possible arguments. In order to support this formatting (printf-like) API in Java, the language needed another feature— *variable argument lists* (called *varargs* for short). We'll talk about varargs more in Appendix B.

Just one more thing...static imports

Static imports are a real mixed blessing. Some people love this idea, some people hate it. Static imports exist to make your code a little shorter. If you hate to type or hate long lines of code, you might just like this feature. The downside to static imports is that—if you're not careful—using them can make your code a lot harder to read.

The basic idea is that whenever you're using a static class, a static variable, or an enum (more on those later), you can import them and save yourself some typing.

Without static imports:

```
class NoStatic {

  public static void main(String[] args) {

    System.out.println("sqrt " + Math.sqrt(2.0));

    System.out.println("tan " + Math.tan(60));
  }
}
```

Same code, with static imports:

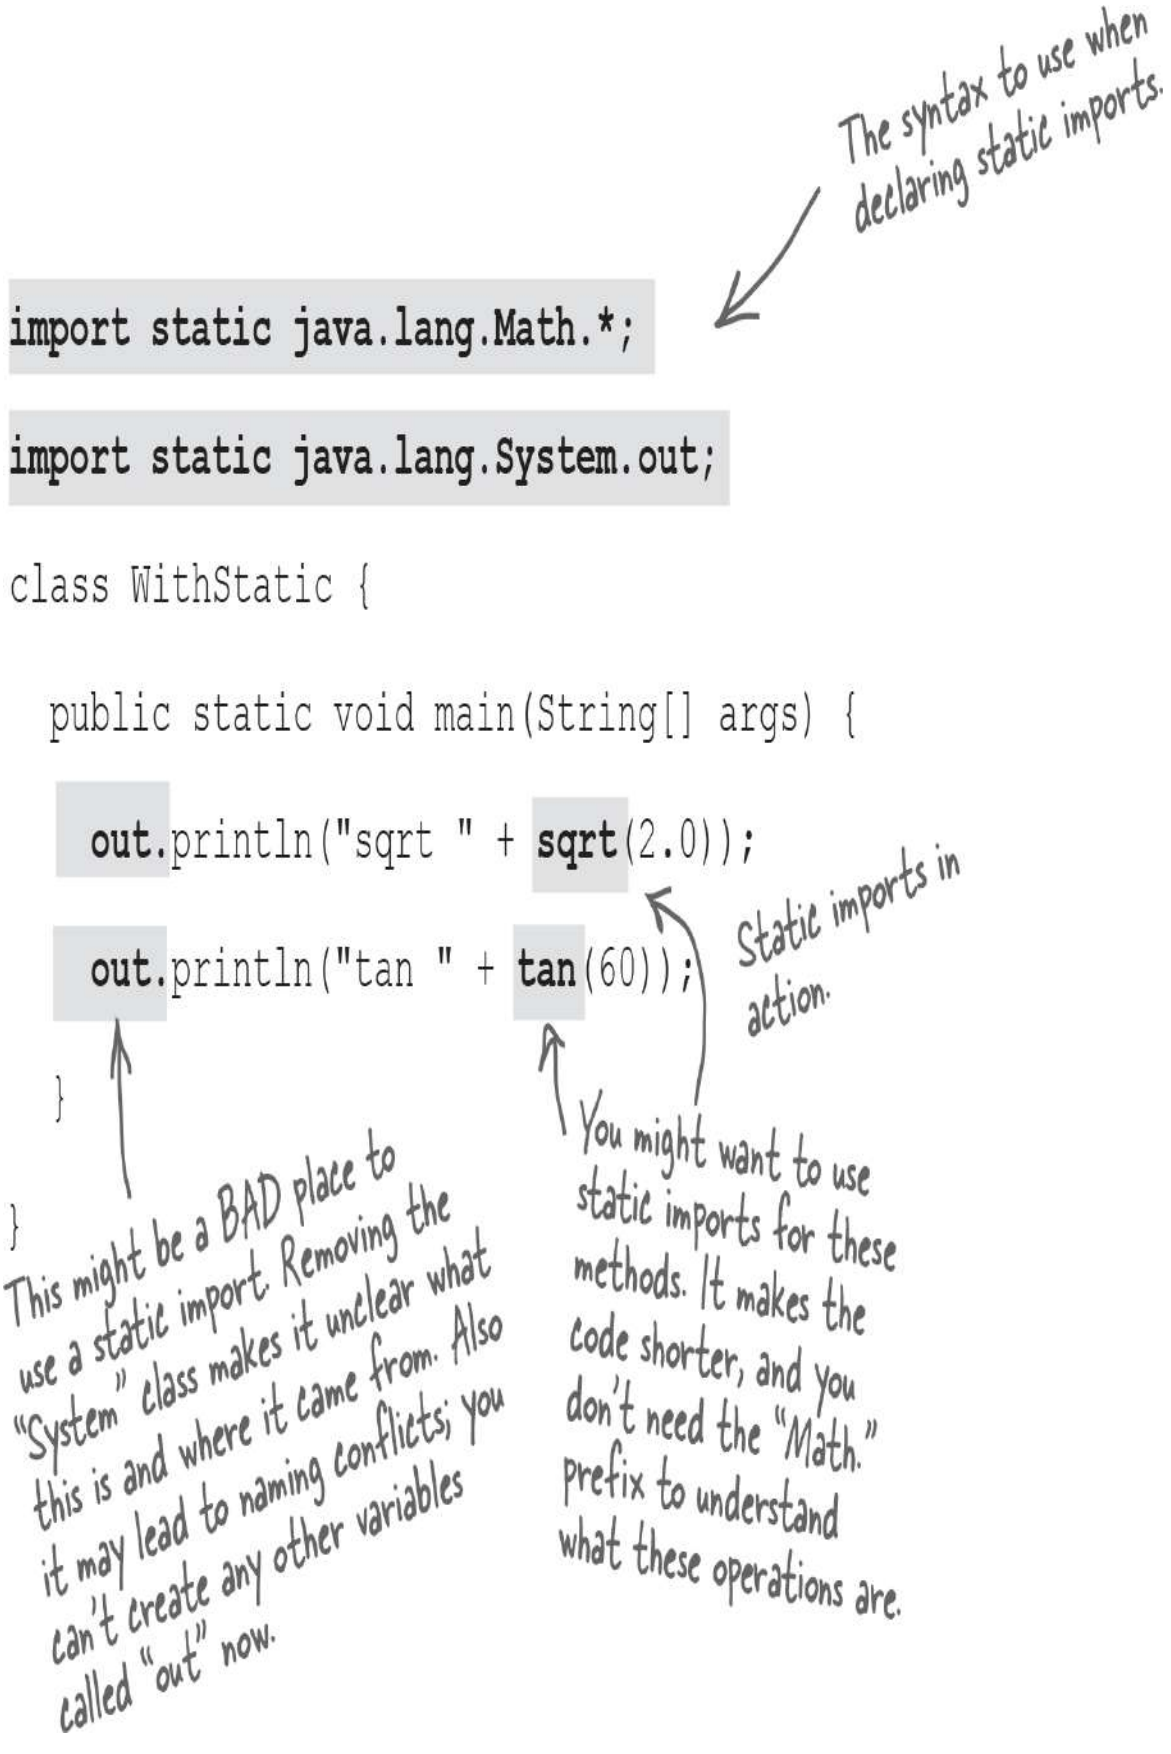
The syntax to use when declaring static imports.
import static java.lang.Math.*;
import static java.lang.System.out;
class WithStatic {
public static void main(String[] args) {
out.println("sqrt " + sqrt(2.0));
out.println("tan " + tan(60));
}
}
Static imports in action.
You might want to use static imports for these methods. It makes the code shorter, and you don't need the "Math." prefix to understand what these operations are.
This might be a BAD place to use a static import. Removing the "System" class makes it unclear what this is and where it came from. Also it may lead to naming conflicts; you can't create any other variables called "out" now.

NOTE

Use carefully: Static imports can make your code confusing to read. Always re-read your code after using a static import and think: "Will I understand this in six months time?"

CAVEATS & GOTCHAS

- Using a static import removes the information about which class the static came from. We'd advise using static imports only when the static method or variable still means something when it's not prefixed with the class name.
- A big issue with static imports is that it 's easy to create naming conflicts. For example, if you have two different classes with an "add()" method, how will you and the compiler know which one to use? So it's best not to use a static import if it's possible to create a conflict.
- Notice that you can use wildcards (.*), in your static import declaration.

Fireside Chats

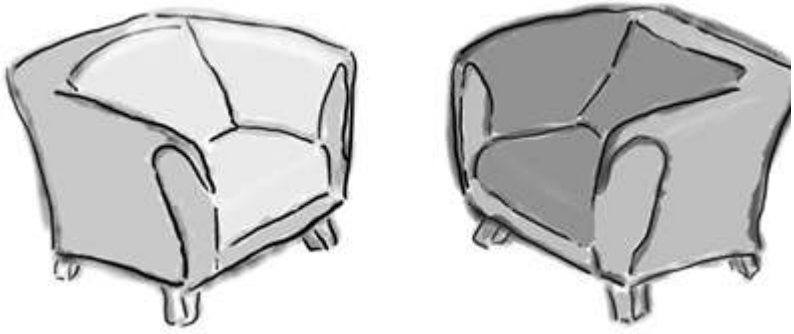

Tonight's Talk: **An instance variable takes cheap shots at a static variable**

Instance Variable	Static Variable
I don't even know why we're doing this. Everyone knows static variables are just used for constants. And how many of those are there? I think the whole API must have, what, four? And it's not like anybody ever uses them.	
	You really should check your facts. When was the last time you looked at the API? It's frickin' loaded with statics! It even has entire classes dedicated to holding constant values. There's a class called SwingConstants, for example, that's just full of them.
Full of it. Yeah, you can say that again. OK, so there are a few in the Swing library, but everybody knows Swing is just a special case.	
	It might be a special case, but it's a really important one! And what about the Color class? What a pain if you had to remember the RGB values to make the standard colors! But the color class already has constants defined for blue, purple, white, red, etc. Very handy.
Ok, but besides a few GUI things, give me an example of just one static variable that anyone would actually use. In the real world.	
	How's System.out for starters? The out in System.out is a static variable of the System class. You personally don't make a new instance of the System; you just ask the System class for its out variable.
Well, that's another special case. And nobody uses that except for debugging anyway.	
	Oh, like debugging isn't important? And here's something that probably never crossed your narrow mind—let's face it, static variables are more efficient. One per class instead of one per instance. The memory savings might be huge!
Um, aren't you forgetting something?	
	What?
Static variables are about as un-OO as it gets!! Gee, why not just go take a giant backward step and do some procedural programming while we're at it.	

Instance Variable	Static Variable
	What do you mean *un*-OO?
You're like a global variable, and any programmer worth their sticker-covered laptop knows that's usually a Bad Thing.	
	I am NOT a global variable. There's no such thing. I live in a class! That's pretty OO you know, a CLASS. I'm not just sitting out there in space somewhere; I'm a natural part of the state of an object; the only difference is that I'm shared by all instances of a class. Very efficient.
Yeah, you live in a class, but they don't call it *Class*-Oriented programming. That's just stupid. You're a relic. Something to help the old-timers make the leap to Java.	
	Alright just stop right there. THAT is definitely not true. Some static variables are absolutely crucial to a system. And even the ones that aren't crucial sure are handy.
Well, OK, every once in a while sure, it makes sense to use a static, but let me tell you, abuse of static variables (and methods) is the mark of an immature OO programmer. A designer should be thinking about *object* state, not *class* state.	
	Why do you say that? And what's wrong with static methods?
Static methods are the worst things of all, because it usually means the programmer is thinking procedurally instead of about objects doing things based on their unique object state.	
	Sure, I know that objects should be the focus of an OO design, but just because there are some clueless programmers out there...don't throw the baby out with the bytecode. There's a time and place for statics, and when you need one, nothing else beats it.
Riiiiight. Whatever you need to tell yourself.	

Exercise

BE the compiler

The Java file on this page represents a complete program. Your job is to play compiler and determine whether this file will compile. If it won't compile, how would you fix it? When it runs, what would be its output?

```
class StaticSuper {
  static {
    System.out.println("super static block");
  }

  StaticSuper () {
    System.out.println("super constructor");
```

```
  }
}

public class StaticTests extends StaticSuper {
  static int rand;

  static {
    rand = (int) (Math.random() * 6);
    System.out.println("static block " + rand);
  }

  StaticTests() {
    System.out.println("constructor");
  }

  public static void main(String[] args) {
    System.out.println("in main");
    StaticTests st = new StaticTests();
  }
}
```

Which of these is the output?

Possible Output

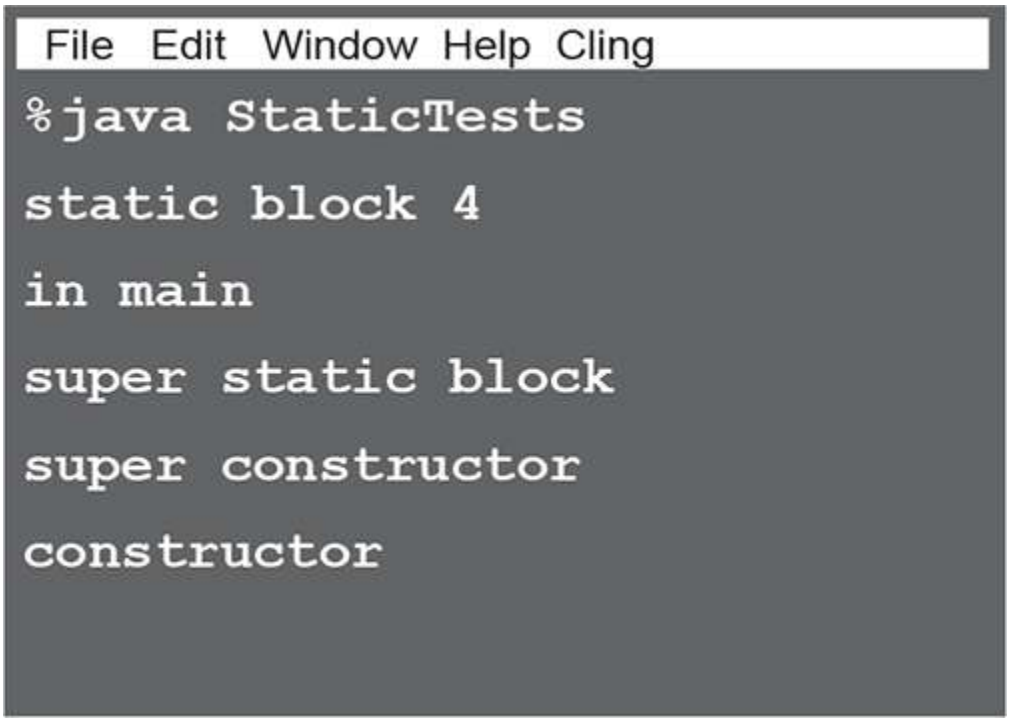

Possible Output

```
File  Edit  Window  Help  Electricity
%java StaticTests
super static block
static block 3
in main
super constructor
constructor
```

→ **Answers in "BE the compiler".**

This chapter explored the wonderful, static world of Java. Your job is to decide whether each of the following statements is true or false.

True or False

1. To use the Math class, the first step is to make an instance of it.
2. You can mark a constructor with the **`static`** keyword.
3. Static methods don't have access to instance variable state of the "this" object.
4. It is good practice to call a static method using a reference variable.

5. Static variables could be used to count the instances of a class.
6. Constructors are called before static variables are initialized.
7. MAX_SIZE would be a good name for a static final variable.
8. A static initializer block runs before a class's constructor runs.
9. If a class is marked final, all of its methods must be marked final.
10. A final method can be overridden only if its class is extended.
11. There is no wrapper class for boolean primitives.
12. A wrapper is used when you want to treat a primitive like an object.
13. The parseXxx methods always return a String.
14. Formatting classes (which are decoupled from I/O) are in the java.format package.

→ **Answers in "True or False".**

Exercise Solution

Sharpen your pencil

(from "Sharpen your pencil")

1, 4, 5, and 6 are legal.
2 doesn't compile because the static method references a non-static instance variable.
3 doesn't compile because the instance variable is final but hasn't been initialized.

BE the compiler

(from "BE the compiler")

```
StaticSuper () {
  System.out.println(
    "super constructor");
}
```

StaticSuper is a constructor and must have ( ) in its signature. Notice that as the output below demonstrates, the static blocks for both classes run before either of the constructors run.

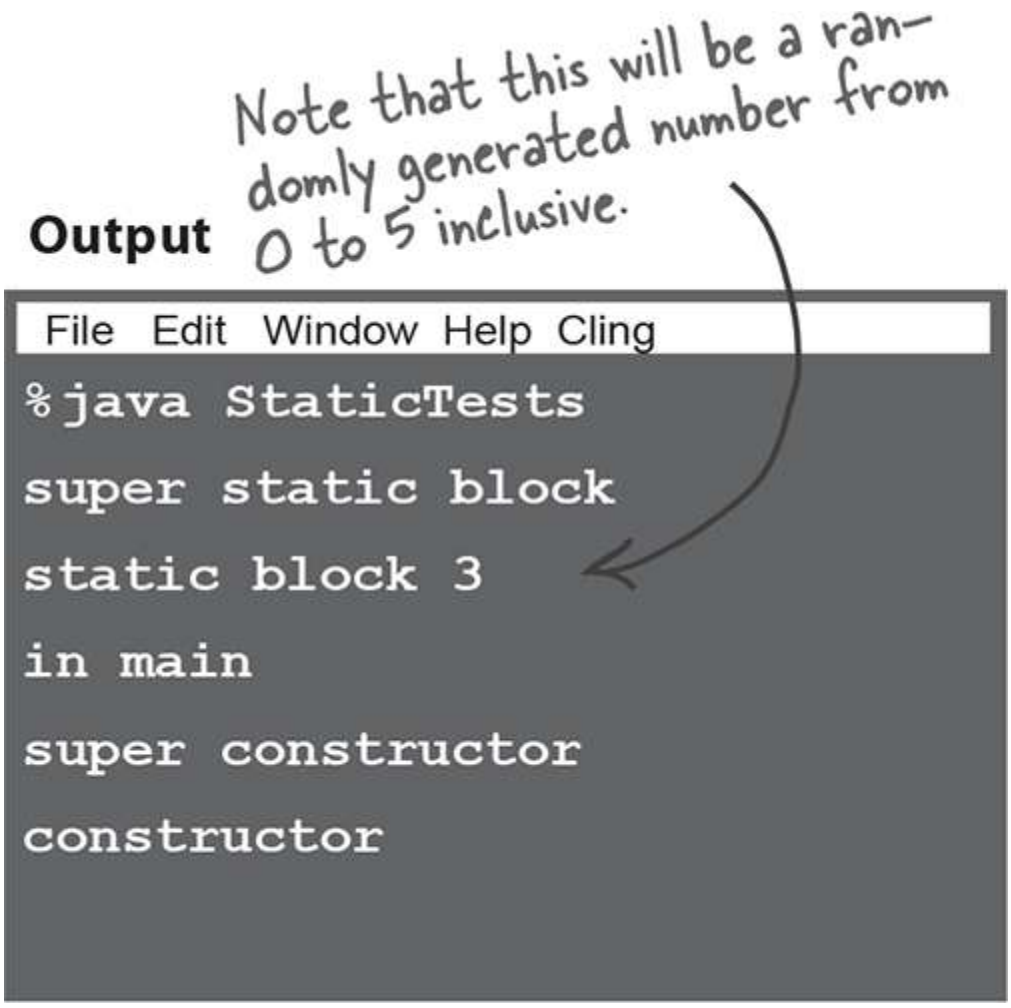

True or False

(from "True or False")

1. To use the Math class, the first step is to make an instance of it.	**False**
2. You can mark a constructor with the keyword "static."	**False**
3. Static methods don't have access to an object's instance variables.	**True**
4. It is good practice to call a static method using a reference variable.	**False**
5. Static variables could be used to count the instances of a class.	**True**
6. Constructors are called before static variables are initialized.	**False**
7. MAX_SIZE would be a good name for a static final variable.	**True**
8. A static initializer block runs before a class's constructor runs.	**True**
9. If a class is marked final, all of its methods must be marked final.	**False**
10. A final method can be overridden only if its class is extended.	**False**
11. There is no wrapper class for boolean primitives.	**False**
12. A wrapper is used when you want to treat a primitive like an object.	**True**
13. The parseXxx methods always return a String.	**False**
14. Formatting classes (which are decoupled from I/O) are in the java.format package.	**False**

Chapter 11. Data Structures: Collections and Generics

Sorting is a snap in Java. You have all the tools for collecting and manipulating your data without having to write your own sort algorithms

(unless you're reading this right now sitting in your Computer Science 101 class, in which case, trust us—you are SO going to be writing sort code while the rest of us just call a method in the Java API). In this chapter, you're going to get a peek at when Java can save you some typing and figure out the types that you need.

The Java Collections Framework has a data structure that should work for virtually anything you'll ever need to do. Want to keep a list that you can easily keep adding to? Want to find something by name? Want to create a list that automatically takes out all the duplicates? Sort your co-workers by the number of times they've tried to speak with their mic muted on a video call? Sort your pets by number of tricks learned? It's all here...

Tracking song popularity on your jukebox

Congratulations on your new job—managing the automated jukebox system at Lou's Diner. There's no Java inside the jukebox itself, but each time someone plays a song, the song data is appended to a simple text file.

Your job is to manage the data to track song popularity, generate reports, and manipulate the playlists. You're not writing the entire app—some of the other software developers are involved as well, but you're responsible for managing and sorting the data inside the Java app. And since Lou has a thing against databases, this is strictly an in-memory data collection. Another programmer will be writing the code to read the song data from a file and put the songs into a List. (In a few chapters you'll learn how to read data from

files, and write data to files.) All you're going to get is a List with the song data the jukebox keeps adding to.

Let's not wait for that other programmer to give us the actual file of songs; let's create a small test program to provide us with some sample data we can work with. We've agreed with the other programmer that she'll ultimately provide a Songs class with a getSongs method we'll use to get the data. Armed with that information, we can write a small class to temporarily "stand in" for the actual code. Code that stands in for other code is often called "**mock**" code.

> **NOTE**
>
> **You'll often want to write some temporary code that stands in for the real code that will come later. This is called "mocking."**

Your first job, sort the songs in alphabetical order

We'll start by creating code that reads in data from the mock Songs class and prints out what it got. Since an ArrayList's elements are placed in the order

in which they were added, it’s no surprise that the song titles are not yet alphabetized.

```
import java.util.*;

public class Jukebox1 {
  public static void main(String[] args) {
    new Jukebox1().go();
  }

  public void go() {
    List<String> songList = MockSongs.getSongStrings();
    System.out.println(songList);
  }
}

// Below is the "mock" code. A stand in for the actual
// I/O code that the other programmer will provide later

class MockSongs {
  public static List<String> getSongStrings() {
    List<String> songs = new ArrayList<>();
    songs.add("somersault");
    songs.add("cassidy");
    songs.add("$10");
    songs.add("havana");
    songs.add("Cassidy");
    songs.add("50 Ways");
    return songs;
  }
}
```

We'll store the song titles in a List of Strings.

Then print the contents of the songList.

Nothing special here...just some sample data we can use to work on our sorting code.

This is definitely NOT alphabetical!

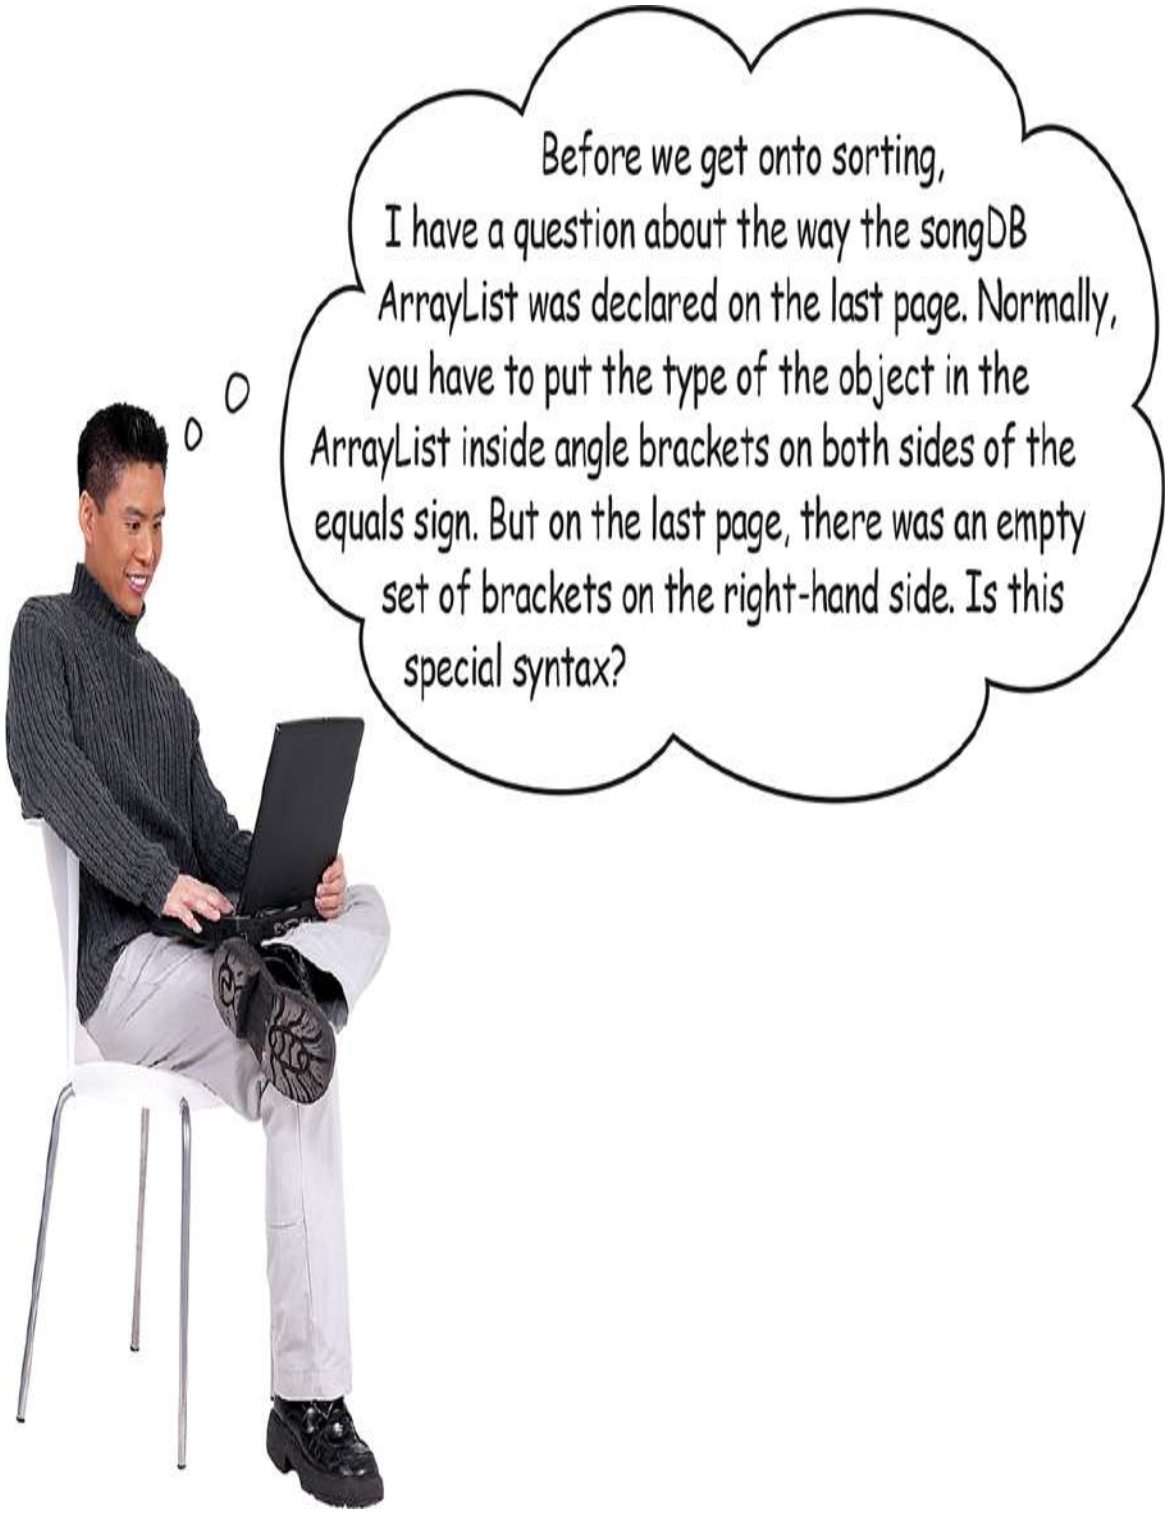
Before we get onto sorting, I have a question about the way the songDB ArrayList was declared on the last page. Normally, you have to put the type of the object in the ArrayList inside angle brackets on both sides of the equals sign. But on the last page, there was an empty set of brackets on the right-hand side. Is this special syntax?

Great question! You spotted the diamond operator

So far, we've been declaring our ArrayLists by showing the element type twice:

```
ArrayList<String> songs = new ArrayList<String>();
```

Most of the time, we don't need to say the same thing twice. The compiler can tell from what you wrote on the left-hand side what you probably want on the right-hand side. It uses *type inference* to infer (work out) the type you need.

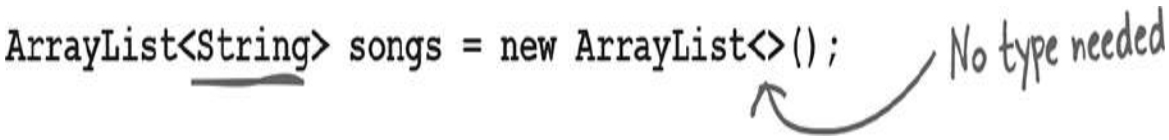

This syntax is called the diamond operator (because, well, it's diamond-shaped!) and was introduced in Java 7, so it's been around a while and is probably available in your version of Java.

NOTE

Over time, Java has evolved to remove unnecessary code duplication from its syntax. If the compiler can figure out a type, you don't always need to write it out in full.

THERE ARE NO DUMB QUESTIONS

Q: Should I be using the diamond operator all the time? Are there any downsides?

A: The diamond operator is "syntactic sugar," which means it's there to make our lives easier as we write (and read) code, but it doesn't make any difference to the underlying byte code. So if you're worried about whether using the diamond means something different to using the specific type, don't worry! It's basically the same thing.

However, sometimes you might choose to write out the full type. The main reason you might want to is to help people reading your code. For example, if the variable is declared a long way from where it's initialized, you might want to use the type when you initialize it so you can see clearly what objects go into it.

```
ArrayList<String> songs;
// lots of code between these lines...
songs = new ArrayList<String>();
```

Q: Are there any other places the compiler can work out the types for me?

A: Yes! For example, the **`var`** keyword ("Local Variable Type Inference"), which we'll talk about in Appendix B. And another important example, lambda expressions, which we will see later in this chapter.

Q: I saw you were creating an ArrayList but assigning it to a List reference, and that you created an ArrayList but returned a List from the method. Why not just use ArrayList everywhere?

A: One of the advantages of polymorphism is that code doesn't need to know the specific implementation type of an object to work well with it. List is a well-known, well-understood interface (which we'll see more of in this chapter). Code that is working with an ArrayList doesn't

usually need to know it's an ArrayList. It could be a LinkedList. Or a specialized type of List. Code that's working with the List only needs to know it can call List methods on it (like add(), size() etc). It's usually safer to pass the interface type (i.e., List) around instead of the implementation. That way, other code can't go rooting around inside your object in a way that was never intended.

It also means that should you ever want to change from an ArrayList to a LinkedList, or a CopyOnWriteArrayList (see Chapter 18, *Dealing with Concurrency Issues*) at a later date, you can without having to change all the places the List is used.

Exploring the java.util API, List and Collections

We know that with an ArrayList, or any List, the elements are kept in the order in which they were added. So we're going to need to sort the elements in the song list. In this chapter, we'll be looking at some of the most important and commonly used collection classes in the java.util package, but for now, let's limit ourselves to two classes: java.util.List and java.util.Collections.

We've been using ArrayList for a while now. Because ArrayList IS-A List and because many of the methods we're familiar with on ArrayList come from List, we can comfortably transfer most of what we know about working with ArrayLists to List.

The Collections class is known as a "utility" class. It's a class that has a lot of handy methods for working with the various collection types.

Excerpts from the API

java.util.List

sort(**Comparator**): Sorts this list according to the order induced by the specified **Comparator.**

java.util.Collections

sort(List): Sorts the specified list into ascending order, according to the **natural ordering** of its elements.

sort(List, **Comparator**): Sorts the specified list according to the order defined by the **Comparator**.

In the "Real-World"™ there are lots of ways to sort

We don't always want our lists sorted alphabetically. We might want to sort clothes by size, or movies by how many five-star reviews they get. Java lets you sort the good old-fashioned way, alphabetically, and it also lets you create your own custom sorting approaches. Those references you see above to "Comparator" have to do with custom sorting, which we'll get to later this chapter. So for now, let's stick with "natural ordering" (alphabetical).

Since we know we have a List, it looks like we've found the perfect method, **Collections.sort()**.

"Natural Ordering," what Java means by alphabetical

Lou wants you to sort songs "alphabetically," but what exactly does that mean? The A–Z part is obvious, but how about lowercase versus uppercase letters? How about numbers and special characters? Well, this is another

can-of-worms topic, but Java uses Unicode, and for many of us in “the West” that means that numbers sort before uppercase letters, uppercase letters sort before lowercase letters, and some special characters sort before numbers and some sort after numbers. That’s pretty clear, right? Ha! Well, the upshot is that, by default, sorting in Java happens in what’s called “natural order,” which is more or less alphabetical. Let’s take a look at what happens when we sort our list of songs:

```
  public void go() {
    List<String> songList = MockSongs.getSongStrings();
    System.out.println(songList);
    Collections.sort(songList);
    System.out.println(songList);
  }
}
```

Sort our song titles using "natural ordering."

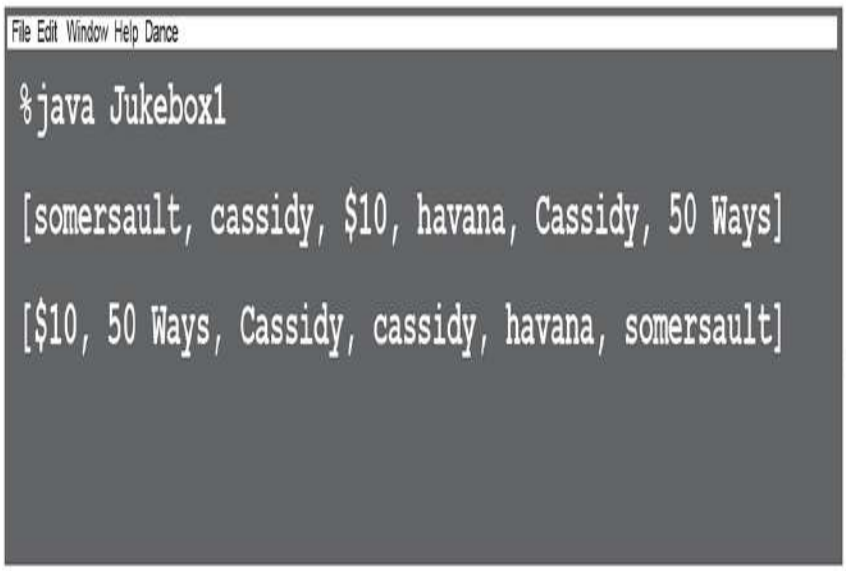

Our songs unsorted, in the order they were added.

Our songs sorted. Notice how the special characters, numbers, and uppercase letters got sorted.

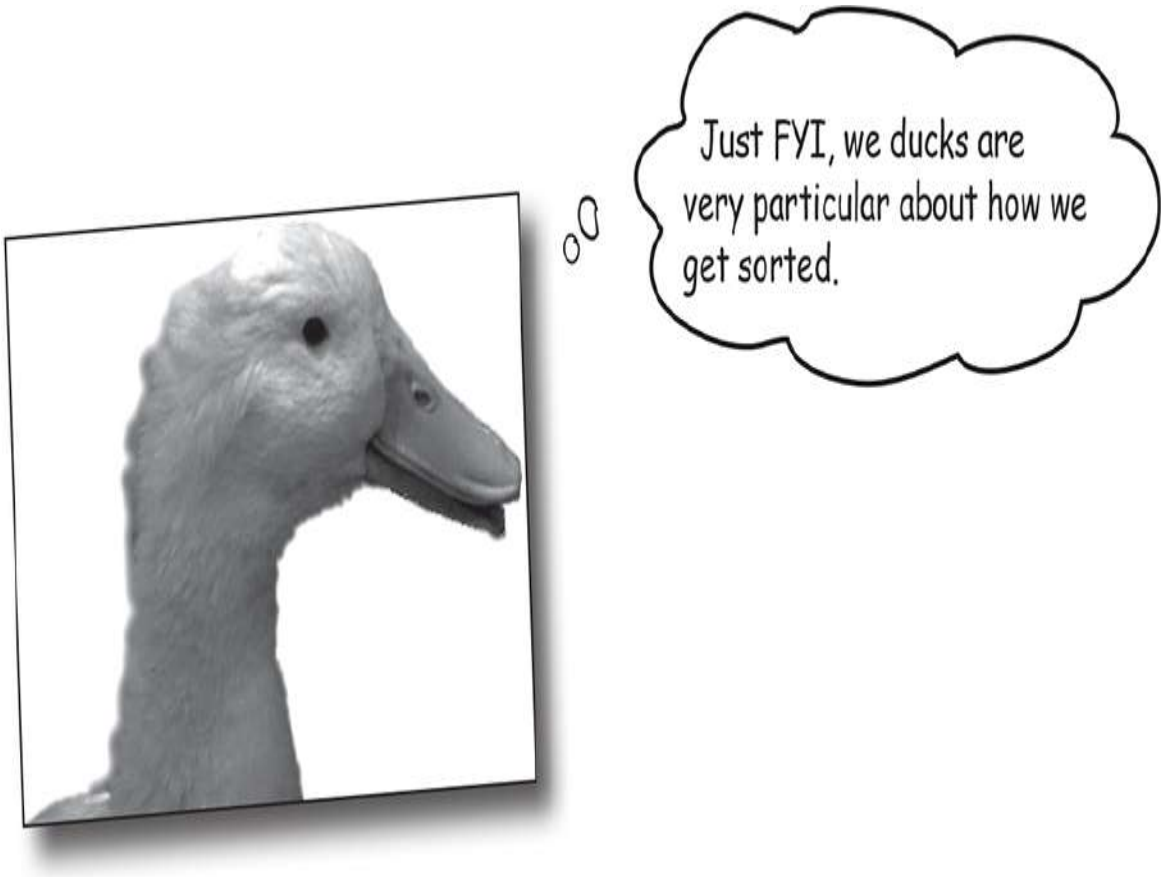

But now you need Song objects, not just simple Strings

Now your boss Lou wants actual Song class instances in the list, not just Strings, so that each Song can have more data. The new jukebox device outputs more information, so the actual song file will have *three* pieces of information for each song.

The Song class is really simple, with only one interesting feature—the overridden toString() method. Remember, the toString() method is defined in class Object, so every class in Java inherits the method. And since the toString() method is called on an object when it's printed (System.out.println(anObject)), you should override it to print something more readable than the default unique identifier code. When you print a list, the toString() method will be called on each object.

```
class SongV2 {
  private String title;
  private String artist;
  private int bpm;

  SongV2(String title, String artist, int bpm) {
    this.title = title;
    this.artist = artist;
    this.bpm = bpm;
  }
  public String getTitle() {
    return title;
  }
  public String getArtist() {
    return artist;
  }
  public int getBpm() {
    return bpm;
  }
  public String toString() {
    return title;
  }
}
```

Three instance variables for the three song attributes in the file.

The variables are all set in the constructor whenever a new Song is created.

The getter methods for the three attributes.

We override toString(), because when you do a System.out.println(aSongObject), we want to see the title. When you do a System.out.println(aListOfSongs), it calls the toString() method of EACH element in the list.

```
class MockSongs {
  public static List<String> getSongStrings() { ... }

  public static List<SongV2> getSongsV2() {
    List<SongV2> songs = new ArrayList<>();
    songs.add(new SongV2("somersault", "zero 7", 147));
    songs.add(new SongV2("cassidy", "grateful dead", 158));
    songs.add(new SongV2("$10", "hitchhiker", 140));

    songs.add(new SongV2("havana", "cabello", 105));
    songs.add(new SongV2("Cassidy", "grateful dead", 158));
    songs.add(new SongV2("50 ways", "simon", 102));
    return songs;
  }
}
```

We made a new method in the MockSongs class to mock the new song data.

Changing the Jukebox code to use Songs instead of Strings

Your code changes only a little. The big change is that the List will be of type <SongV2> instead of <String>.

```
import java.util.*;

public class Jukebox2 {
  public static void main(String[] args) {
    new Jukebox2().go();
  }

  public void go() {

    List<SongV2> songList = MockSongs.getSongsV2();
    System.out.println(songList);

    Collections.sort(songList);
    System.out.println(songList);
  }
}
```

Change to a List of SongV2 objects instead of Strings.

Call the mock class to load song data into our List of songs.

And once again, call the sort method to sort the songs.

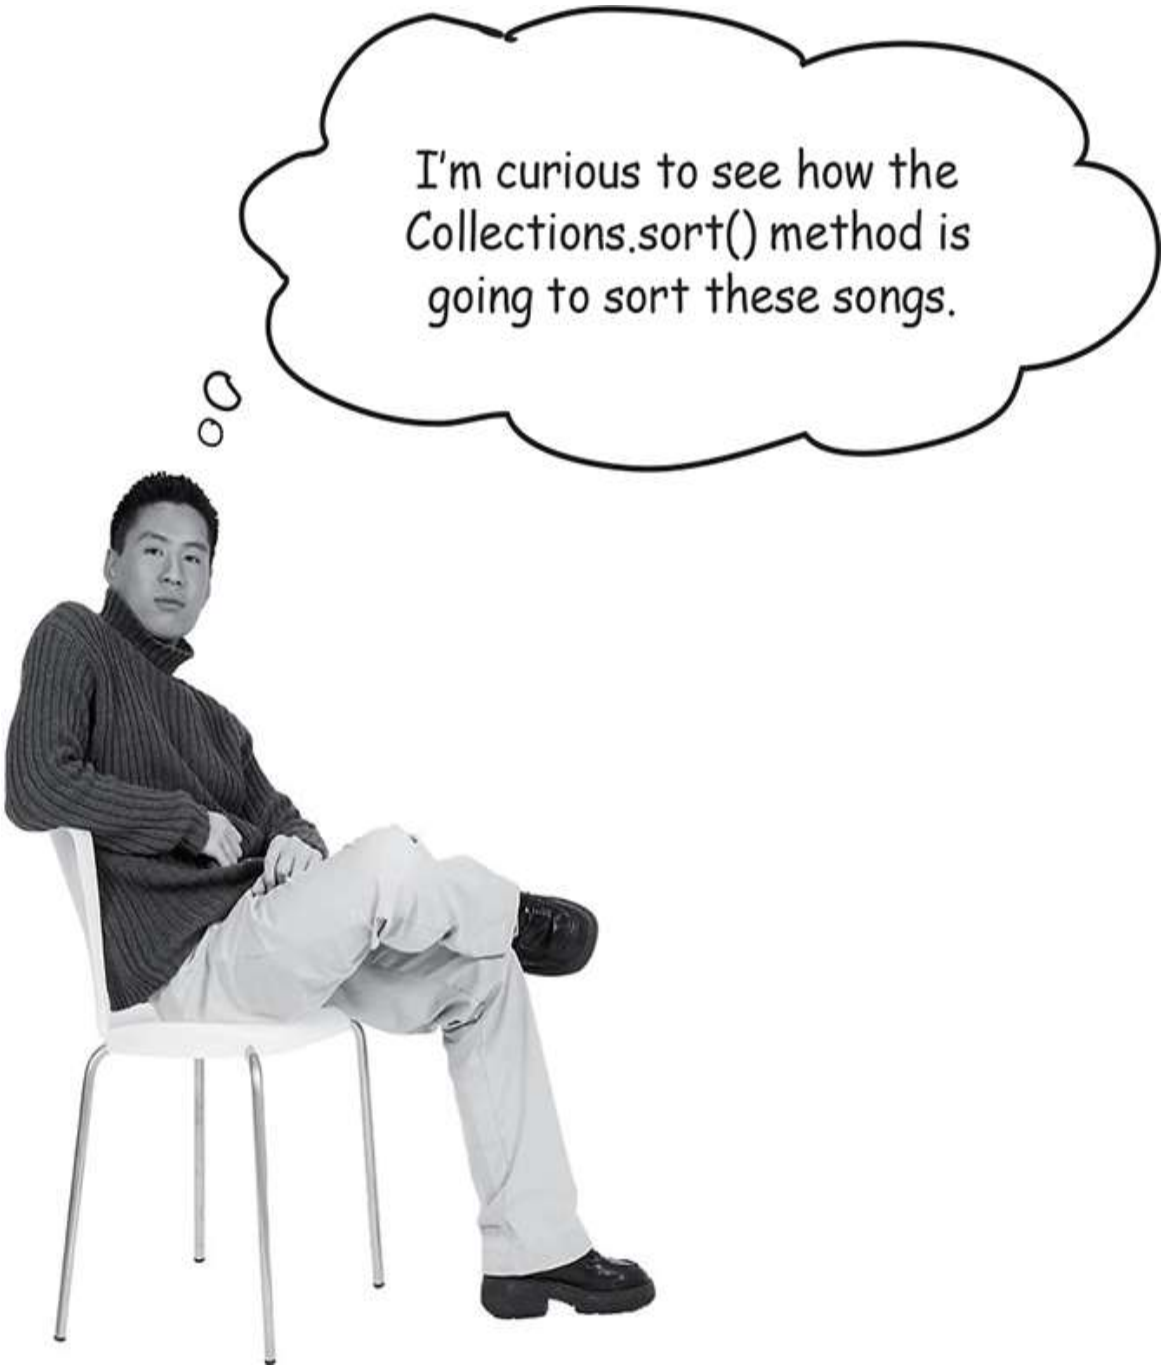

It won't compile!

He's right to be curious, something's wrong...the Collections class clearly shows there's a sort() method that takes a List. It *should* work.

But it doesn't!

The compiler says it can't find a sort method that takes a List<SongV2>, so maybe it doesn't like a List of Song objects? It didn't mind a List<String>, so what's the important difference between Song and String? What's the difference that's making the compiler fail?

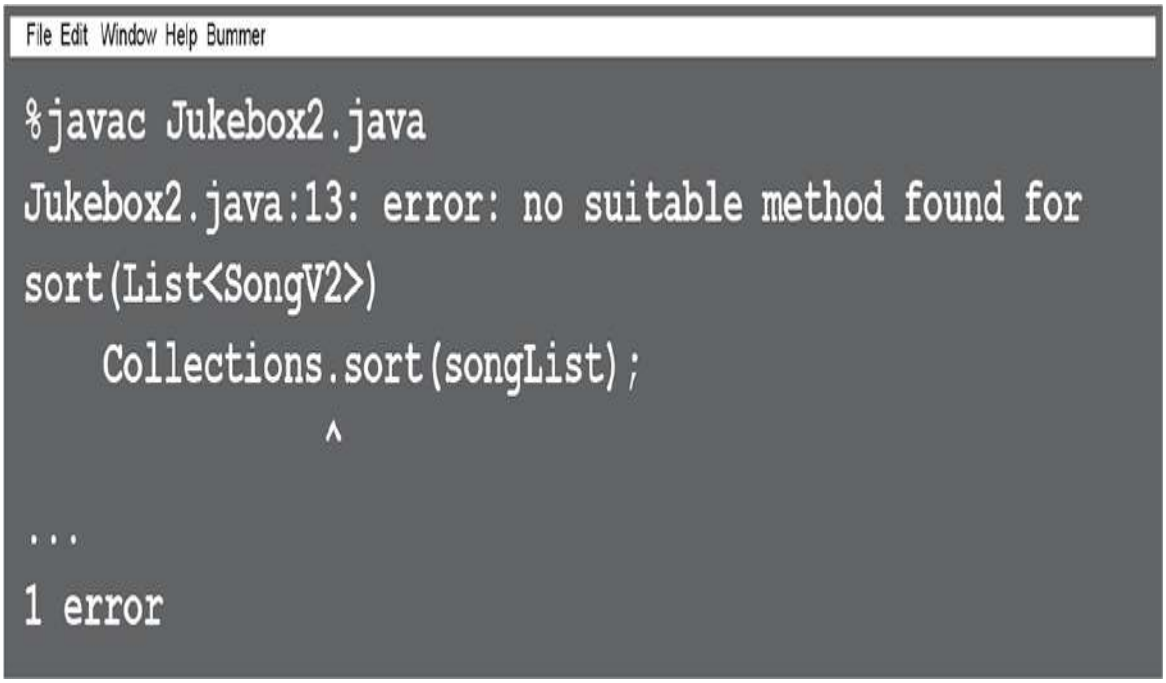

And of course you probably already asked yourself, "What would it be sorting *on*?" How would the sort method even *know* what made one Song greater or less than another Song? Obviously if you want the song's *title* to be the value that determines how the songs are sorted, you'll need some way to tell the sort method that it needs to use the title and not, say, the beats per minute.

We'll get into all that a few pages from now, but first, let's find out why the compiler won't even let us pass a SongV2 List to the sort() method.

What is this??? I have no idea how to read the method declaration on this. It says that sort() takes a List<T>, but what is T? And what is that big thing before the return type?

The sort() method declaration

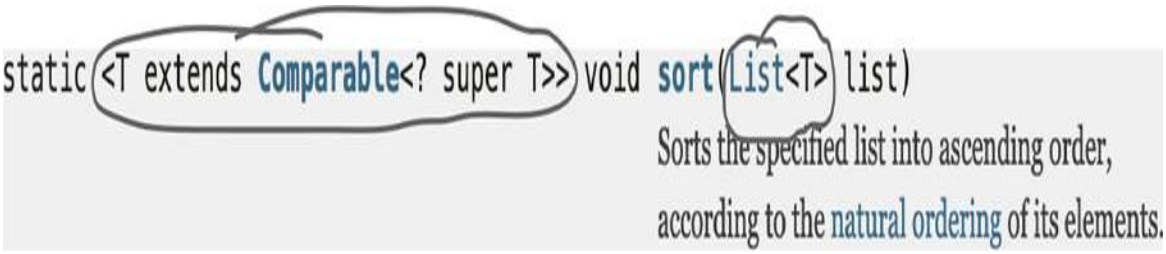

From the API docs (looking up the java.util.Collections class and scrolling to the sort() method), it looks like the sort() method is declared...*strangely*. Or at least different from anything we've seen so far.

That's because the sort() method (along with other things in the whole collection framework in Java) makes heavy use of *generics*. Any time you see something with angle brackets in Java source code or documentation, it means generics—a feature added in Java 5. So it looks like we'll have to learn how to interpret the documentation before we can figure out why we were able to sort String objects in a List, but not a List of Song objects.

Generics means more type-safety

Although generics can be used in other ways, you'll often use generics to write type-safe collections. In other words, code that makes the compiler stop you from putting a Dog into a list of Ducks.

Without generics the compiler could not care less what you put into a collection, because all collection implementations hold type Object. You could put *anything* in any ArrayList without generics; it's like the ArrayList is declared as ArrayList<Object>.

WITHOUT generics

Objects go IN as a reference to SoccerBall, Fish, Guitar, and Car objects

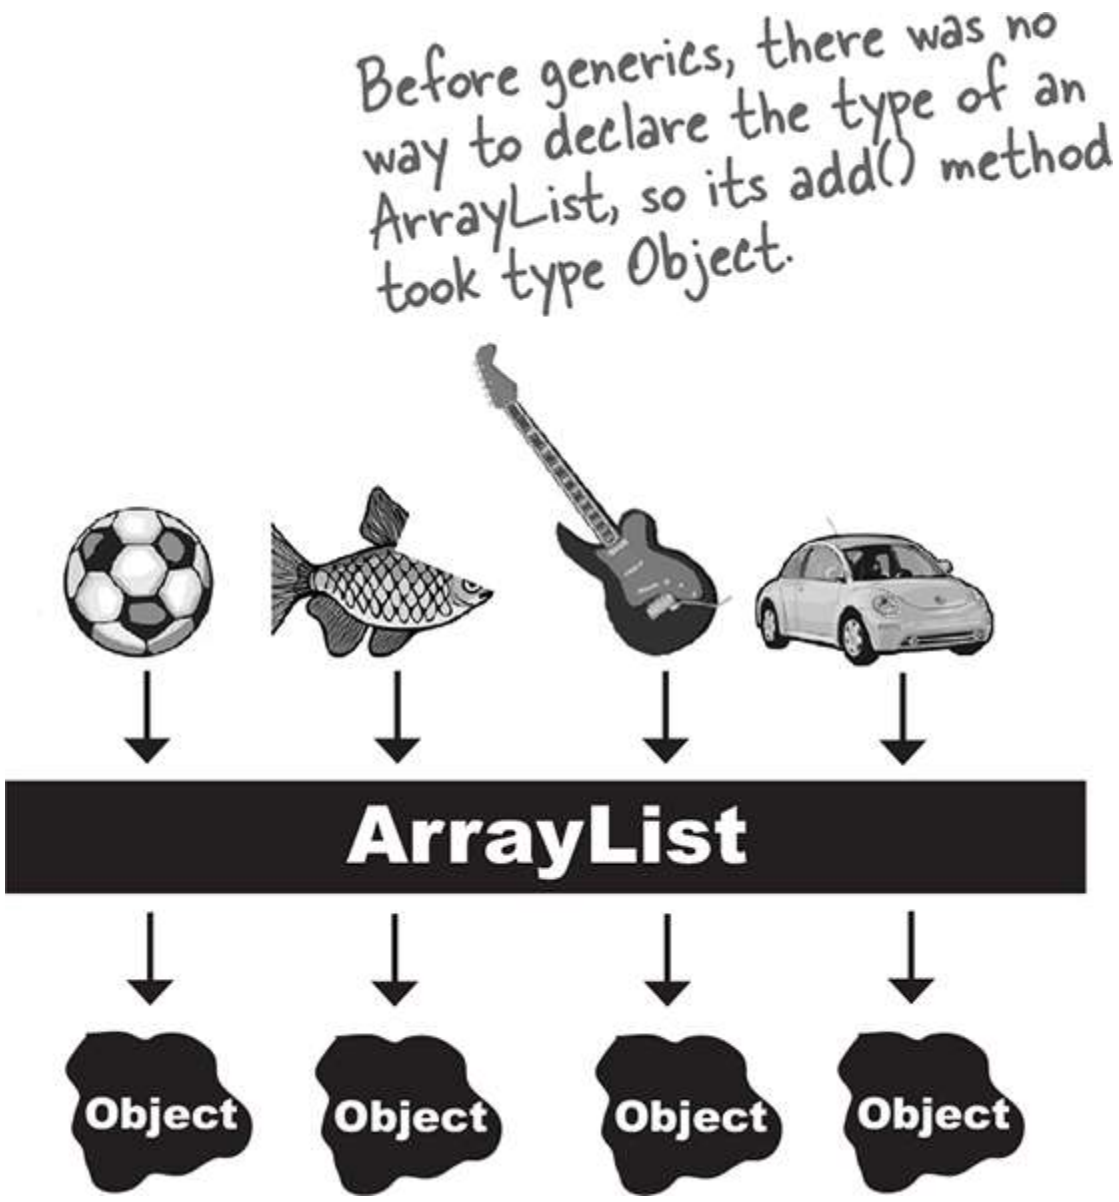

And come OUT as a reference of type Object

WITH generics

Objects go IN as a reference to only Fish objects

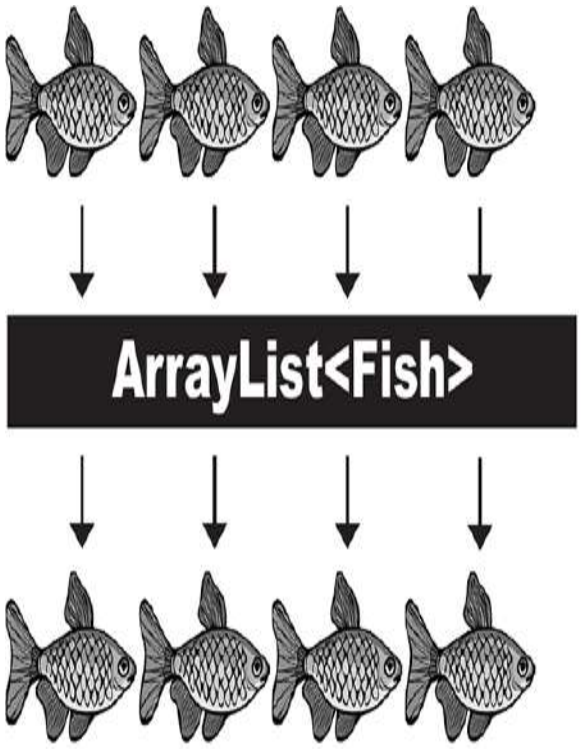

Now with generics, you can put only Fish objects in the ArrayList<Fish>, so the objects come out as Fish references. You don't have to worry about someone sticking a Volkswagen in there, or that what you get out won't really be castable to a Fish reference.

And come out as a reference of type Fish

> **NOTE**
>
> **Without generics, the compiler would happily let you put a Pumpkin into an ArrayList that was supposed to hold only Cat objects.**
>
> **With generics, you can create type-safe collections where more problems are caught at compile-time instead of runtime.**

Learning generics

Of the dozens of things you could learn about generics, there are really only three that matter to most programmers:

- ① **Creating instances of generic *classes* (like ArrayList)**

When you make an ArrayList, you have to tell it the type of objects you'll allow in the list, just as you do with plain old arrays.

```
new ArrayList<Song>()
```

- ② **Declaring and assigning *variables* of generic types**

  How does polymorphism really work with generic types? If you have an ArrayList<Animal> reference variable, can you assign an ArrayList<Dog> to it? What about a List<Animal> reference? Can you assign an ArrayList<Animal> to it? You'll see...

```
List<Song>songList =
      new ArrayList<Song>()
```

- ③ **Declaring (and invoking) *methods* that take generic types**

  If you have a method that has as a parameter, say, an ArrayList of Animal objects, what does that really mean? Can you also pass it an ArrayList of Dog objects? We'll look at some subtle and tricky polymorphism issues that are very different from the way you write methods that take plain old arrays.

  (This is actually the same point as #2, but that shows you how important we think it is.)

```
void foo(List<Song> list)


x.foo(songList)
```

THERE ARE NO DUMB QUESTIONS

Q: But don't I also need to learn how to create my OWN generic classes? What if I want to make a class type that lets people instantiating the class decide the type of things that class will use?

A: You probably won't do much of that. Think about it—the API designers made an entire library of collections classes covering most of the data structures you'd need, and the things that really need to be generic are collection classes or classes and methods that work on collections. There are some other cases too (like Optional, which we'll see in the next chapter). Generally, generic classes are classes that hold or operate on objects of some other type they don't know about.

Yes, it is possible that you might want to *create* generic classes, but that's pretty advanced, so we won't cover it here. (But you can figure it out from the things we *do* cover, anyway.)

Using generic CLASSES

Since ArrayList is one of our most-used generic classes, we'll start by looking at its documentation. The two key areas to look at in a generic class are:

1. The *class* declaration
2. The *method* declarations that let you add elements

Understanding ArrayList documentation *(Or, what's the true meaning of "E"?)*

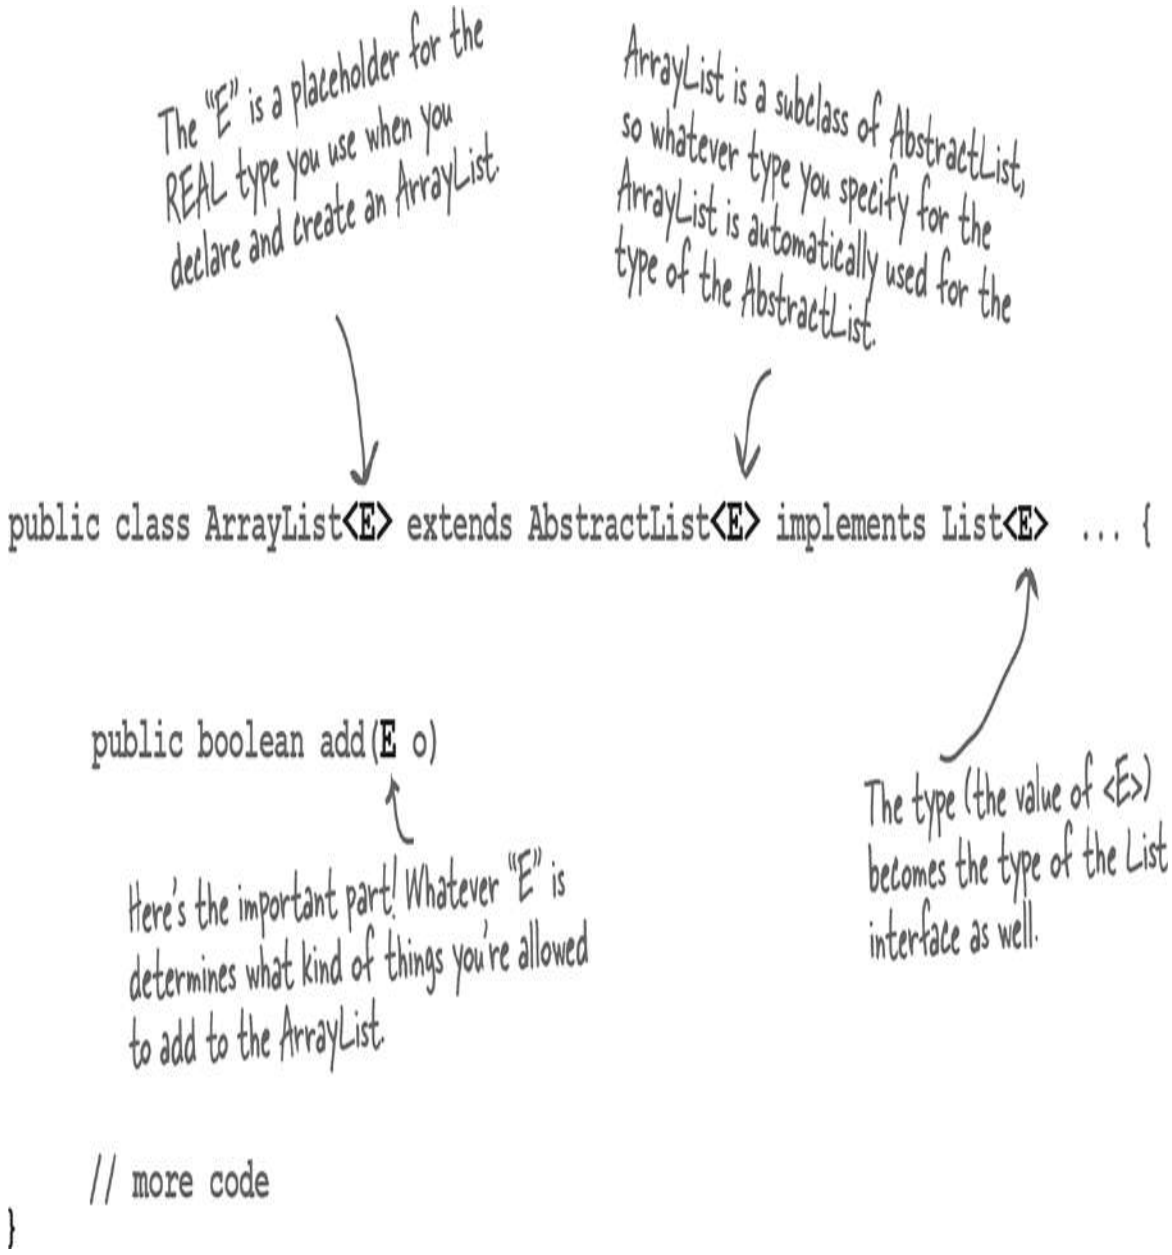

The “E” represents the type used to create an instance of ArrayList. When you see an “E” in the ArrayList documentation, you can do a mental find/replace to exchange it for whatever <type> you use to instantiate ArrayList.

So, new ArrayList<Song> means that “E” becomes “Song” in any method or variable declaration that uses “E.”

> **NOTE**
>
> Think of "E" as a stand-in for "the type of element you want this collection to hold and return." (E is for Element.)

Using type parameters with ArrayList

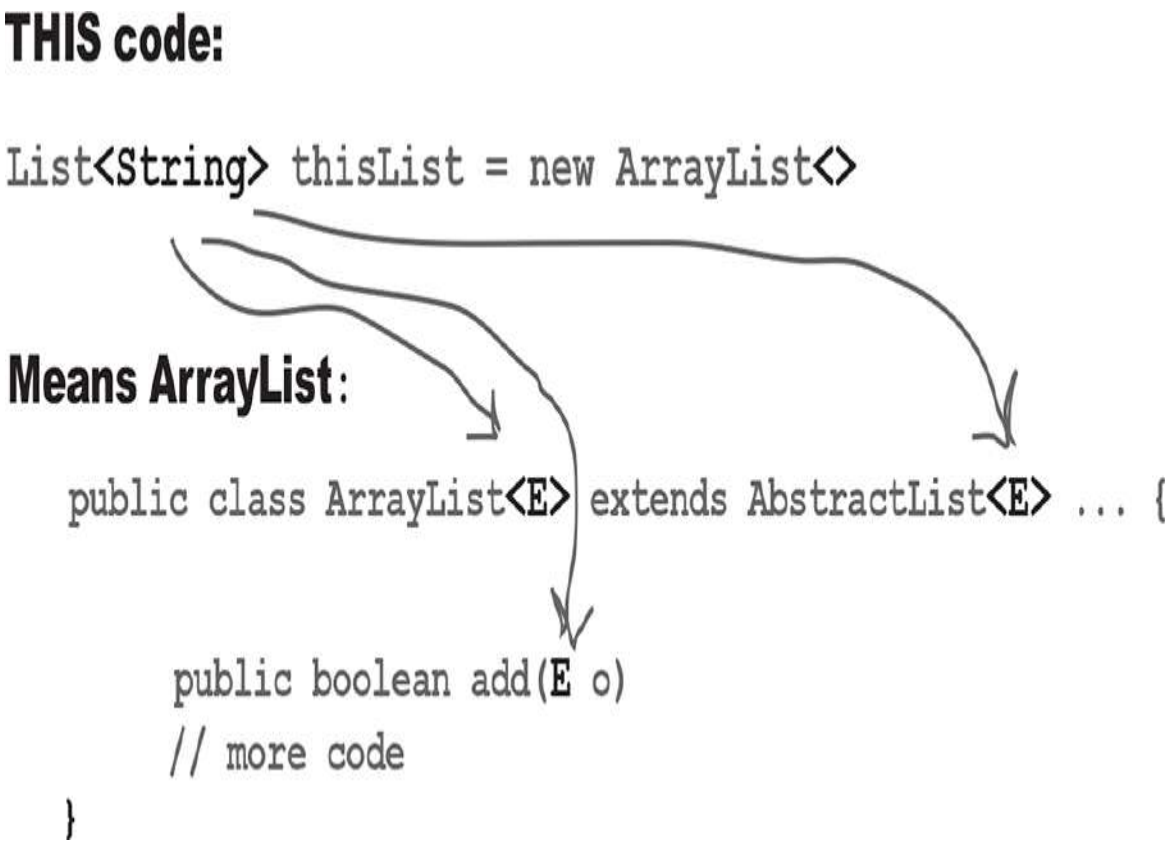

Is treated by the compiler as:

```
public class ArrayList<String> extends AbstractList<String>... {

    public boolean add(String o)
    // more code
}
```

In other words, the "E" is replaced by the *real* type (also called the *type parameter*) that you use when you create the ArrayList. And that's why the

add() method for ArrayList won't let you add anything except objects of a reference type that's compatible with the type of "E." So if you make an ArrayList<**String**>, the add() method suddenly becomes **add(String o)**. If you make the ArrayList of type **Dog**, suddenly the add() method becomes **add(Dog o)**.

THERE ARE NO DUMB QUESTIONS

Q: Is "E" the only thing you can put there? Because the docs for sort used "T"....

A: You can use anything that's a legal Java identifier. That means anything that you could use for a method or variable name will work as a type parameter. But you'll often see single letter used. Another convention is to use "T" ("Type") unless you're specifically writing a collection class, where you'd use "E" to represent the "type of the Element the collection will hold." Sometimes you'll see "R" for "Return type."

Using generic METHODS

A generic *class* means that the *class declaration* includes a type parameter. A generic *method* means that the *method declaration* uses a type parameter in its signature.

You can use type parameters in a method in several different ways:

- ① **Using a type parameter defined in the class declaration**

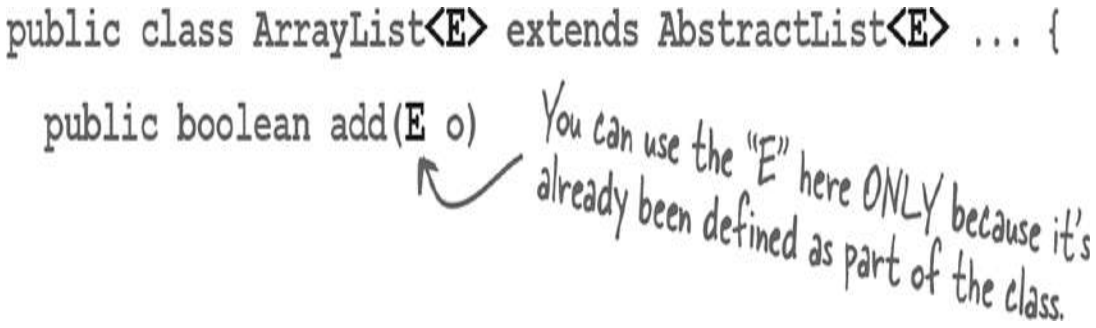

When you declare a type parameter for the class, you can simply use that type any place that you'd use a *real* class or interface type. The type declared in the method argument is essentially replaced with the type you use when you instantiate the class.

- ② **Using a type parameter `that was NOT defined in the class declaration`**

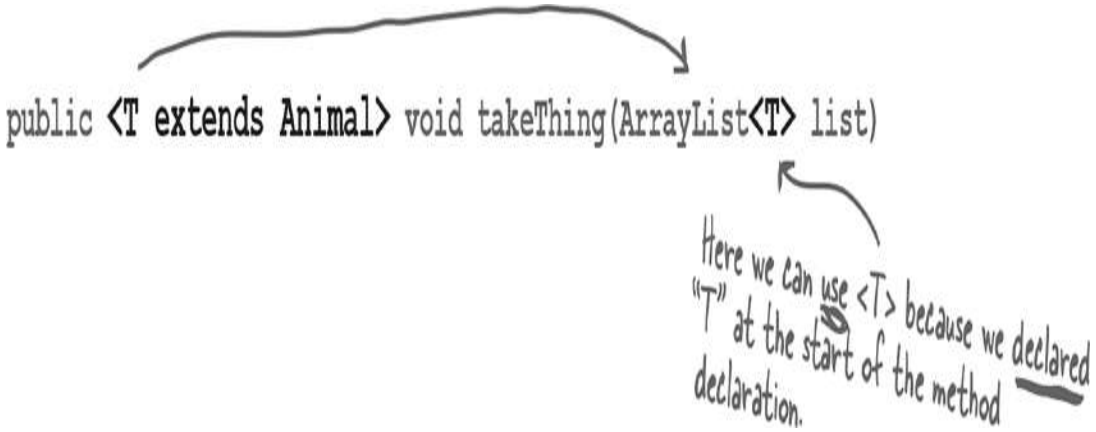

If the class itself doesn't use a type parameter, you can still specify one for a method, by declaring it in a really unusual (but available) space—*before the return type*. This method says that T can be "any type of Animal."

Here's where it gets weird...

This:

```
public<T extends Animal> void takeThing(ArrayList<T> list)
```

Is NOT the same as this:

```
public void takeThing(ArrayList<Animal> list)
```

Both are legal, but they're *different*!

The first one, where **<T extends Animal>** is part of the method declaration, means that any ArrayList declared of a type that is Animal, or one of Animal's subtypes (like Dog or Cat), is legal. So you could invoke the top method using an ArrayList<Dog>, ArrayList<Cat>, or ArrayList<Animal>.

But...the one on the bottom, where the method argument is (ArrayList<Animal> list) means that *only* an ArrayList<Animal> is legal. In other words, while the first version takes an ArrayList of any type that is a type of Animal (Animal, Dog, Cat, etc.), the second version takes *only* an ArrayList of type Animal. Not ArrayList<Dog> or ArrayList<Cat>, but only ArrayList<Animal>.

And yes, it does appear to violate the point of polymorphism, but it will become clear when we revisit this in detail at the end of the chapter. For now, remember that we're only looking at this because we're still trying to figure out how to sort() that SongList, and that led us into looking at the API for the sort() method, which had this strange generic type declaration.

For now, all you need to know is that the syntax of the top version is legal and that it means you can pass in a ArrayList object instantiated as Animal or any Animal subtype.

And now back to our sort() method...

Remember where we were...

File Edit Window Help Bummer

```
%javac Jukebox2.java
Jukebox2.java:13: error: no suitable method found
for sort(List<SongV2>)
    Collections.sort(songList);
                ^

...
1 error
```

```
import java.util.*;

public class Jukebox2 {
  public static void main(String[] args) {
    new Jukebox2().go();
  }

  public void go() {

    List<SongV2> songList = MockSongs.getSongsV2();
    System.out.println(songList);

    Collections.sort(songList);
    System.out.println(songList);
  }
}
```

This is where it breaks! It worked fine when passed in a List<String>, but as soon as we tried to sort a List<SongV2>, it failed.

Revisiting the sort() method

So here we are, trying to read the sort() method docs to find out why it was OK to sort a list of Strings, but not a list of Song objects. And it looks like the answer is...

```
static <T extends Comparable<? super T>> void sort(List<T> list)
```

Sorts the specified list into ascending order, according to the natural ordering of its elements.

The sort() method can take only lists of Comparable objects.

Song is NOT a subtype of Comparable, so you cannot sort() the list of Songs.

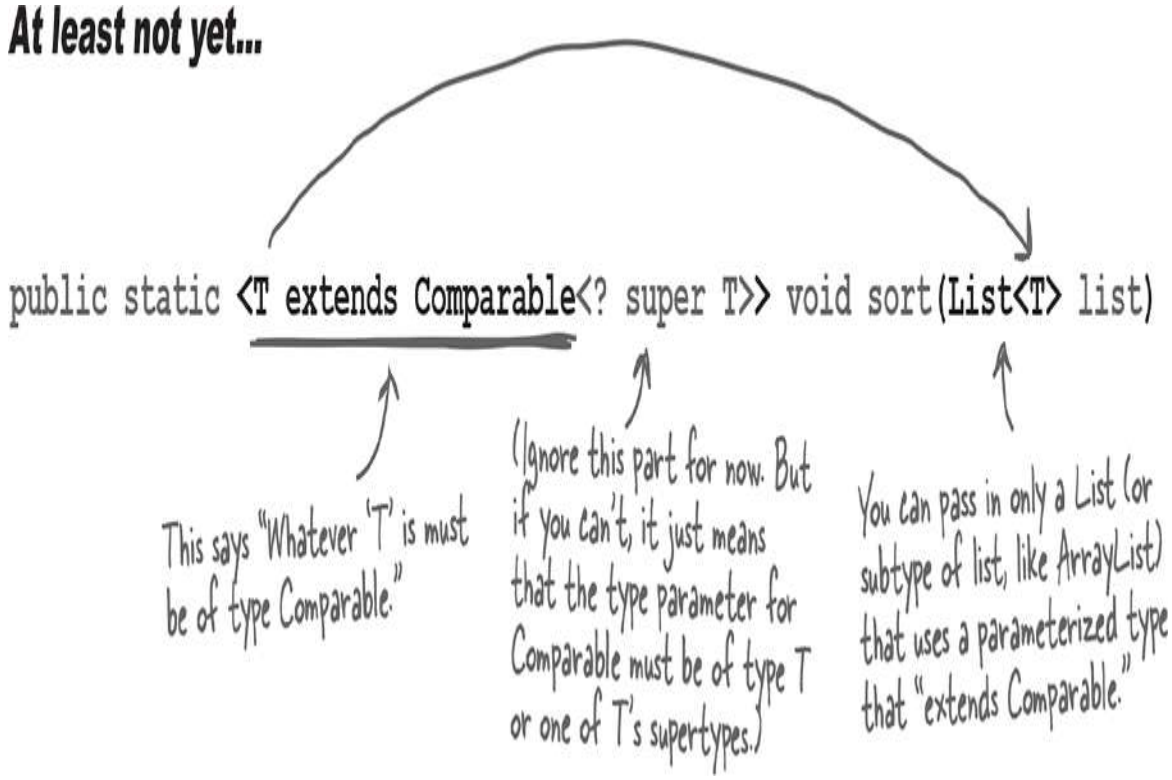

```
public final class String
    implements java.io.Serializable, Comparable<String>,
CharSequence {
```

Great point, and one that deserves a full answer! Turn the page...

In generics, “extends” means “extends or implements”

The Java engineers had to give you a way to put a constraint on a parameterized type so that you can restrict it to, say, only subclasses of Animal. But you also need to constrain a type to allow only classes that implement a particular interface. So here’s a situation where we need one kind of syntax to work for both situations—inheritance and implementation. In other words, that works for both *extends* and *implements*.

And the winning word was...*extends*. But it really means “IS-A” and works regardless of whether the type on the right is an interface or a class.

NOTE

In generics, the keyword “extends” really means “IS-A” and works for BOTH classes and interfaces.

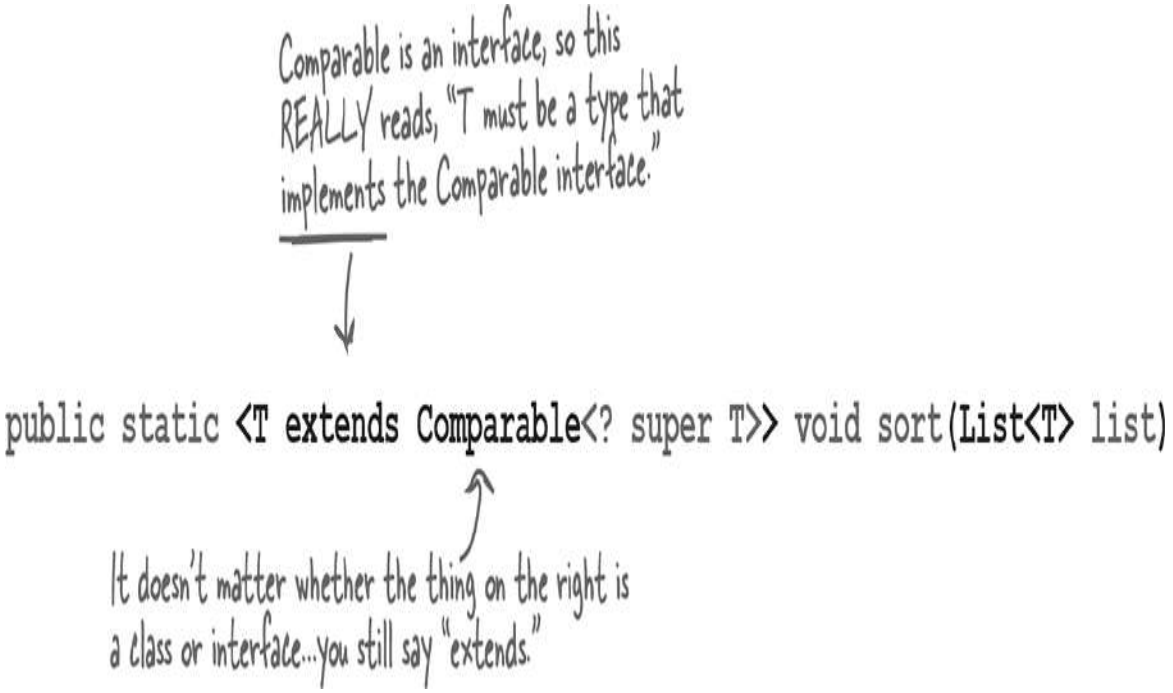

THERE ARE NO DUMB QUESTIONS

Q: Why didn't they just make a new keyword, "is"?

A: Adding a new keyword to the language is a REALLY big deal because it risks breaking Java code you wrote in an earlier version. Think about it—you might be using a variable "is" (which we do use in this book to represent input streams). And since you're not allowed to use keywords as identifiers in your code, that means any earlier code that used the keyword *before* it was a reserved word, would break. So whenever there's a chance for the language engineers to reuse an existing keyword, as they did here with "extends," they'll usually choose that. But sometimes they don't have a choice.

In recent years, new "keyword-like" terms have been added to the language, without actually making it a keyword that would trample all over your earlier code. For example, the identifier **`var`**, which we'll talk about in Appendix B, is a *reserved type name*, not a keyword. This means any existing code that used var (for example, as a variable name) will not break if it's compiled with a version of Java that supports **`var`**.

Finally we know what's wrong...

The Song class needs to implement Comparable

We can pass the ArrayList<Song> to the sort() method only if the Song class implements Comparable, since that's the way the sort() method was declared. A quick check of the API docs shows the Comparable interface is really simple, with only one method to implement:

java.lang.Comparable

```
public interface Comparable<T> {
   int compareTo(T o);
}
```

And the method documentation for compareTo() says:

```
Returns:
a negative integer if this object is
less than the specified object;
a zero if they're equal;
a positive integer if this object is
greater than the specified object.
```

It looks like the compareTo() method will be called on one Song object, passing that Song a reference to a different Song. The Song running the compareTo() method has to figure out if the Song it was passed should be sorted higher, lower, or the same in the list.

Your big job now is to decide what makes one song greater than another, and then implement the compareTo() method to reflect that. A negative number (any negative number) means the Song you were passed is greater than the

Song running the method. Returning a positive number says that the Song running the method is greater than the Song passed to the compareTo() method. Returning zero means the Songs are equal (at least for the purpose of sorting...it doesn't necessarily mean they're the same object). You might, for example, have two Songs by different artists with the same title.

(That brings up a whole different can of worms we'll look at later...)

The big question is: what makes *one* song less than, equal to, or greater than *another* song?

You can't implement the Comparable interface until you make that decision.

SHARPEN YOUR PENCIL

Write in your idea and pseudocode (or better, REAL code) for implementing the compareTo() method in a way that will sort() the Song objects by title.

Hint: if you're on the right track, it should take less than three lines of code!

→ **Yours to solve.**

The new, improved, comparable Song class

We decided we want to sort by title, so we implement the compareTo() method to compare the title of the Song passed to the method against the title of the song on which the compareTo() method was invoked. In other words, the song running the method has to decide how its title compares to the title of the method parameter.

Hmmm...we know that the String class must know about alphabetical order, because the sort() method worked on a list of Strings. We know String has a compareTo() method, so why not just call it? That way, we can simply let one title String compare itself to another, and we don't have to write the comparing/alphabetizing algorithm!

Usually these match...we're specifying the type that the implementing class can be compared against.

This means that SongV3 objects can be compared to other SongV3 objects, for the purpose of sorting.

```
class SongV3 implements Comparable<SongV3> {
  private String title;
  private String artist;
  private int bpm;

  public int compareTo(SongV3 s) {
    return title.compareTo(s.getTitle());
  }

  SongV3(String title, String artist, int bpm) {
    this.title = title;
    this.artist = artist;
    this.bpm = bpm;
  }

  public String getTitle() {
    return title;
  }

  public String getArtist() {
    return artist;
  }

  public int getBpm() {
    return bpm;
  }

  public String toString() {
    return title;
  }
}
```

The sort() method sends a Song to compareTo() to see how that Song compares to the Song on which the method was invoked.

Simple! We just pass the work on to the title String objects, since we know Strings have a compareTo() method.

This time it worked. It prints the list and then calls sort, which puts the Songs in alphabetical order by title.

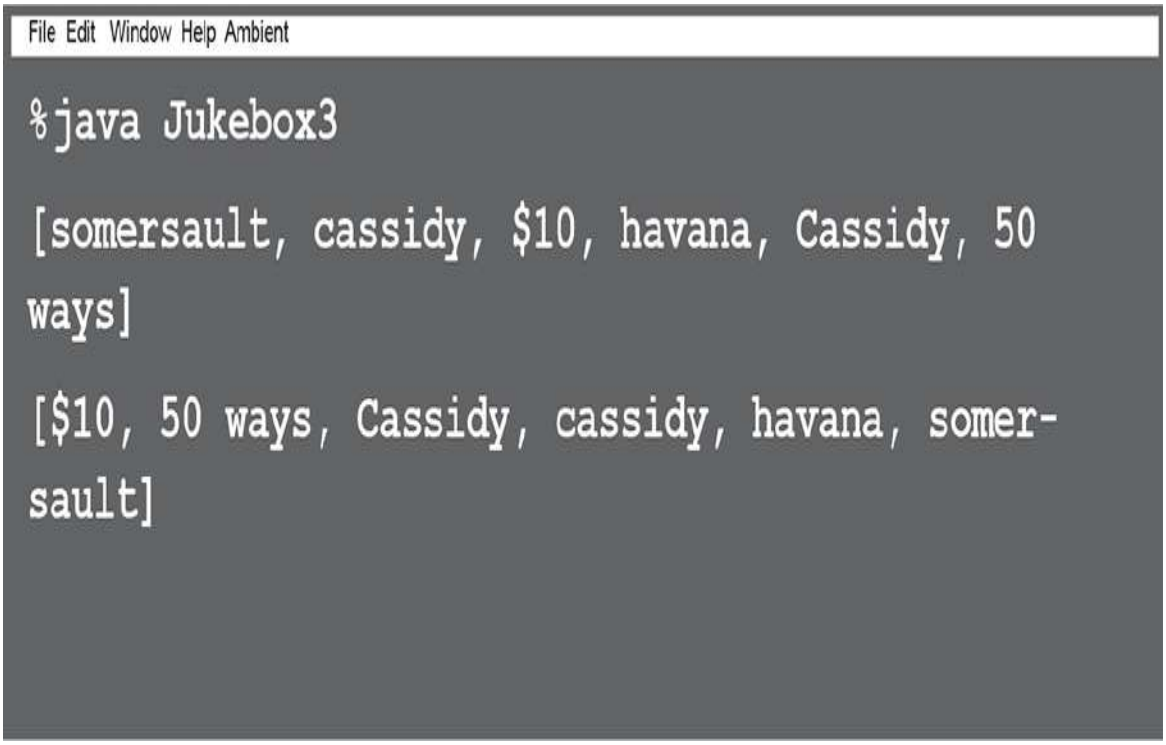

We can sort the list, but...

That's not good enough.
Sometimes I want it to sort
by artist instead of title.

There’s a new problem—Lou wants two different views of the song list, one by song title and one by artist!

But when you make a collection element comparable (by having it implement Comparable), you get only one chance to implement the compareTo() method. So what can you do?

The horrible way would be to use a flag variable in the Song class and then do an *if* test in compareTo() and give a different result depending on whether the flag is set to use title or artist for the comparison.

But that’s an awful and brittle solution, and there’s something much better. Something built into the API for just this purpose—when you want to sort the same thing in more than one way.

Look at API documentation again. There’s a second sort() method on Collections—and it takes a Comparator. There’s also a sort method on List that takes a Comparator.

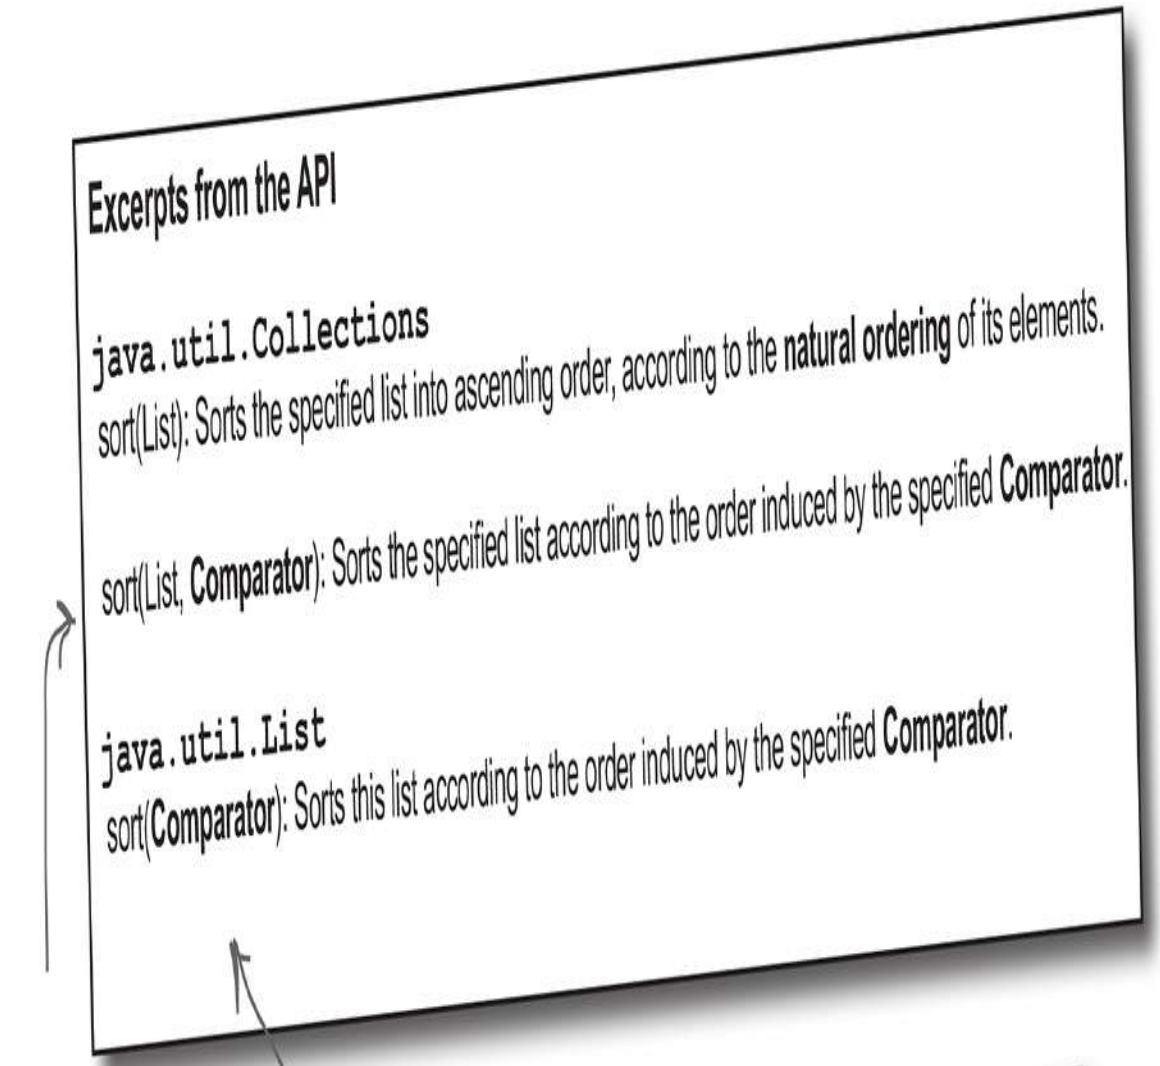

The sort() method on Collections is overloaded to take something called a Comparator.

There's also a sort() on List, which takes a Comparator.

Note to self: figure out how to get/make a Comparator that can compare and order the songs by artist instead of title.

Using a custom Comparator

A **Comparable** element in a list can compare *itself* to another of its own type in only one way, using its compareTo() method. But a **Comparator** is external to the element type you're comparing—it's a separate class. So you can make as many of these as you like! Want to compare songs by artist? Make an ArtistComparator. Sort by beats per minute? Make a BpmComparator.

Then all you need to do is call a sort() method that takes a Comparator (Collections.sort or List.sort), which will use this Comparator to put things in order.

The sort() method that takes a Comparator will use the Comparator instead of the element's own compareTo() method when it puts the elements in order. In other words, if your sort() method gets a Comparator, it won't even *call* the compareTo() method of the elements in the list. The sort() method will instead invoke the **compare()** method on the Comparator.

To summarize, the rules are:

- ▶ Invoking the **Collections.sort(List list)** method means the list element's compareTo() method determines the order. The elements in the list MUST implement the **Comparable** interface.
- ▶ Invoking **List.sort(Comparator c)** or **Collections.sort(List list, Comparator c)** means the **Comparator**'s compare() method will be used. That means the elements in the list do NOT need to implement the Comparable interface, but if they do, the list element's compareTo() method will NOT be called.

java.util.Comparator

```
public interface Comparator<T> {
    int compare(T o1, T o2);
}
```

NOTE

If you pass a Comparator to the sort() method, the sort order is determined by the Comparator.

If you don't pass a Comparator and the element is Comparable, the sort order is determined by the element's compareTo() method.

THERE ARE NO DUMB QUESTIONS

Q: Why are there two sort methods that take a comparator on two different classes? Which sort method should I use?

A: Both methods that take a comparator, Collections.sort(List, Comparator) and List.sort(Comparator), do the same thing; you can use either and expect exactly the same results.

List.sort was introduced in Java 8, so older code *must* use Collections.sort(List, Comparator).

We use List.sort because it's a bit shorter, and generally you already have the list you want to sort, so it makes sense to call the sort method on that list.

Updating the Jukebox to use a Comparator

We're going to update the Jukebox code in three ways:

1. Create a separate class that implements Comparator (and thus the ***compare()*** method that does the work previously done by ***compareTo()***).

2. Make an instance of the Comparator class.

3. Call the List.sort() method, giving it the instance of the Comparator class.

```
import java.util.*;

public class Jukebox4 {
  public static void main(String[] args) {
    new Jukebox4().go();
  }

  public void go() {
    List<SongV3> songList = MockSongs.getSongsV3();
    System.out.println(songList);

    Collections.sort(songList);
    System.out.println(songList);

    ArtistCompare artistCompare = new ArtistCompare();
    songList.sort(artistCompare);
    System.out.println(songList);
  }
}

class ArtistCompare implements Comparator<SongV3> {
  public int compare(SongV3 one, SongV3 two) {
    return one.getArtist().compareTo(two.getArtist());
  }
}
```

Make an instance of the Comparator class.

Invoke sort() on our list, passing it a reference to the new custom Comparator object.

This is a String (the artist)

We're letting the String variables (for artist) do the actual comparison, since Strings already know how to alphabetize themselves.

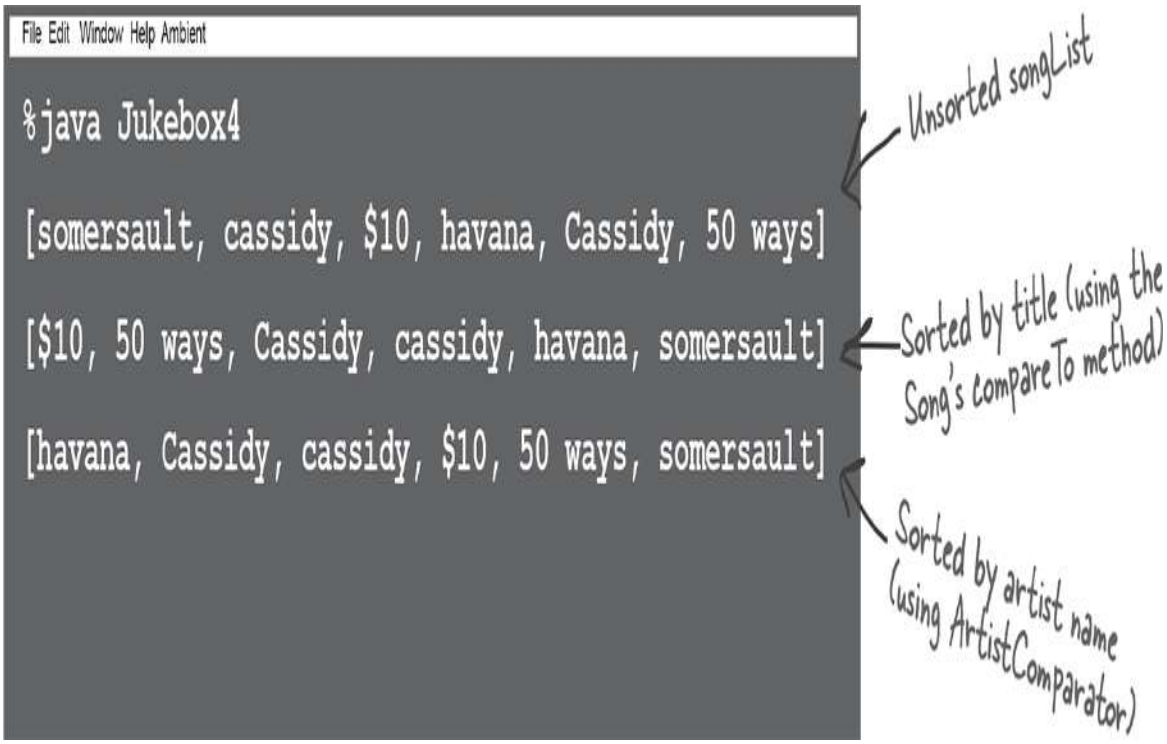

Fill-in-the-blanks

For each of the questions below, fill in the blank with one of the words from the "possible answers" list, to correctly answer the question.

Possible Answers:

```
Comparator,
Comparable,
compareTo( ),
compare( ),
yes,
no
```

Given the following compilable statement:

```
Collections.sort(myArrayList);
```

1. What must the class of the objects stored in `myArrayList` implement? _____
2. What method must the class of the objects stored in `myArrayList` implement? _____
3. Can the class of the objects stored in `myArrayList` implement both `Comparator` AND `Comparable`? _____

Given the following compilable statements (they both do the same thing):

```
Collections.sort(myArrayList, myCompare);
myArrayList.sort(myCompare);
```

4. Can the class of the objects stored in `myArrayList` implement `Comparable`? _____
5. Can the class of the objects stored in `myArrayList` implement `Comparator`? _____
6. Must the class of the objects stored in `myArrayList` implement `Comparable`? _____
7. Must the class of the objects stored in `myArrayList` implement `Comparator`? _____
8. What must the class of the `myCompare` object implement? _____
9. What method must the class of the `myCompare` object implement? _____

→ **Answers in "Fill-in-the-blanks".**

But wait! We're sorting in two different ways!

Now we're able to sort the song list two ways:

1. Using Collections.sort(songList), because Song implements **Comparable**
2. Using songLists.sort(artistCompare) because the ArtistCompare class implements **Comparator**

While our new code allows us to sort songs by title and by artist, it is reminiscent of Frankenstein's monster, cobbled together bit by bit.

```
public void go() {
 List<SongV3> songList = MockSongs.getSongsV3();
 System.out.println(songList);

 Collections.sort(songList);
 System.out.println(songList);

 ArtistCompare artistCompare = new ArtistCompare();
 songList.sort(artistCompare);
 System.out.println(songList);
}
```

This uses Comparable to sort

This uses a custom Comparator to sort

NOTE

A better approach would be to handle all of the sorting definitions in classes that implement Comparator.

THERE ARE NO DUMB QUESTIONS

Q: So does this mean that if you have a class that doesn't implement Comparable, and you don't have the source code, you could still put the things in order by creating a Comparator?

A: That's right. The other option (if it's possible) would be to subclass the element and make the subclass implement Comparable.

Q: But why doesn't *every* class implement Comparable?

A: Do you really believe that *everything* can be ordered? If you have element types that just don't lend themselves to any kind of natural ordering, then you'd be misleading other programmers if you implement Comparable. And there's no problem if you *don't* implement Comparable, since a programmer can compare anything in any way that they choose using their own custom Comparator.

Sorting using only Comparators

Having Song implement Comparable and creating a custom Comparator for sorting by Artist absolutely works, but it's confusing to rely on two different mechanisms for our sort. It's much clearer if our code uses the same technique to sort, regardless of how Lou wants his songs sorted. The code below has been updated to use Comparators for sorting by both Title and Artist; the new code is in bold.

```
public class Jukebox5 {
  public static void main(String[] args) {
    new Jukebox5().go();
  }

  public void go() {
    List<SongV3> songList = MockSongs.getSongsV3();
    System.out.println(songList);

    TitleCompare titleCompare = new TitleCompare();
    songList.sort(titleCompare);
    System.out.println(songList);

    ArtistCompare artistCompare = new ArtistCompare();
    songList.sort(artistCompare);
    System.out.println(songList);
  }
}
class TitleCompare implements Comparator<SongV3> {
  public int compare(SongV3 one, SongV3 two) {
    return one.getTitle().compareTo(two.getTitle());
  }
}
class ArtistCompare implements Comparator<SongV3> {
  public int compare(SongV3 one, SongV3 two) {
    return one.getArtist().compareTo(two.getArtist());
  }
}

// more specialized Comparator classes could go here,
// e.g. BpmCompare
```

Make an instance of the Comparator class and use the sort() method on List.

This is the new class that implements Comparator.

That's an awful lot of code for sorting our songs in just two different orders. Isn't there a better way?

Just the code that matters

The Jukebox class does have a lot of code that's needed for sorting. Let's zoom in on one of the Comparator classes we wrote for Lou. The first thing to notice is that all we really want to sort our collection is the one line of code in the middle of the class. The rest of the code is just the long-winded syntax that's necessary to let the compiler know what type of class this is and which method it implements.

CODE UP CLOSE

```
class TitleCompare implements Comparator<Song> {
   public int compare(Song one, Song two) {
     return one.getTitle().compareTo(two.getTitle());
   }
}
```

The one line of code that's doing all the work

There's more than one way to declare small pieces of functionality like this. One approach is inner classes, which we'll look at in a later chapter. You can even declare the inner class right where you use it (instead of at the end of your class file); this is sometimes called an "argument-defined anonymous inner class." Sounds fun already:

```
songList.sort(new Comparator<SongV3>() {
  public int compare(SongV3 one, SongV3 two) {
    return one.getTitle().compareTo(two.getTitle());
  }
});
```

While this lets us declare the sorting logic in exactly the location we need it (where we call the sort method, instead of in a separate class), there's still a lot of code there for saying "sort by title please").

RELAX

We're not going to learn how to write "argument-defined anonymous inner classes"!

We just wanted you to see this example, in case you stumble across it in Real Code.

What do we REALLY need in order to sort?

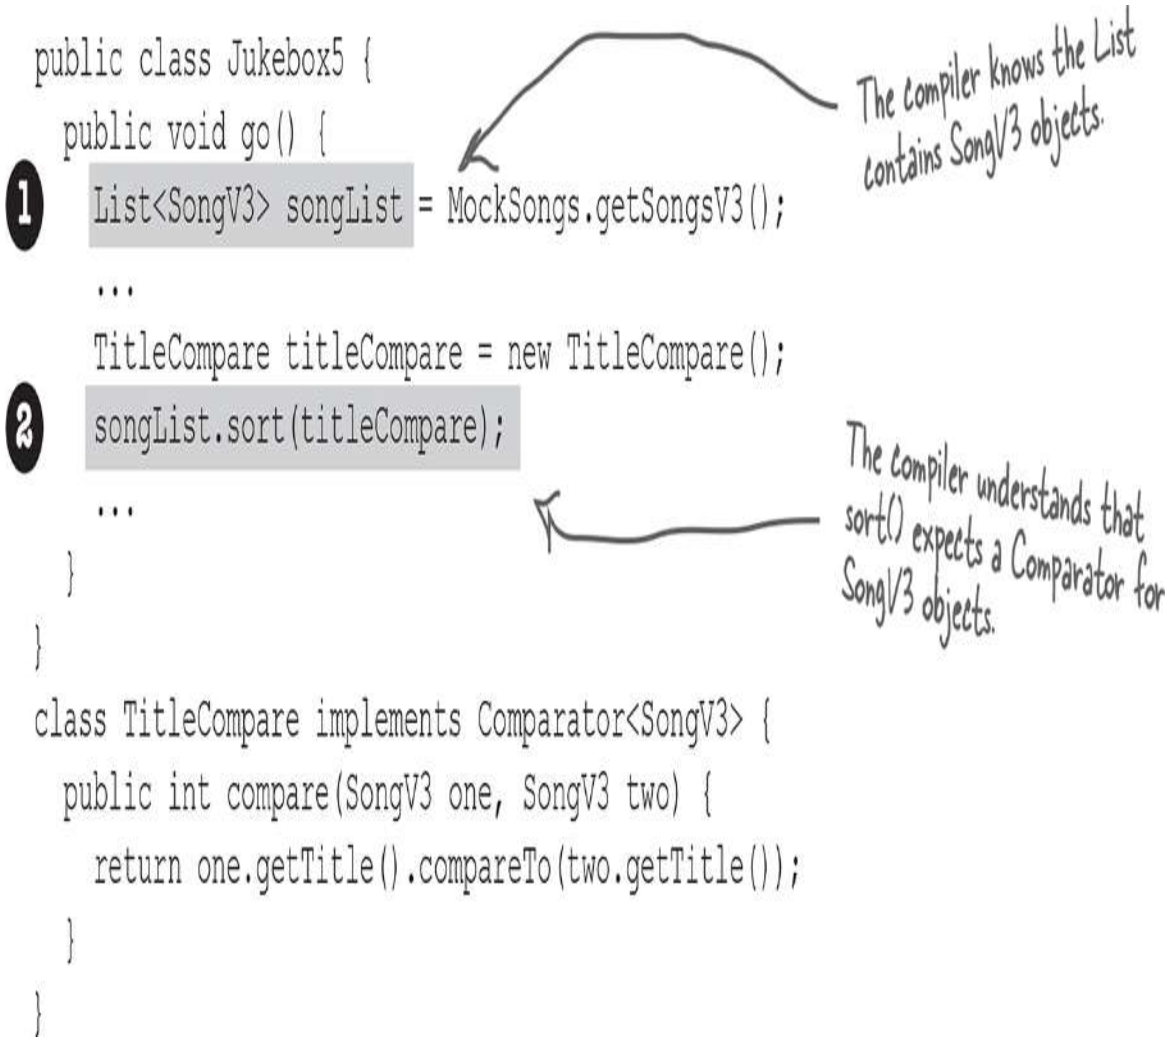

Let's take a look at the API documentation for the sort method on List:

default void	sort(Comparator<? super E> c)	Sorts this list according to the order induced by the specified Comparator.

If we were to explain out loud the following line of code:

```
songList.sort(titleCompare);
```

We could say:

"Call the sort method on the list of songs ❶ and pass it a reference to a Comparator object, which is designed specifically to sort Song objects ❷."

If we're honest, we could say all that without even looking at the TitleCompare class. We can work it all out just by looking at the documentation for sort and the type of the List that we're sorting!

BRAIN BARBELL

Do you think the compiler cares about the name "TitleCompare"? If the class was called "FooBar" instead, would the code still work?

Wouldn't it be wonderful if the code that described HOW you want to sort your Songs wasn't so far away from the sort method? And wouldn't it be great if you didn't have to write a bunch of code the compiler could probably figure out on its own...

Enter lambdas! Leveraging what the compiler can infer

We could write a whole bunch of code to say how to sort a list (like we have been doing)...

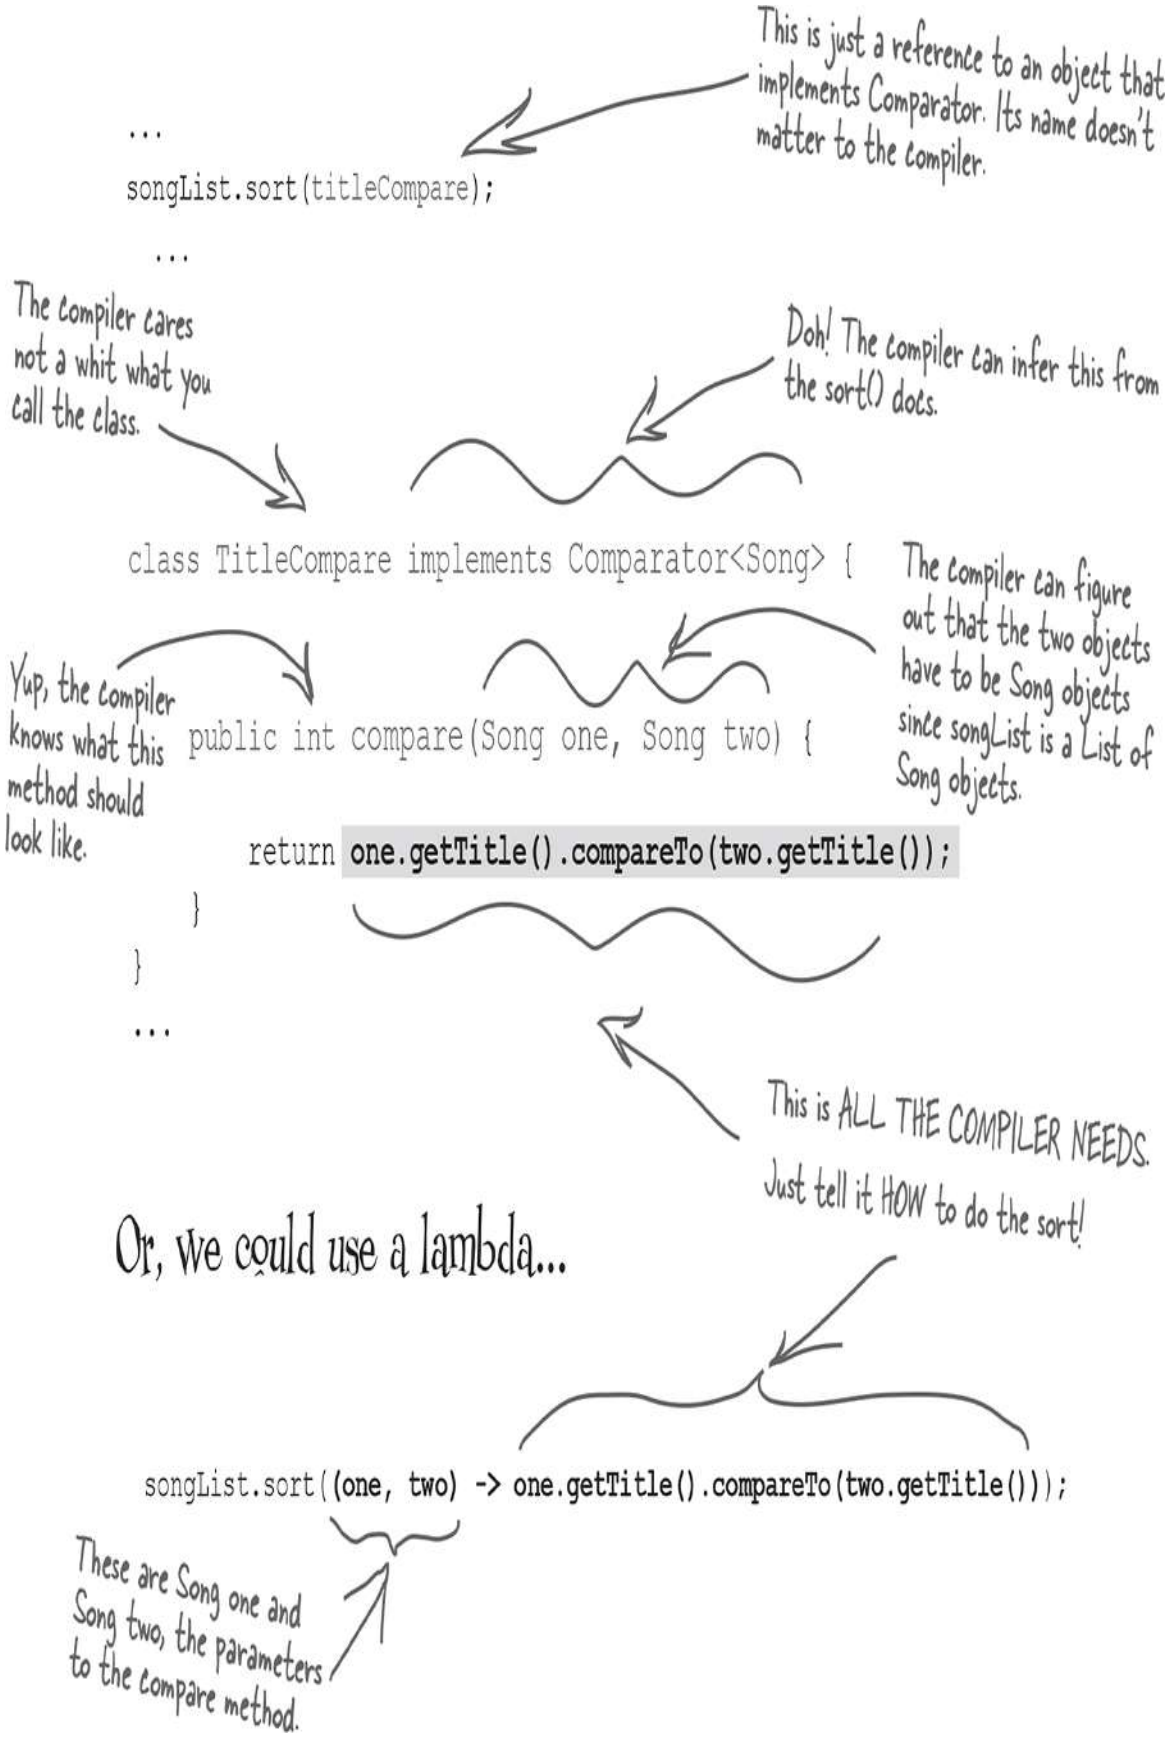
This is just a reference to an object that implements Comparator. Its name doesn't matter to the compiler.
...
songList.sort(titleCompare);
...
The compiler cares not a whit what you call the class.
Doh! The compiler can infer this from the sort() docs.
class TitleCompare implements Comparator<Song> {
The compiler can figure out that the two objects have to be Song objects since songList is a List of Song objects.
Yup, the compiler knows what this method should look like.
public int compare(Song one, Song two) {
return one.getTitle().compareTo(two.getTitle());
}
}
...
This is ALL THE COMPILER NEEDS.
Just tell it HOW to do the sort!
Or, we could use a lambda...
songList.sort((one, two) -> one.getTitle().compareTo(two.getTitle()));
These are Song one and Song two, the parameters to the compare method.

BRAIN BARBELL

What do you think would happen if Comparator needed you to implement more than one method? How much could the compiler fill in for you?

Where did all that code go?

To answer this question, let's take a look at the API documentation for the Comparator interface.

Method Summary

Modifier and Type	Method	Description
int	compare(T o1, T o2)	Compares its two arguments for order.
boolean	equals(Object obj)	Indicates whether some other object is "equal to" this comparator.

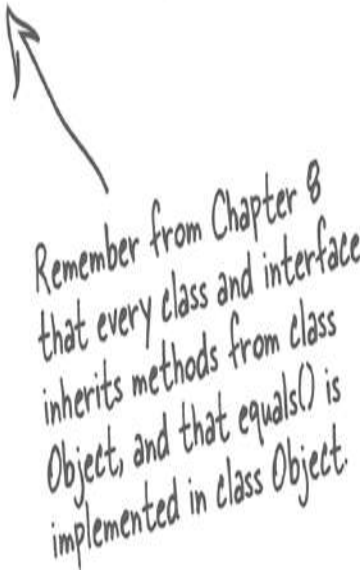

Because equals has been implemented by Object, if we create a custom comparator, we know we only *need* to implement the compare method.

We also know exactly the shape of that method—it has to return an int, and it takes two arguments of type T (remember generics?). Our lambda expression implements the compare() method, without having to declare the class or the method, only the details of what goes into the body of the compare() method.

Some interfaces have only ONE method to implement

With interfaces like Comparator, we only have to implement a ***single abstract method***, SAM for short. These interfaces are so important that they have several special names:

SAM Interfaces a.k.a. **Functional Interfaces**

If an interface has only one method that needs to be implemented, that interface can be implemented as a ***lambda expression***. You don't need to create a whole class to implement the interface; the compiler knows what the class and method would look like. What the compiler *doesn't* know is the logic that goes *inside* that method.

RELAX

We'll look at lambda expressions and functional interfaces in much more detail in the next chapter. For now, back to Lou's diner.

Updating the Jukebox code with lambdas

```
import java.util.*;

public class Jukebox6 {
  public static void main(String[] args) {
    new Jukebox6().go();
  }

  public void go() {
    List<SongV3> songList = MockSongs.getSongsV3();
    System.out.println(songList);

    songList.sort((one, two) -> one.getTitle().compareTo(two.getTitle()));
    System.out.println(songList);

    songList.sort((one, two) -> one.getArtist().compareTo(two.getArtist()));
    System.out.println(songList);
  }
}
```

Here's our lambda expression in action—no need to create a custom Comparator class; just put the sorting logic right inside sort method call.

You can tell what the list will be sorted by, just by looking at the field used in the lambda.

The output is exactly the same as when we used Comparator classes, but our code was much shorter.

```
File Edit Window Help Ambient
%java Jukebox6
[somersault, cassidy, $10, havana, Cassidy, 50 ways]
[$10, 50 ways, Cassidy, cassidy, havana, somersault]
[havana, Cassidy, cassidy, $10, 50 ways, somersault]
```

SHARPEN YOUR PENCIL

How could you sort the songs differently?

Write lambda expressions to sort the songs in these ways (the answers are at the end of the chapter):

- Sort by BPM
- Sort by title in descending order

→ **Answers in "Sorting with lambdas".**

Reverse Engineer

Assume this code exists in a single file. Your job is to fill in the blanks so the program will create the output shown.

```
import ____________________;
public class SortMountains {
  public static void main(String [] args) {
    new SortMountains().go();
  }

  public void go() {
    List_________________ mountains = new ArrayList<>();
    mountains.add(new Mountain("Longs", 14255));
    mountains.add(new Mountain("Elbert", 14433));
    mountains.add(new Mountain("Maroon", 14156));
    mountains.add(new Mountain("Castle", 14265));
    System.out.println("as entered:\n" + mountains);

    mountains._______(____->____________);
    System.out.println("by name:\n" + mountains);

    __________._______(____->____________);
    System.out.println("by height:\n" + mountains);
  }
}
class Mountain {
  ____________________;
  ____________________;
  _________________________ {
    ____________________;
    ____________________;
  }
  _____________________________ {
    ___________________________________;
  }
}
```

Output:

```
File  Edit  Window  Help  ThisOne'sForBob
%java SortMountains
as entered:
[Longs 14255, Elbert 14433, Maroon 14156, Castle 14265]
by name:
[Castle 14265, Elbert 14433, Longs 14255, Maroon 14156]
by height:
[Elbert 14433, Castle 14265, Longs 14255, Maroon 14156]
```

→ **Answers in ""Reverse Engineer" lambdas exercise".**

Uh-oh. The sorting all works, but now we have duplicates...

The sorting works great; now we know how to sort on both *title* and *artist*. But there's a new problem we didn't notice with a test sample of the jukebox songs—***the sorted list contains duplicates.***

Unlike the mock code, Lou's real jukebox application appears to just keep writing to the file regardless of whether the same song has already been played (and thus written) to the text file. The *SongListMore.txt* jukebox text file is an example. It's a complete record of every song that was played, and might contain the same song multiple times.

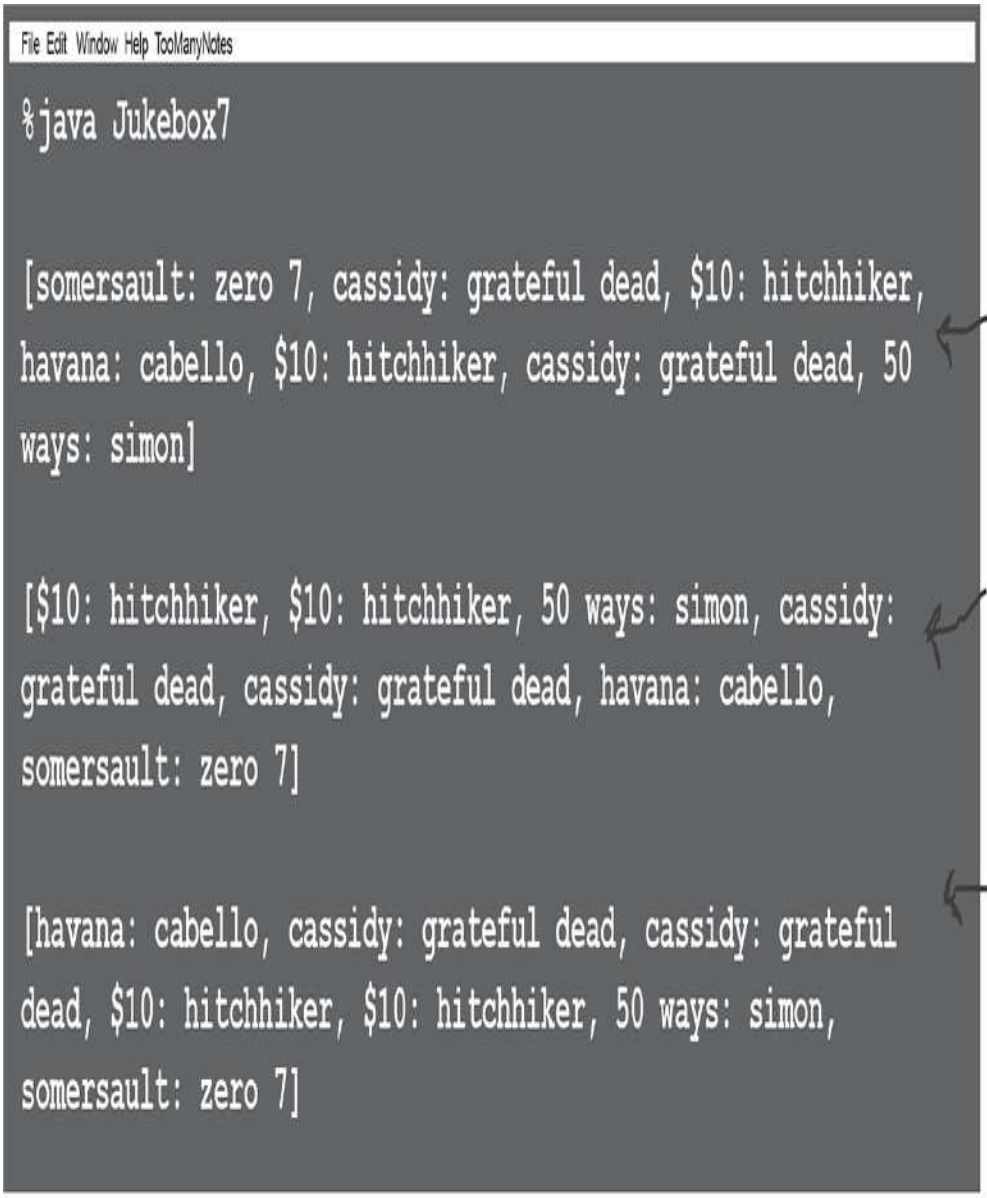

Before sorting

After sorting by song title

After sorting by artist name

Note that we changed the Song's toString to output the title and the artist.

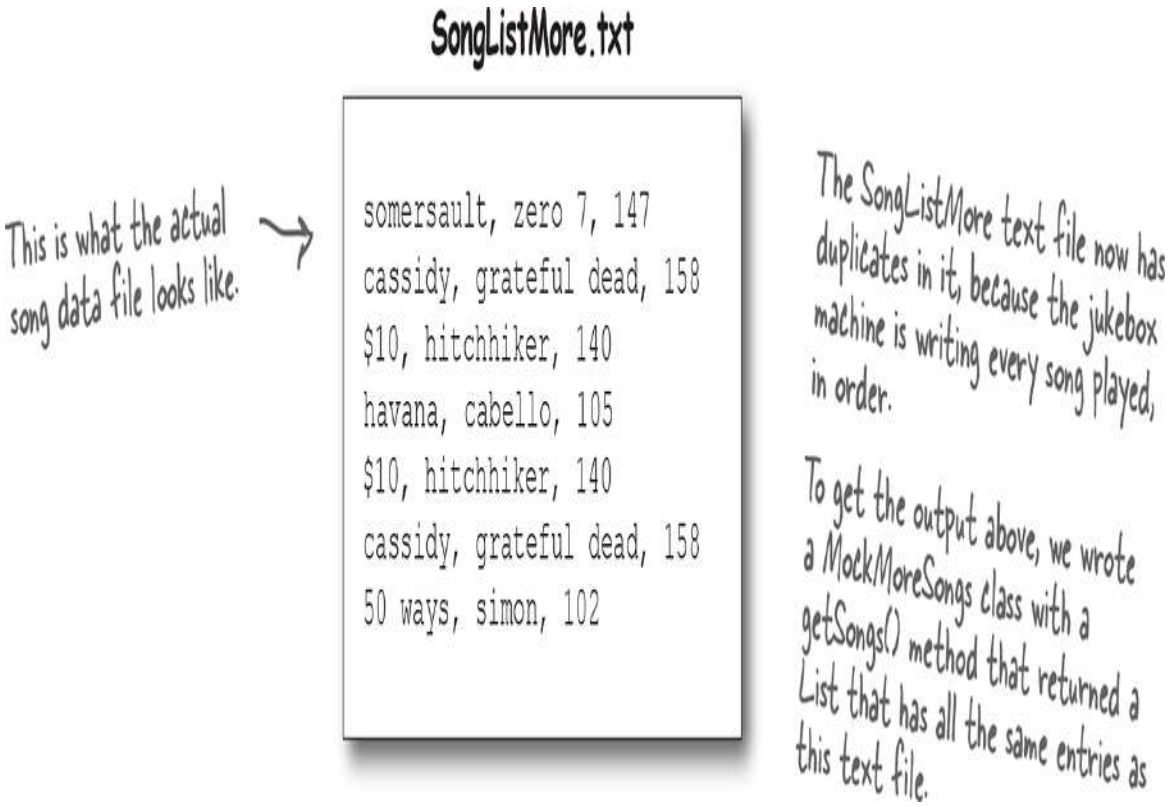

We need a Set instead of a List

From the Collection API, we find three main interfaces, **List**, **Set**, and **Map**. ArrayList is a **List**, but it looks like ***Set*** is exactly what we need.

- ▶ **LIST - when *sequence* matters**

  Collections that know about ***index position***.

  Lists know where something is in the list. You can have more than one element referencing the same object.

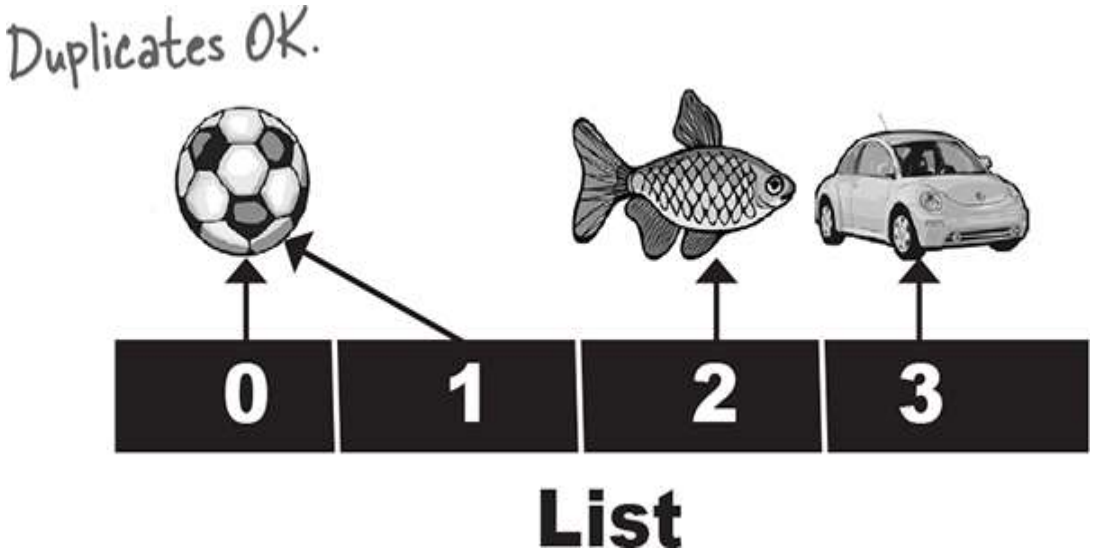

- ▶ **SET - when *uniqueness* matters**

  Collections that ***do not allow duplicates***.

  Sets know whether something is already in the collection. You can never have more than one element referencing the same object (or more than one element referencing two objects that are considered equal—we'll look at what object equality means in a moment).

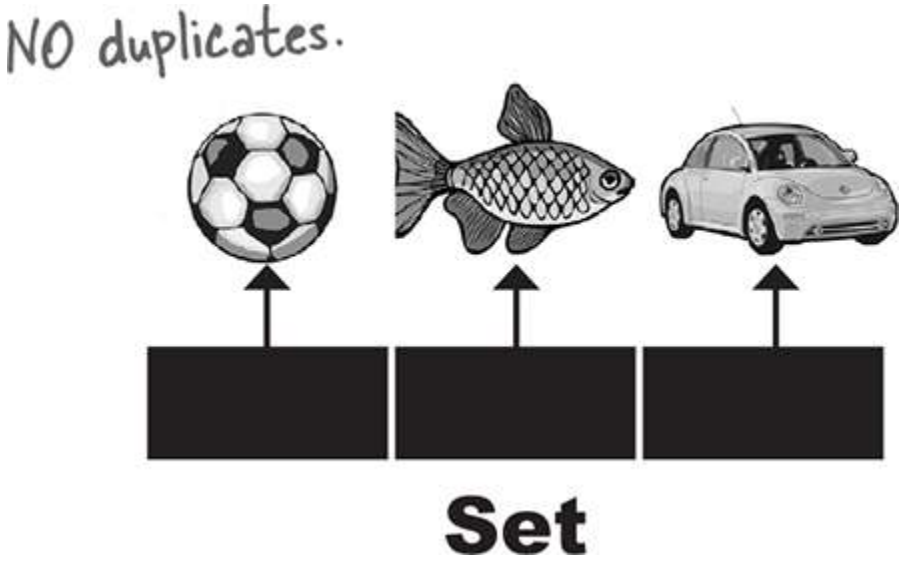

- ▶ **MAP - when *finding something by key* matters**

  Collections that use ***key-value pairs***.

Maps know the value associated with a given key. You can have two keys that reference the same value, but you cannot have duplicate keys. A key can be any object.

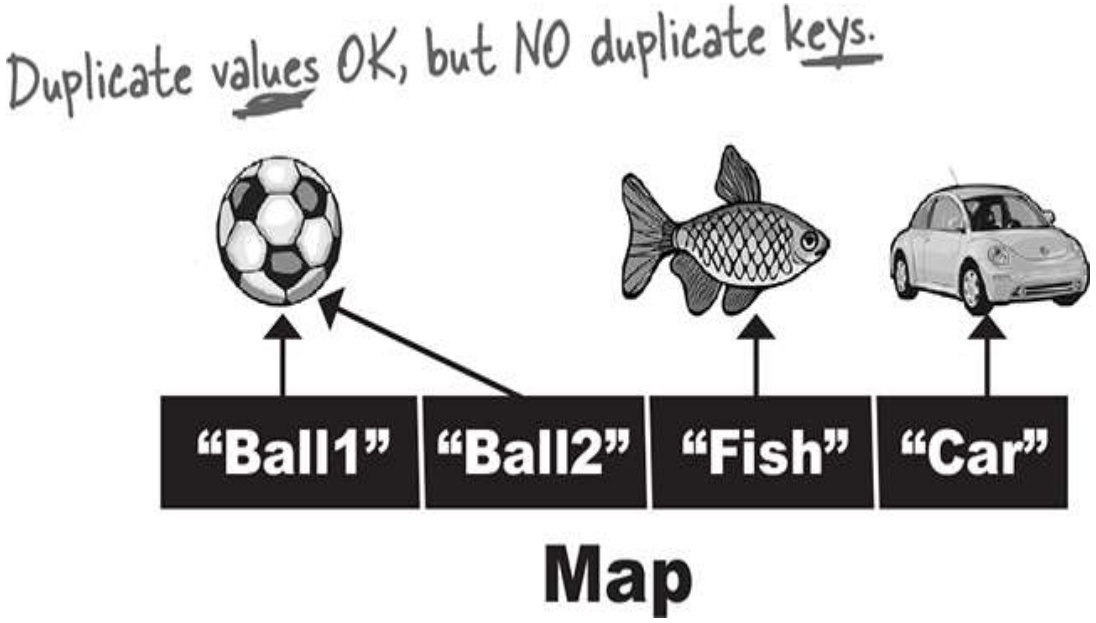

The Collection API (part of it)

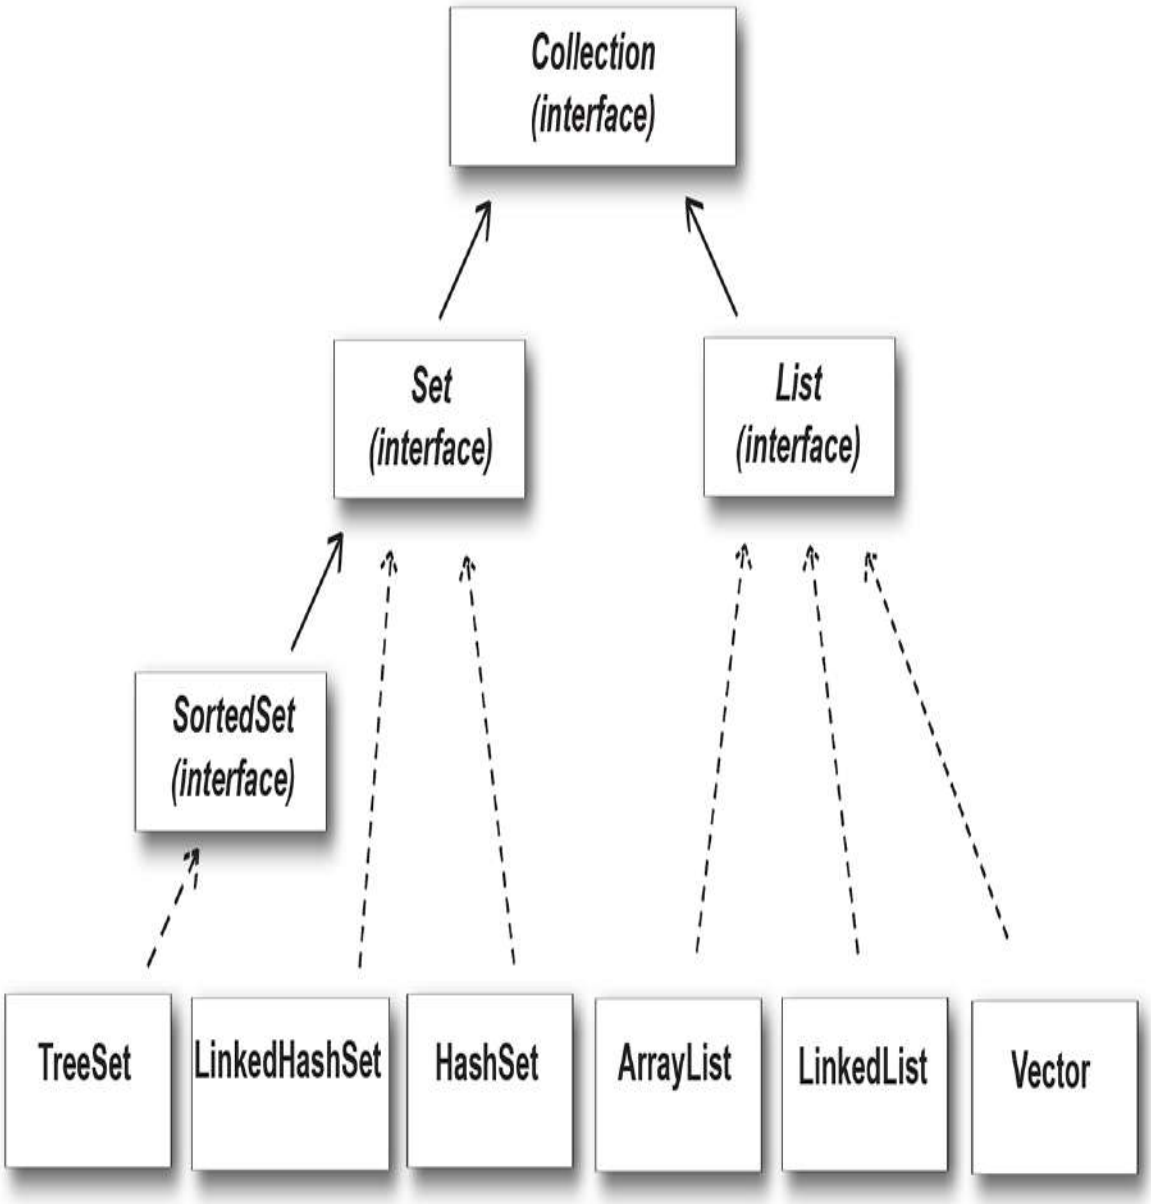
Collection
(interface)
Set
(interface)
List
(interface)
SortedSet
(interface)
TreeSet
LinkedHashSet
HashSet
ArrayList
LinkedList
Vector

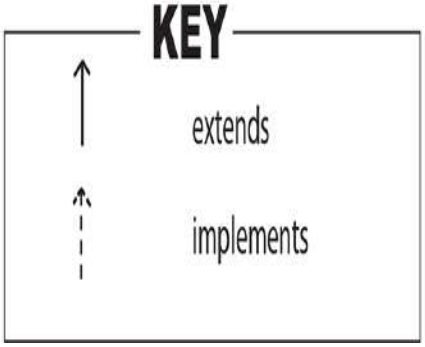
KEY
extends
implements

Notice that the Map interface doesn't actually extend the Collection interface, but Map is still considered part of the "Collection Framework" (also known as the "Collection API"). So Maps are still collections, even though they don't include java.util.Collection in their inheritance tree.

(Note: this is not the complete collection API; there are other classes and interfaces, but these are the ones we care most about.)

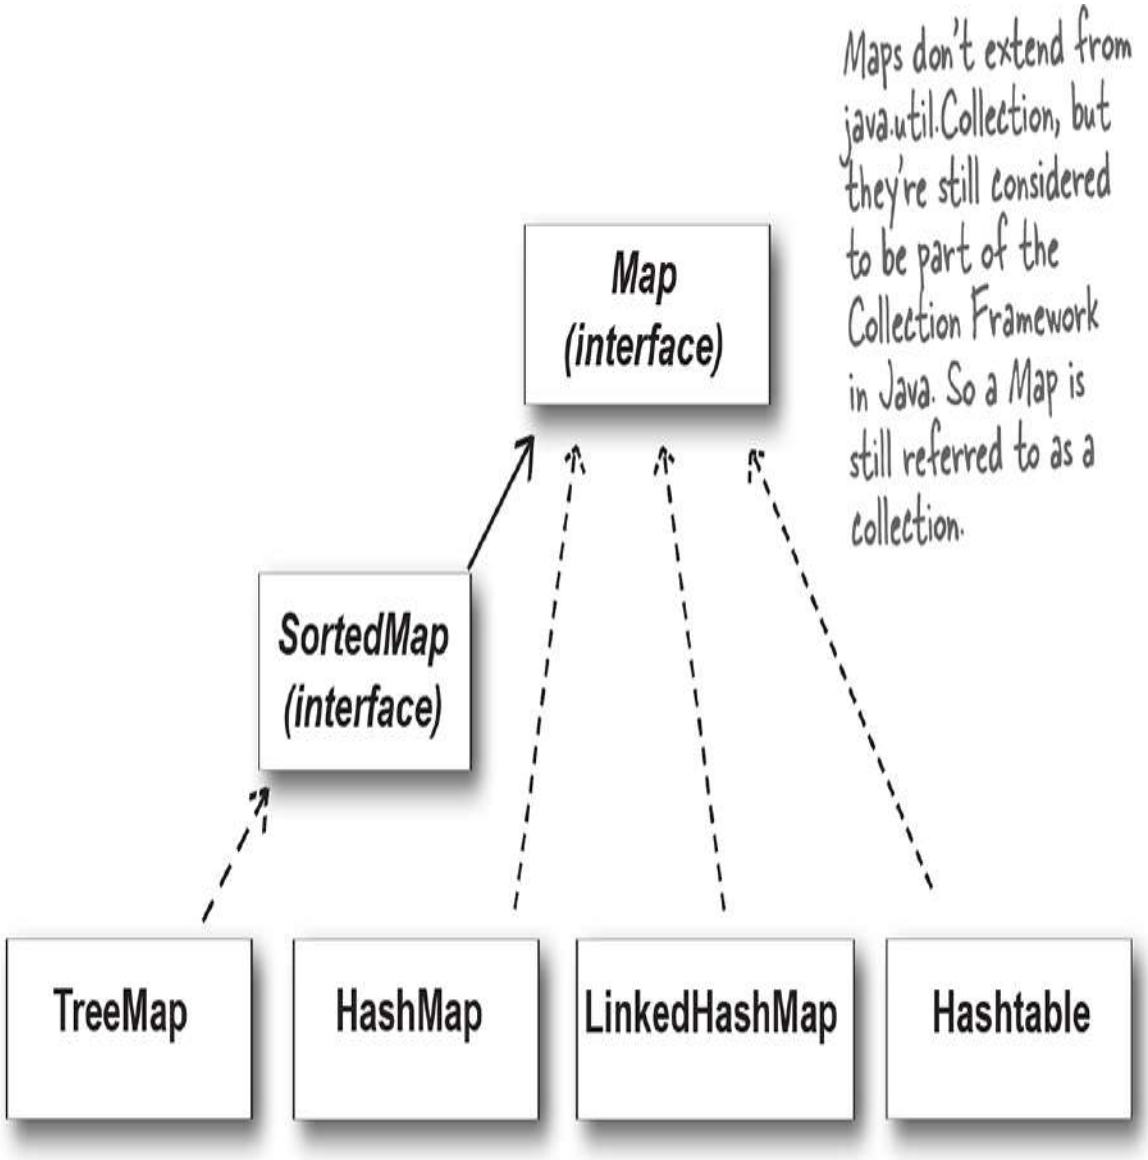

Using a HashSet instead of ArrayList

We updated the Jukebox code to put the songs in a HashSet to try to eliminate our duplicate songs. (Note: we left out some of the Jukebox code, but you can copy it from earlier versions.)

```
import java.util.*;

public class Jukebox8 {
  public static void main(String[] args) {
    new Jukebox8().go();
  }

  public void go() {
    List<SongV3> songList = MockMoreSongs.getSongsV3();
    System.out.println(songList);

    songList.sort((one, two) -> one.getTitle().compareTo(two.getTitle()));
    System.out.println(songList);

    Set<SongV3> songSet = new HashSet<>(songList);
    System.out.println(songSet);
  }
}
```

We created a MockMoreSongs class to return a List of SongV3 objects that contain the same values as SongListMore.txt.

HashSet has a constructor that takes a Collection, and it will create a set with all the items from that collection.

We want the Set to hold SongV3 objects. HashSet IS-A Set, so we can store the HashSet in this Set variable.

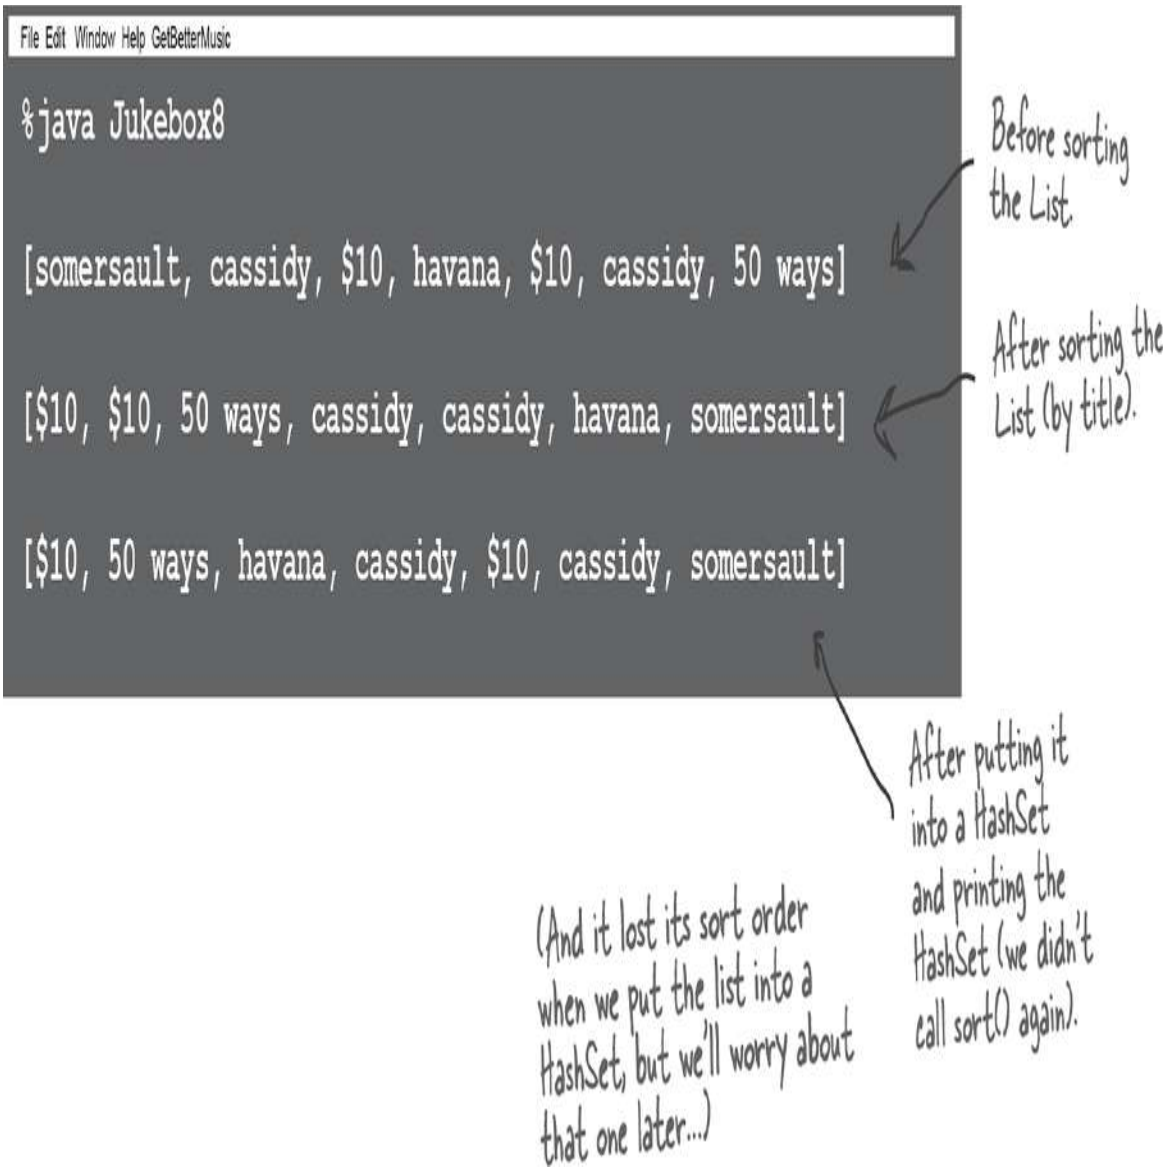

NOTE

The Set didn't help!!

We still have all the duplicates!

What makes two objects equal?

To figure out why using a Set didn't remove the duplicates, we have to ask—what makes two Song references duplicates? They must be considered ***equal***. Is it simply two references to the very same object, or is it two separate objects that both have the same *title*?

This brings up a key issue: *reference* equality vs. *object* equality.

- ▶ **Reference equality**

  Two references, one object on the heap.

  Two references that refer to the same object on the heap are equal. Period. If you call the **`hashCode()`** method on both references, you'll get the same result. If you don't override the hashCode `()` method, the default behavior (remember, you inherited this from class Object) is that each object will get a unique number (most versions of Java assign a hashcode based on the object's memory address on the heap, so no two objects will have the same hashcode).

  If you want to know if two *references* are really referring to the same object, use the == operator, which (remember) compares the bits in the variables. If both references point to the same object, the bits will be identical.

If two objects *foo* and *bar* are equal, *foo.equals(bar)* and *bar.equals(foo)* must be true, and both *foo* and *bar* must return the same value from *hashCode()*. For a Set to treat two objects as duplicates, you must override the hashCode() and equals() methods inherited from class Object so that you can make two different objects be viewed as equal.

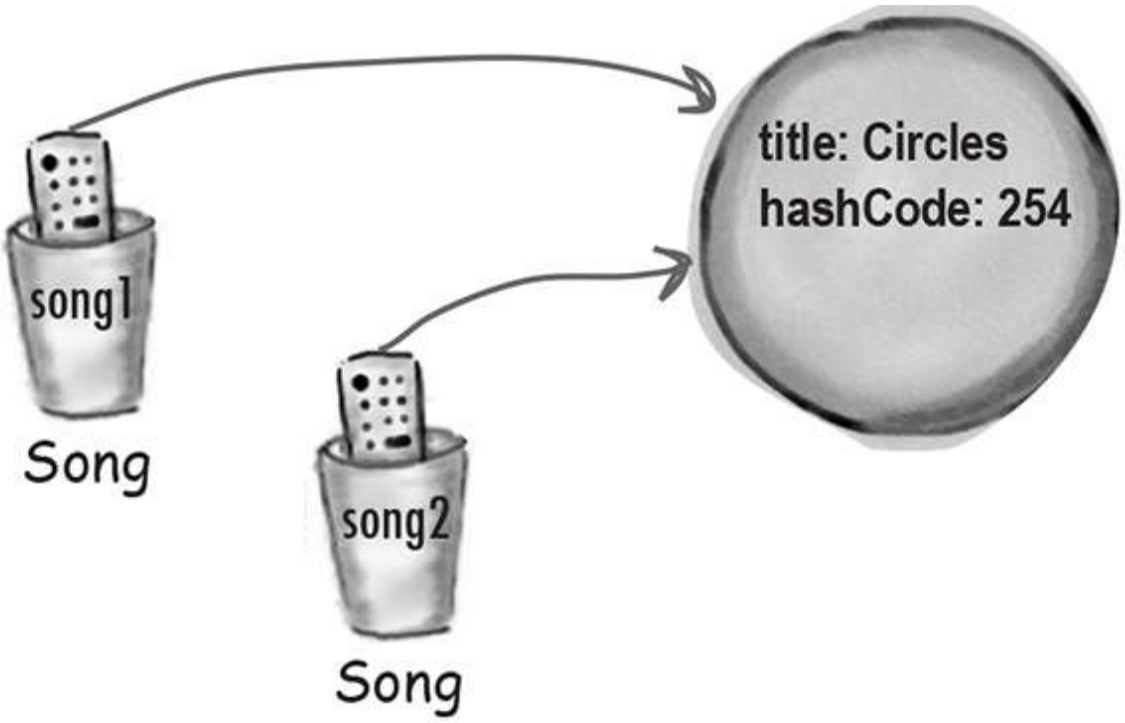


```
if (song1 == song2) {
    // both references are referring
    // to the same object on the heap
}
```

- ▶ **Object equality**

  Two references, two objects on the heap, but the objects are considered *meaningfully equivalent.*

  If you want to treat two different Song objects as equal (for example if you decided that two Songs are the same if they have matching *title* variables), you must override *both* the **hashCode()** and **equals()** methods inherited from class Object.

  As we said above, if you *don't* override hashCode(), the default behavior (from Object) is to give each object a unique hashcode value. So you must override hashCode() to be sure that two equivalent objects return the same hashcode. But you must also override equals() so that if

you call it on *either* object, passing in the other object, always returns ***true***.

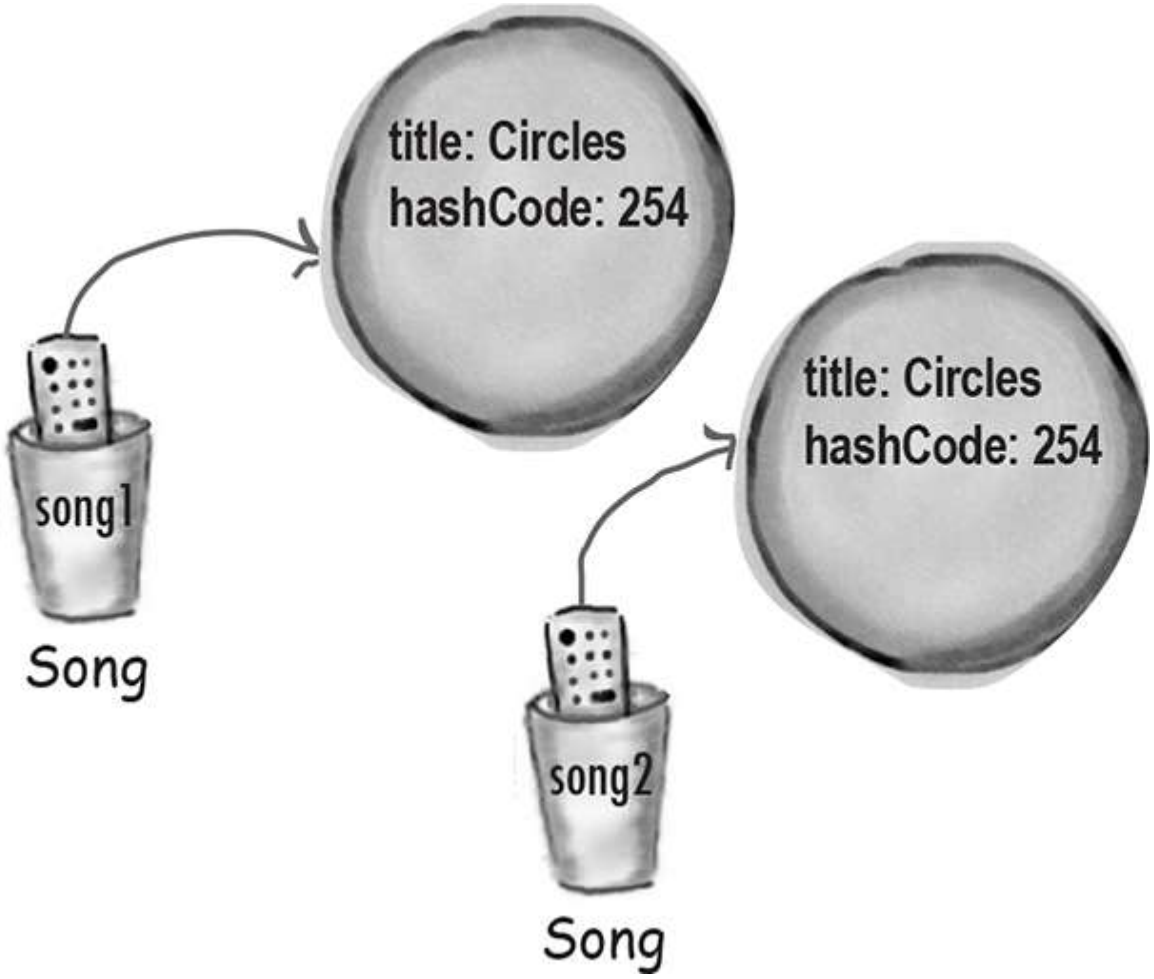


```
if (song1.equals(song2) && song1.hashCode() == song2.hashCode()) {
    // both references are referring to either a
    // a single object, or to two objects that are equal
}
```

How a HashSet checks for duplicates: hashCode() and equals()

When you put an object into a HashSet, it calls the object's hashCode method to determine where to put the object in the Set. But it also compares the object's hash code to the hash code of all the other objects in the HashSet,

and if there's no matching hash code, the HashSet assumes that this new object is *not* a duplicate.

In other words, if the hash codes are different, the HashSet assumes there's no way the objects can be equal!

So you must override hashCode() to make sure the objects have the same value.

But two objects with the same hash code might *not* be equal (more on this on the next page), so if the HashSet finds a matching hash code for two objects —one you're inserting and one already in the set—the HashSet will then call one of the object's equals() methods to see if these hash code–matched objects really *are* equal.

And if they're equal, the HashSet knows that the object you're attempting to add is a duplicate of something in the Set, so the add doesn't happen.

You don't get an exception, but the HashSet's add() method returns a boolean to tell you (if you care) whether the new object was added. So if the add() method returns *false*, you know the new object was a duplicate of something already in the set.

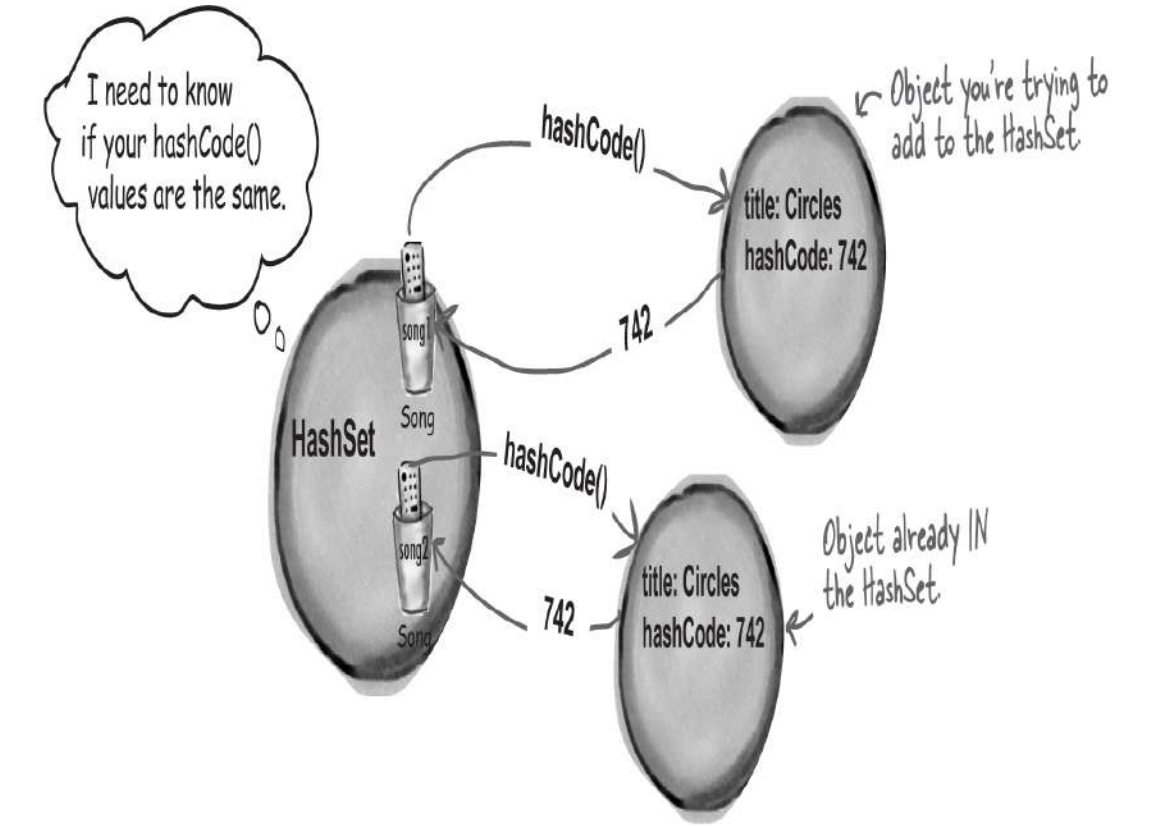
I need to know if your hashCode() values are the same.
hashCode()
Object you're trying to add to the HashSet
title: Circles
hashCode: 742
742
HashSet
song1
Song
hashCode()
song2
Song
742
title: Circles
hashCode: 742
Object already IN the HashSet

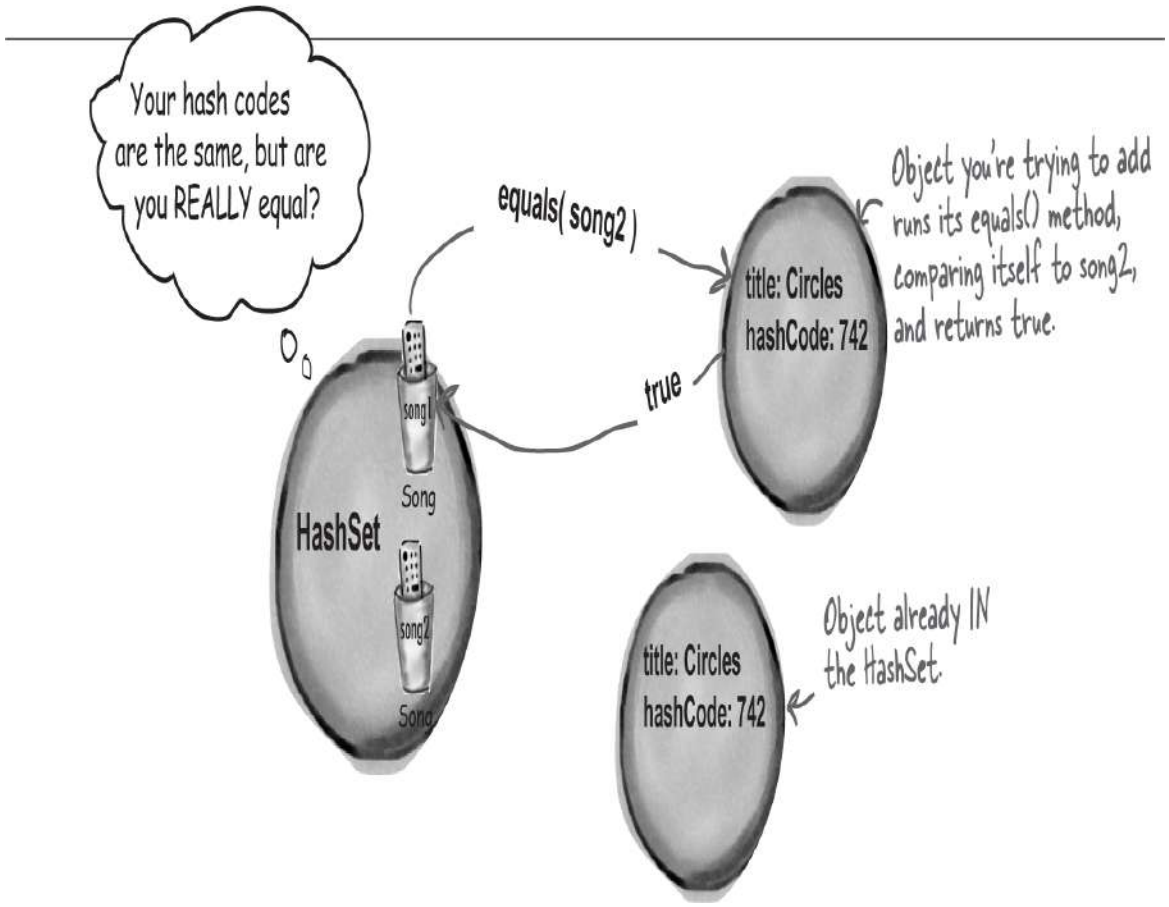
Your hash codes are the same, but are you REALLY equal?
equals(song2)
Object you're trying to add runs its equals() method, comparing itself to song2, and returns true.
title: Circles
hashCode: 742
true
HashSet
song1
Song
song2
Song
title: Circles
hashCode: 742
Object already IN the HashSet.

The Song class with overridden hashCode() and equals()

```
class SongV4 implements Comparable<SongV4> {
  private String title;
  private String artist;
  private int bpm;

  public boolean equals(Object aSong) {
    SongV4 other = (SongV4) aSong;
    return title.equals(other.getTitle());
  }

  public int hashCode() {
    return title.hashCode();
  }

  public int compareTo(SongV4 s) {
    return title.compareTo(s.getTitle());
  }

  SongV4(String title, String artist, int bpm) {
    this.title = title;
    this.artist = artist;
    this.bpm = bpm;
  }

  public String getTitle() {
    return title;
  }

  public String getArtist() {
    return artist;
  }

  public int getBpm() {
    return bpm;
  }

  public String toString() {
    return title;
  }
}
```

The HashSet (or anyone else calling this method) sends it another Song.

The GREAT news is that title is a String, and Strings have an overridden equals() method. So all we have to do is ask one title if it's equal to the other song's title.

Same deal here...the String class has an overridden hashCode() method, so you can just return the result of calling hashCode() on the title. Notice how hashCode() and equals() are using the SAME instance variable (title).

Now it works! No duplicates when we print out the HashSet. But we didn't call sort() again, and when we put the ArrayList into the HashSet, the HashSet didn't preserve the sort order.

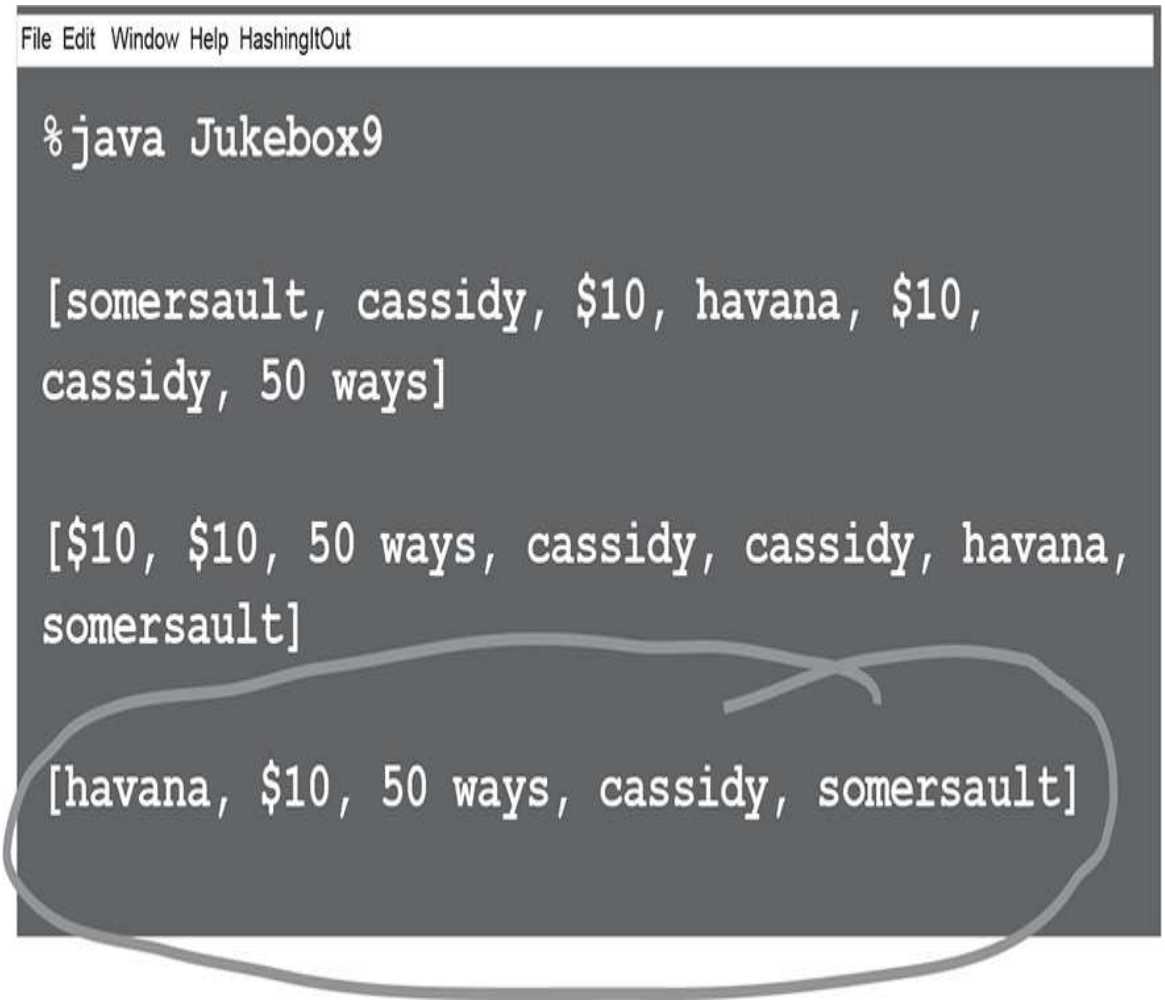
File Edit Window Help HashingItOut
%java Jukebox9
[somersault, cassidy, $10, havana, $10, cassidy, 50 ways]
[$10, $10, 50 ways, cassidy, cassidy, havana, somersault]
[havana, $10, 50 ways, cassidy, somersault]

Java Object Law for hashCode() and equals()

The API docs for class Object state the rules you MUST follow:

- **If two objects are equal, they MUST have matching hash codes.**
- **If two objects are equal, calling equals() on either object MUST return true. In other words, if (a.equals(b)) then (b.equals(a)).**
- **If two objects have the same hash code value, they are NOT required to be equal. But if they're equal, they MUST have the same hash code value.**
- **So, if you override equals(), you MUST override hashCode().**
- **The default behavior of hashCode() is to generate a unique integer for each object on the heap. So if you don't override hashCode() in a class, no two objects of that type can EVER be considered equal.**
- **The default behavior of equals() is to do an == comparison. In other words, to test whether the two references refer to a single object on the heap. So if you don't override equals() in a class, no two objects can EVER be considered equal since references to two different objects will always contain a different bit pattern.**

  ***a.equals(b)* must also mean that**

  ***a.hashCode()* == b.hashCode()**

  But *a.hashCode() == b.hashCode()*

  does NOT have to mean *a.equals(b)*

THERE ARE NO DUMB QUESTIONS

Q: How come hash codes can be the same even if objects aren't equal?

A: HashSets use hash codes to store the elements in a way that makes it much faster to access. If you try to find an object in an ArrayList by giving the ArrayList a copy of the object (as opposed to an index value), the ArrayList has to start searching from the beginning, looking at each element in the list to see if it matches. But a HashSet can find an object much more quickly, because it uses the hash code as a kind of label on the "bucket" where it stored the element. So if you say, "I want you to find an object in the set that's exactly like this one...," the HashSet gets the hash code value from the copy of the Song you give it (say, 742), and then the HashSet says, "Oh, I know exactly where the object with hash code #742 is stored...," and it goes right to the #742 bucket.

This isn't the whole story you get in a computer science class, but it's enough for you to use HashSets effectively. In reality, developing a good hashing algorithm is the subject of many a PhD thesis, and more than we want to cover in this book.

The point is that hash codes can be the same without necessarily guaranteeing that the objects are equal, because the "hashing algorithm" used in the hashCode() method might happen to return the same value for multiple objects. And yes, that means that multiple objects would all land in the same hash code bucket in the HashSet, but that's not the end of the world. The HashSet might be a little less efficient, because if the HashSet finds more than one object in the same hash code bucket, it has to use the equals() on all those objects to see if there's a perfect match.

If we want the set to stay sorted, we've got TreeSet

TreeSet is similar to HashSet in that it prevents duplicates. But it also *keeps* the list sorted. It works just like the sort() method in that if you make a TreeSet without giving it a Comparator, the TreeSet uses each object's compareTo() method for the sort. But you have the option of passing a Comparator to the TreeSet constructor, to have the TreeSet use that instead.

The downside to TreeSet is that if you don't *need* sorting, you're still paying for it with a small performance hit. But you'll probably find that the hit is almost impossible to notice for most apps.

```
public class Jukebox10 {
  public static void main(String[] args) {
    new Jukebox10().go();
  }

  public void go() {
    List<SongV4> songList = MockMoreSongs.getSongsV4();
    System.out.println(songList);

    songList.sort((one, two) -> one.getTitle().compareTo(two.getTitle()));
    System.out.println(songList);

    Set<SongV4> songSet = new TreeSet<>(songList);
    System.out.println(songSet);
  }
}
```

NOTE

Create a TreeSet instead of HashSet. The TreeSet will use SongV4's compareTo() method to sort the items in songList.

If we want the TreeSet to sort on something different (i.e., to NOT use SongV4's compareTo() method), we need to pass in a Comparator (or a lambda) to the TreeSet constructor. Then we'd use songSet.addAll() to add the songList values into the TreeSet.

```
Set<SongV4> songSet = new TreeSet<>((o1, o2) -> o1.getBpm() -
o2.getBpm());
```

```
songSet.addAll(songList);
```

NOTE

Yep, another lambda for sorting. This one sorts by BPM. Remember, this lambda implements Comparator.

What you MUST know about TreeSet...

TreeSet looks easy, but make sure you really understand what you need to do to use it. We thought it was so important that we made it an exercise so you'd *have* to think about it. Do NOT turn the page until you've done this. *We mean it*.

→ **Answers in "TreeSet exercise".**

SHARPEN YOUR PENCIL

Look at this code. Read it carefully, then answer the questions below. (Note: there are no syntax errors in this code.)

```
import java.util.*;
public class TestTree {
  public static void main(String[] args) {
    new TestTree().go();
  }

  public void go() {
    Book b1 = new Book("How Cats Work");
    Book b2 = new Book("Remix your Body");
    Book b3 = new Book("Finding Emo");

    Set<Book> tree = new TreeSet<>();
    tree.add(b1);
    tree.add(b2);
    tree.add(b3);
    System.out.println(tree);
  }
}
class Book {
  private String title;
  public Book(String t) {
    title = t;
  }
}
```

1. What is the result when you compile this code?

_____

2. If it compiles, what is the result when you run the TestTree class?

_____

3. If there is a problem (either compile-time or runtime) with this code, how would you fix it?

_____

TreeSet elements MUST be comparable

TreeSet can't read the programmer's mind to figure out how the objects should be sorted. You have to tell the TreeSet *how*.

To use a TreeSet, one of these things must be true:

- **The elements in the list must be of a type that implements *Comparable***

  The Book class on the previous page didn't implement Comparable, so it wouldn't work at runtime. Think about it, the poor TreeSet's sole purpose in life is to keep your elements sorted, and once again—it had no idea how to sort Book objects! It doesn't fail at compile-time, because the TreeSet add() method doesn't take a Comparable type. The TreeSet add() method takes whatever type you used when you created the TreeSet. In other words, if you say new TreeSet<Book>(), the add() method is essentially add(Book). And there's no requirement that the Book class implement Comparable! But it fails at runtime when you add the second element to the set. That's the first time the set tries to call one of the object's compareTo() methods and...can't.

  OR

- **You use the TreeSet's overloaded constructor that takes a *Comparator***

  TreeSet works a lot like the sort() method—you have a choice of using the element's compareTo() method, assuming the element type implemented the Comparable interface, OR you can use a custom Comparator that knows how to sort the elements in the set. To use a custom Comparator, you call the TreeSet constructor that takes a Comparator.

```
class Book implements Comparable<Book> {
  private String title;
  public Book(String t) {
    title = t;
  }
```

```
 public int compareTo(Book other) {
   return title.compareTo(other.title);
 }
}
```

```
class BookCompare implements Comparator<Book> {
  public int compare(Book one, Book two) {
    return one.title.compareTo(two.title);
  }
}
public class TestTreeComparator {
  public void go() {
    Book b1 = new Book("How Cats Work");
    Book b2 = new Book("Remix your Body");
    Book b3 = new Book("Finding Emo");
    BookCompare bookCompare = new BookCompare();
    Set<Book> tree = new TreeSet<>(bookCompare);
    tree.add(b1);
    tree.add(b2);
    tree.add(b3);
    System.out.println(tree);
  }
}
```

You could use a lambda instead of declaring a new Comparator class.

We've seen Lists and Sets, now we'll use a Map

Lists and Sets are great, but sometimes a Map is the best collection (not Collection with a capital "C"—remember that Maps are part of Java collections but they don't implement the Collection interface).

Imagine you want a collection that acts like a property list, where you give it a name and it gives you back the value associated with that name. Keys can be any Java object (or, through autoboxing, a primitive), but you'll often see String keys (i.e., property names) or Integer keys (representing unique IDs, for example).

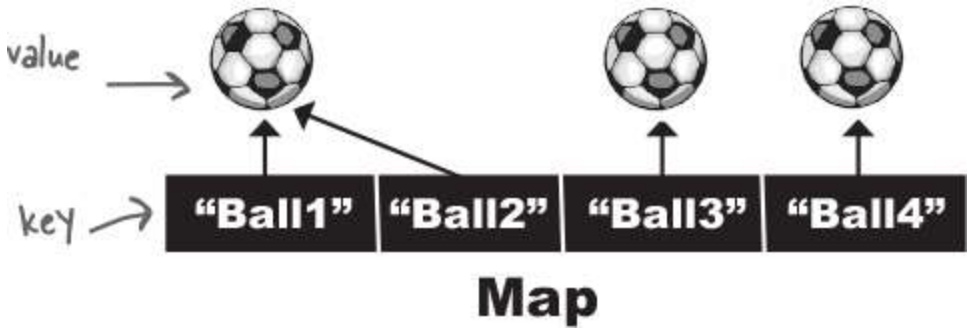

Each element in a Map is actually TWO objects—a *key* and a *value*. You can have duplicate values, but NOT duplicate *keys*.

Map example

```
public class TestMap {
  public static void main(String[] args) {
    Map<String, Integer> scores = new HashMap<>();

    scores.put("Kathy", 42);
    scores.put("Bert", 343);
    scores.put("Skyler", 420);

    System.out.println(scores);
    System.out.println(scores.get("Bert"));
  }
}
```

HashMap needs TWO type parameters—one for the key and one for the value.

Use put() instead of add(), and now of course it takes two arguments (key, value).

The get() method takes a key and returns the value (in this case, an Integer).

```
File Edit Window Help WhereAmI

%java TestMap

{Skyler=420, Bert=343, Kathy=42}
343
```

When you print a Map, it gives you the key=value pairs, in braces { } instead of the brackets [ ] you see when you print lists and sets.

Creating and filling collections

The code for creating, and then filling, a collection crops up again and again. You've already seen code for creating an ArrayList and adding elements to it quite a few times. Code like this:

```
List<String> songs = new ArrayList<>();
songs.add("somersault");
songs.add("cassidy");
songs.add("$10");
```

Whether you're creating a List, a Set, or a Map, it looks pretty similar. What's more, these types of collections are often ones where we know what the data is right at the start, and then we don't intend to change it at all during

the lifetime of the collection. If we wanted to really make sure that no-one changed the collection after we'd created it, we'd have to add an extra step:

```
:
List<String> songs = new ArrayList<>();
songs.add("somersault");
songs.add("cassidy");
songs.add("$10");
return Collections.unmodifiableList(songs);
```

Return an "unmodifiable" version of the list we just created so we know no one else can change it.

We'll see in Chapters 12 and 18 why we might want to create data structures that can't be changed.

That's a lot of code! And it's a lot of code for something common that we probably want to do a lot.

Fortunately for us, Java now has "Convenience Factory Methods of Collections" (they were added in Java 9). We can use these methods to create common data structures and fill them with data, with just one method call.

Convenience Factory Methods for Collections

Convenience Factory Methods for Collections allow you to easily create a List, Set, or Map that's been prefilled with known data. There are a couple of things to understand about using them:

- ① **The resulting collections cannot be changed.** You can't add to them or alter the values; in fact, you can't even do the sorting that we've seen in this chapter.
- ② **The resulting collections are not the standard Collections we've seen**. These are not ArrayList, HashSet, HashMap, etc. You can rely on them to behave according to their interface: a List will always preserve

the order in which the elements were placed; a Set will never have duplicates. But you can't rely on them being a specific implementation of List, Set, or Map.

Convenience Factory Methods are just that—a convenience that will work for most of the cases where you want to create a collection prefilled with data. And for those cases where these factory methods don't suit you, you can still use the Collections constructors and add() or put() methods instead.

- ▶ **Creating a List: `List.of()`**

  To create the list of Strings from the last page, we don't need five lines of code; we just need one:

```
List<String> strings = List.of("somersault", "cassidy",
"$10");
```

  If you want to add Song objects instead of simple Strings, it's still short and descriptive:

```
List<SongV4> songs = List.of(new SongV4("somersault", "zero
7", 147),
                        new SongV4("cassidy", "grateful dead",
158),
                        new SongV4("$10", "hitchhiker", 140));
```

- ▶ **Creating a Set: `Set.of()`**

  Creating a Set uses very similar syntax:

```
Set<Book> books = Set.of(new Book("How Cats Work"),
                     new Book("Remix your Body"),
                     new Book("Finding Emo"));
```

- ▶ **Creating a Map: `Map.of()`, `Map.ofEntries()`**

Maps are different, because they take two objects for each "entry"—a key and a value. If you want to put less than 10 entries into your Map, you can use Map.of, passing in key, value, key, value, etc.:

```
Map<String, Integer> scores = Map.of("Kathy", 42,
                                     "Bert", 343,
                                     "Skyler", 420);
```

If you have more than 10 entries, or if you want to be clearer about how your keys are paired up to their values, you can use Map.ofEntries instead:

```
Map<String, String> stores = Map.ofEntries(Map.entry("Riley",
"Supersports"),
                                           Map.entry("Brooklyn",
"Camera World"),
                                           Map.entry("Jay",
"Homecase"));
```

To make the line shorter, you can use a *static import* on Map.entry (we talked about static imports in Chapter 10).

Finally, back to generics

Remember earlier in the chapter we talked about how methods that take arguments with generic types can be...*weird*. And we mean weird in the polymorphic sense. If things start to feel strange here, just keep going—it takes a few pages to really tell the whole story. The examples are going to use a class hierarchy of Animals.

```
abstract class Animal {
  void eat() {
    System.out.println("animal eating");
  }
}
class Dog extends Animal {
  void bark() { }
}
class Cat extends Animal {
  void meow() { }
}
```

The simplified Animal class hierarchy

Using polymorphic arguments and generics

Generics can be a little...counterintuitive when it comes to using polymorphism with a generic type (the class inside the angle brackets). Let's create a method that takes a List<Animal> and use this to experiment.

Passing in List<Animal>

```
public class TestGenerics1 {
  public static void main(String[] args) {

    List<Animal> animals = List.of(new Dog(), new Cat(), new Dog());
    takeAnimals(animals);
  }

  public static void takeAnimals(List<Animal> animals) {
    for (Animal a : animals) {
      a.eat();
    }
  }
}
```

Using the List.of factory method we just looked at

Pass a List<Animal> into our testAnimals method

Method that has a generic class (List) as a parameter

Remember, we can call ONLY the methods declared in type Animal, since the animals parameter is of type List<Animal>.

Compiles and runs just fine

```
File Edit Window Help CatFoodIsBetter
%java TestGenerics1

animal eating
animal eating
animal eating
```

But will it work with List<Dog>?

A List<Animal> argument can be passed to a method with a List<Animal> parameter. So the big question is, will the List<Animal> parameter accept a List<Dog>? Isn't that what polymorphism is for?

Passing in List<Dog>

```
public void go() {
  List<Animal> animals = List.of(new Dog(), new Cat(), new Dog());
  takeAnimals(animals);
}

public void takeAnimals(List<Animal> animals) {
  for (Animal a : animals) {
    a.eat();
  }
}
```

We know this line worked fine.

```
  List<Dog> dogs = List.of(new Dog(), new Dog());
  takeAnimals(dogs);
```

Will this work now that we changed from an array to a List?

Make a Dog List and put a couple dogs in.

When we compile it:

```
File Edit Window Help CatsAreSmarter

%javac TestGenerics2.java

TestGenerics2.java:20: error: incompatible types:
List<Dog> cannot be converted to List<Animal>
    takeAnimals(dogs);
                ^
1 error
```

It looked so right, but went so wrong...

What could happen if it were allowed...?

Imagine the compiler let you get away with that. It let you pass a List<Dog> to a method declared as:

```
public void takeAnimals(List<Animal> animals) {
  for (Animal a : animals) {
    a.eat();
  }
}
```

There's nothing in that method that *looks* harmful, right? After all, the whole point of polymorphism is that anything an Animal can do (in this case, the eat() method), a Dog can do as well. So what's the problem with having the method call eat() on each of the Dog references?

There's nothing wrong with *that* code. But imagine *this* code instead:

```
public void takeAnimals(List<Animal> animals) {
   animals.add(new Cat());
}
```

Yikes!! We just stuck a Cat in what might be a Dogs-only List.

So that's the problem. There's certainly nothing wrong with adding a Cat to a List<Animal>, and that's the whole point of having a List of a supertype like Animal—so that you can put all types of animals in a single Animal List.

But if you passed a Dog List—one meant to hold ONLY Dogs—to this method that takes an Animal List, then suddenly you'd end up with a Cat in the Dog list. The compiler knows that if it lets you pass a Dog List into the method like that, someone could, at runtime, add a Cat to your Dog list. So instead, the compiler just won't let you take the risk.

NOTE

If you declare a method to take List<Animal>, it can take ONLY a List<Animal>, not List<Dog> or List<Cat>.

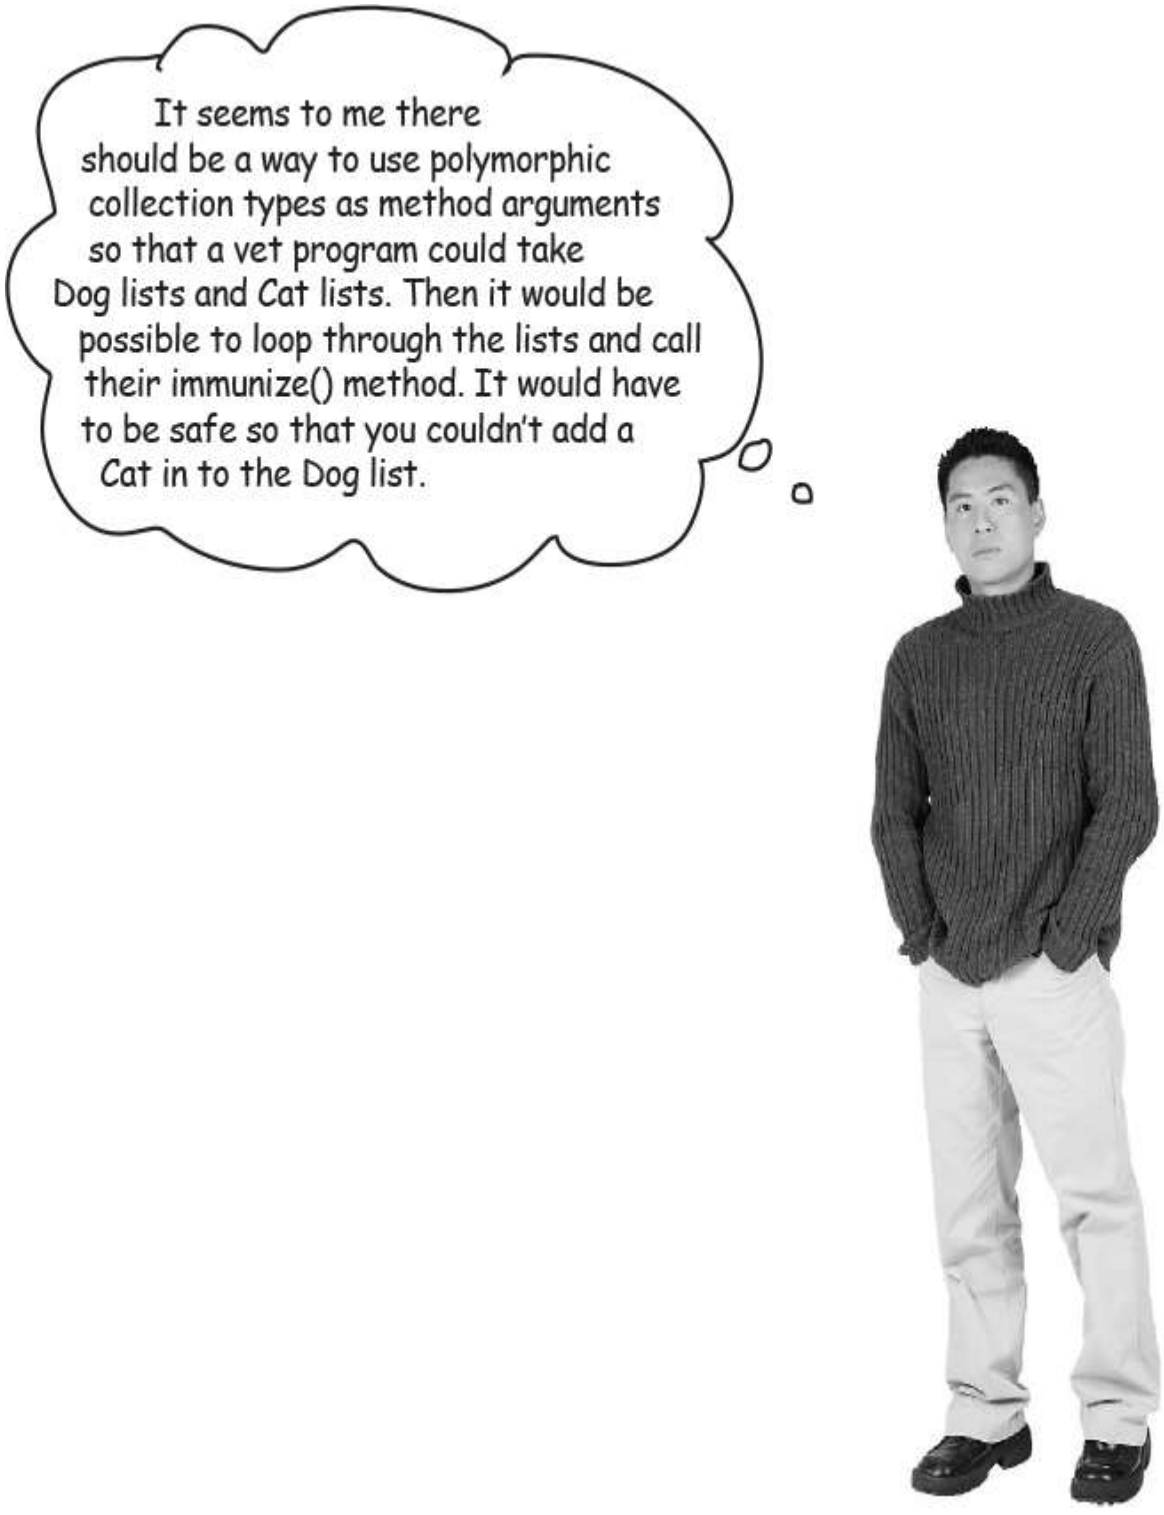

We can do this with wildcards

It looks unusual, but there *is* a way to create a method argument that can accept a List of any Animal subtype. The simplest way is to use a **wildcard**.

```
public void takeAnimals(List<? extends Animal> animals) {
  for (Animal a : animals) {
    a.eat();
  }
}
```

Remember, the keyword "extends" here means either extends OR implements.

So now you're wondering, "What's the *difference*? Don't you have the same problem as before?"

And you'd be right for wondering. The answer is NO. When you use the wildcard <?> in your declaration, the compiler won't let you do anything that adds to the list!

When you use a wildcard in your method argument, the compiler will STOP you from doing anything that could hurt the list referenced by the method parameter.

You can still call methods on the elements in the list, but you cannot add elements to the list.

In other words, you can do things *with* the list elements, but you can't put *new* things in the list.

THERE ARE NO DUMB QUESTIONS

Q: Back when we first saw generic methods, there was a similar-looking method that declared the generic type in front of the method name. Does that do the same thing as this takeAnimals method?

A: Well spotted! Back at the start of the chapter, there was a method like this:

```
<T extends Animal> void takeThing(List<T> list)
```

We actually could use this syntax to achieve a similar thing, but it works in a slightly different way. Yes, you can pass List<Animal> and List<Dog> into the method, but you get the added benefit of being able to use the generic type, T, elsewhere too.

Using the method's generic type parameter

What can we do if we define our method like this instead?

```
public <T extends Animal> void takeAnimals(List<T> list) { }
```

Well, not much as the method stands right now, we don't need to use "T" for anything. But if we made a change to our method to return a List, for example of all the animals we had successfully vaccinated, we can declare that the List that's returned has the same generic type as the List that's passed in:

```
public <T extends Animal> List<T> takeAnimals(List<T> list) { }
```

When you call the method, you know you're going to get the same type back as you put in.

```
List<Dog> dogs = List.of(new Dog(), new Dog());
List<Dog> vaccinatedDogs = takeAnimals(dogs);
```

```
List<Animal> animals = List.of(new Dog(), new Cat());
List<Animal> vaccinatedAnimals = takeAnimals(animals);
```

> **NOTE**
>
> **The List we get back from the takeAnimals method is always the same type as the list we pass in.**

If the method used the wildcard for both method parameter and return type, there's nothing to guarantee they're the same type. In fact, anything calling the method has almost no idea what's going to be in the collection, other than "some sort of animal."

```
public void go() {
  List<Dog> dogs = List.of(new Dog(), new Dog());
  List<? extends Animal> vaccinatedSomethings = takeAnimals(dogs);
}

public List<? extends Animal> takeAnimals(List<? extends Animal>
animals) { }
```

> **NOTE**
>
> Using the wildcard ("? extends") is fine when you don't care much about the generic type, you just want to allow all subtypes of some type.
>
> Using a type parameter ("T") is more helpful when you want to do more with the type itself, for example in the method's return.

Exercise

BE the Compiler, advanced

Your job is to play compiler and determine which of these statements would compile. Some of this code wasn't covered in the chapter, so you need to work out the answers based on what you DID learn, applying the "rules" to these new situations.

The signatures of the methods used in the exercise are in the boxes.

```
private void takeDogs(List<Dog> dogs) { }
```

```
private void takeAnimals(List<Animal> animals) { }
```

```
private void takeSomeAnimals(List<? extends Animal> animals) { }
```

```
private void takeObjects(ArrayList<Object> objects) { }
```

Compiles?

❑	`takeAnimals(new ArrayList<Animal>());`
❑	`takeDogs(new ArrayList<Animal>());`
❑	`takeAnimals(new ArrayList<Dog>());`
❑	`takeDogs(new ArrayList<>());`
❑	`List<Dog> dogs = new ArrayList<>(); takeDogs(dogs);`
❑	`takeSomeAnimals(new ArrayList<Dog>());`
❑	`takeSomeAnimals(new ArrayList<>());`
❑	`takeSomeAnimals(new ArrayList<Animal>());`
❑	`List<Animal> animals = new ArrayList<>(); takeSomeAnimals(animals);`
❑	`List<Object> objects = new ArrayList<>(); takeObjects(objects);`
❑	`takeObjects(new ArrayList<Dog>());`
❑	`takeObjects(new ArrayList<Object>());`

→ **Answers in "BE the Compiler solution".**

Exercise Solution

Fill-in-the-blanks

(from "Fill-in-the-blanks")

Possible Answers:

```
Comparator,
Comparable,
compareTo( ),
compare( ),
yes,
no
```

Given the following compilable statement:

```
Collections.sort(myArrayList);
```

1. What must the class of the objects stored in `myArrayList` implement? **Comparable**
2. What method must the class of the objects stored in `myArrayList` implement? **compareTo( )**
3. Can the class of the objects stored in `myArrayList` implement both `Comparator` AND `Comparable`? **yes**

Given the following compilable statement:

```
Collections.sort(myArrayList, myCompare);
```

4. Can the class of the objects stored in `myArrayList` implement `Comparable`? **yes**
5. Can the class of the objects stored in `myArrayList` implement `Comparator`? **yes**
6. Must the class of the objects stored in `myArrayList` implement `Comparable`? **no**
7. Must the class of the objects stored in `myArrayList` implement `Comparator`? **no**
8. What must the class of the `myCompare` object implement? **Comparator**
9. What method must the class of the `myCompare` object implement? **compare( )**

"Reverse Engineer" lambdas exercise

(from "Reverse Engineer")

```
import java.util.*;

public class SortMountains {
 public static void main(String[] args) {
    new SortMountains().go();
  }

  public void go() {

    List<Mountain> mountains = new ArrayList<>();
    mountains.add(new Mountain("Longs", 14255));
    mountains.add(new Mountain("Elbert", 14433));
    mountains.add(new Mountain("Maroon", 14156));
    mountains.add(new Mountain("Castle", 14265));
    System.out.println("as entered:\n" + mountains);

    mountains.sort((mount1, mount2) -> mount1.name.compareTo(mount2.name));
    System.out.println("by name:\n" + mountains);

    mountains.sort((mount1, mount2) -> mount2.height - mount1.height);
    System.out.println("by height:\n" + mountains);
  }
}
```

Did you notice that the height list is in DESCENDING sequence? :)

```
class Mountain {
  String name;
  int height;

  Mountain(String name, int height) {
    this.name = name;
    this.height = height;
  }
  public String toString( ) {
    return name + " " + height;
  }
}
```

Output:

```
File  Edit  Window  Help  ThisOne'sForBob
%java SortMountains
as entered:
[Longs 14255, Elbert 14433, Maroon 14156, Castle 14265]
by name:
[Castle 14265, Elbert 14433, Longs 14255, Maroon 14156]
by height:
[Elbert 14433, Castle 14265, Longs 14255, Maroon 14156]
```

Sorting with lambdas

(from "Reverse Engineer")

Sort by BPM ascending

```
songList.sort((one, two) -> one.getBpm() - two.getBpm());
```

Sort by title descending

```
songList.sort((one, two) -> two.getTitle().compareTo(one.getTitle()));
```

Output:

```
File  Edit  Window  Help  IntNotString
%java SharpenLambdas
[50 ways, havana, $10, somersault, cassidy, Cassidy]
[somersault, havana, cassidy, Cassidy, 50 ways, $10]
```

TreeSet exercise

(from "What you MUST know about TreeSet...")

1. What is the result when you compile this code?

   It compiles correctly

2. If it compiles, what is the result when you run the TestTree class?

   It throws an exception:

```
Exception in thread "main" java.lang.ClassCastException:
class Book can-
not be cast to class java.lang.Comparable
     at
java.base/java.util.TreeMap.compare(TreeMap.java:1291)
     at java.base/java.util.TreeMap.put(TreeMap.java:536)
     at java.base/java.util.TreeSet.add(TreeSet.java:255)
     at TestTree.go(TestTree.java:16)
     at TestTree.main(TestTree.java:7)
```

3. If there is a problem (either compile-time or runtime) with this code, how would you fix it?

Make Book implement Comparable, or pass the TreeSet a Comparator

See page 574

BE the Compiler solution

(from "BE the Compiler, advanced")

Compiles?

```
takeAnimals(new ArrayList<Animal>());
```

```
takeDogs(new ArrayList<Animal>());
```

```
takeAnimals(new ArrayList<Dog>());
```

```
takeDogs(new ArrayList<>());
```

If you use the diamond operator here, it works out the type from the method signature. Therefore, the compiler assumes this ArrayList is ArrayList<Dog>.

```
List<Dog> dogs = new ArrayList<>();
takeDogs(dogs);
```

```
takeSomeAnimals(new ArrayList<Dog>());
```

```
takeSomeAnimals(new ArrayList<>());
```

Here the diamond operator means this is ArrayList<Animal>.

```
takeSomeAnimals(new ArrayList<Animal>());
```

```
List<Animal> animals = new ArrayList<>();
takeSomeAnimals(animals);
```

```
List<Object> objects = new ArrayList<>();
takeObjects(objects);
```

This doesn't compile because takeObjects wants an ArrayList, not a List.

```
takeObjects(new ArrayList<Dog>());
```

```
takeObjects(new ArrayList<Object>());
```

Chapter 12. Lambdas and Streams: What, Not How: Lambdas and Streams

What if...you didn't need to tell the computer HOW to do something? Programming involves a lot of telling the computer how to do something: **while** this is true **do** this thing; **for** all these items **if** it looks like this **then** do this; and so on.

We've also seen that we don't have to do everything ourselves. The JDK contains library code, like the Collections API we saw in the previous chapter, that we can use instead of writing everything from scratch. This library code isn't just limited to collections to put data into; there are methods that will do common tasks for us, so we just need to tell them **what** we want and not **how** to do it.

In this chapter we'll look at the Streams API. You'll see how helpful lambda expressions can be when you're using streams, and you'll learn how to use the Streams API to query and transform the data in a collection.

Tell the computer WHAT you want

Imagine you have a list of colors, and you wanted to print out all the colors. You could use a for loop to do this.

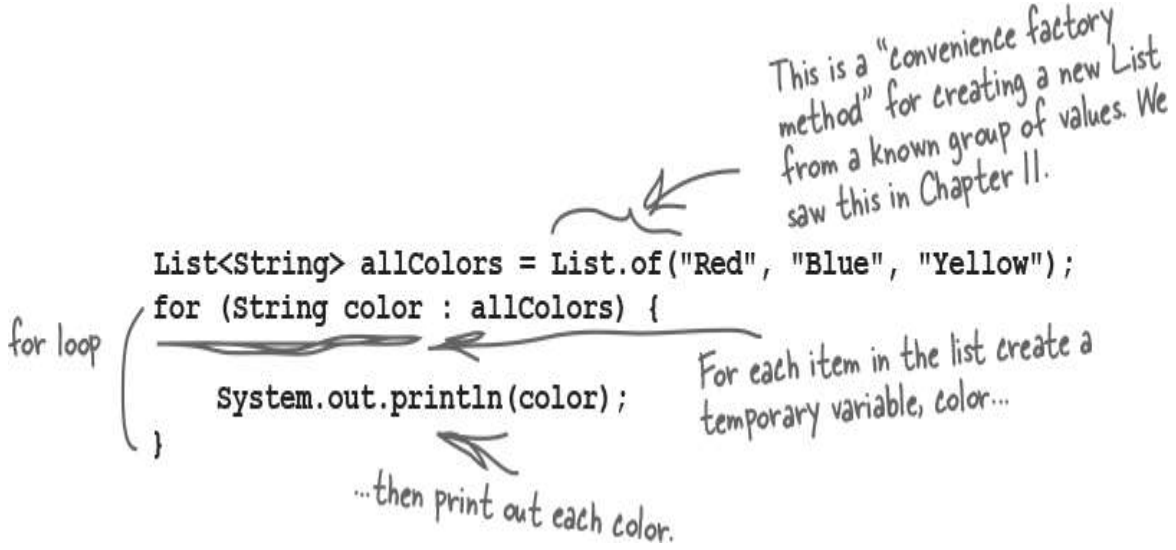

But doing something to every item in a list is a really common thing to want to do. So instead of creating a for loop every time we want to do something "for each" item in the list, we can call the **`forEach`** method from the Iterable interface—remember, List implements Iterable so it has all the methods from the Iterable interface.

```
List<String> allColors = List.of("Red", "Blue", "Yellow");
allColors.forEach(color -> System.out.println(color));
```

Create a temporary variable named color

For each item in the list...

Print out the color

```
File Edit Window Help SingARainbow
%java PrintColors

Red
Blue
Yellow
```

NOTE

The forEach method of a list takes a lambda expression, which we saw for the first time in the previous chapter. This is a way for you to pass behavior ("follow these instructions") into a method, instead of passing an object containing data ("here is an object for you to use").

Fireside Chats

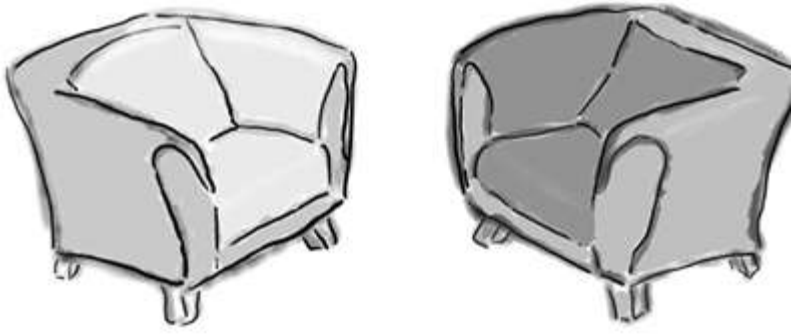

Tonight's Talk: **The for loop and forEach method battle over the question, "Which is better?"**

forEach()	for loop
I am the default! The for loop is so important that loads of programming languages have me. It's one of the first things a programmer learns! If someone needs to loop a set number of times to do something, they're going to reach for their trusty for loop.	
	Pff. Please. You are *so old*; that's why you're in all the programming languages. But things change, languages evolve. There's a better way. A more modern way. Me.
Sure, fashions change. But sometimes it's just a fad; things fall out of fashion too. A classic like me will be easy to read and write forever, even for non-Java programmers.	
	But look how much work developers need to do to write you! They have to control when to start, increment, and stop the loop, as well as writing the code that needs to be run inside the loop. All sorts of things could go wrong! If they use me, they just have to think about what needs to happen to each item, they don't have to worry about how to loop to find each item.
So much work?! Ha! A developer isn't scared of a little syntax to clearly specify what to do and how to do it. At least with me, someone reading my code can clearly see what's going on.	
	Dude, they shouldn't *have* to see what's going on. It says very clearly in my method name exactly what I do—"for each" element I will apply the logic they specify. Job done.
Well I'm faster. Everyone knows that.	
	Well actually, under the covers I'm using a for loop myself, but if something is invented later that's even faster, I can use that, and developers don't have to change a single thing to get faster code. In fact we're out of time now so....
I said you would disappear soon.	

When for loops go wrong

Using **`forEach`** instead of a for loop means a bit less typing, and it's also nice to focus on telling the compiler *what* you want to do and not *how* to do it. There's another advantage to letting the libraries take care of routine code like this—it can mean fewer accidental errors.

Mixed Messages

A short Java program is listed below. One block of the program is missing. We expect the output of the program should be "1 2 3 4 5" but sometimes it's difficult to get a for loop just right.

Your challenge is to **match the candidate block of code** (on the left) **with the output** that you'd see if the block were inserted. Not all the lines of output will be used, and some of the lines of output might be used more than once.

```
class MixForLoops {
  public static void main(String [] args) {
    List<Integer> nums = List.of(1, 2, 3, 4, 5);
    String output = "";
```

Candidate code goes here

```
    System.out.println(output);
  }
}
```

Candidates:

```
for (int i = 1; i < nums.size(); i++)
    output += nums.get(i) + " ";
```

```
for (Integer num : nums)
    output += nums + " ";
```

```
for (int i = 0; i <= nums.length; i++)
    output += nums.get(i) + " ";
```

```
for (int i = 0; i <= nums.size(); i++)
    output += nums.get(i) + " ";
```

Possible output:

```
1 2 3 4 5
```

```
Compiler error
```

```
2 3 4 5
```

```
Exception thrown
```

```
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
```

Match each candidate with one of the possible outputs

→ **Answers in "Mixed Messages".**

Small errors in common code can be hard to spot

The for loops from the previous exercise all look quite similar, and at first glance they all look like they would print out all the values in the List in order. Compiler errors can be easiest to spot, because your IDE or compiler will tell you the code is wrong, and Exceptions (which we'll see in Chapter 13, *Risky Behavior*) can also point to a problem in the code. But it

can be trickier to spot code that produces incorrect output just by looking at the code.

Using a method like **`forEach`** takes care of the "boilerplate," the repetitive and common code like the for loop. Using forEach, passing in only the thing we want to do, can reduce accidental errors in our code.

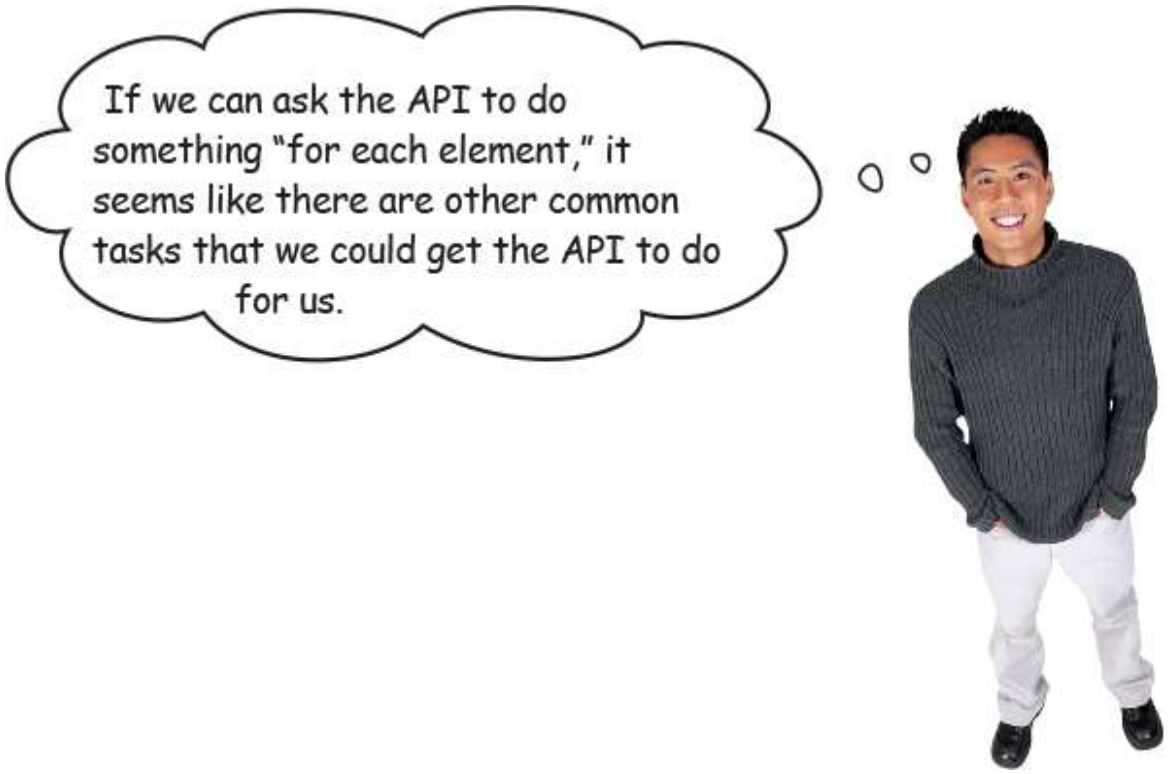

Yes absolutely, in fact Java 8 introduced a whole API just for this.

Java 8 introduced the *Streams API*, a new set of methods that can be used on many classes, including the Collections classes we looked at in the previous chapter.

The Streams API isn't just a bunch of helpful methods, but also a slightly different way of working. It lets us build up a whole set of requirements, a recipe if you like, of what we want to know about our data.

BRAIN BARBELL

Can you think of more examples of the types of things we might want to do to a collection? Are you going to want to ask similar questions about what's inside different types of collections? Can you think of different types of information you might want to output from a collection?

Building blocks of common operations

The ways we search our collections, and the types of information we want to output from those collections, can be quite similar even on different types of collections containing different types of Objects.

Imagine what you might want do to with a Collection: "give me just the items that meet some criteria," "change all the items using these steps," "remove all duplicates," and the example we worked through in the previous chapter: "sort the elements in this way."

It's not too hard to go one step further and assume each of these collection operations could be given a name that tells us what will happen to our collection.

WHO DOES WHAT?

We know this is all new, but have a go at matching each operation name to the description of what it does. Try not to look at the next page as you complete it, as that will give the game away!

filter	Changes the current element in the stream into something else
skip	Sets the maximum number of elements that can be output from this Stream
limit	While a given criteria is true, will not process elements
distinct	Only allows elements that match the given criteria to remain in the Stream
sorted	Will only process elements while the given criteria is true
map	States the result of the stream should be ordered in some way
dropWhile	This is the number of elements at the start of the Stream that will not be processed
takeWhile	Use this to make sure duplicates are removed

→ **Answers in "Who Does What?".**

Introducing the Streams API

The Streams API is a set of operations we can perform on a collection, so when we read these operations in our code, we can understand what we're trying to do with the collection data. If you were successful in the "Who Does What?" exercise on the previous page (the complete answers are at the end of this chapter), you should have seen that the names of the operations describe what they do.

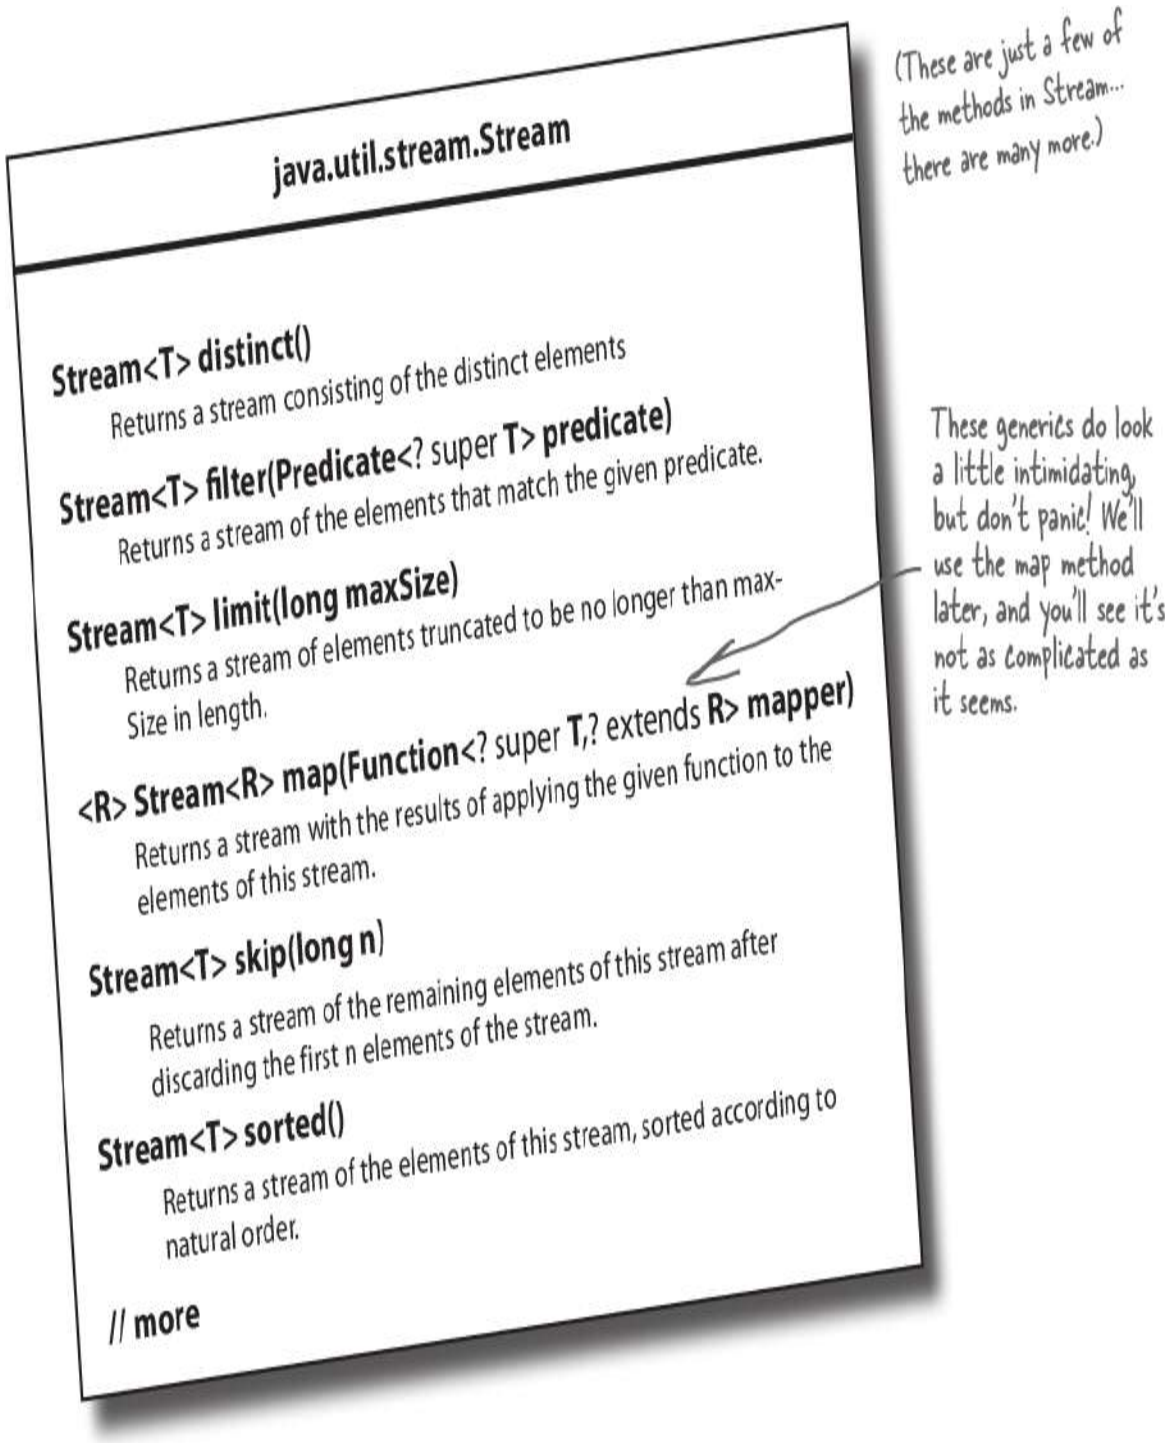

NOTE

Streams, and lambda expressions, were introduced in Java 8.

RELAX

You don't need to worry too much about the generic types on the Stream methods; you'll see that using Streams "just works" the way you'd expect.

In case you are interested:

- **`<T>`** is usually the Type of the object in the stream.
- **`<R>`** is usually the type of the Result of the method.

Getting started with Streams

Before we start going into detail about what the Streams API is, what it does, and how to use it, we're going to give you some very basic tools to start experimenting.

To use the Streams methods, we need a Stream object (obviously). If we have a collection like a List, this doesn't implement Stream. However, the Collection interface has a method, **`stream`**, which returns a Stream object for the Collection.

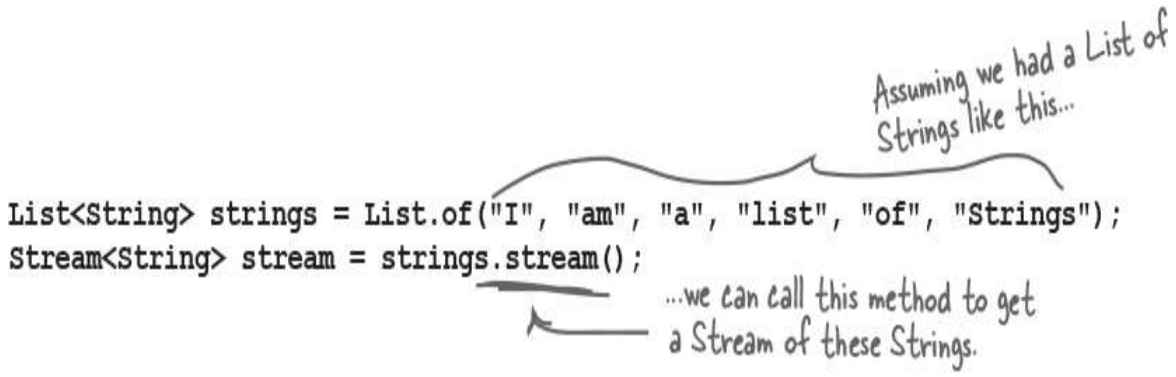

Now we can call the methods of the Streams API. For example, we could use **limit** to say we want a maximum of four elements.

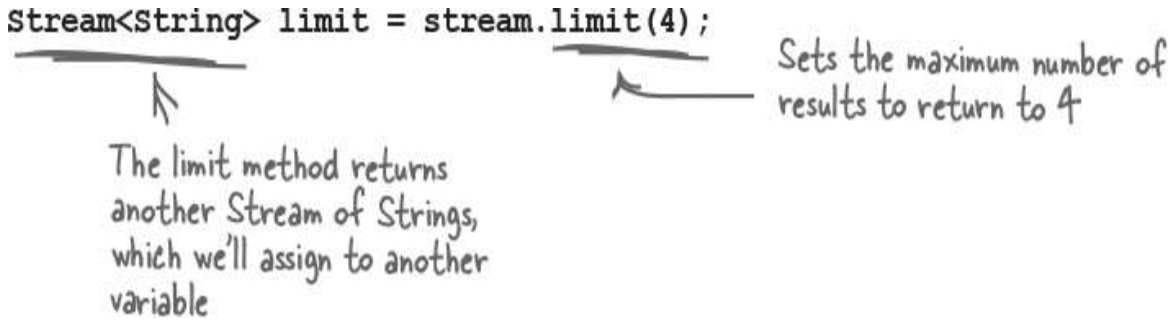

What happens if we try to print out the result of calling limit()?

```
System.out.println("limit = " + limit);
```

Like everything in Java, the stream variables in the example are Objects. But a stream does ***not*** contain the elements in the collection. It's more like the set of instructions for the operations to perform on the Collection data.

NOTE

Stream methods that return another Stream are called Intermediate Operations. These are instructions of things to do, but they don't actually perform the operation on their own.

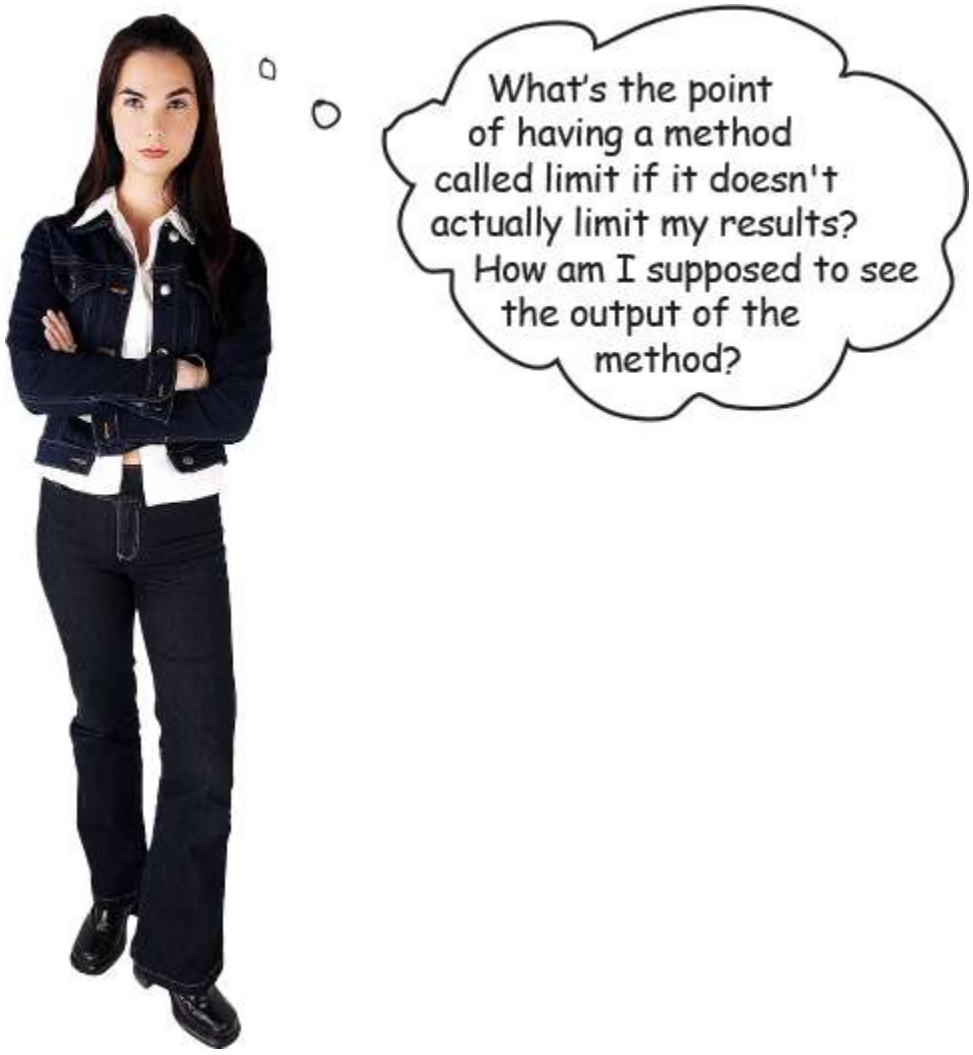

Streams are like recipes: nothing's going to happen until someone actually cooks them

A recipe in a book only tells someone *how* to cook or bake something. Opening the recipe doesn't automatically present you with a freshly baked

chocolate cake. You need to gather the ingredients according to the recipe and follow the instructions exactly to come up with the result you want.

Collections are not ingredients, and a list limited to four entries is not a chocolate cake (sadly). But you do need to call one of the Stream's "do it" methods in order to get the result you want. These "do it" methods are called **Terminal Operations**, and these are the methods that will actually return something to you.

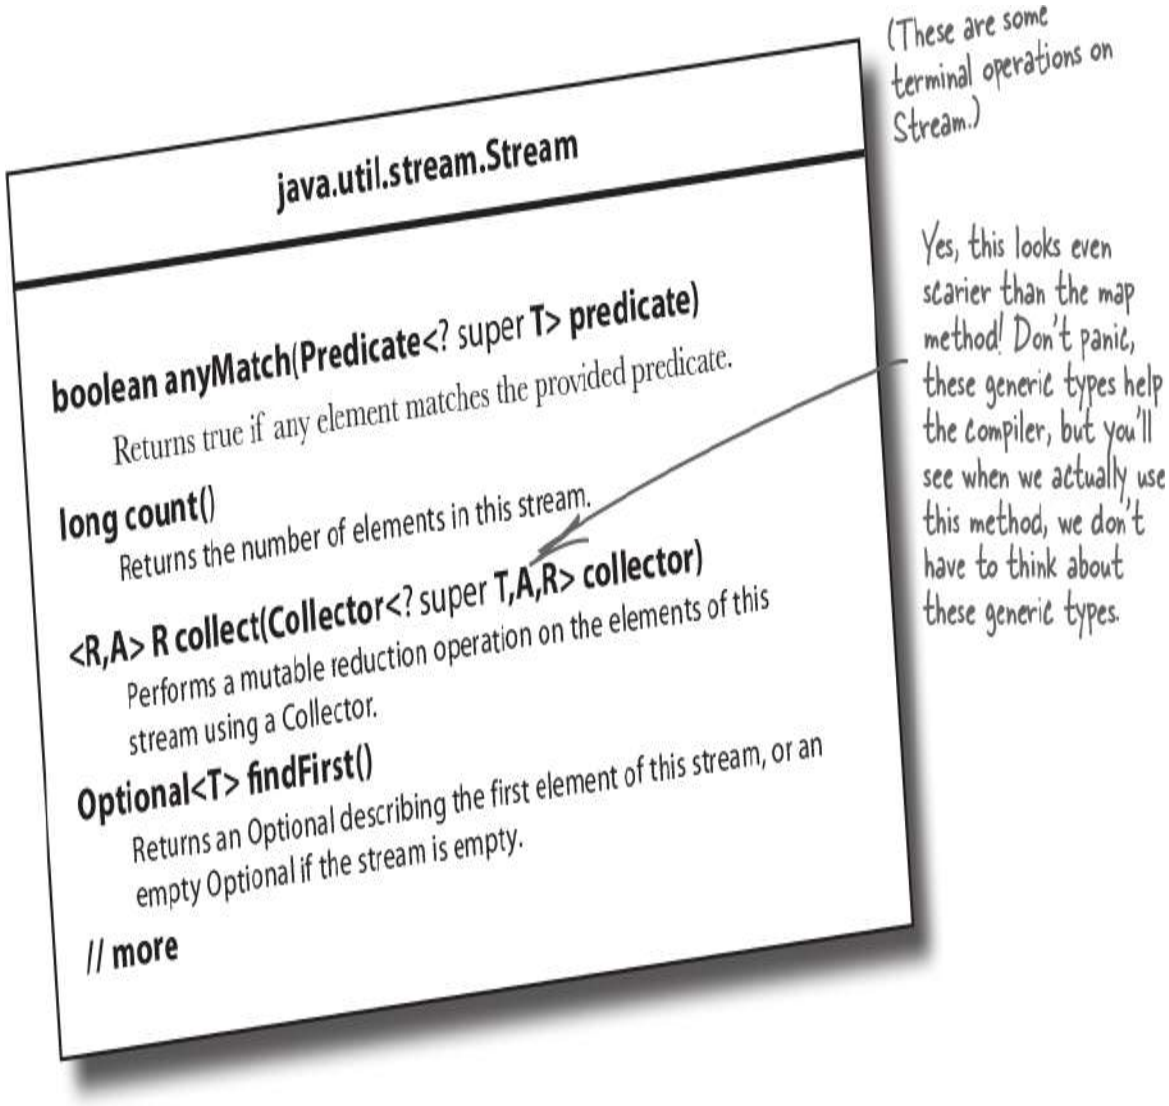

Getting a result from a Stream

Yes, we've thrown a **lot** of new words at you: *streams*; *intermediate operations*; *terminal operations*... And we still haven't told you what streams can do!

To start to get a feel for what we can do with streams, we going to show code for a simple use of the Streams API. After that, we'll step back and learn more about what we're seeing here.

```
List<String> strings = List.of("I", "am", "a", "list", "of", "Strings");

Stream<String> stream = strings.stream();
Stream<String> limit = stream.limit(4);
long result = limit.count();
System.out.println("result = " + result);
```

Call the count terminal operator, and store the output in a variable called result

```
File Edit Window Help WellDuh
%java LimitWithStream

result = 4
```

This works, but it's not very useful. One of the most common things to do with Streams is put the results into another type of collection. The API documentation for this method might seem intimidating with all the generic types, but the simplest case is straightforward:

The stream contained Strings, so the output object will also contain Strings.

Terminal operation that will collect the output into some sort of Object.

This method returns a Collector that will output the results of the stream into a List.

```
List<String> result = limit.collect(Collectors.toList());
```

The toList Collector will output the results as a List.

A helpful class that contains methods to return common Collector implementations.

```
System.out.println("result = " + result);
```

```
File Edit Window Help FinallyAResult
%java LimitWithStream

result = [I, am, a, list]
```

Finally, we have a result that looks like something we would have expected: we had a List of Strings, and we asked to **limit** that list to the first four items and then **collect** those four items into a new List.

RELAX

We'll see collect() and the Collectors in more detail later.

For now, `collect(Collectors.toList)` is a magic incantation to get the output of the stream pipeline in a List.

Stream operations are building blocks

We wrote a lot of code just to output the first four elements in the list. We also introduced a lot of new terminology: streams, intermediate operations, and terminal operations. Let's put all this together: you create a **stream pipeline** from three different types of building blocks.

- ① Get the Stream from a **source** collection.

- ② Call zero or more **intermediate operations** on the Stream.

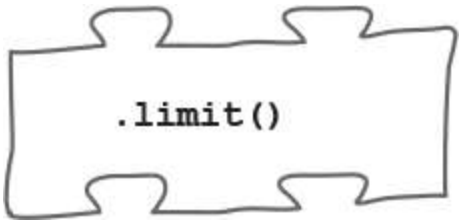

- ③ Output the results with a **terminal operation**.

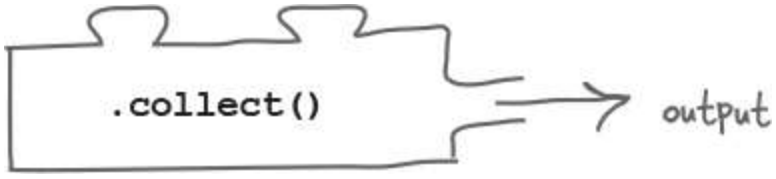

You need at least the ***first*** and ***last*** pieces of the puzzle to use the Streams API. However, you don't need to assign each step to its own variable (which we were doing on the last page). In fact, the operations are designed to be **chained**, so you can call one stage straight after the previous one, without putting each stage in its own variable.

On the last page, all the building blocks for the stream were highlighted (stream, limit, count, collect). We can take these building blocks and rewrite the limit-and-collect operation in this way:

```
List<String> strings = List.of("I", "am", "a", "list", "of", "Strings");
```

```
List<String> result = strings.stream()
                             .limit(4)
                             .collect(Collectors.toList());
```

Get the stream for the collection

Set a limit to return a maximum of 4 results from the stream

Formatted to align each operation directly underneath the one above, to clearly show each stage.

Returns the results of the operation as a List

```
System.out.println("result = " + result);
```

Building blocks can be stacked and combined

Every intermediate operation acts on a Stream and returns a Stream. That means you can stack together as many of these operations as you want, before calling a terminal operation to output the results.

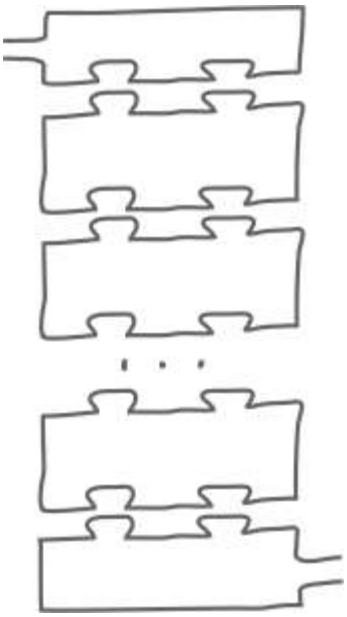

NOTE

The source, the intermediate operation(s), and the terminal operation all combine to form a Stream Pipeline. This pipeline represents a query on the original collection.

This is where the Streams API becomes really useful. In the earlier example, we needed three building blocks (stream, limit, collect) to create a shorter version of the original List, which may seem like a lot of work for a simple operation.

But to do something more complicated, we can stack together multiple operations in a single **stream pipeline**.

For example, we can sort the elements in the stream before we apply the limit:

```
List<String> strings = List.of("I", "am", "a", "list", "of", "Strings");

List<String> result = strings.stream()
                           .sorted()
                           .limit(4)
                           .collect(Collectors.toList());

System.out.println("result = " + result);
```

Sort what's in the stream (not the original collection), using natural order, before limiting the results.

Limit the stream to just four elements.

```
File Edit Window Help InChains
%java ChainedStream

result = [I, Strings, a, am]
```

Natural ordering of Strings will place capitalized Strings ahead of lowercase Strings.

Customizing the building blocks

We can stack together operations to create a more advanced query on our collection. We can also customize what the blocks do too. For example, we customized the **`limit`** method by passing in the maximum number of items to return (four).

If we didn't want to use the natural ordering to sort our Strings, we could define a specific way to sort them. It's possible to set the sort criteria for the **`sorted`** method (remember, we did something similar in the previous chapter when we sorted Lou's song list).

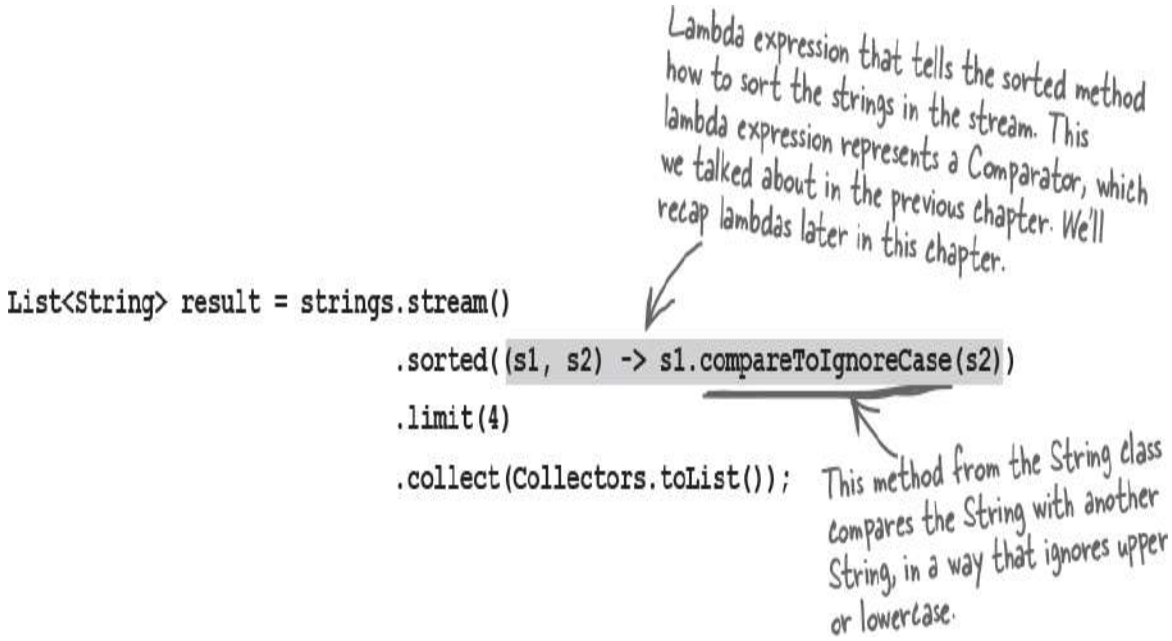


```
File Edit Window Help IgnoreCaps
%java ChainedStream

result = [a, am, I, list]
```

Create complex pipelines block by block

Each new operation you add to the pipeline changes the output from the pipeline. Each operations tell the Streams API *what* it is you want to do.

```
List<String> result = strings.stream()
                             .sorted((s1, s2) -> s1.compareToIgnoreCase(s2))
                             .skip(2)
                             .limit(4)
                             .collect(Collectors.toList());
```

```
File Edit Window Help BoxersDoIt
%java ChainedStream

result = [I, list, of, Strings]
```

The stream skipped over the first two elements.

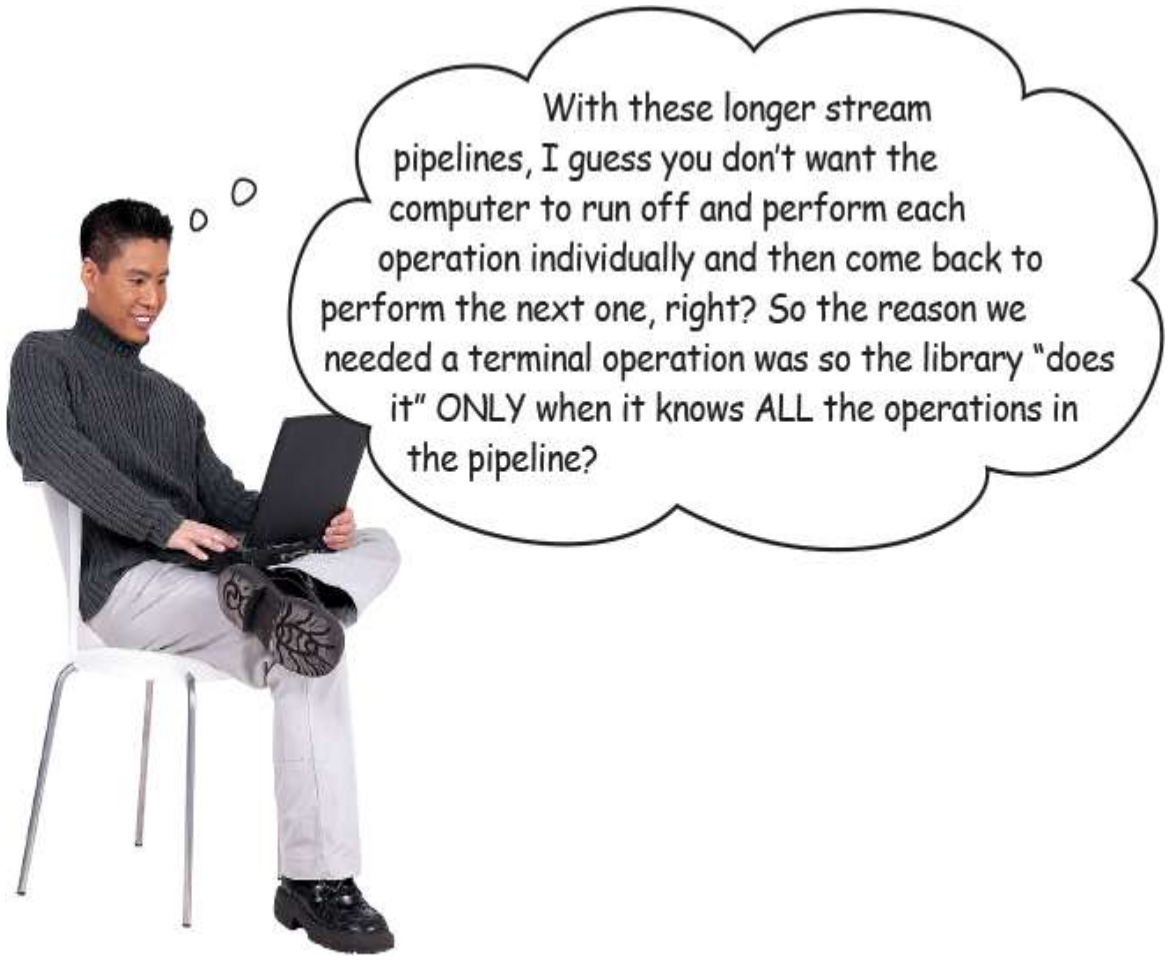

Yes, because Streams are lazy

That doesn't mean they're slow or useless! It means that each intermediate operation is just the instruction about what to do; it doesn't perform the instruction itself. Intermediate operations are *lazily evaluated*.

The terminal operation is responsible for looking at the whole list of instructions, all those intermediate operations in the pipeline, and then running the whole set together in one go. Terminal operations are *eager*; they are run as soon as they're called.

This means that in theory it's possible to run the combination of instructions in the most efficient way. Instead of having to iterate over the original collection for each and every intermediate operation, it may be possible to do all the operations while only going through the data once.

Terminal operations do all the work

Since intermediate operations are *lazy*, it's up to the terminal operation to do everything.

- ❶ Perform all the intermediate operations as efficiently as possible. Ideally, just going through the original data once.
- ❷ Work out the result of the operation, which is defined by the terminal operation itself. For example, this could be a list of values, a single value, or a boolean (true/false).
- ❸ Return the result.

Collecting to a List

Now that we know more about what's going on in a terminal operation, let's take a closer look at the "magic incantation" that returns a list of results.

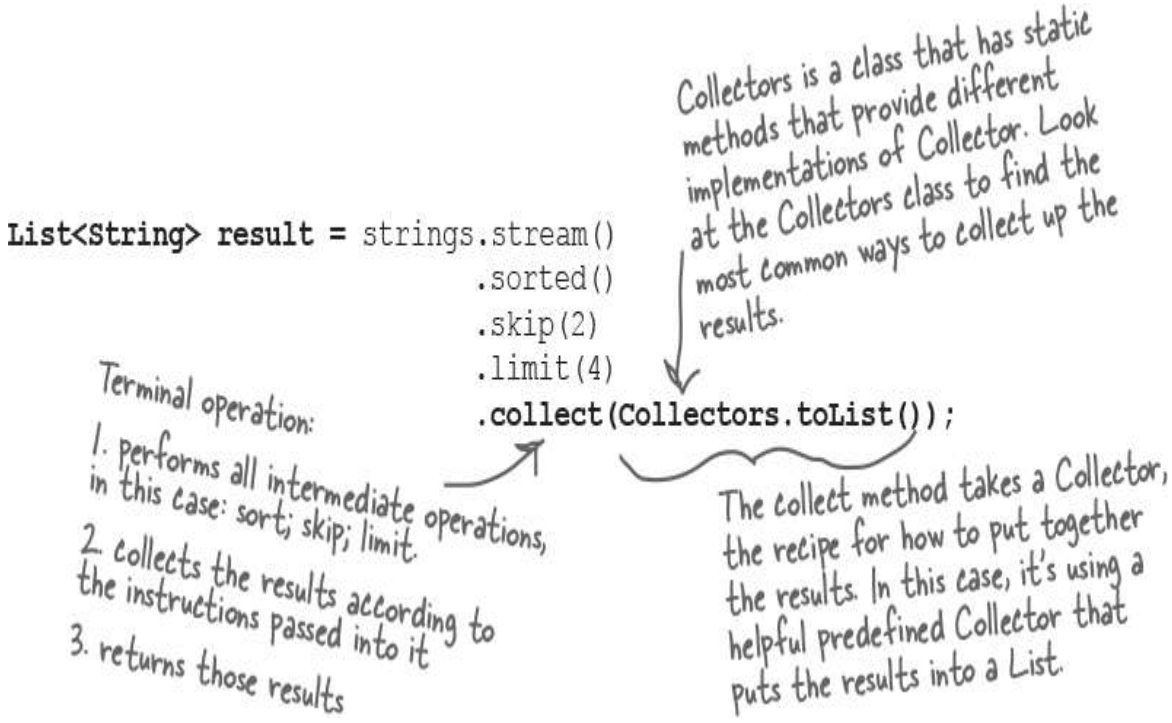

> We will look at more Collectors, and other terminal operations, later in the chapter. For now, you know enough to get going with Streams.

Guidelines for working with streams

Like any puzzle or game, there are rules for getting the stream building blocks to work properly.

- ① **You need at least the first and last pieces to create a stream pipeline.**

  Without the **`stream()`** piece, you don't get a Stream at all, and without the terminal operation, you're not going to get any results.

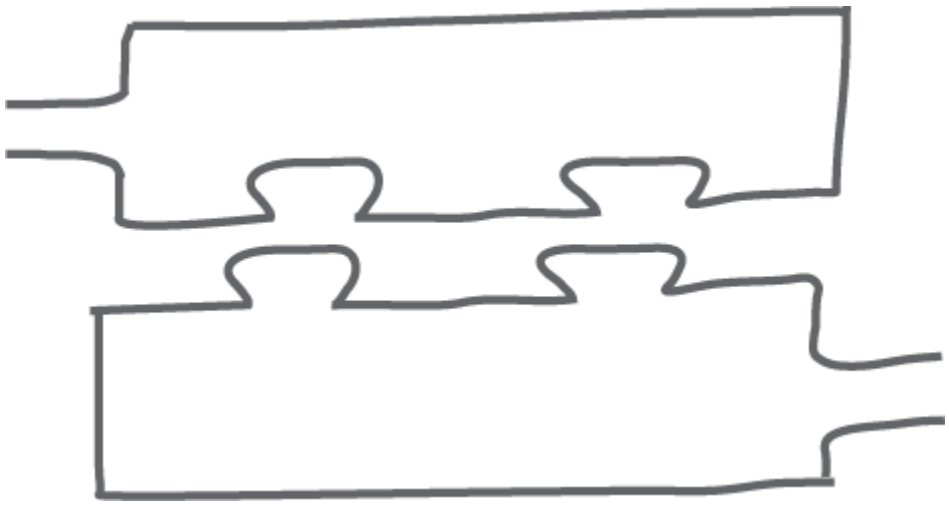

- ② **You can't reuse Streams.**

  It might seem useful to store a Stream representing a query, and reuse it in multiple places, either because the query itself is useful or because you want to build on it and add to it. But once a terminal operation has been called on a stream, you can't reuse any parts of that stream; you have to create a new one. Once a pipeline has executed, that stream is closed and can't be used in another pipeline, even if you stored part of it in a variable for reusing elsewhere. If you try to reuse a stream in any way, you'll get an Exception.

```
Stream<String> limit = strings.stream()
                        .limit(4);
List<String> result = limit.collect(Collectors.toList());
List<String> result2 = limit.collect(Collectors.toList());
```

```
File Edit Window Help ClosingTime
%java LimitWithStream

Exception in thread "main" java.lang.IllegalStateException: stream has
already been operated upon or closed
      at java.base/java.util.stream.AbstractPipeline.
evaluate(AbstractPipeline.java:229)
```

- ③ **You can't change the underlying collection while the stream is operating.**

  If you do this, you'll see strange results, or exceptions. Think about it—if someone asked you a question about what was in a shopping list and then someone else was scribbling on that shopping list at the same time, you'd give confusing answers too.

Correct! Stream operations don't change the original collection.

The Streams API is a way to query a collection, but it **doesn't make changes** to the collection itself. You can use the Streams API to look through that collection and return results based on the contents of the collection, but your original collection will remain the same as it was.

This is actually very helpful. It means you can query collections and output the results from anywhere in your program and know that the data in your original collection is safe; it will not be changed ("mutated") by any of these queries.

You can see this in action by printing out the contents of the original collection after using the Streams API to query it.

```
List<String> strings = List.of("I", "am", "a", "list", "of", "Strings");

Stream<String> limit = strings.stream()
                              .limit(4)
                              .collect(Collectors.toList());
System.out.println("strings = " + strings);
System.out.println("result = " + result);
```

```
File Edit Window Help Untouchable
%java LimitWithStream

strings = [I, am, a, list, of, Strings]
result = [I, am, a, list]
```

No changes to original collection after the stream operations are run.

Only the output object has the results of the query. This is a brand new List.

Exercise

Code Magnets

A Java program is all scrambled up on the fridge. Can you reconstruct the code snippets to make a working Java program that produces the output listed below?

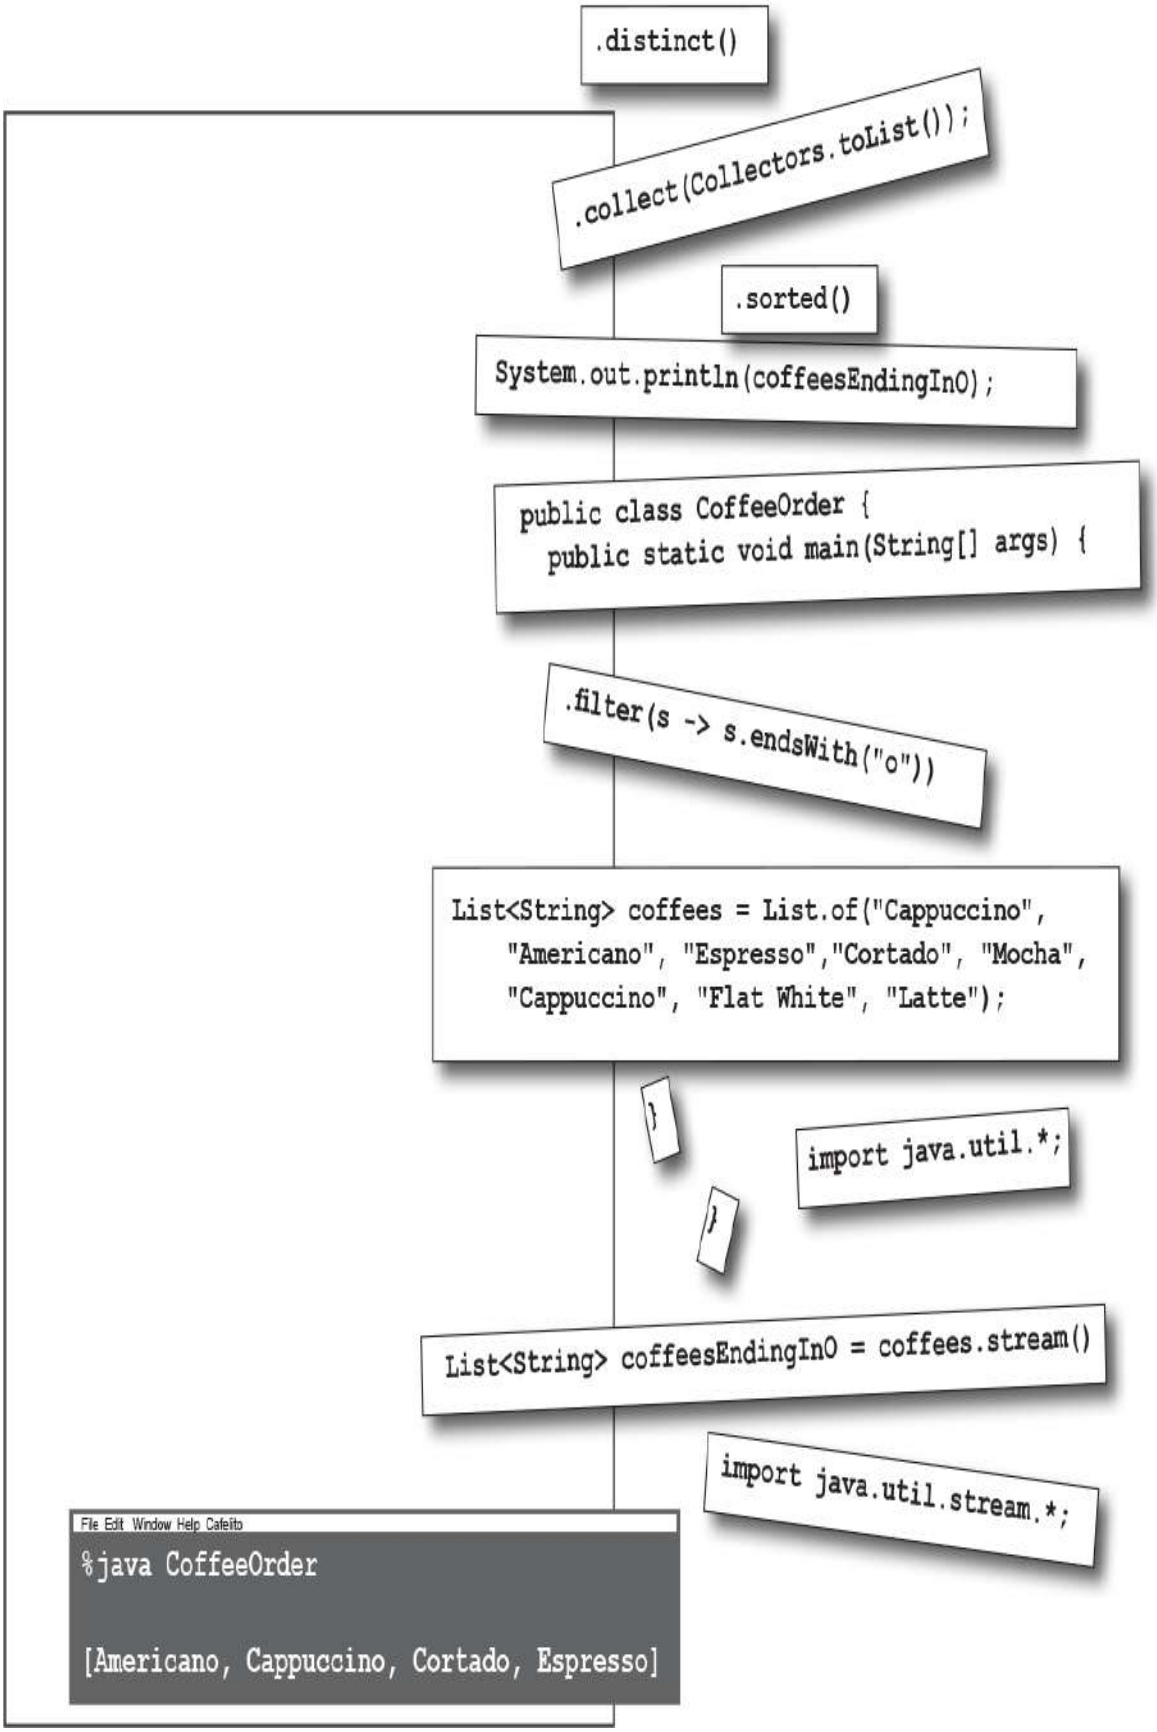
.distinct()
.collect(Collectors.toList());
.sorted()
System.out.println(coffeesEndingIn0);
public class CoffeeOrder {
public static void main(String[] args) {
.filter(s -> s.endsWith("o"))
List<String> coffees = List.of("Cappuccino",
"Americano", "Espresso","Cortado", "Mocha",
"Cappuccino", "Flat White", "Latte");
}
import java.util.*;
}
List<String> coffeesEndingIn0 = coffees.stream()
import java.util.stream.*;
File Edit Window Help Cafeito
%java CoffeeOrder
[Americano, Cappuccino, Cortado, Espresso]

Answers in “Code Magnets”.

THERE ARE NO DUMB QUESTIONS

Q: Is there a limit to the number of intermediate operations I can put in a stream pipeline?

A: No, you can keep chaining these operations as much as you like. But do remember that it's not just computers that have to read and understand this code; it's humans too! If the stream pipeline is really long, it might be too complicated to understand. That's when you might want to split it up and assign sections to variables, so you can give these variables useful names.

Q: Is there any point in having a stream pipeline *without* intermediate operations?

A: Yes, you might find that there's a terminal operation that outputs the original collection in some new shape, which is just right for what you need. Be aware, however, that some of the terminal operations are similar to methods that exist on the collection; you don't always need to use streams. For example, if you're just using `count` on a Stream, you could probably use `size` instead, if your original collection is a List. Similarly, anything that is Iterable (like List) already has a `forEach` method; you don't need to use `stream().forEach()`.

Q: You said not to change the source collection while the stream operation is in progress. How is it possible to change the collection from my code, if my code is doing a stream operation?

A: Great question! It's possible to write programs that run different bits of code at the same time. We'll learn about this in Chapter 17 and Chapter 18, which cover concurrency. To be safe, it's usually best (not just for Streams, but in general) to create collections that can't be changed if you know they don't need to be changed.

Q: How can I output a List that can't be changed from the collect terminal operation?

A: If you're using Java 10 or higher, you can use **`Collectors.toUnmodifiableList`**, instead of using **`Collectors.toList`**, when you call **`collect`**.

Q: Can I get the results of the stream pipeline in a collection that isn't a List?

A: Yes! In the previous chapter we learned that there are a few different kinds of collections for different purposes. The Collectors class has convenience methods for collecting **`toList`**, **`toSet`**, and **`toMap`**, as well as (since Java 10) **`toUnmodifiableList`**, **`toUnmodifiableSet`**, and **`toUnmodifiableMap`**.

BULLET POINTS

- You don't have to write detailed code telling the JVM exactly what to do and how to do it. You can use library methods, including the Streams API, to query collections and output the results.
- Use **`forEach`** on a collection instead of creating a *for* loop. Pass the method a lambda expression of the operation to perform on each element of the collection.
- Create a stream from a collection (a **source**) by calling the **`stream`** method.
- Configure the query you want to run on the collection by calling one or more **intermediate operations** on the stream.
- You won't get any results until you call a terminal operation. There are a number of different **terminal operations** depending upon what you want your query to output.
- To output the results into a new List, use **`collect(Collectors.toList)`** as the terminal operation.
- The combination of the source collection, intermediate operations, and terminal operations is a **stream pipeline**.
- Stream operations do not change the original collection; they are a way to query the collection and return a different Object, which is a result of the query.

Hello Lambda, my (not so) old friend

Lambda expressions have cropped up in the streams examples so far, and you can bet your bottom dollar (or euro, or currency of your choice) that you're going to see more of them before this chapter is done.

Having a better understanding of what lambda expressions are will make it easier to work with the Streams API, so let's take a closer look at lambdas.

Passing behavior around

If you wrote a **`forEach`** method, it might look something like this:

What would you put in the place where "?????" is? It would need to somehow **be** the block of code that's going to go into that nice, blank square.

Then you want someone calling the method to be able to say:

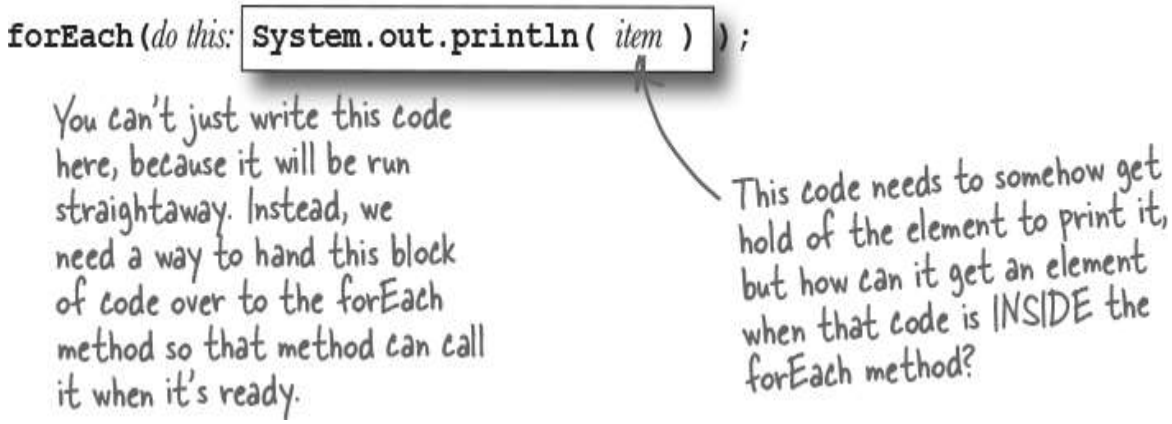

Now, we need to replace the *do this* with some sort of symbol to represent that this code isn't to be run straightaway, but instead needs to be passed into the method. We could use, oh, let's see... "**`->`**" as this symbol.

Then we need a way to say "look, this code is going to need to work on values from elsewhere." We could put the things the code needs on the left side of the "do this" symbol....

```
forEach( item -> System.out.println(item) );
```

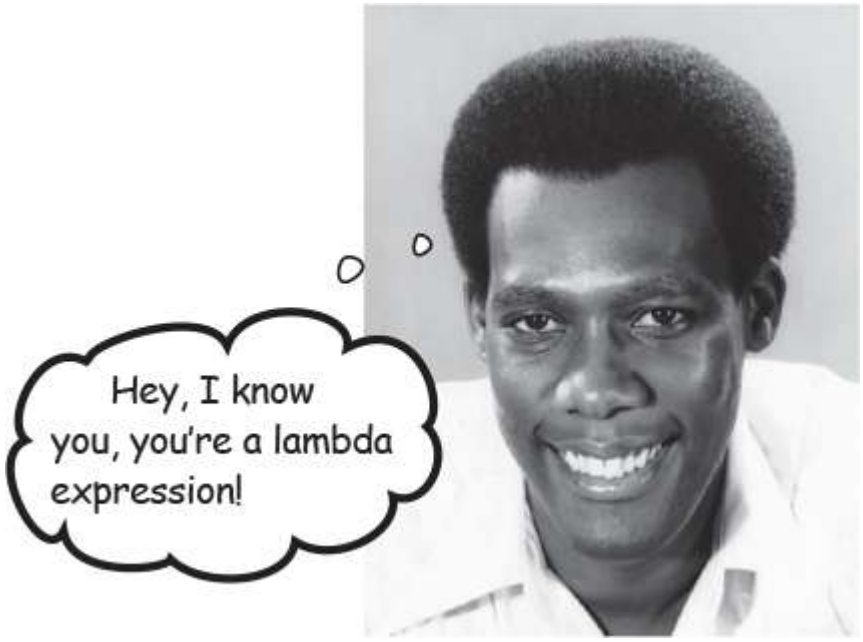

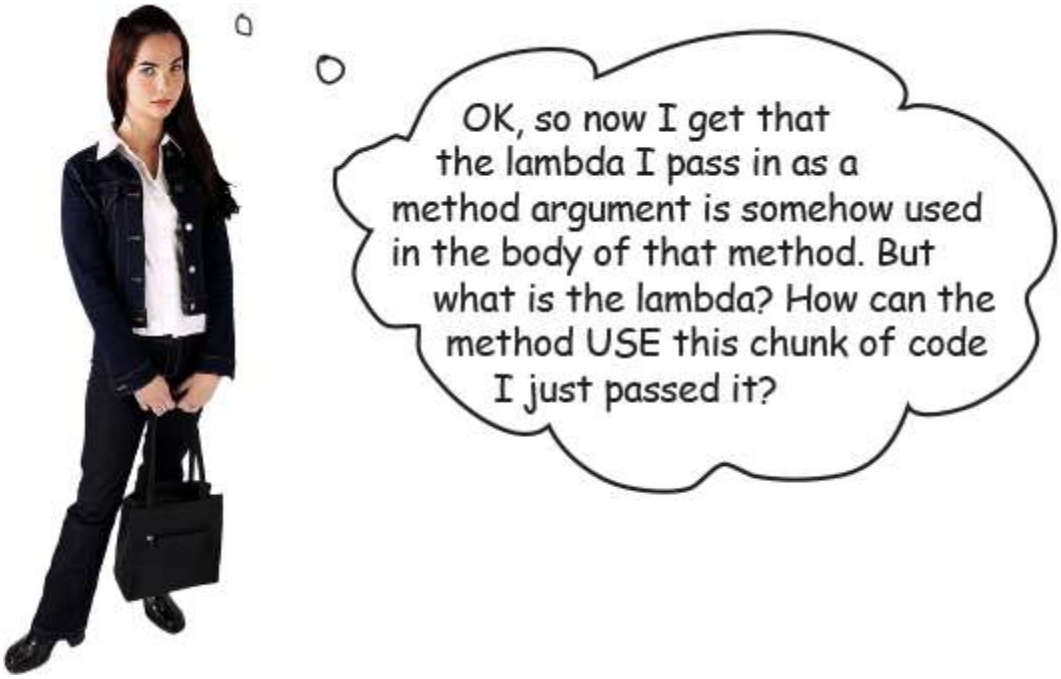

Lambda expressions are objects, and you run them by calling their Single Abstract Method

Remember, everything in Java is an Object (well, except for the primitive types), and lambdas are no exception.

> **NOTE**
>
> **A lambda expression implements a Functional Interface.**

This means the reference to the lambda expression is going to be a Functional Interface. So, if you want your method to accept a lambda expression, you need to have a parameter whose type is a functional interface. That functional interface needs to be the right "shape" for your lambda.

Back to our imaginary **`forEach`** example; our parameter needs to implement a Functional Interface. We also need to call that lambda expression somehow, passing in the list element.

Remember, Functional Interfaces have a Single Abstract Method (SAM). It's this method, whatever its name is, that gets called when we want to run the lambda code.

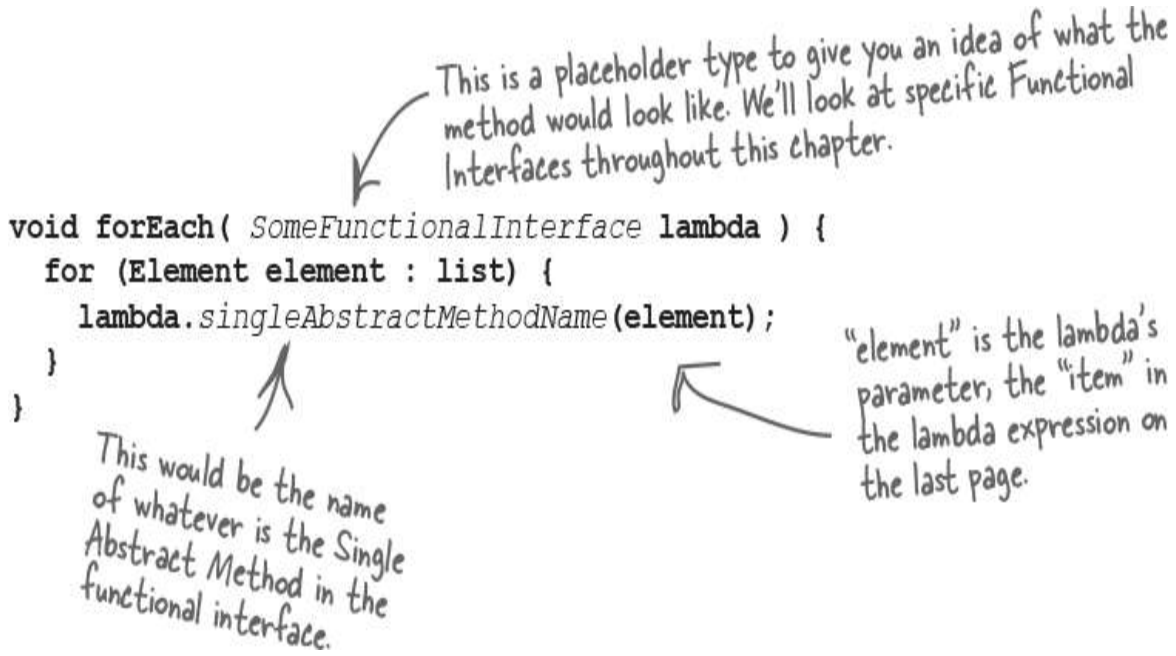

> **NOTE**
>
> **Lambdas aren't magic; they're just classes like everything else.**

The shape of lambda expressions

We've seen two lambda expressions that implement the Comparator interface: the example for sorting Lou's songs in the previous chapter, and the lambda expression we passed into the **`sorted()`** stream operation in "Customizing the building blocks". Look at this last example side by side with the Comparator Functional Interface.

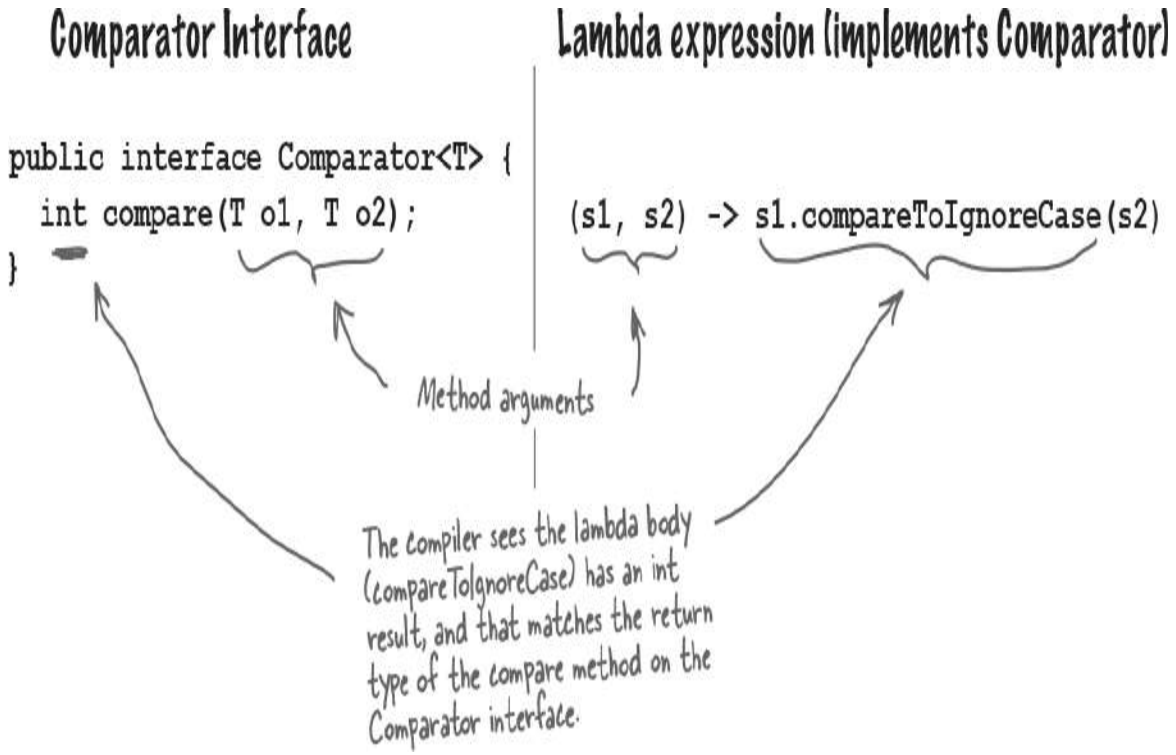

You might be wondering where the **return** keyword is in the lambda expression. The short version is: you don't need it. The longer version is, if the lambda expression is a single line, and if the functional interface's method signature requires a returned value, the compiler just assumes that your one line of code will generate the value that is to be returned.

The lambda expression can also be written like this, if you want to add all the parts a lambda expression can have:

```
(String s1, String s2) -> {
 return s1.compareToIgnoreCase(s2);
}
```

Anatomy of a lambda expression

If you take a closer look at this expanded version of the lambda expression that implements `Comparator<String>`, you'll see it's not so different from a standard Java method.

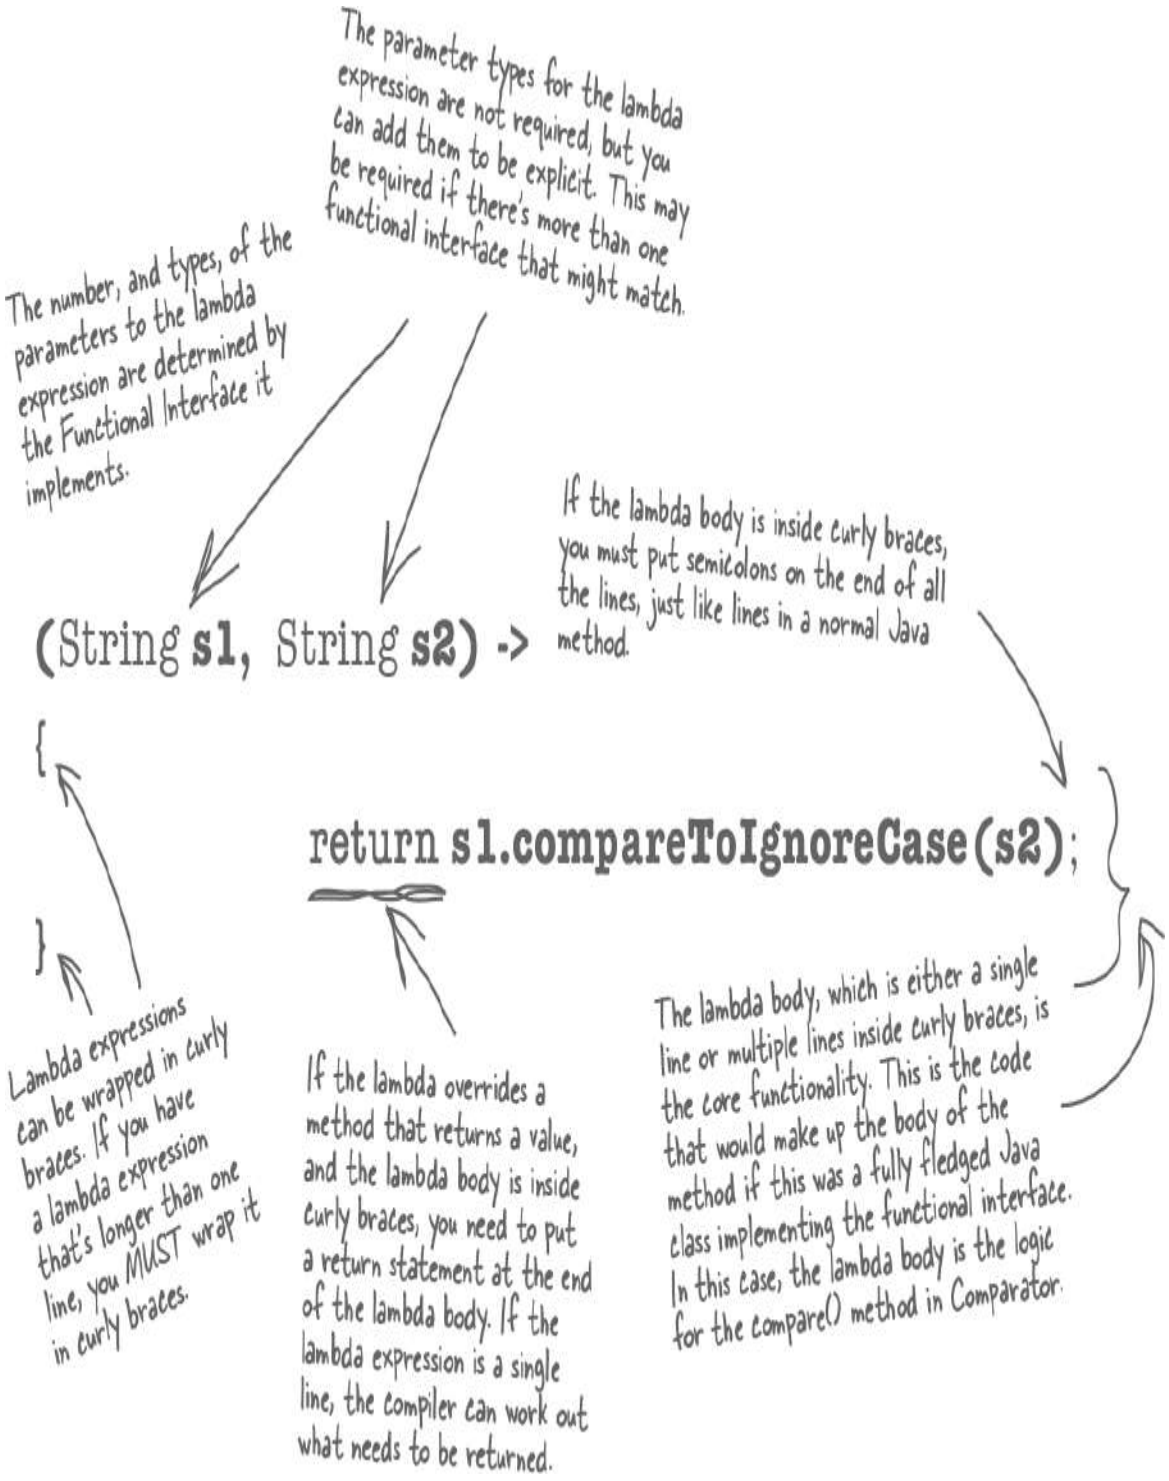

The shape of the lambda (its parameters, return type, and what it can reasonably be expected to do) is dictated by the Functional Interface it implements.

Variety is the spice of life

Lambda expressions can come in all shapes and sizes, and still conform to the same basic rules that we've seen.

A lambda might have more than one line

A lambda expression is effectively a method, and can have as many lines as any other method. Multiline lambda expressions ***must*** be inside curly braces. Then, like any other method code, every line ***must*** end in a semicolon, and if the method is supposed to return something, the lambda body ***must*** include the word "return" like any normal method.

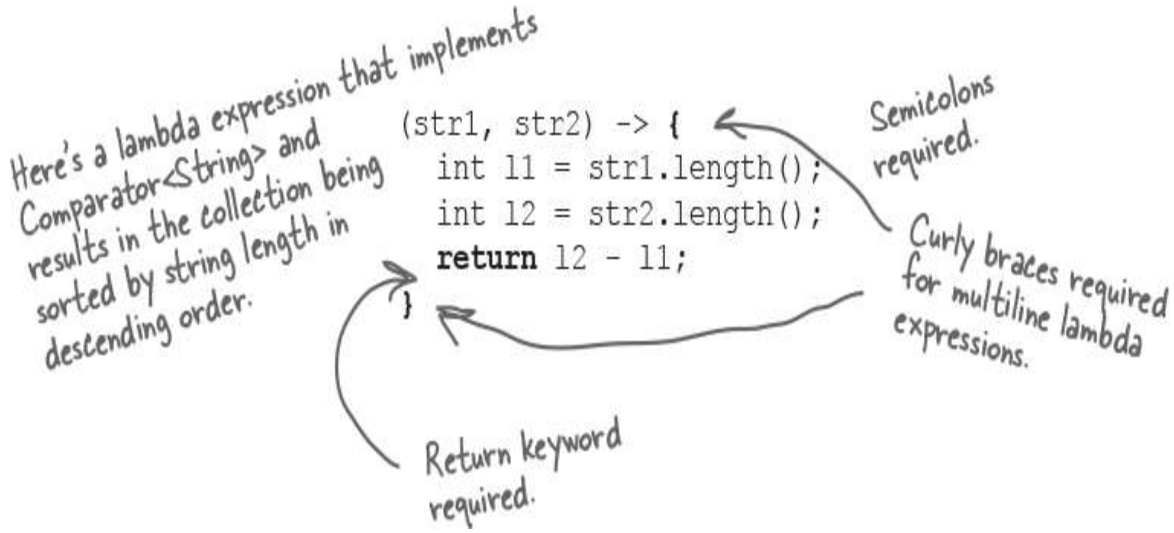

Single-line lambdas don't need ceremony

If your lambda expression is a single line, it makes it much easier for the compiler to guess what's going on. Therefore, we can leave out a lot of the "boilerplate" syntax. If we shrink the lambda expression from the last example into a single line, it looks like this:

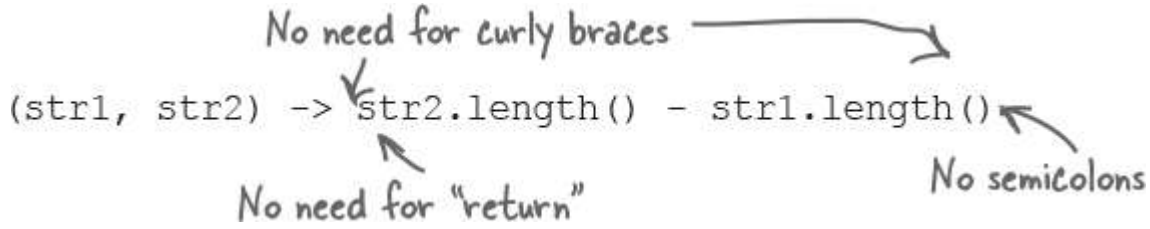

This is the same Functional Interface (Comparator) and performs the same operation. Whether you use multiline lambdas or single-line lambdas is completely up to you. It will probably depend upon how complicated the logic in the lambda expression is, and how easy you think it is to read—sometimes longer code can be more descriptive.

Later, we'll see another approach for handling long lambda expressions.

A lambda might not return anything

The Functional Interface's method might be declared void; i.e., it doesn't return anything. In these cases, the code inside the lambda is simply run, and you don't need to return any values from the lambda body.

This is the case for lambda expressions in a **`forEach`** method.

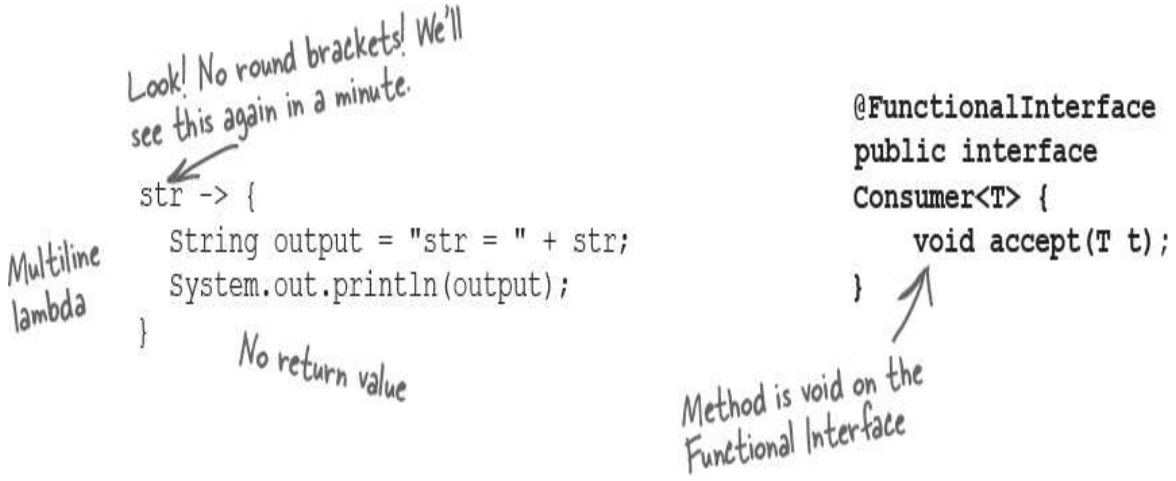

A lambda might have zero, one, or many parameters

The number of parameters the lambda expression needs is dependent upon the number of parameters the Functional Interface's method takes. The parameter types (e.g., the name "String") are not usually required, but you can add them if you think it makes it easier to understand the code. You may need to add the types if the compiler can't automatically work out which Functional Interface your lambda implements.

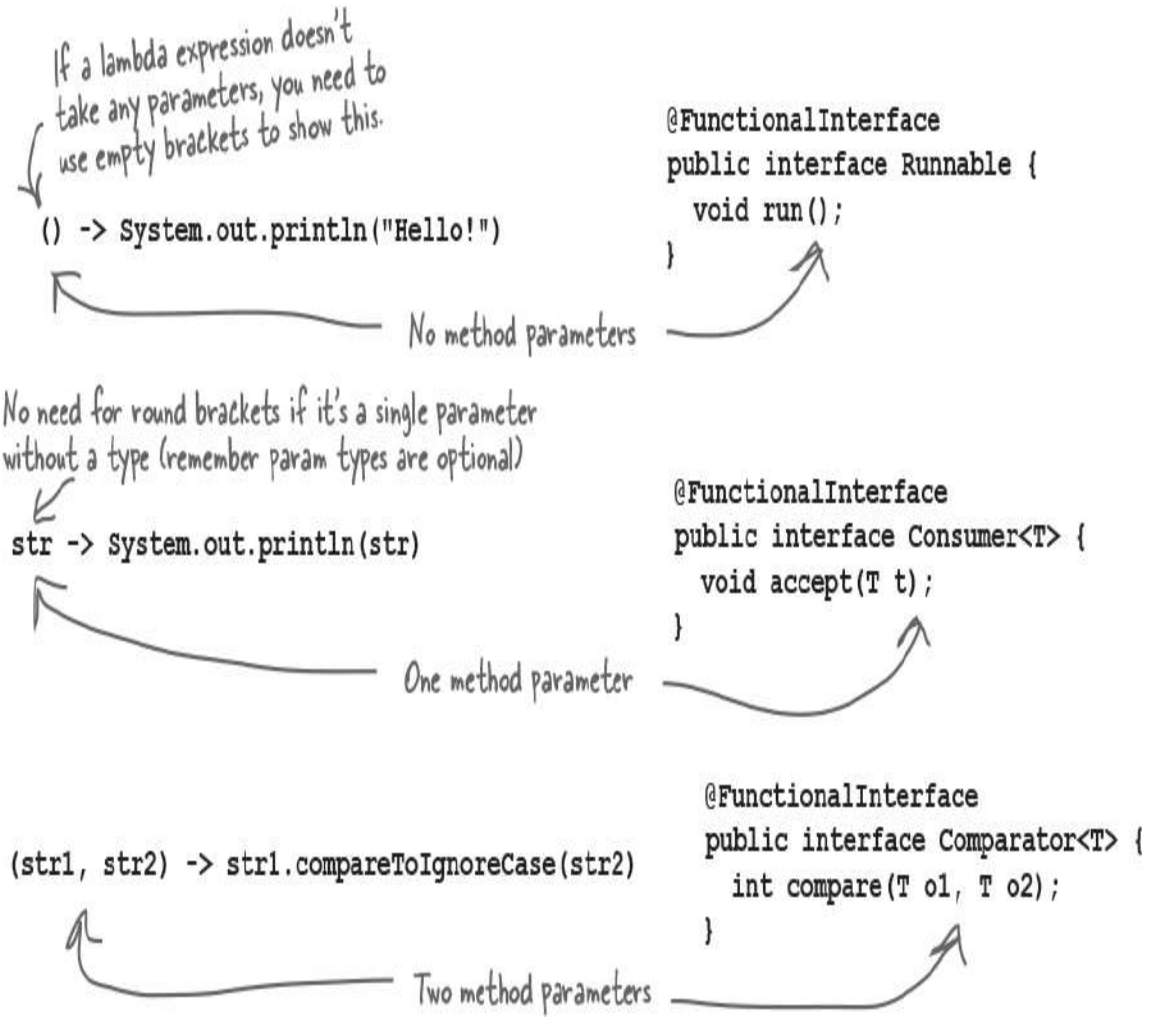

How can I tell if a method takes a lambda?

By now you've seen that lambda expressions are implementations of a functional interface—that is, an Interface with a Single Abstract Method. That means the **type** of a lambda expression is this interface.

Go ahead and create a lambda expression. Instead of passing this into some method, as we have been doing so far, assign it to a variable. You'll see it can be treated just like any other Object in Java, because everything in Java is an Object. The variable's type is the Functional Interface.

```
Comparator<String> comparator = (s1, s2) ->
s1.compareToIgnoreCase(s2);
```

```
Runnable runnable = () -> System.out.println("Hello!");

Consumer<String> consumer = str -> System.out.println(str);
```

How does this help us see if a method takes a lambda expression? Well, the method's parameter type will be a Functional Interface. Take a look at some examples from the Streams API:

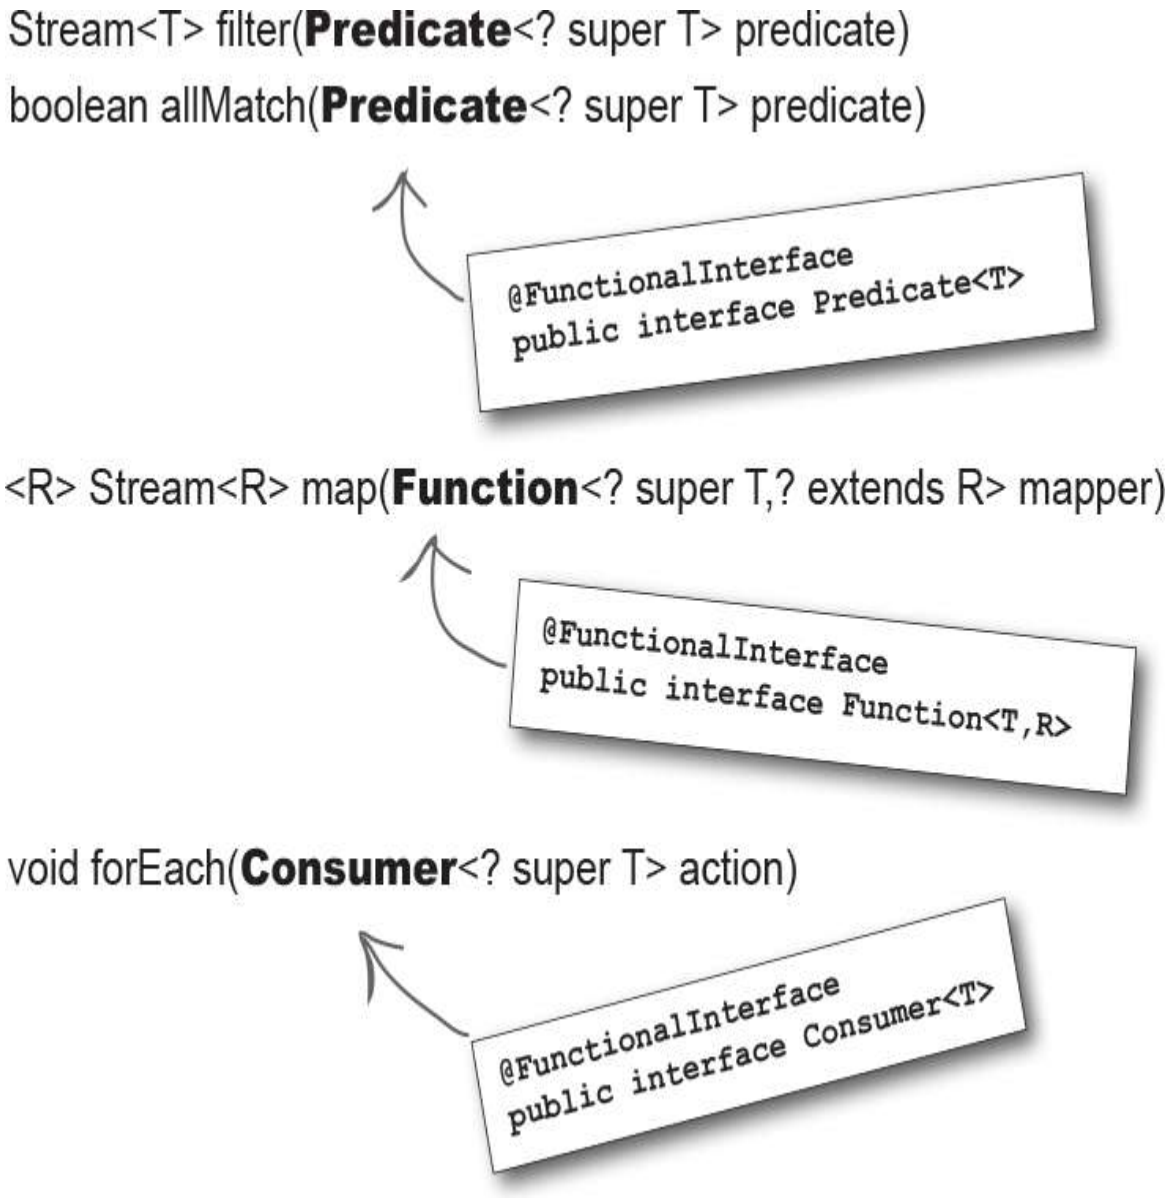

Exercise

BE the Compiler, advanced

Your job is to play compiler and determine which of these statements would compile. But some of this code wasn't covered in the chapter, so you need to work out the answers based on what you DID learn, applying the "rules" to these new situations.

The signatures of the functional interfaces are on the right, for your convenience.

```
public interface Runnable {
  void run();
}
```

```
public interface Consumer<T> {
    void accept(T t);
}
```

```
public interface Supplier<T> {
    T get();
}
```

```
public interface Function<T, R> {
    R apply(T t);
}
```

Check the box if the statement would compile.

❑	`Runnable r = () -> System.out.println("Hi!");`
❑	`Consumer<String> c = s -> System.out.println(s);`
❑	`Supplier<String> s = () -> System.out.println("Some string");`
❑	`Consumer<String> c = (s1, s2) -> System.out.println (s1 + s2);`
❑	`Runnable r = (String str) -> System.out.println(st r);`
❑	`Function<String, Integer> f = s -> s.length();`
❑	`Supplier<String> s = () -> "Some string";`
❑	`Consumer<String> c = s -> "String" + s;`
❑	`Function<String, Integer> f = (int i) -> "i = " + i;`
❑	`Supplier<String> s = s -> "Some string: " + s;`
❑	`Function<String, Integer> f = (String s) -> s.length ();`

→ **Answers in "BE the Compiler".**

Spotting Functional Interfaces

So far we've seen Functional Interfaces that are marked with a `@FunctionalInterface` *annotation* (we'll cover annotations in Appendix B), which conveniently tells us this interface has a Single Abstract Method and can be implemented with a lambda expression.

Not all functional interfaces are tagged this way, particularly in older code, so it's useful to understand how to spot a functional interface for yourself.

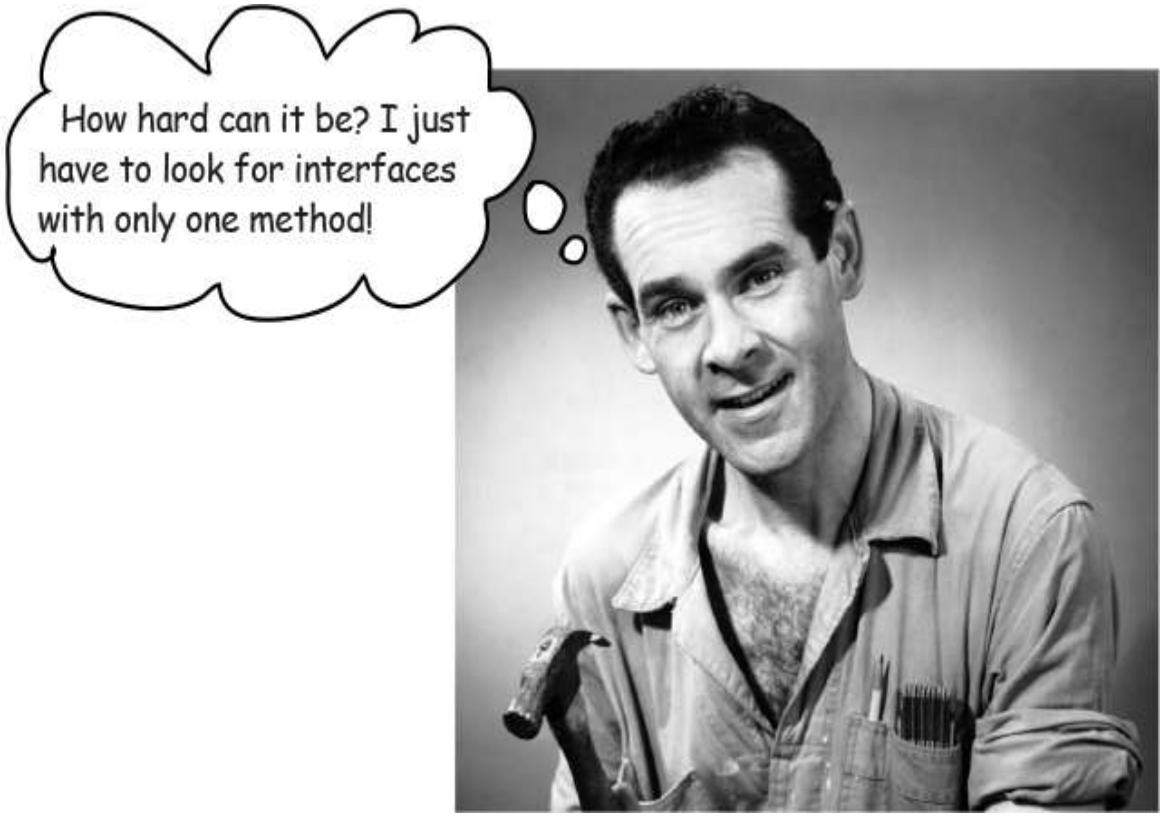

Not so fast!

Originally, the only kind of methods allowed in interfaces were **abstract** methods, methods that need to be *overridden* by any class that *implements* this interface. But as of Java 8, interfaces can also contain **`default`** and **`static`** methods.

You saw static methods in Chapter 10, *Numbers Matter*, and you'll see them later in this chapter too. These are methods that don't need to belong to an instance, and are often used as helper methods.

Default methods are slightly different. Remember abstract classes from Chapter 8, *Serious Polymorphism*? They had abstract methods that need to be overridden, and standard methods with a body. On an interface, a default method works a bit like a standard method in an abstract class—they have a body, and will be inherited by subclasses.

Both default and static methods have a method body, with defined behavior. With interfaces, any method that is not defined as **`default`** or **`static`** is an abstract method that *must* be overridden.

Functional interfaces in the wild

Now that we know interfaces can have **non**-abstract methods, we can see there's a bit more of a trick to identifying interfaces with just one abstract method. Take a look at our old friend, Comparator. It has a **lot** of methods! And yet it's still a SAM-type; it has only one Single Abstract Method. It's a Functional Interface we can implement as a lambda expression.

Here it is! This is our Single Abstract Method.

Don't be misled by this method! It's not static or default, but it's not actually abstract either—it's inherited from Object. It does have a method body, defined by the Object class.

Modifier and Type	Method
int	compare(T o1, T o2)
static <T,U extends Comparable<? super U>> Comparator<T>	comparing(Function<? super T,? extends U> keyExtractor)
static <T,U> Comparator<T>	comparing(Function<? super T,? extends U> keyExtractor, Comparator<? super U> keyComparator)
static <T> Comparator<T>	comparingDouble(ToDoubleFunction<? super T> keyExtractor)
static <T> Comparator<T>	comparingInt(ToIntFunction<? super T> keyExtractor)
static <T> Comparator<T>	comparingLong(ToLongFunction<? super T> keyExtractor)
boolean	equals(Object obj)
static <T extends Comparable<? super T>> Comparator<T>	naturalOrder()
static <T> Comparator<T>	nullsFirst(Comparator<? super T> comparator)
static <T> Comparator<T>	nullsLast(Comparator<? super T> comparator)
default Comparator<T>	reversed()

SHARPEN YOUR PENCIL

Which of these interfaces has a Single Abstract Method and can therefore be implemented as a lambda expression?

BiPredicate

Modifier and Type	Method
default BiPredicate<T,U>	and(BiPredicate<? super T,? super U> other)
default BiPredicate<T,U>	negate()
default BiPredicate<T,U>	or(BiPredicate<? super T,? super U> other)
boolean	test(T t, U u)

ActionListener

Modifier and Type	Method
void	actionPerformed(ActionEvent e)

Iterator

Modifier and Type	Method
default void	forEachRemaining(Consumer<? super E> action)
boolean	hasNext()
E	next()
default void	remove()

Function

Modifier and Type	Method
default <V> Function<T,V>	andThen(Function<? super R,? extends V> after)
R	apply(T t)
default <V> Function<V,R>	compose(Function<? super V,? extends T> before)
static <T> Function<T,T>	identity()

SocketOption

Modifier and Type	Method
String	name()
Class<T>	type()

→ **Answers in "Sharpen your pencil".**

Lou's back!

Lou's been running his new jukebox management software from the last chapter for some time now, and he wants to learn so much more about the songs played on the diner's jukebox. Now that he has the data, he wants to slice-and-dice it and put it together in a new shape, just as he does with the ingredients of his famous Special Omelette!

He's thinking there are all kinds of information he could learn about the songs that are played, like:

- What are the top five most-played songs?
- What sort of genres are played?
- Are there any songs with the same name by different artists?

We *could* find these things out writing a for loop to look at our song data, performing checks using if statements, and perhaps putting songs, titles, or artists into different collections to find the answers to these questions.

> **NOTE**
>
> **But now that we know about the Streams API, we know there's an easier way....**

The code on the next page is your **mock** code; calling `Songs.getSongs()` will give you a List of Song objects that you can assume looks just like the real data from Lou's jukebox.

Exercise

Type in the Ready-Bake Code on the next page, including filling out the rest of the Song class. When you've done that, create a main method that prints out all the songs.

What do you expect the output to look like?

Ready-Bake Code

Here's an updated "mock" method. It will return some test data that we can use on to try out some of the reports Lou wants to create for the jukebox system. There's also an updated Song class.

```
class Songs {
 public List<Song> getSongs() {
   return List.of(
     new Song("$10", "Hitchhiker", "Electronic", 2016, 183),
     new Song("Havana", "Camila Cabello", "R&B", 2017, 324),
     new Song("Cassidy", "Grateful Dead", "Rock", 1972, 123),
     new Song("50 ways", "Paul Simon", "Soft Rock", 1975, 199),
     new Song("Hurt", "Nine Inch Nails", "Industrial Rock", 1995,
257),
     new Song("Silence", "Delerium", "Electronic", 1999, 134),
     new Song("Hurt", "Johnny Cash", "Soft Rock", 2002, 392),
     new Song("Watercolour", "Pendulum", "Electronic", 2010,
155),
     new Song("The Outsider", "A Perfect Circle", "Alternative
Rock", 2004, 312),
     new Song("With a Little Help from My Friends", "The
Beatles", "Rock", 1967, 168),
     new Song("Come Together", "The Beatles", "Blues rock", 1968,
173),
     new Song("Come Together", "Ike & Tina Turner", "Rock", 1970,
165),
     new Song("With a Little Help from My Friends", "Joe Cocker",
"Rock", 1968, 46),
     new Song("Immigrant Song", "Karen O", "Industrial Rock",
2011, 12),
     new Song("Breathe", "The Prodigy", "Electronic", 1996, 337),
     new Song("What's Going On", "Gaye", "R&B", 1971, 420),
     new Song("Hallucinate", "Dua Lipa", "Pop", 2020, 75),
     new Song("Walk Me Home", "P!nk", "Pop", 2019, 459),
     new Song("I am not a woman, I'm a god", "Halsey",
"Alternative Rock", 2021, 384),
```

```
    new Song("Pasos de cero", "Pablo Alborán", "Latin", 2014,
117),
    new Song("Smooth", "Santana", "Latin", 1999, 244),
    new Song("Immigrant song", "Led Zeppelin", "Rock", 1970,
484));
  }
}
public class Song {
  private final String title;
  private final String artist;
  private final String genre;
  private final int year;
  private final int timesPlayed;
  // Practice for you! Create a constructor, all the getters and a toString()
}
```

Lou's Challenge #1: Find all the "rock" songs

The data in the updated song list contains the *genre* of the song. Lou's noticed that the diner's clientele seem to prefer variations on rock music, and he wants to see a list of all the songs that fall under some genre of "rock."

This is the Streams chapter, so clearly the solution is going to involve the Streams API. Remember, there are three types of pieces we can put together to form a solution.

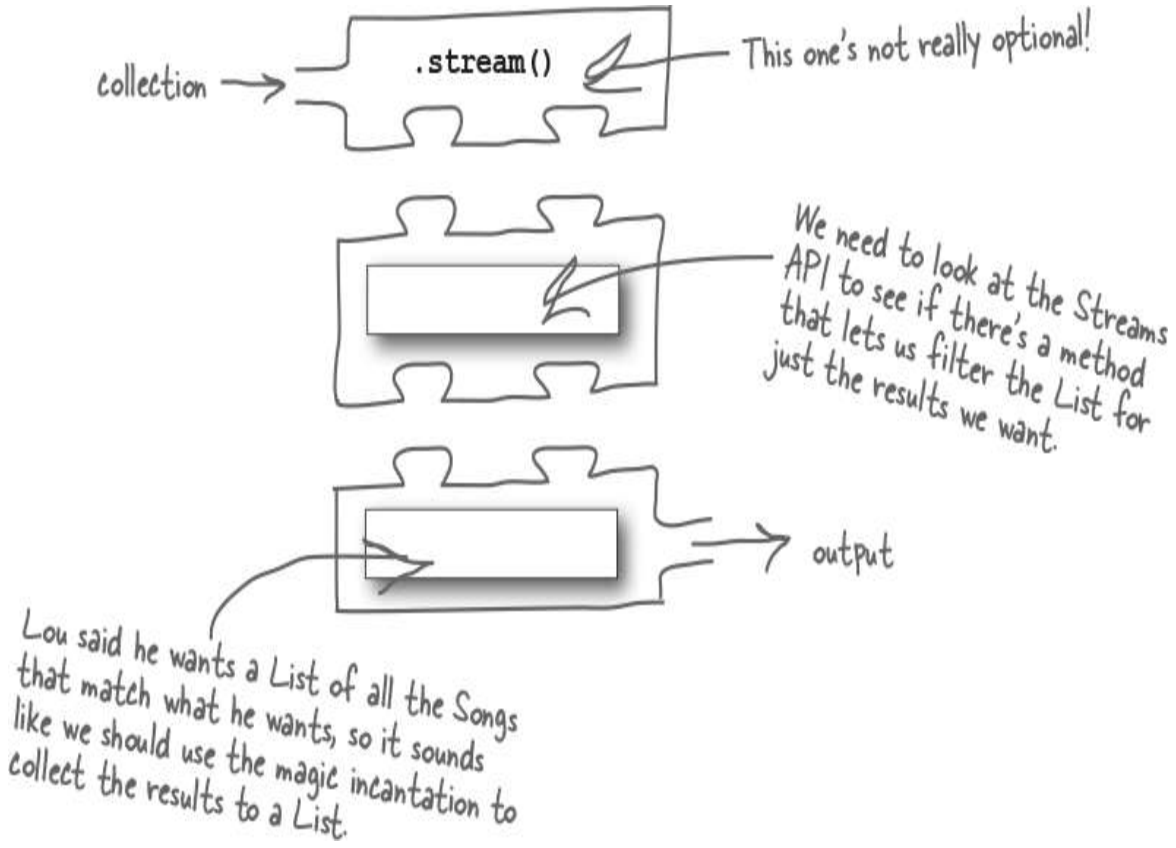

Fortunately, there are hints about how to create a Streams API call based on the requirements Lou gave us: he wants to **`filter`** for just the Songs with a particular genre, and he wants to **`collect`** them into a new List.

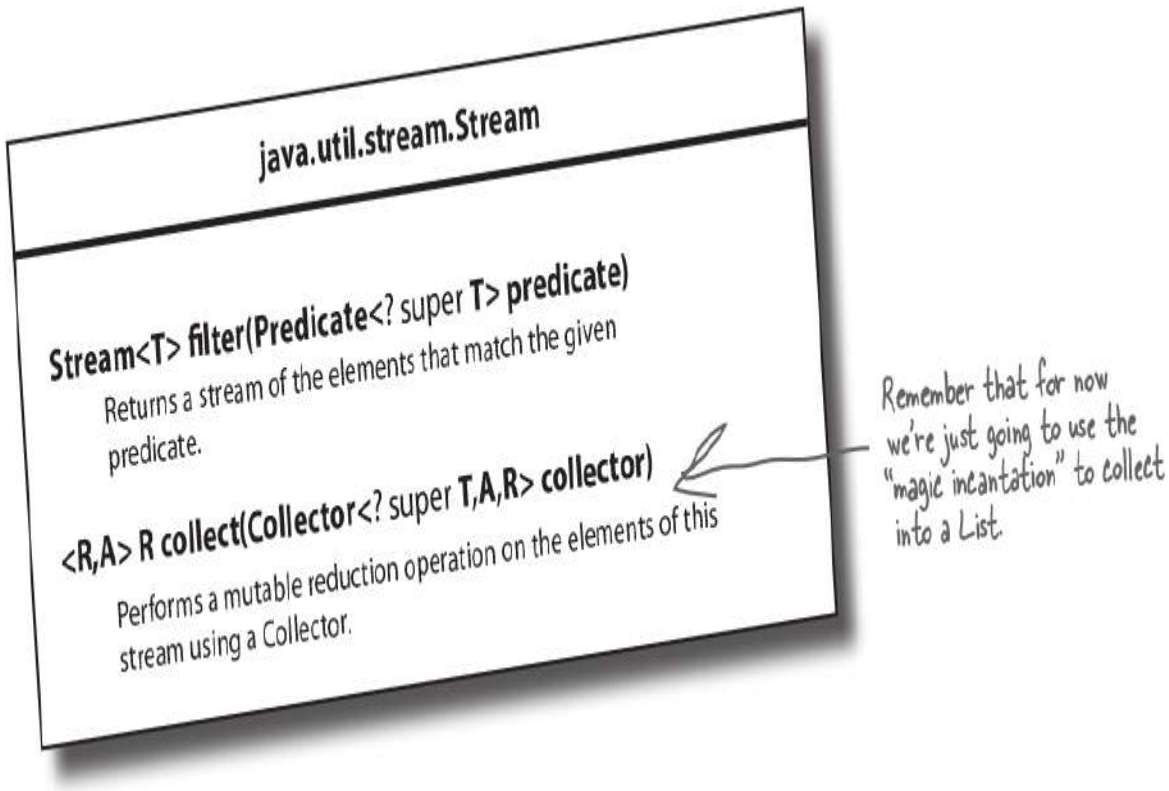

Filter a stream to keep certain elements

Let's see how a filter operation might work on the list of songs.

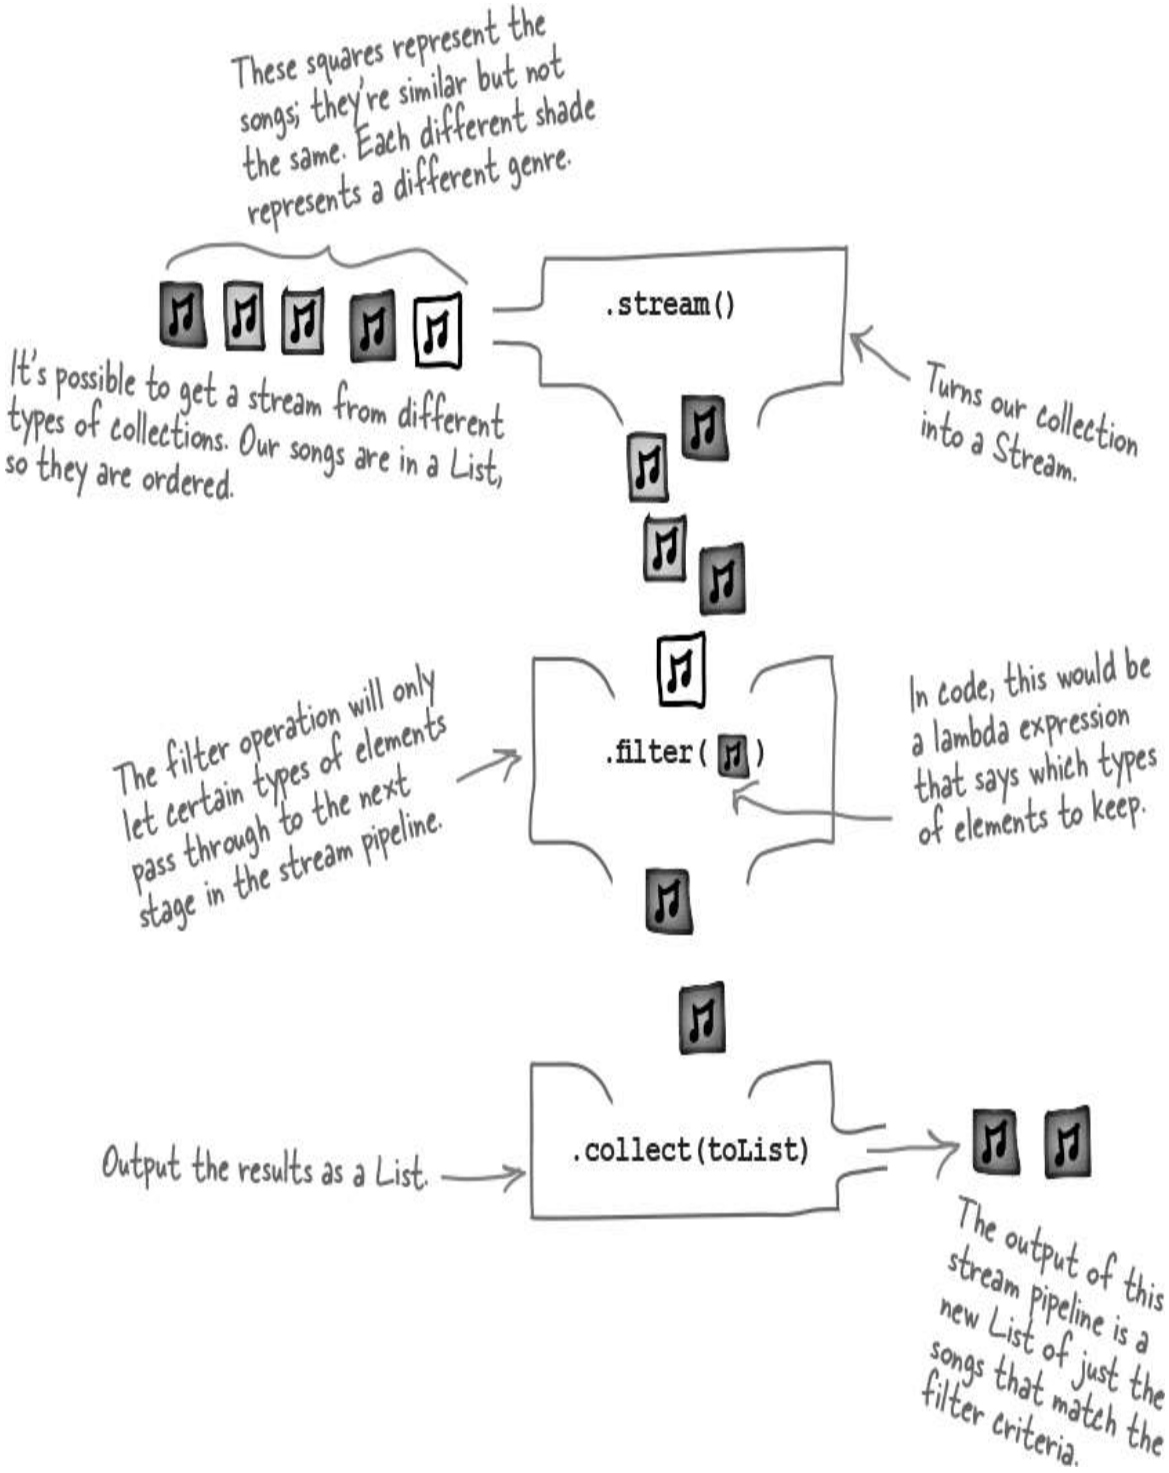
These squares represent the songs; they're similar but not the same. Each different shade represents a different genre.
.stream()
It's possible to get a stream from different types of collections. Our songs are in a List, so they are ordered.
Turns our collection into a Stream.
The filter operation will only let certain types of elements pass through to the next stage in the stream pipeline.
.filter( )
In code, this would be a lambda expression that says which types of elements to keep.
Output the results as a List.
.collect(toList)
The output of this stream pipeline is a new List of just the songs that match the filter criteria.

Let's Rock!

So adding a **`filter`** operation filters out elements that we don't want, and the stream continues with just the elements that meet our criteria. It should come as no surprise to find that you can use a lambda expression to state which elements we want to keep in the stream.

The filter method takes a **`Predicate`**.

Given what we know about the shapes of lambda expressions, we should be able to work out how to write a lambda expression that implements Predicate.

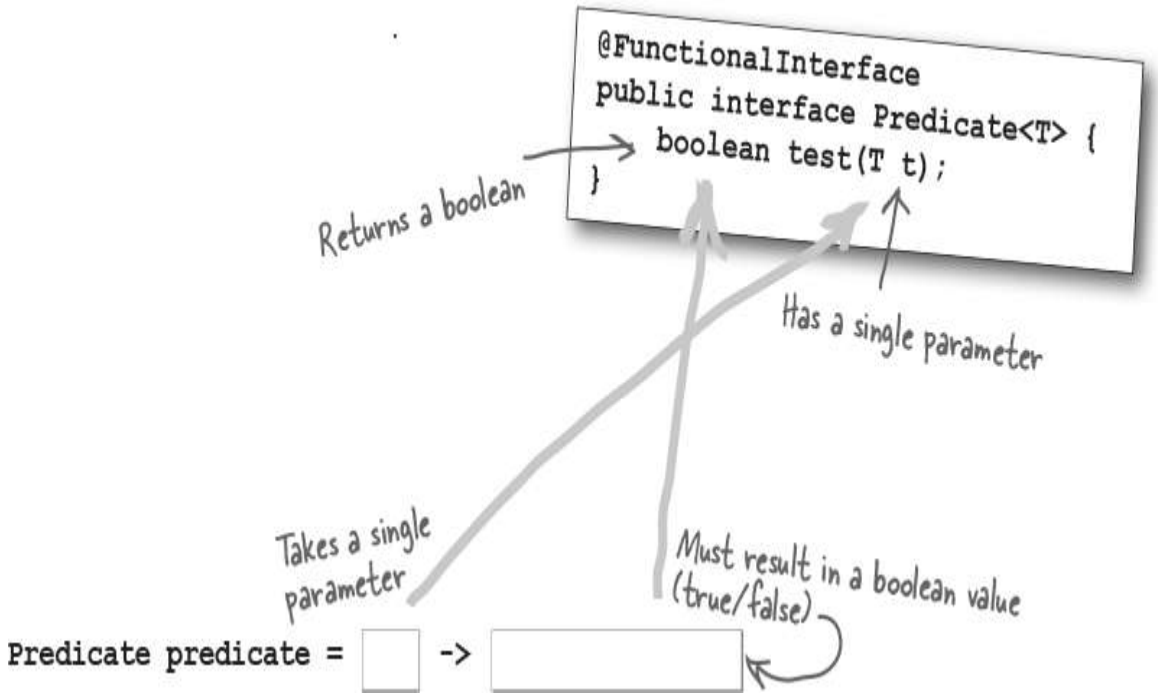
@FunctionalInterface
public interface Predicate<T> {
boolean test(T t);
}
Returns a boolean
Has a single parameter
Takes a single parameter
Must result in a boolean value (true/false)
Predicate predicate = ->
Predicate predicate = ->
Predicate predicate = ->

```
public class JukeboxStreams {
  public static void main(String[] args) {
    List<Song> songs = new Songs().getSongs();

    List<Song> rockSongs = songs.stream()
                           .filter(song -> song.getGenre().equals("Rock"))
                           .collect(Collectors.toList());

    System.out.println(rockSongs);
  }
}

class Songs {
  // as Ready-Bake Code
}
class Song {
 // as Ready-Bake Code
}
```

This is a List of Songs.

This is a Song because filter() is acting on a Stream of Songs.

Get the genre (a String) from the song and see if it's "Rock." This will return a true or false.

The stream pipeline will return a List of Songs.

Puts the results into a List.

This lambda implements Predicate.

```
File Edit Window Help StoneFaceVimes
%java JukeboxStreams

[Cassidy, Grateful Dead, Rock
 With a Little Help from My Friends, The Beatles, Rock,
 Come Together, Ike & Tina Turner, Rock,
 With a Little Help from My Friends, Joe Cocker, Rock,
 Immigrant song, Led Zeppelin, Rock]
```

Getting clever with filters

The **`filter`** method, with its "simple" true or false return value, can contain sophisticated logic to filter elements in, or out, of the stream. Let's take our filter one step further and actually do what Lou asked:

*He wants to see a list of all the songs that fall under **some genre** of "rock."*

He doesn't want to see just the songs that are classed as "Rock," but any genre that is kinda Rock-like. We should search for any genre that has the word "Rock" in it somewhere.

There's a method in String that can help us with this, it's called **`contains`**.

```
List<Song> rockSongs = songs.stream()
                           .filter(song -> song.getGenre().contains("Rock"))
                           .collect(Collectors.toList());
```

Returns true if the genre has the word "Rock" in it anywhere

```
File Edit Window Help YouRock
%java JukeboxStreams

[Cassidy, Grateful Dead, Rock
 50 ways, Paul Simon, Soft Rock
 Hurt, Nine Inch Nails, Industrial Rock
 Hurt, Johnny Cash, Soft Rock
 ...
```

Now the stream returns different types of rock songs.

Output chopped down to save space in the book—save the trees!

BRAIN BARBELL

Can you write a filter operation that can select songs:

- By The Beatles
- That start with "H"
- More recent than 1995

Lou's Challenge #2: List all the genres

Lou now senses that the genres of music that the diners are listening to are more complicated than he thought. He wants a list of all the genres of the songs that have been played.

So far, all of our streams have returned the same types that they started with. The earlier examples were Streams of Strings, and returned Lists of Strings. Lou's previous challenge started with a List of Songs and ended up with a (smaller) List of Songs.

Lou now wants a list of genres, which means we need to somehow turn the song elements in the stream into genre (String) elements. This is what **`map`** is for. The map operation states how to map *from* one type *to* another type.

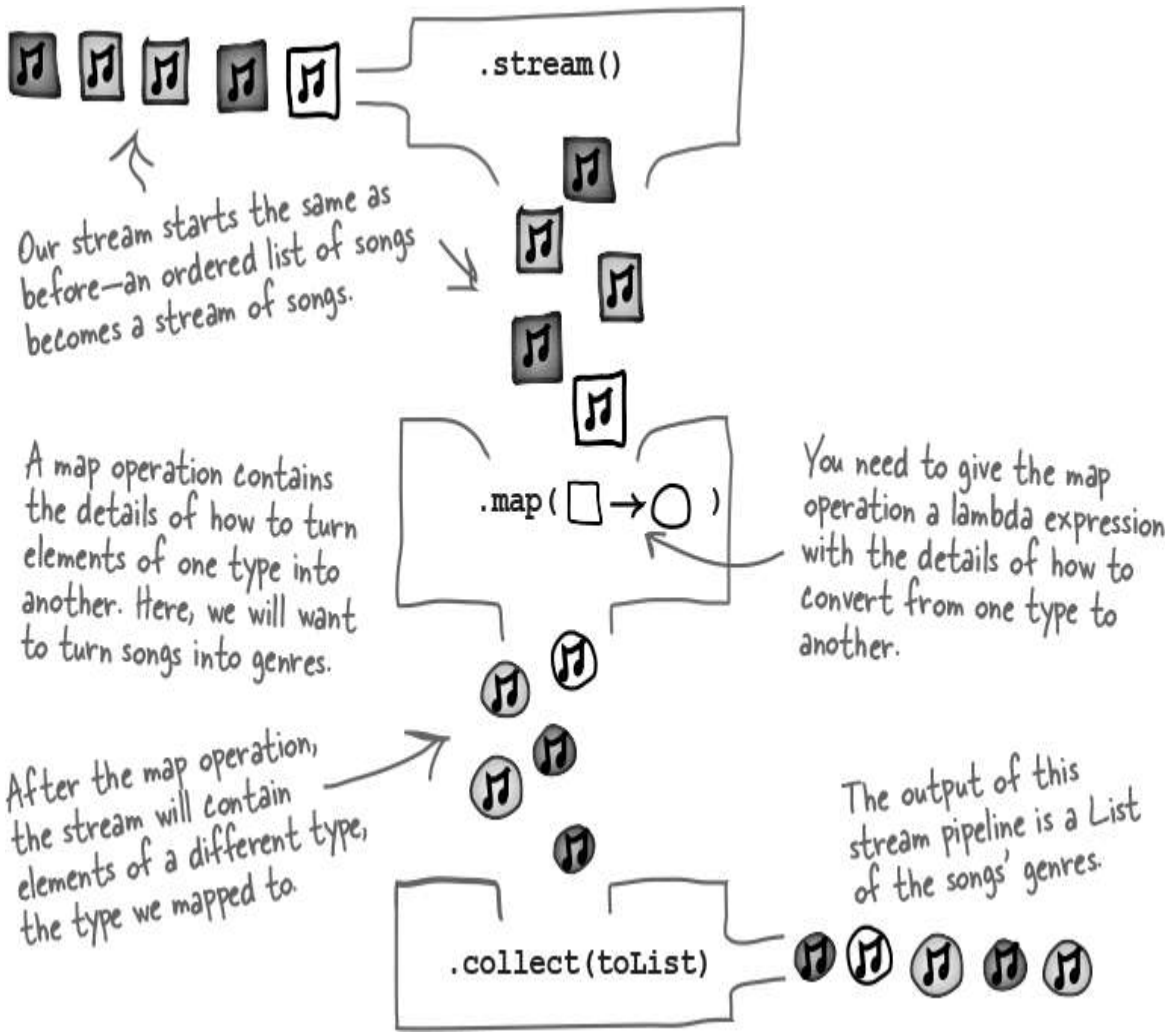

Mapping from one type to another

The map method takes a **`Function`**. The generics by definition are a bit vague, which makes it a little tricky to understand, but Functions do one thing: they take something of one type and return something of a different type. Exactly what's needed for mapping varies from one type to another.

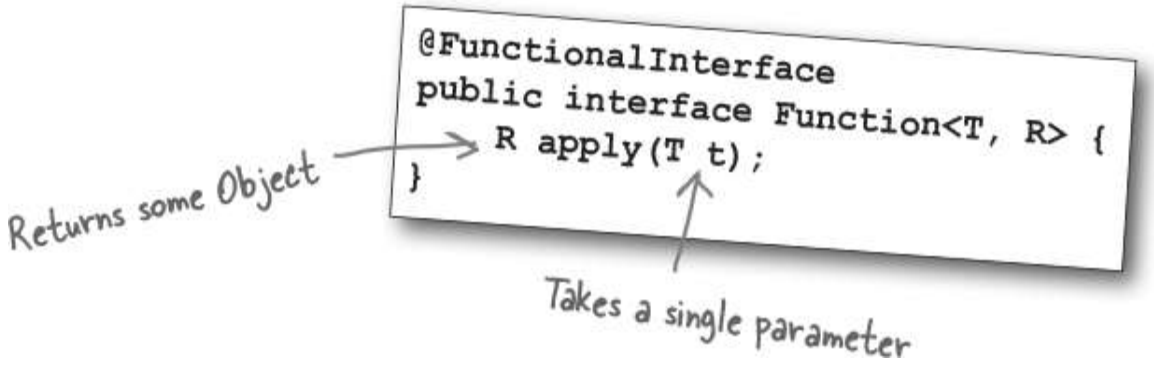

Let's see what it looks like when we use **`map`** in a stream pipeline.

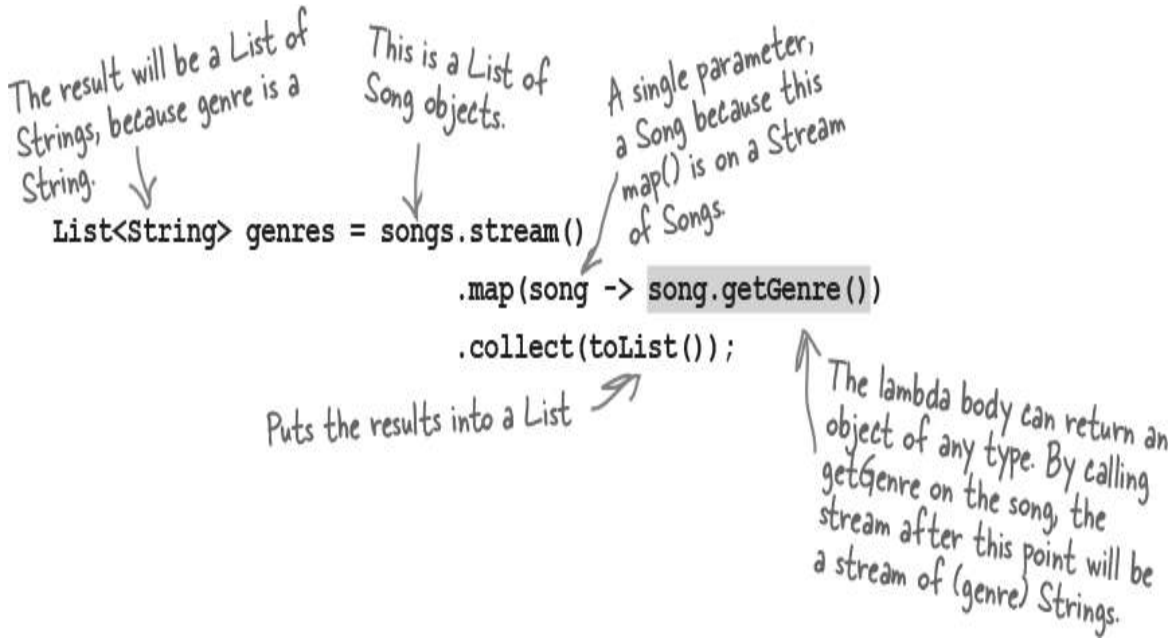

The map's lambda expression is similar to the one for filter; it takes a song and turns it into something else. Instead of returning a boolean, it returns some other object, in this case a String containing the song's genre.

```
File Edit Window Help RoadToNowhere
%java JukeboxStreams

[Electronic, R&B, Rock, Soft Rock, Industri-
al Rock, Electronic, Soft Rock, Electronic,
Alternative Rock, Rock, Blues rock, Rock,
Rock, Industrial Rock, Electronic, R&B, Pop,
Pop, Alternative Rock, Latin, Latin, Rock]
```

Removing duplicates

We've got a list of all the genres in our test data, but Lou probably doesn't want to wade through all these duplicate genres. The **`map`** operation on its own will result in an output List that's the same size as the input List. Since stream operations are designed to be stacked together, perhaps there's another operation we can use to get just one of every element in the stream?

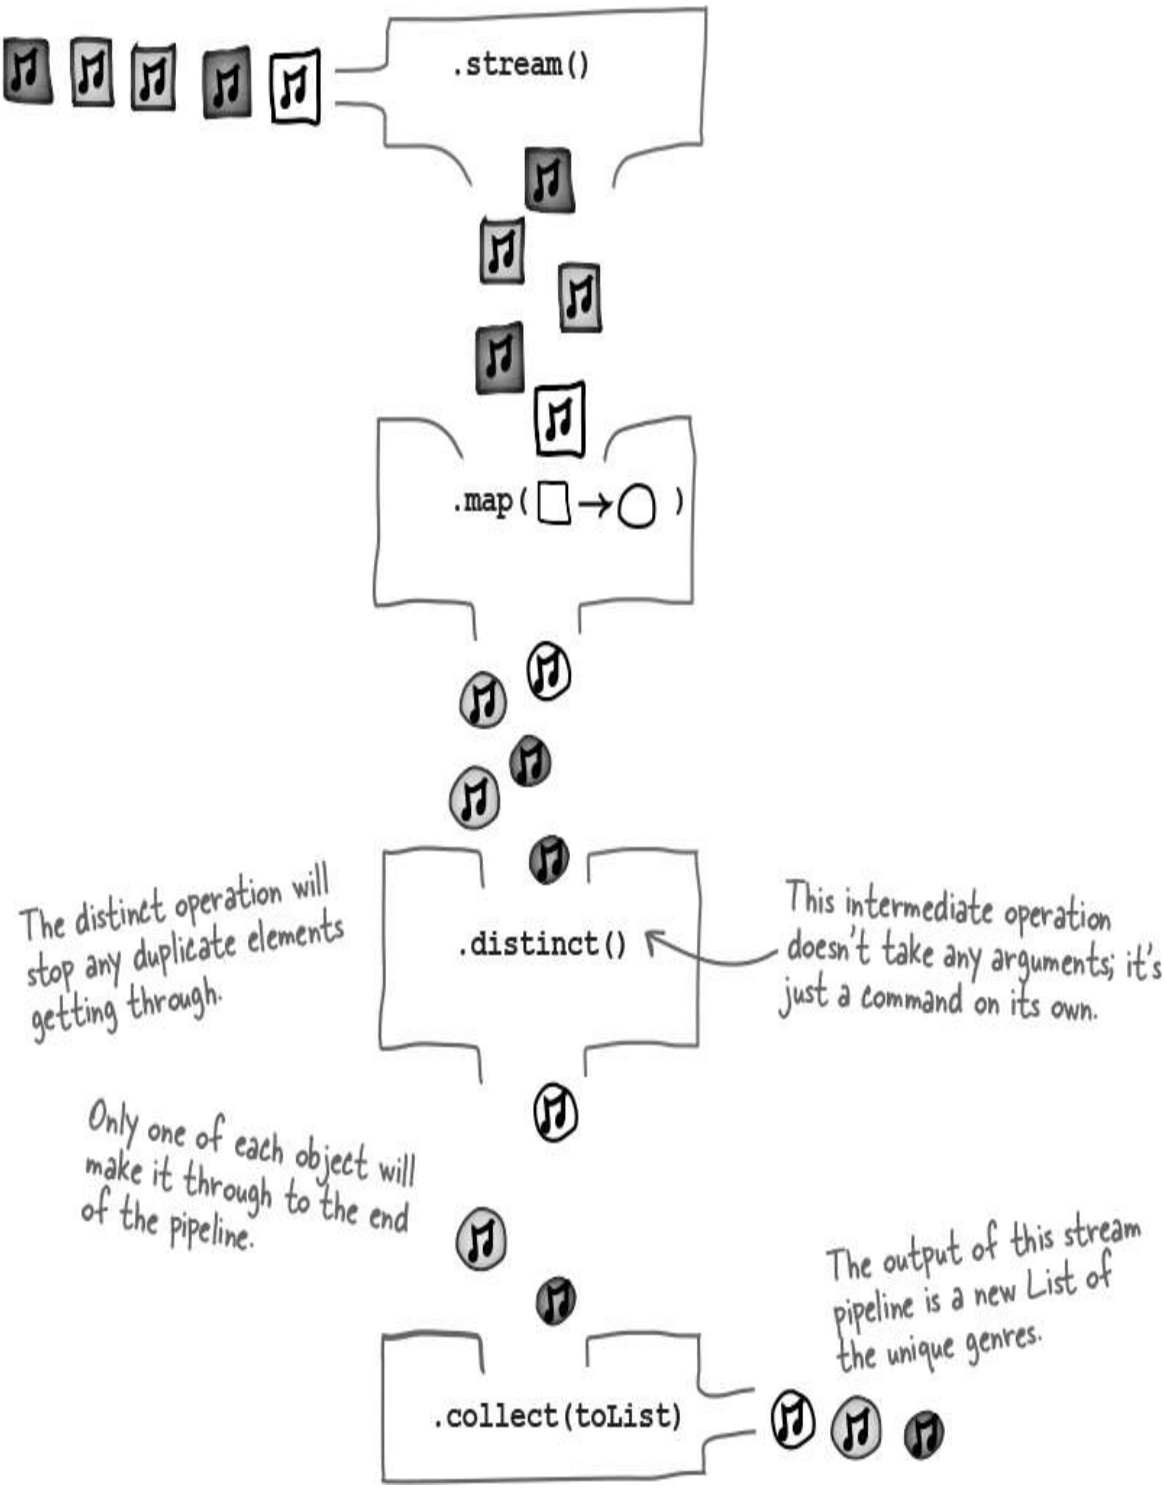

Only one of every genre

All we need to do is to add a distinct operation to the stream pipeline, and we'll get just one of each genre.

```
List<String> genres = songs.stream()
                           .map(song -> song.getGenre())
                           .distinct()
                           .collect(Collectors.toList());
```

Having this in the stream pipeline means there will be no duplicates after this point

```
File Edit Window Help UniqueIsGood
%java JukeboxStreams

[Electronic, R&B, Rock, Soft Rock,
Industrial Rock, Alternative Rock,
Blues rock, Pop, Latin]
```

Outputs a much more readable list of all the genres

Just keep building!

A stream pipeline can have any number of intermediate operations. The power of the Streams API is that we can build up complex queries with understandable building blocks. The library will take care of running this in a way that is as efficient as possible. For example, we could create a query that returns a list of all the artists that have covered a specific song, excluding the original artists, by using a map operation and multiple filters.

```
String songTitle = "With a Little Help from My Friends";
List<String> result = allSongs.stream()
                          .filter(song ->
song.getTitle().equals(songTitle))
                          .map(song -> song.getArtist())
                          .filter(artist -> !artist.equals("The
Beatles"))
                          .collect(Collectors.toList());
```

SHARPEN YOUR PENCIL

Try annotating this code yourself. What do each of the filters do? What does the map do?

→ **Yours to solve.**

Sometimes you don’t even need a lambda expression

Some lambda expressions do something simple and predictable, given the type of the parameter or the shape of the functional interface. Look again at the lambda expression for the **`map`** operation.

```
Function<Song, String> getGenre = song -> song.getGenre();
```

NOTE

Method references can replace lambda expressions, but you don’t have to use them.

Sometimes method references make the code easier to understand.

Instead of spelling this whole thing out, you can point the compiler to a method that does the operation we want, using a **method reference**.

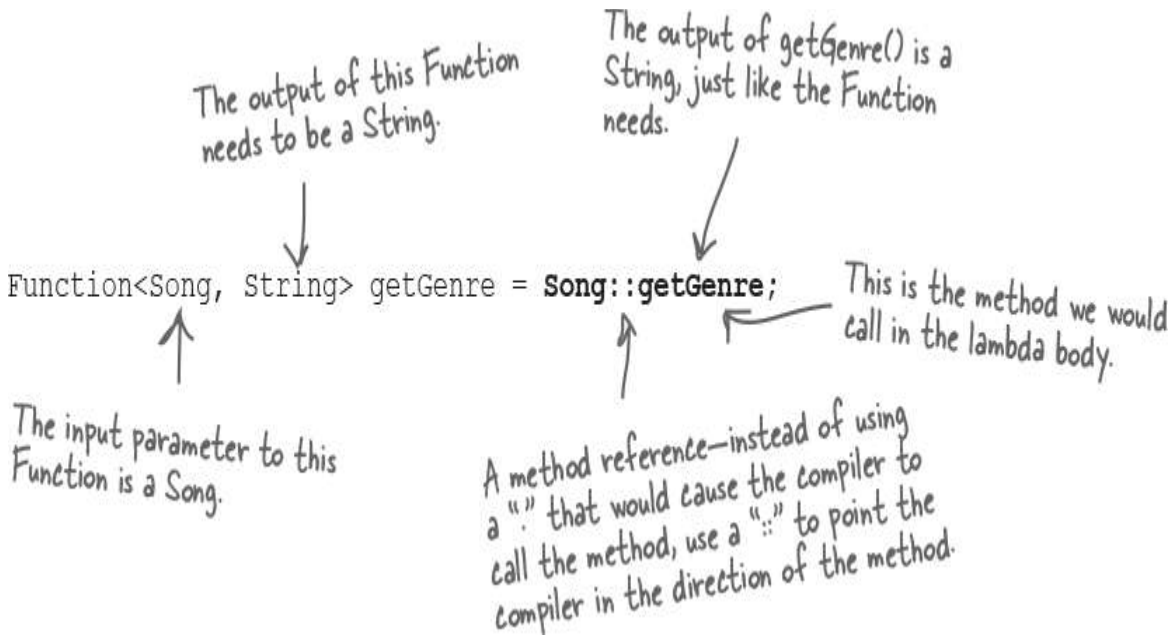

Method references can replace lambda expressions in a number of different cases. Generally, we might use a method reference if it makes the code easier to read.

Take our old friend the Comparator, for example. There are a lot of helper methods on the Comparator interface that, when combined with a method reference, let you see which value is being used for sorting and in which direction. Instead of doing this, to order the songs from oldest to newest:

```
List<Song> result = allSongs.stream()
                            .sorted((o1, o2) -> o1.getYear() -
o2.getYear())
                            .collect(toList());
```

Use a method reference combined with a **`static`** helper method from Comparator to state what the comparison should be:

```
List<Song> result = allSongs.stream()

.sorted(Comparator.comparingInt(Song::getYear))
                            .collect(toList());
```

RELAX

You don't need to use method references if you don't feel comfortable with them. What's important is to be able to recognize the "::" syntax, especially in a stream pipeline.

Collecting results in different ways

While **`Collectors.toList`** is the most commonly used Collector, there are other useful Collectors. For example, instead of using **`distinct`** to solve the last challenge, we could collect the results into a Set, which does not allow duplicates. The advantage of using this approach is that anything else that uses the results knows that because it's a Set, *by definition* there will be no duplicates.

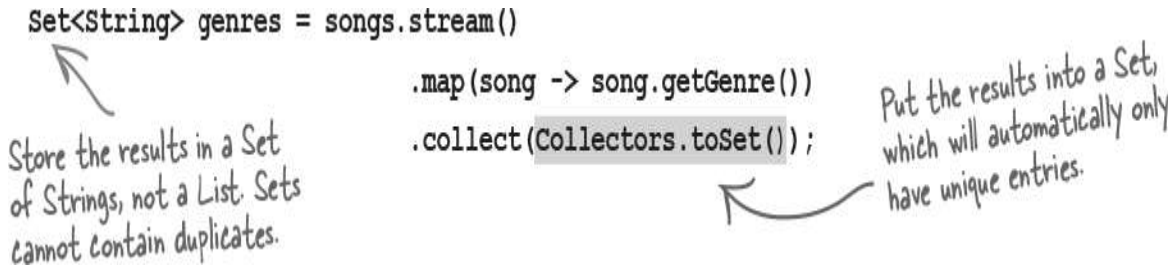

Collectors.toList and Collectors.toUnmodifiableList

You've already seen **`toList`**. Alternatively, you can get a List that can't be changed (no elements can be added, replaced or removed) by using **`Collectors.toUnmodifableList`** instead. This is only available from Java 10 onward.

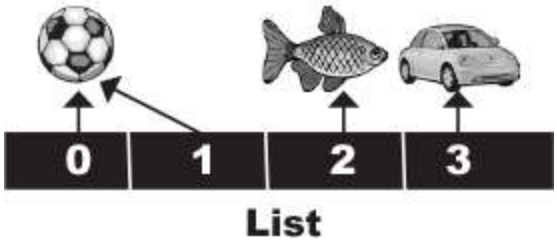

Collectors.toSet and Collectors.toUnmodifiableSet

Use these to put the results into a Set, rather than a List. Remember that a Set cannot contain duplicates, and is not usually ordered. If you're using Java 10 or higher, you can use **`Collectors.toUnmodifiableSet`** if you want to make sure your results aren't changed by anything.

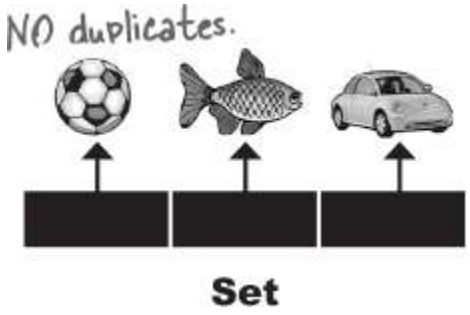

Collectors.toMap and Collectors.toUnmodifiableMap

You can collect your stream into a Map of key/value pairs. You will need to provide some functions to tell the collector what will be the key and what will be the value. You can use **`Collectors.toUnmodifiableMap`** to create a map that can't be changed, from Java 10 onward.

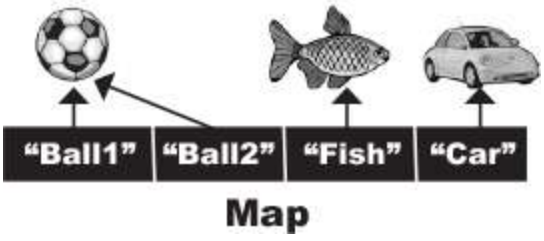

Collectors.joining

You can create a String result from the stream. It will join together all the stream elements into a single String. You can optionally define the *delimiter*,

the character to use to separate each element. This can be very useful if you want to turn your stream into a String of Comma Separated Values (CSV).

But wait, there's more!

Collecting the results is not the only game in town; **`collect`** is just one of many terminal operations.

Checking if something exists

You can use terminal operations that return a boolean value to look for certain things in the stream. For example, we can see if any R&B songs have been played in the diner.

```
boolean result =
    songs.stream()
         .anyMatch(s -> s.getGenre().equals("R&B"));
```

```
boolean anyMatch(Predicate p);

boolean allMatch(Predicate p);

boolean noneMatch(Predicate p);
```

Find a specific thing

Terminal operations that return an **`Optional`** value look for certain things in the stream. For example, we can find the first song played that was released in 1995.

```
Optional<Song> result =
    songs.stream()
         .filter(s -> s.getYear() == 1995)
         .findFirst();
```

```
Optional<T> findAny();

Optional<T> findFirst();

Optional<T> max(Comparator c);

Optional<T> min(Comparator c);

Optional<T> reduce(BinaryOperator a);
```

Count the items

There's a count operation that you can use to find out the number of elements in your stream. We could find the number of unique artists, for example.

```
long result =
   songs.stream()
        .map(Song::getArtist)
        .distinct()
        .count();
```

```
long count();
```

NOTE

There are even more terminal operations, and some of them depend upon the type of Stream you're working with.

Remember, the API documentation can help you figure out if there's a built-in operation that does what you want.

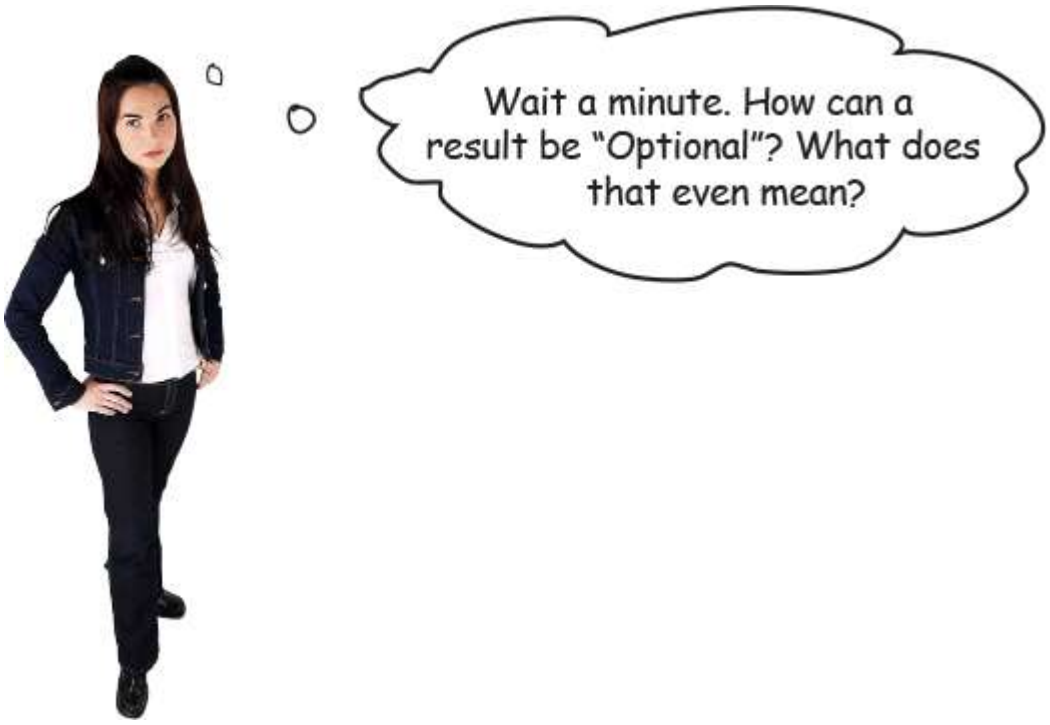

Well, some operations may return something, or may not return anything at all

It might seem weird that a method *may* or *may not* return a value, but it happens all the time in real life.

Imagine you're at an ice-cream stand, and you ask for strawberry ice cream.

```
IceCream iceCream =
  getIceCream("Strawberry");
```

Easy, right? But what if they don't have any strawberry? The ice-cream person is likely to tell you "we don't have that flavor."

It's then up to you what you do next—perhaps order chocolate instead, find another ice-cream place, or maybe just go home and sulk about your lack of ice cream.

Imagine trying to do this in the Java world. In the first example, you get an ice-cream instance. In the second, you get...a String message? But a message doesn't fit into an ice-cream-shaped variable. A null? But what does null really mean?

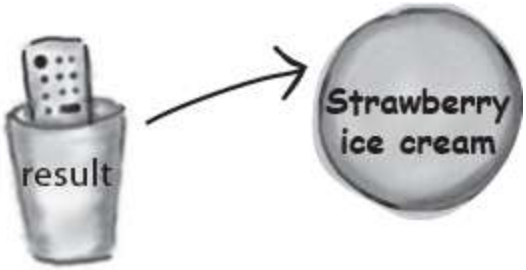

Optional is a wrapper

Since Java 8, the normal way for a method to declare that *sometimes it might not return a result* is to return an **Optional**. This is an object that *wraps* the result, so you can ask "Did I get a result? Or is it empty?" Then you can make a decision about what to do next.

```
Optional<IceCream> optional =
  getIceCream("Strawberry");
```

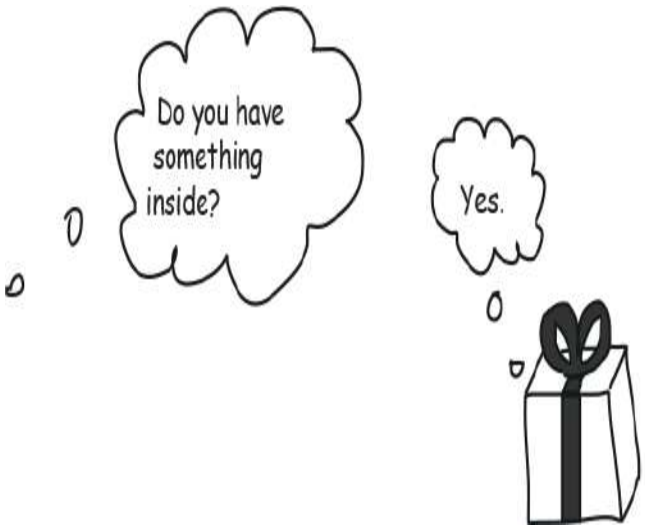


```
if (optional.isPresent()) {
```

Yes, but now we have a way to ask if we have a result

Optional gives us a way to find out about, and deal with, the times when you don't get an ice cream.

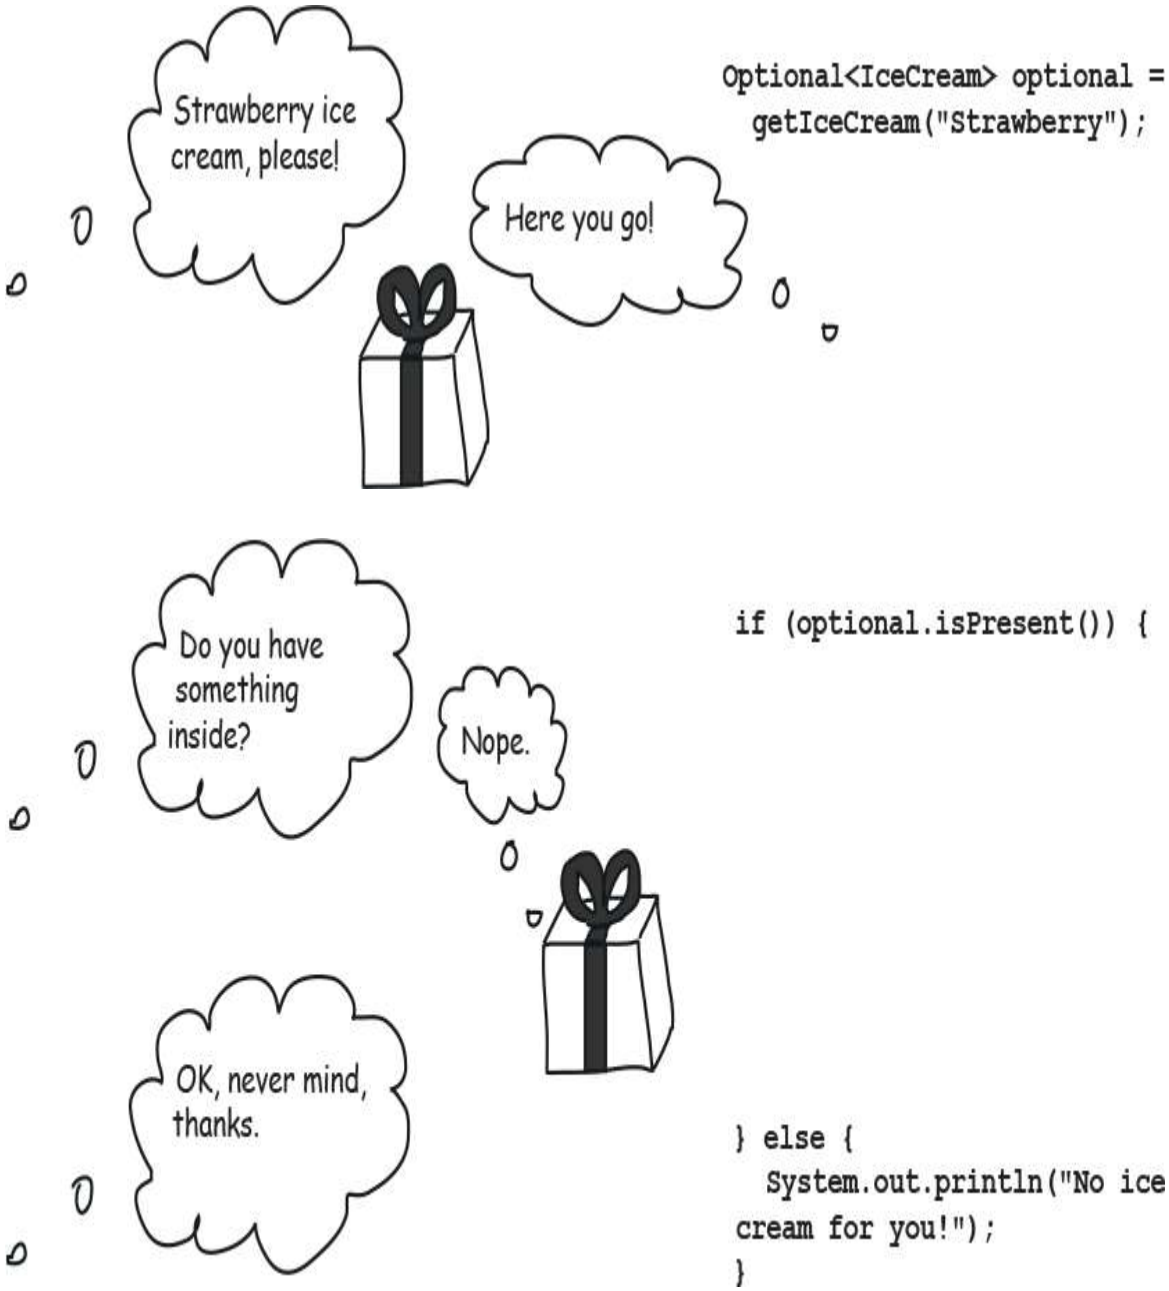

In the past, methods might have thrown Exceptions for this case, or return "null", or a special type of "Not Found" ice-cream instance. Returning an *Optional* from a method makes it really clear that anything calling the method ***needs*** to check if there's a result first, and ***then*** make their own decision about what to do if there isn't one.

Don't forget to talk to the Optional wrapper

The important thing about Optional results is that **they can be empty**. If you don't check first to see if there's a value present and the result is empty, you will get an exception.

```
Optional<IceCream> optional =
  getIceCream("Strawberry");
```

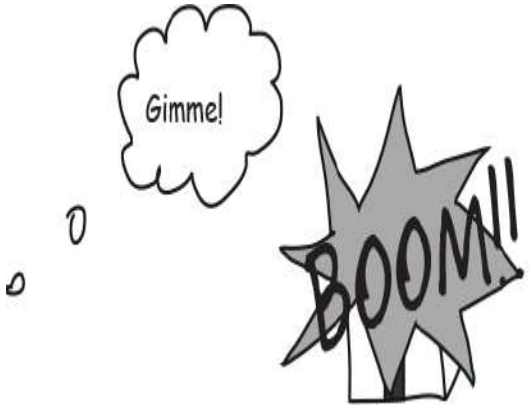


```
IceCream ice = optional.get();
```

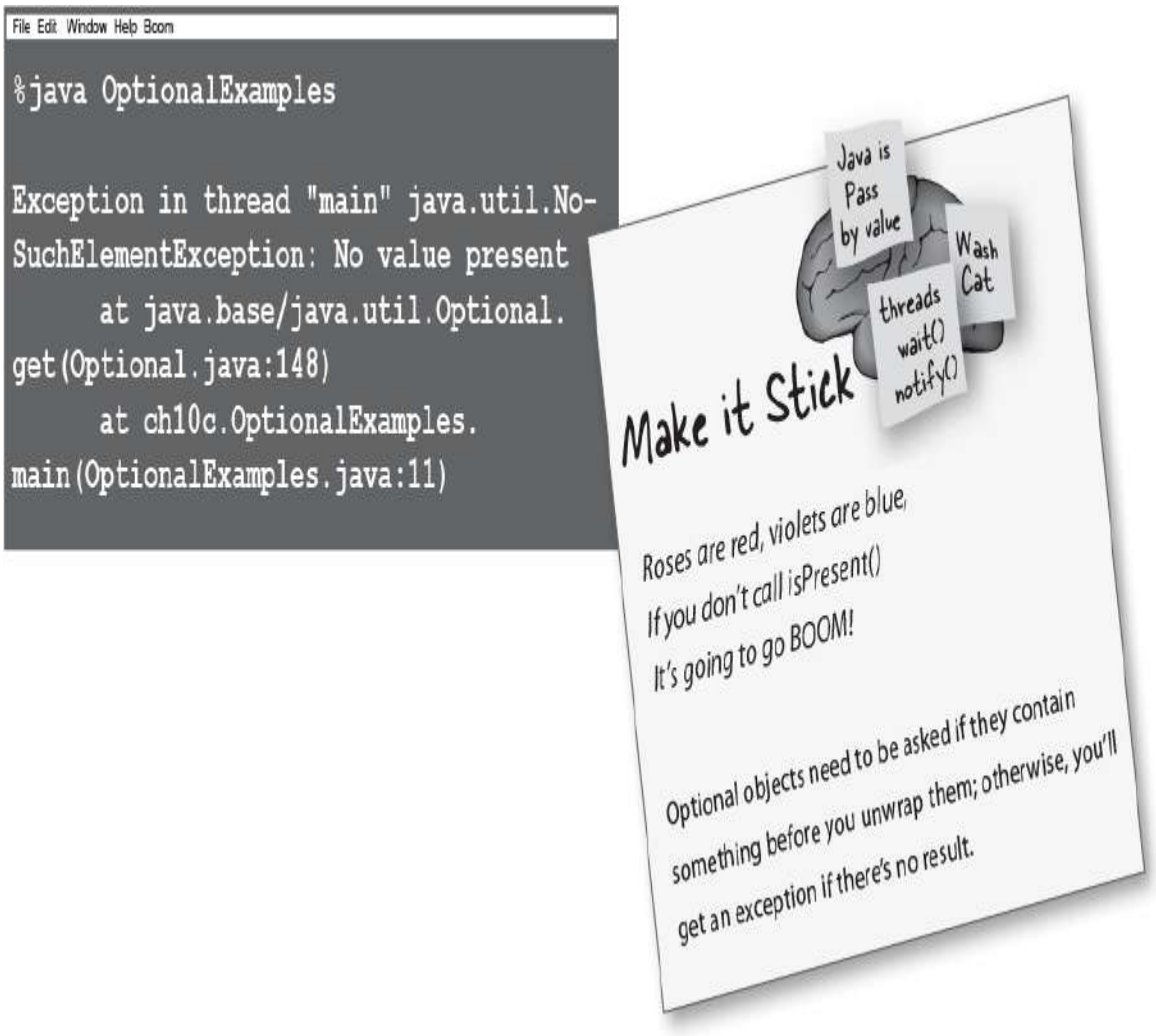

The Unexpected Coffee

Alex was programming her mega-ultra-clever (Java-powered) coffee machine to give her the types of coffee that suited her best at different times of day.

Five-Minute Mystery

In the afternoons, Alex wanted the machine to give her the weakest coffee it had available (she had enough to keep her up at night; she didn't need caffeine adding to her problems!). As an experienced software developer, she knew the Streams API would give her the best stream of coffee at the right time.

The coffees would automatically be sorted from the weakest to the strongest using natural ordering, so she gave the coffee machine these instructions:

```
Optional<String> afternoonCoffee = coffees.stream()
                                          .map(Coffee::getName)
                                          .sorted()
                                          .findFirst();
```

The very next day, she asked for an afternoon coffee. To her horror, the machine presented her with an Americano, not the Decaf Cappuccino she was expecting.

"I can't drink that!! I'll be up all night worrying about my latest software project!"

What happened? Why did the coffee machine give Alex an Americano?

→ **Answers in "Five-Minute Mystery".**

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You may ***not*** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make a class that will compile and run and produce the output listed.

Output

```
File  Edit  Window  Help  DiveIn
%java StreamPuzzle
[Immigrant Song, With a Little
Help from My Friends, Hallucinate,
Pasos de cero, Cassidy]
With a Little Help from My Friends
No songs found by: The Beach Boys
```

Note: each thing from the pool can be used only once!

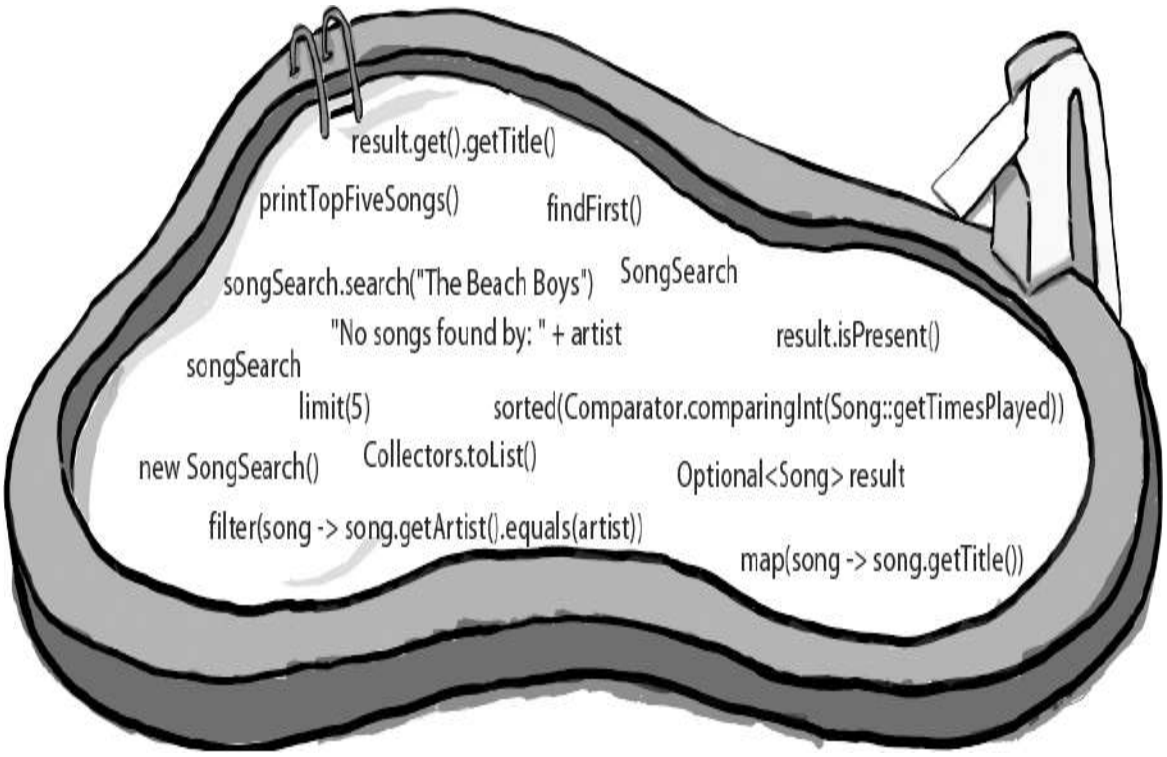


```
public class StreamPuzzle {
  public static void main(String[] args) {
    SongSearch songSearch = _____________;
    songSearch._____________;
    ___________.search("The Beatles");
    ___________________________________;
  }
}
class _____________ {
  private final List<Song> songs =
      new JukeboxData.Songs().getSongs();

  void printTopFiveSongs() {
    List<String> topFive = songs.stream()
                          ._______________
                          ._______________
                          ._______________
                          .collect(_________);
    System.out.println(topFive);
  }
  void search(String artist) {
    ________ = songs.stream()
                    ._______________
                    ._______________;
    if (_________________) {
```

```
      System.out.println(_____________);
    } else {
      System.out.println(_____________);
    }
  }
}
```

→ **Answers in "Pool Puzzle".**

Mixed Messages

(from "When for loops go wrong")

Candidates:

```
for (int i = 1; i < nums.size(); i++)
    output += nums.get(i) + " ";
```

```
for (Integer num : nums)
    output += nums + " ";
```

```
for (int i = 0; i <= nums.length; i++)
    output += nums.get(i) + " ";
```

```
for (int i = 0; i <= nums.size(); i++)
    output += nums.get(i) + " ";
```

Possible output:

```
1 2 3 4 5
```

```
Compiler error
```

```
2 3 4 5
```

```
Exception thrown
```

```
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
[1, 2, 3, 4, 5]
```

Who Does What?

(from "WHO DOES WHAT?")

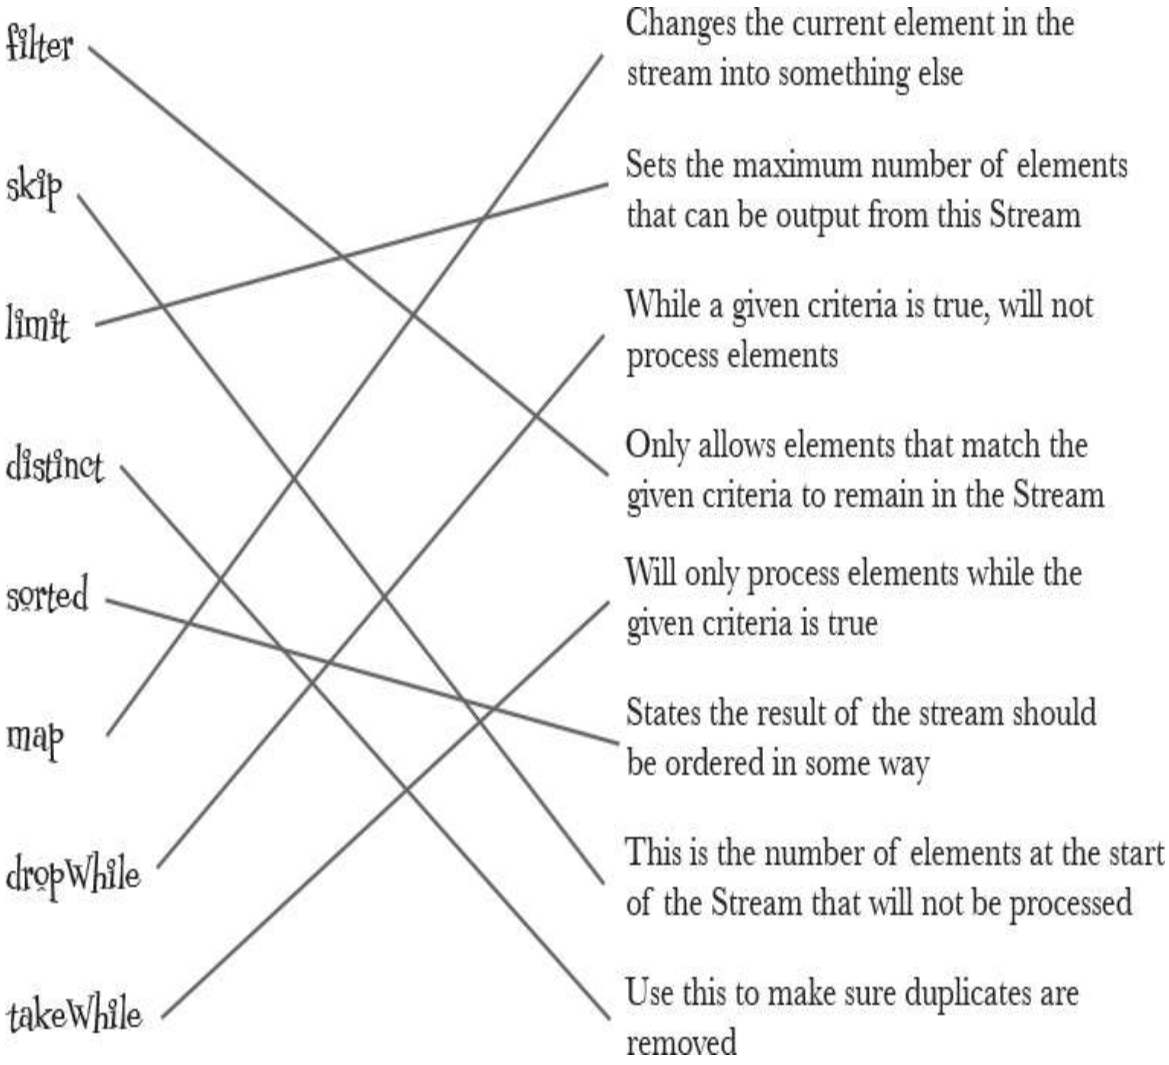

Exercise Solutions

Code Magnets

(from "Code Magnets")

```
import java.util.*;
import java.util.stream.*;

public class CoffeeOrder {
  public static void main(String[] args) {
    List<String> coffees = List.of("Cappuccino",
            "Americano", "Espresso", "Cortado", "Mocha",
            "Cappuccino", "Flat White", "Latte");

    List<String> coffeesEndingInO = coffees.stream()
                                           .filter(s -> s.endsWith("o"))
                                           .sorted()
                                           .distinct()
                                           .collect(Collectors.toList());
    System.out.println(coffeesEndingInO);
  }
}
```

What would happen if the stream operations were in a different order? Does it matter?

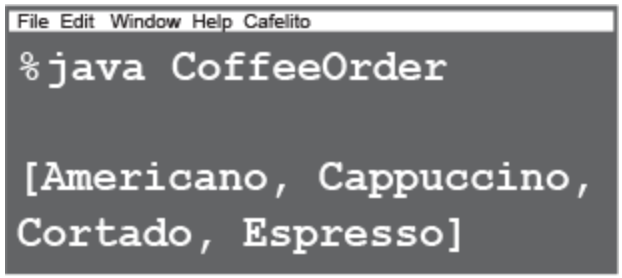

BE the Compiler

(from "BE the Compiler, advanced")

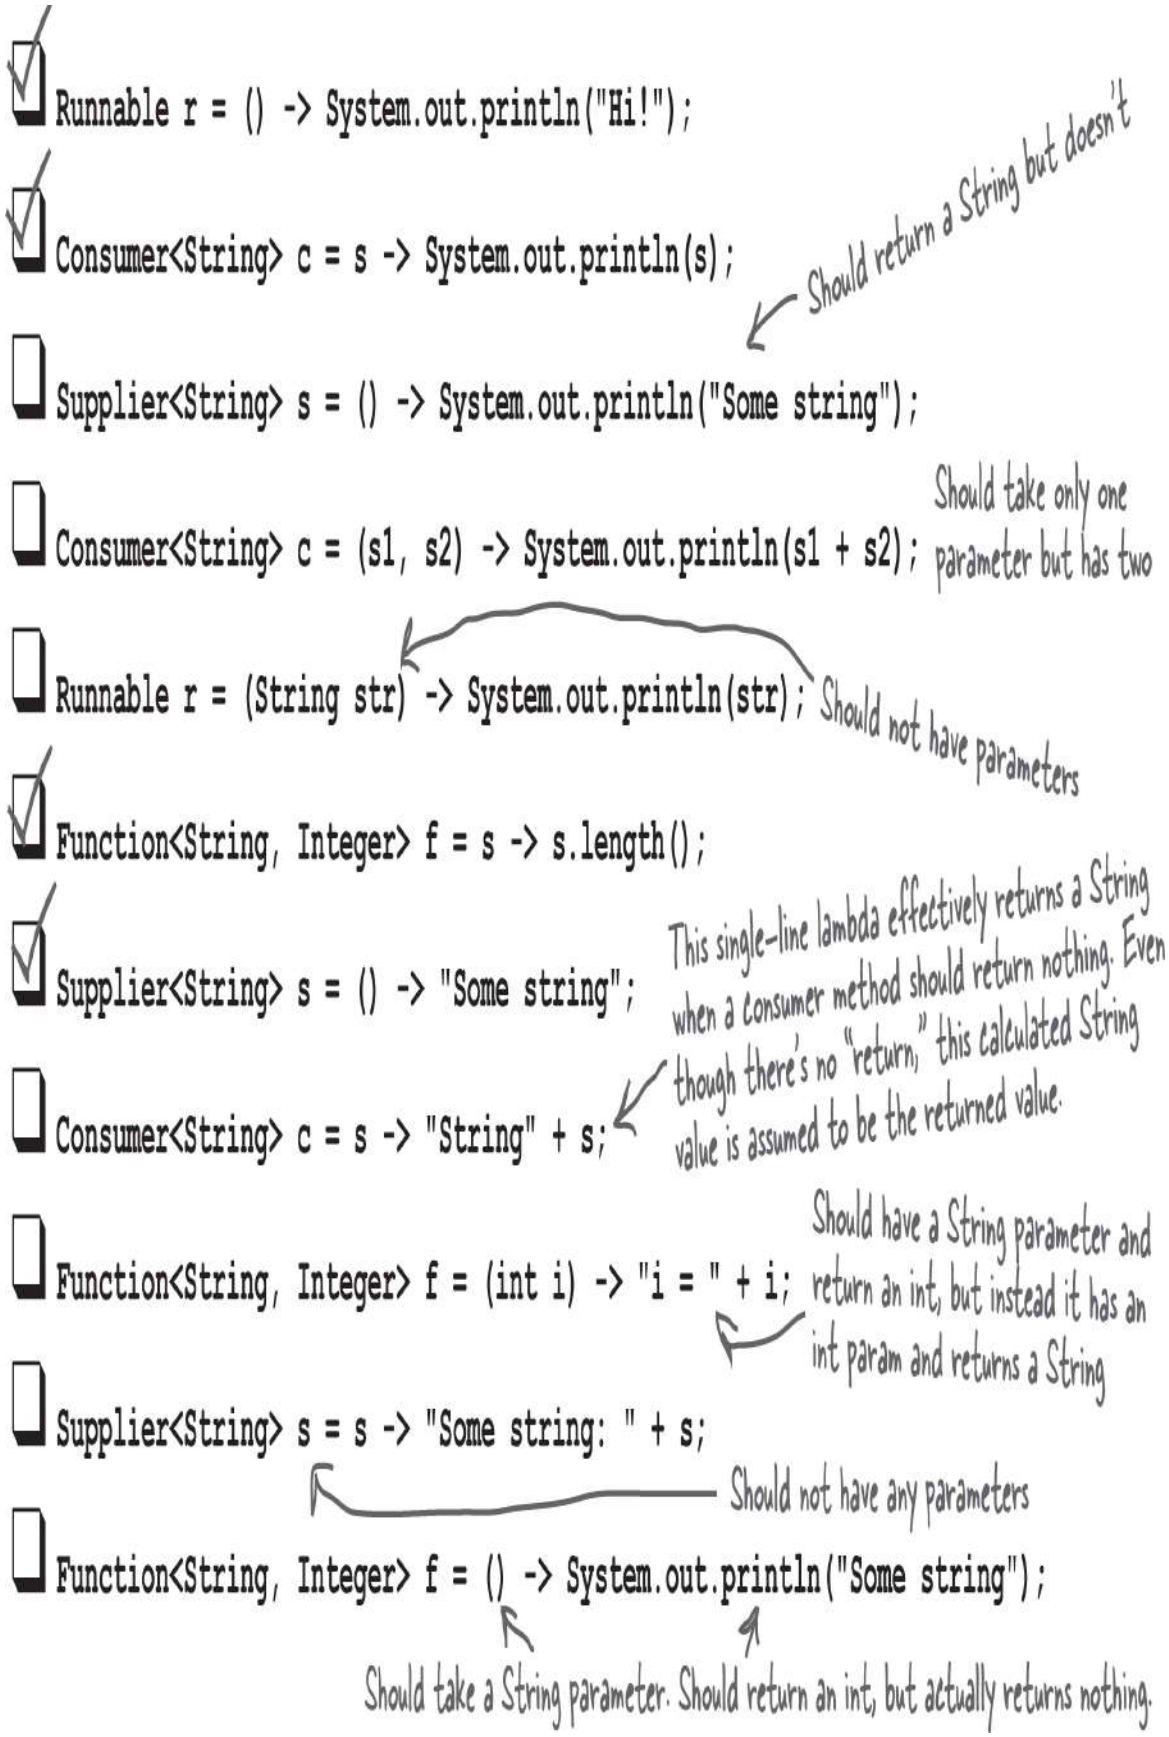
Runnable r = () -> System.out.println("Hi!");
Consumer<String> c = s -> System.out.println(s);
Should return a String but doesn't
Supplier<String> s = () -> System.out.println("Some string");
Consumer<String> c = (s1, s2) -> System.out.println(s1 + s2);
Should take only one parameter but has two
Runnable r = (String str) -> System.out.println(str);
Should not have parameters
Function<String, Integer> f = s -> s.length();
Supplier<String> s = () -> "Some string";
Consumer<String> c = s -> "String" + s;
This single-line lambda effectively returns a String when a consumer method should return nothing. Even though there's no "return," this calculated String value is assumed to be the returned value.
Function<String, Integer> f = (int i) -> "i = " + i;
Should have a String parameter and return an int, but instead it has an int param and returns a String
Supplier<String> s = s -> "Some string: " + s;
Should not have any parameters
Function<String, Integer> f = () -> System.out.println("Some string");
Should take a String parameter. Should return an int, but actually returns nothing.

Sharpen your pencil

(from "Sharpen your pencil")

BiPredicate

Modifier and Type	Method
default BiPredicate<T,U>	and(BiPredicate<? super T,? super U> other)
default BiPredicate<T,U>	negate()
default BiPredicate<T,U>	or(BiPredicate<? super T,? super U> other)
boolean	test(T t, U u)

Has a Single Abstract Method, test(). The others are all default methods.

ActionListener

Modifier and Type	Method
void	actionPerformed(ActionEvent e)

Has a Single Abstract Method

Iterator

Modifier and Type	Method
default void	forEachRemaining(Consumer<? super E> action)
boolean	hasNext()
E	next()
default void	remove()

Has TWO abstract methods, hasNext() and next()

Function

Modifier and Type	Method
default <V> Function<T,V>	andThen(Function<? super R,? extends V> after)
R	apply(T t)
default <V> Function<V,R>	compose(Function<? super V,? extends T> before)
static <T> Function<T,T>	identity()

Has a Single Abstract Method, apply(). The others are default and static methods.

SocketOption

Modifier and Type	Method
String	name()
Class<T>	type()

Has two abstract methods

Five-Minute Mystery

(from "Five-Minute Mystery")

Alex didn't pay attention to the order of the stream operations. She first mapped the coffee objects to a stream of Strings, and then ordered that. Strings are naturally ordered alphabetically, so when the coffee machine got the "first" of these results for Alex's afternoon coffee, it was brewing a fresh "Americano."

If Alex wanted to order the coffees by strength, with the weakest (1 out of 5) first, she needed to order the stream of coffees first, before mapping it to a String name,

```
afternoonCoffee = coffees.stream()
                         .sorted()
                         .map(Coffee::getName)
                         .findFirst();
```

Then the coffee machine will brew her a decaf instead of an Americano.

Pool Puzzle

(from "Pool Puzzle")

```
public class StreamPuzzle {
  public static void main(String[] args) {
    SongSearch songSearch = new SongSearch();
    songSearch.printTopFiveSongs();
```

```
    songSearch.search("The Beatles");
    songSearch.search("The Beach Boys");
  }
}
class SongSearch {
  private final List<Song> songs =
      new JukeboxData.Songs().getSongs();

  void printTopFiveSongs() {
    List<String> topFive = songs.stream()

.sorted(Comparator.comparingInt(Song::getTimesPlayed))
                      .map(song -> song.getTitle())
                      .limit(5)
                      .collect(Collectors.toList());
    System.out.println(topFive);
  }
  void search(String artist) {
    Optional<Song> result = songs.stream()
                  .filter(song -> song.getArtist().equals(artist))
                  .findFirst();
    if (result.isPresent()) {
      System.out.println(result.get().getTitle());
    } else {
      System.out.println("No songs found by: " + artist);
    }
  }
}
```

Chapter 13. Risky Behavior: Exception Handling

Stuff happens. The file isn't there. The server is down. No matter how good a programmer you are, you can't control everything. Things can go wrong. *Very* wrong. When you write a risky method, you need code to handle the bad things that might happen. But how do you *know* when a method is

risky? And where do you put the code to *handle* the ***exceptional*** situation? So far in this book, we haven't *really* taken any risks. We've certainly had things go wrong at runtime, but the problems were mostly flaws in our own code. Bugs. And those we should fix at development time. No, the problem-handling code we're talking about here is for code that you *can't* guarantee will work at runtime. Code that expects the file to be in the right directory, the server to be running, or the Thread to stay asleep. And we have to do this *now*. Because in *this* chapter, we're going to build something that uses the risky JavaSound API. We're going to build a MIDI Music Player.

Let's make a Music Machine

Over the next three chapters, we'll build a few different sound applications, including a BeatBox Drum Machine. In fact, before the book is done, we'll have a multiplayer version so you can send your drum loops to another player, kind of like sharing over social media. You're going to write the whole thing, although you can choose to use Ready-Bake Code for the GUI parts. OK, so not every IT department is looking for a new BeatBox server, but we're doing this to learn more about Java. Building a BeatBox is just a way to have fun *while* we're learning Java.

The finished BeatBox looks something like this:

You make a beatbox loop (a 16-beat drum pattern) by putting check marks in the boxes.

Cyber BeatBox

Bass Drum
Closed Hi-Hat
Open Hi-Hat
Acoustic Snare
Crash Cymbal
Hand Clap
High Tom
Hi Bongo
Maracas
Whistle
Low Conga
Cowbell
Vibraslap
Low-mid Tom
High Agogo
Open Hi Conga

Start
Stop
Tempo Up
Tempo Down
sendIt

dance beat

River: groove #2
Brooklyn: groove2 revised
BoomTish: dance beat

Your message gets sent to the other players, along with your current beat pattern, when you hit "sendIt."

Incoming messages from players. Click one to load the pattern that goes with it, and then click Start to play it.

Notice the check marks in the boxes for each of the 16 “beats.” For example, on beat 1 (of 16) the Bass drum and the Maracas will play, on beat 2 nothing, and on beat 3 the Maracas and Closed Hi-Hat...you get the idea. When you hit Start, it plays your pattern in a loop until you hit Stop. At any time, you can “capture” one of your own patterns by sending it to the BeatBox server (which means any other players can listen to it). You can also load any of the incoming patterns by clicking on the message that goes with it.

We’ll start with the basics

Obviously we’ve got a few things to learn before the whole program is finished, including how to build a GUI, how to *connect* to another machine via networking, and a little I/O so we can *send* something to the other machine.

Oh yeah, and the JavaSound API. *That’s* where we’ll start in this chapter. For now, you can forget the GUI, forget the networking and the I/O, and focus only on getting some MIDI-generated sound to come out of your computer. And don’t worry if you don’t know a thing about MIDI or a thing about reading or making music. Everything you need to learn is covered here. You can almost smell the record deal.

The JavaSound API

JavaSound is a collection of classes and interfaces added to Java way back in version 1.3. These aren’t special add-ons; they’re part of the standard Java SE class library. JavaSound is split into two parts: MIDI and Sampled. We use only MIDI in this book. MIDI stands for Musical Instrument Digital Interface, and is a standard protocol for getting different kinds of electronic sound equipment to communicate. But for our BeatBox app, you can think of MIDI as *a kind of sheet music* that you feed into some device like a high-tech “player piano.” In other words, MIDI data doesn’t actually include any *sound*, but it does include the *instructions* that a MIDI-reading instrument can play back. Or for another analogy, you can think of a MIDI file like an

HTML document, and the instrument that renders the MIDI file (i.e., *plays* it) is like the web browser.

MIDI data says *what* to do (play middle C, and here's how hard to hit it, and here's how long to hold it, etc.), but it doesn't say anything at all about the actual *sound* you hear. MIDI doesn't know how to make a flute, piano, or Jimi Hendrix guitar sound. For the actual sound, we need an instrument (a MIDI device) that can read and play a MIDI file. But the device is usually more like an *entire band or orchestra* of instruments. And that instrument might be a physical device, like a keyboard, or it could even be an instrument built entirely in software, living in your computer.

For our BeatBox, we use only the built-in, software-only instrument that you get with Java. It's called a *synthesizer* (some folks refer to it as a *software synth*) because it *creates* sound. Sound that you *hear*.

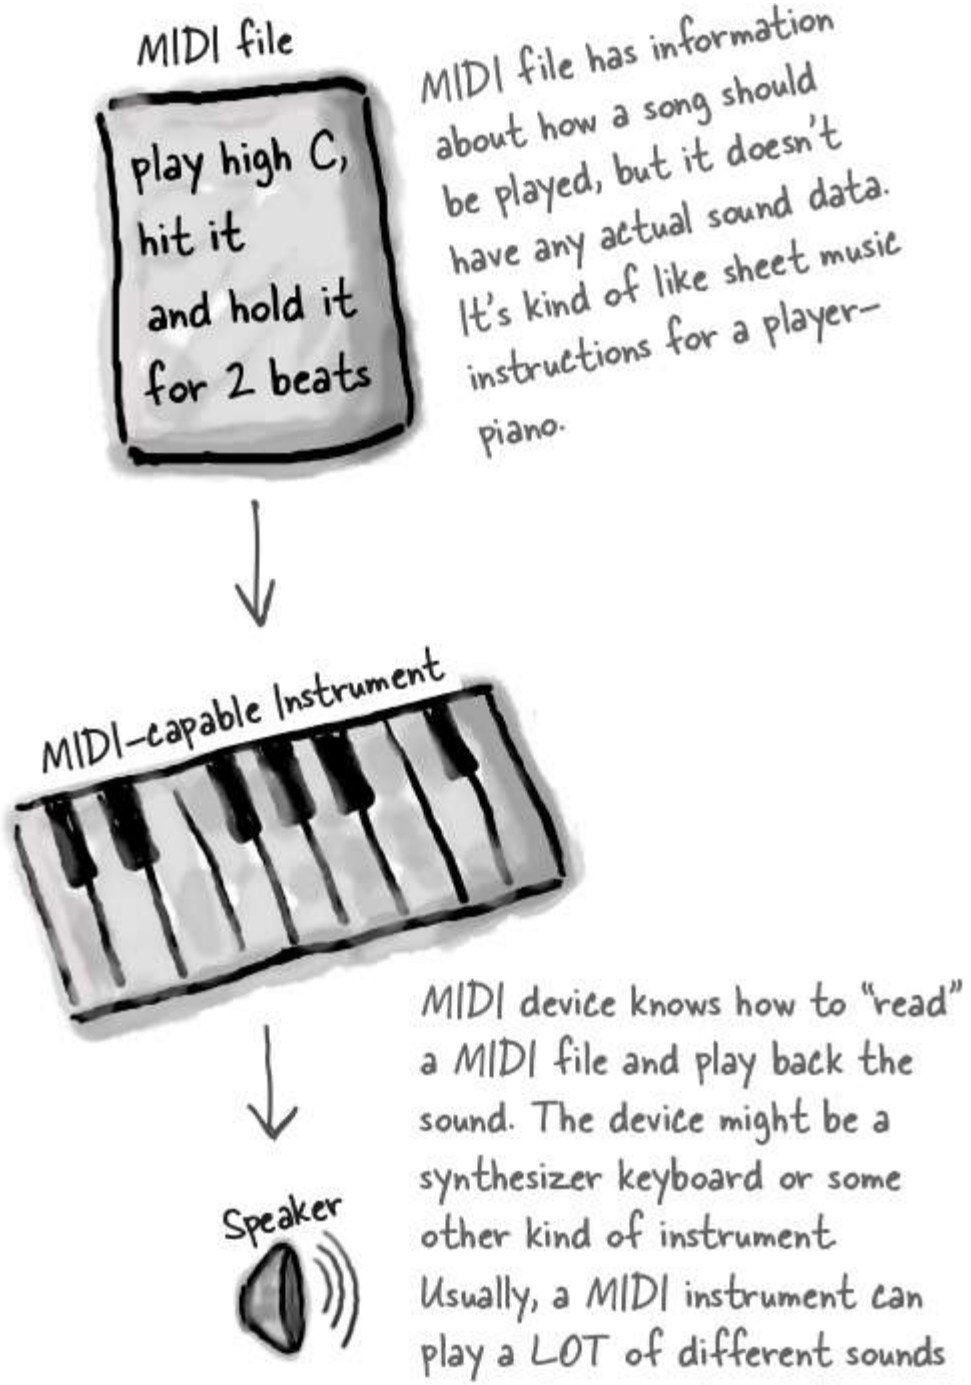

MIDI file has information about how a song should be played, but it doesn't have any actual sound data. It's kind of like sheet music instructions for a player-piano.

MIDI device knows how to "read" a MIDI file and play back the sound. The device might be a synthesizer keyboard or some other kind of instrument. Usually, a MIDI instrument can play a LOT of different sounds (piano, drums, violin, etc.), and all at the same time. So a MIDI file isn't like sheet music for just one musician in the band—it can hold the parts for ALL the musicians playing a particular song.

First we need a Sequencer

Before we can get any sound to play, we need a Sequencer object. The sequencer is the object that takes all the MIDI data and sends it to the right instruments. It's the thing that *plays* the music. A sequencer can do a lot of different things, but in this book, we're using it strictly as a playback device. It's like a device that streams music, but with a few added features. The Sequencer class is in the javax.sound.midi package. So let's start by making sure we can make (or get) a Sequencer object.

```
import javax.sound.midi.*;

public class MusicTest1 {
  public void play() {
    try {
      Sequencer sequencer = MidiSystem.getSequencer();
      System.out.println("Successfully got a sequencer");
    }
  }

  public static void main(String[] args) {
    MusicTest1 mt = new MusicTest1();
    mt.play();
  }
}
```

import the javax.sound.midi package

We need a Sequencer object. It's the main part of the MIDI device/instrument we're using. It's the thing that, well, sequences all the MIDI information into a "song." But we don't make a brand new one ourselves—we have to ask the MidiSystem to give us one.

Something's wrong!

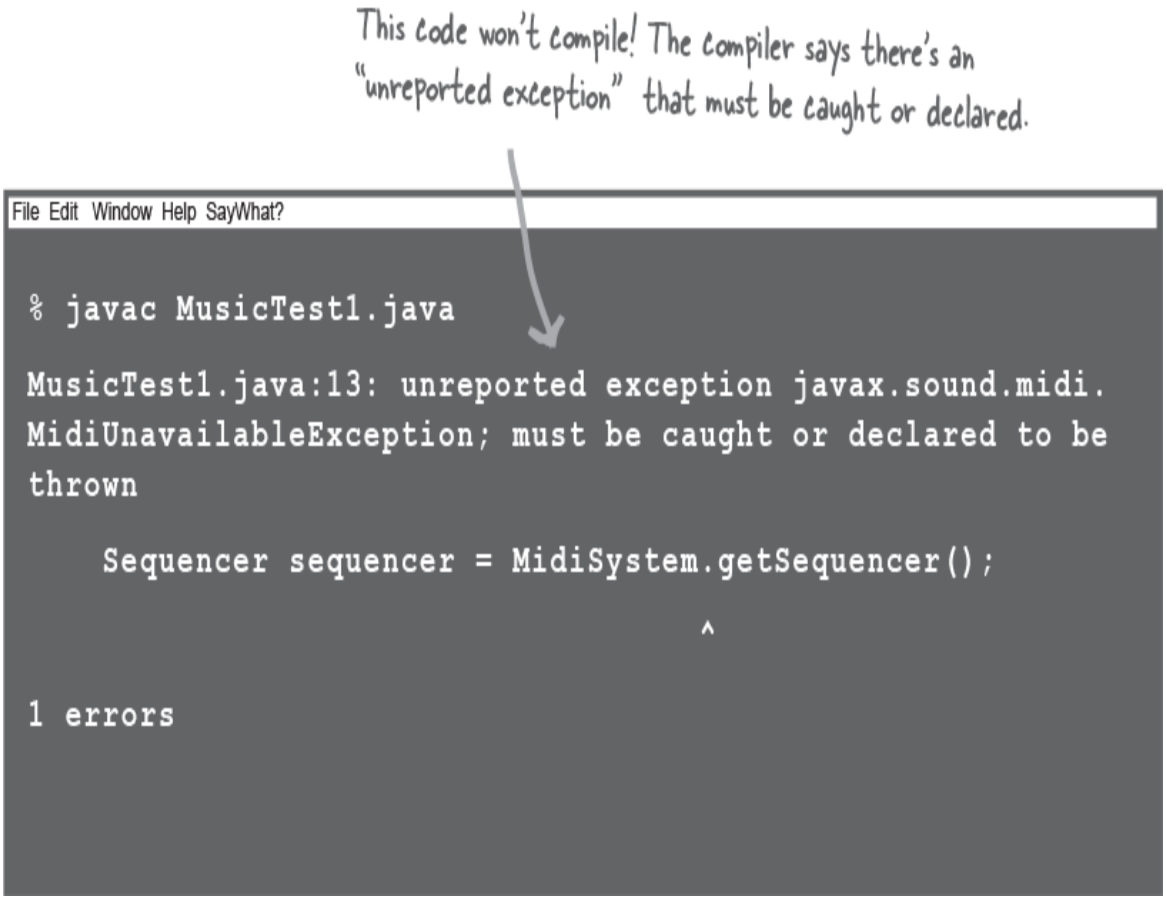

What happens when a method you want to call (probably in a class you didn't write) is risky?

- ① Let's say you want to call a method in a class that you didn't write.

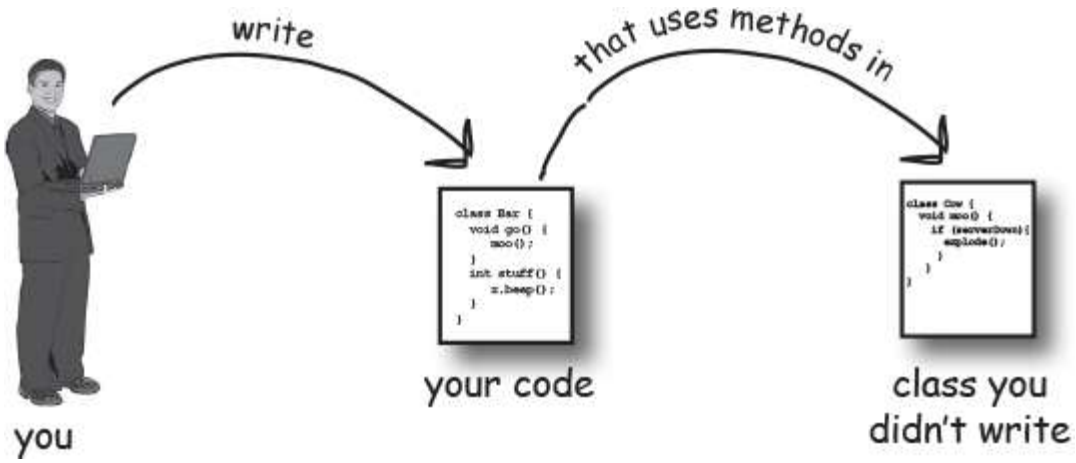

- ② **That method does something risky, something that might not work at runtime.**

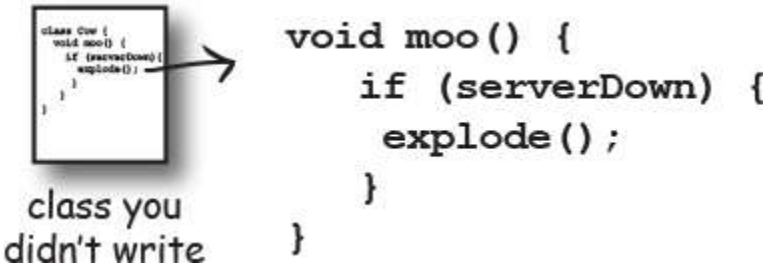

- ③ **You need to *know* that the method you're calling is risky.**

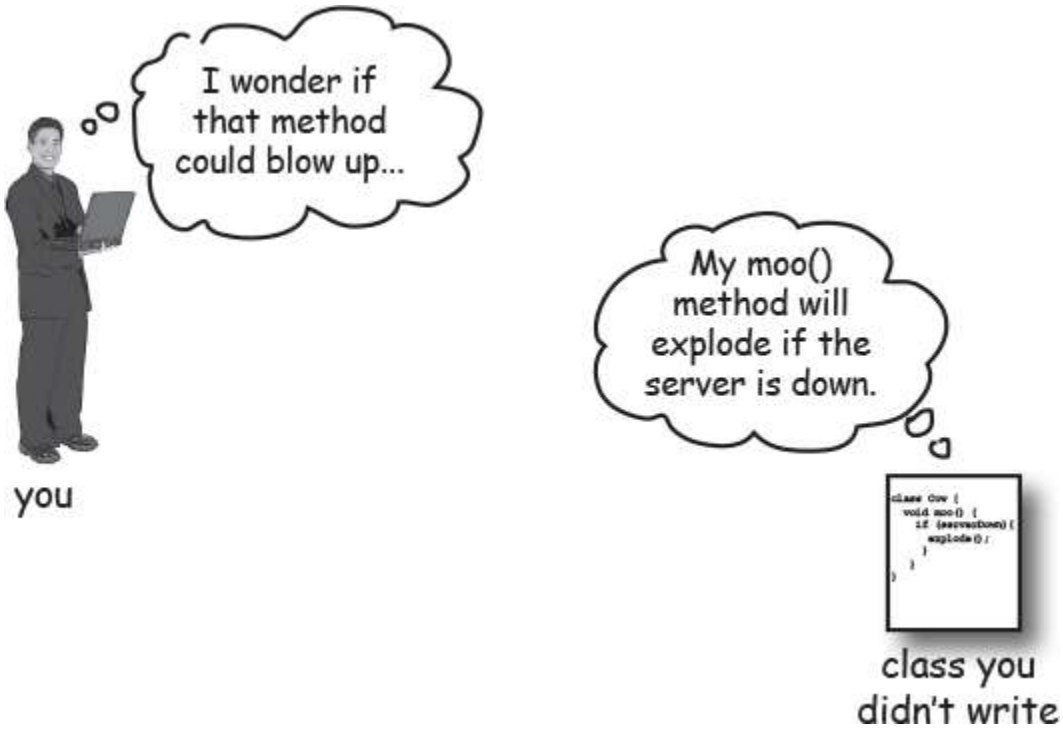

- ④ **You then write code that can handle the failure if it *does* happen. You need to be prepared, just in case.**

Methods in Java use *exceptions* to tell the calling code, "Something Bad Happened. I failed."

Java's exception-handling mechanism is a clean, well-lighted way to handle "exceptional situations" that pop up at runtime; it lets you put all your error-handling code in one easy-to-read place. It's based on the method you're calling *telling you* it's risky (i.e., that the method *might* generate an exception), so that you can write code to deal with that possibility. If you *know* you might get an exception when you call a particular method, you can be *prepared* for—possibly even *recover* from—the problem that caused the exception.

So, how does a method tell you it might throw an exception? You find a **`throws`** clause in the risky method's declaration.

The `getSequencer ()` method takes a risk. It can fail at runtime. So it must "declare" the risk *you* take when you call it.

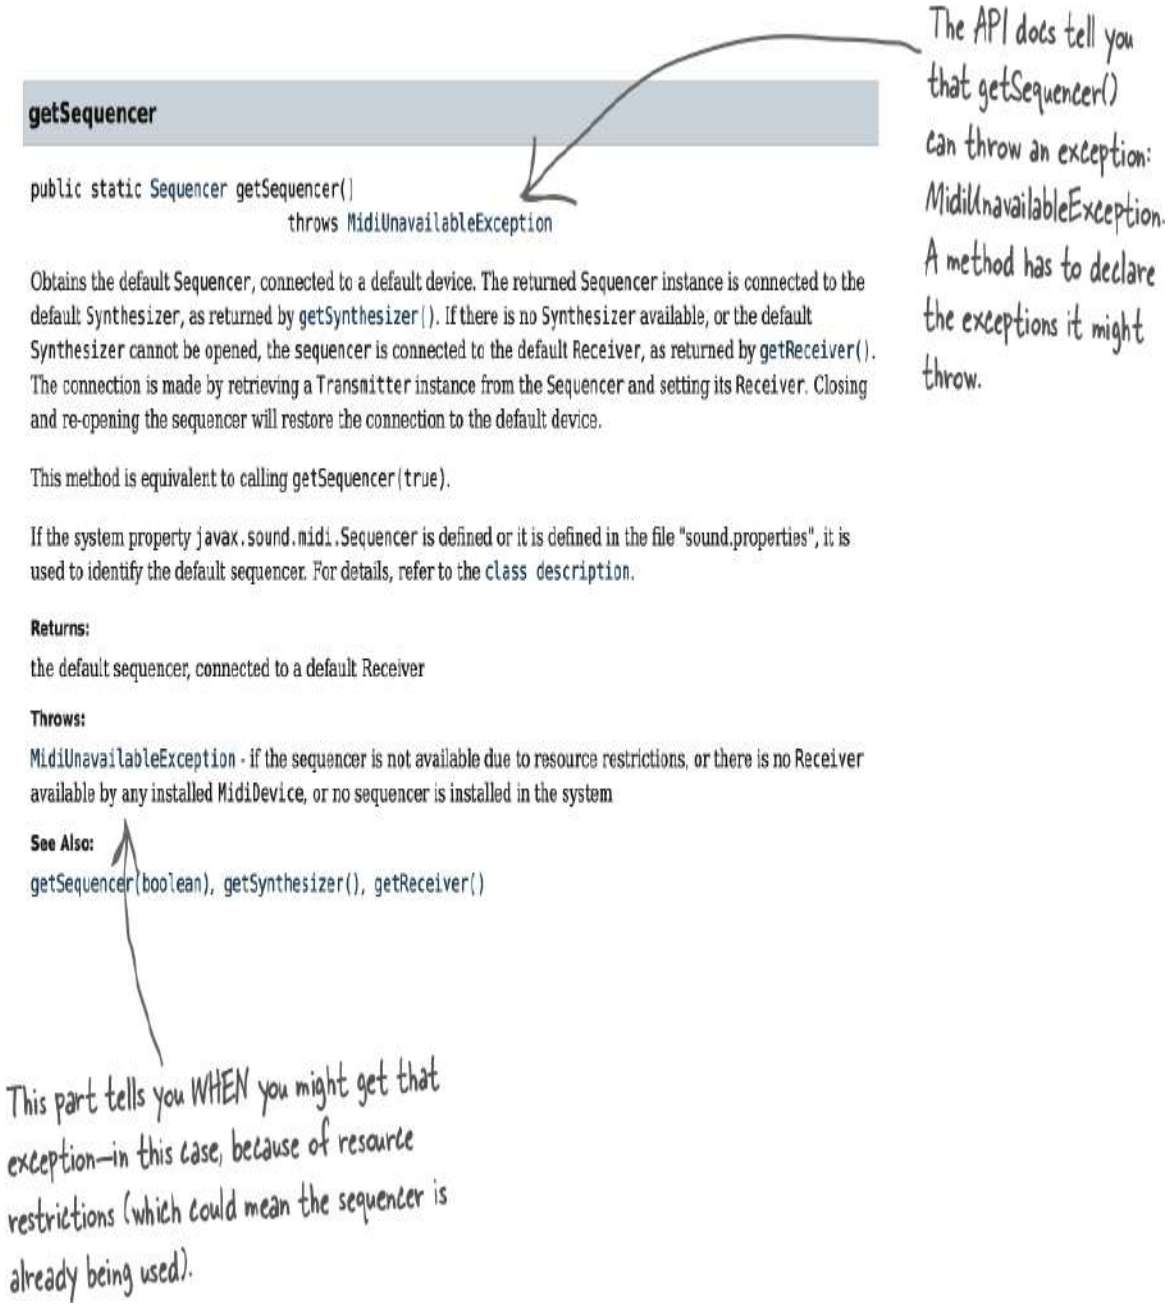

NOTE

Risky methods that could fail at runtime declare the exceptions that might happen using "throws SomeKindOfException" on their method declaration.

The compiler needs to know that YOU know you're calling a risky method

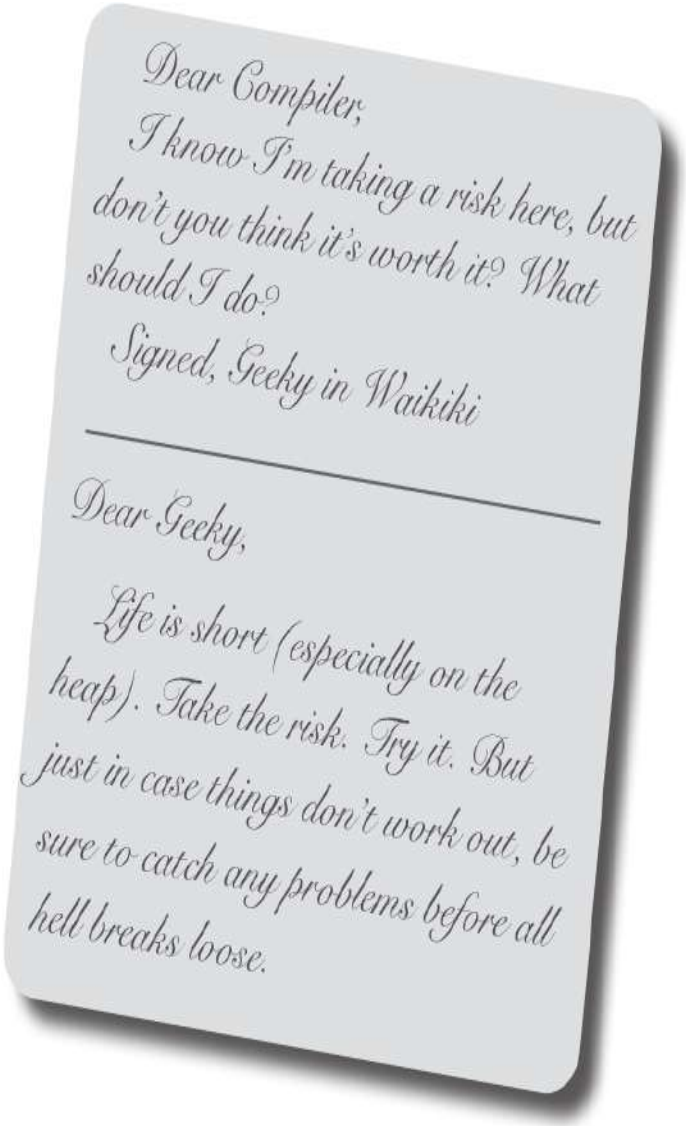


```
import javax.sound.midi.*;

public class MusicTest1 {

  public void play() {
    try {
      Sequencer sequencer = MidiSystem.getSequencer();
      System.out.println("Successfully got a sequencer");
    } catch(MidiUnavailableException e) {
      System.out.println("Bummer");
    }
  }

  public static void main(String[] args) {
    MusicTest1 mt = new MusicTest1();
    mt.play();
  }
}
```

Put the risky thing in a "try" block. It's the "risky" getSequencer method that might throw an exception.

Make a "catch" block for what to do if the exceptional situation happens—in other words, a MidiUnavailableException is thrown by the call to getSequencer().

If you wrap the risky code in something called a **try/catch**, the compiler will relax.

A try/catch block tells the compiler that you *know* an exceptional thing could happen in the method you're calling, and that you're prepared to handle it. That compiler doesn't care *how* you handle it; it cares only that you say you're taking care of it.

An exception is an object... of type Exception

This is fortunate, because it would be much harder to remember if exceptions were of type Broccoli.

Remember from the polymorphism (Chapter 7 and Chapter 8) that an object of type Exception *can* be an instance of any *subclass* of Exception.

Because an *Exception* is an object, what you *catch* is an object. In the following code, the **`catch`** argument is declared as type Exception, and the parameter reference variable is *ex*.

```
try {
  // do risky thing
} catch(Exception e) {
  // try to recover
}
```

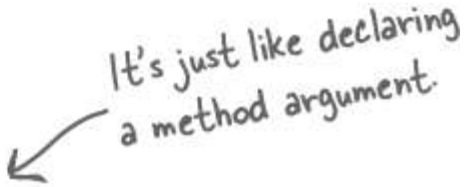

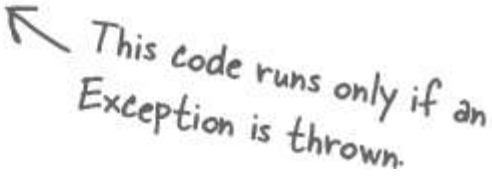

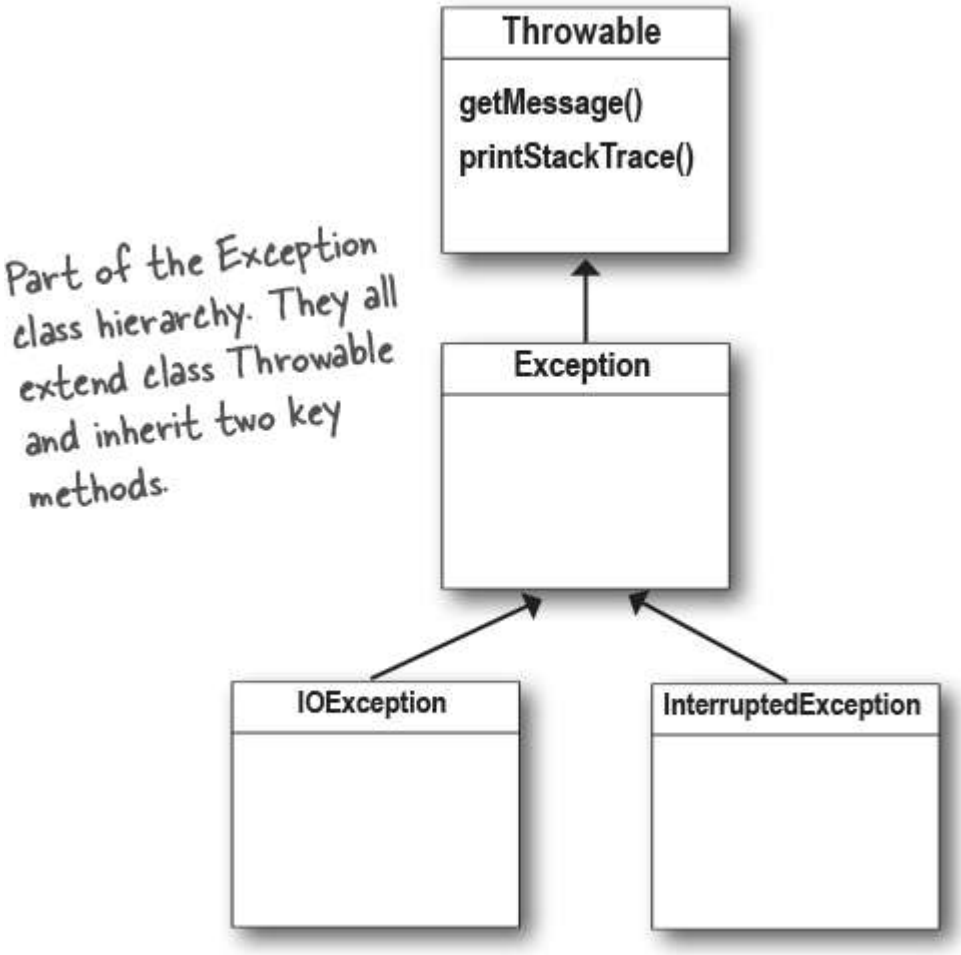

What you write in a catch block depends on the exception that was thrown. For example, if a server is down, you might use the catch block to try another server. If the file isn't there, you might ask the user for help finding it.

If it's your code that catches the exception, then whose code throws it?

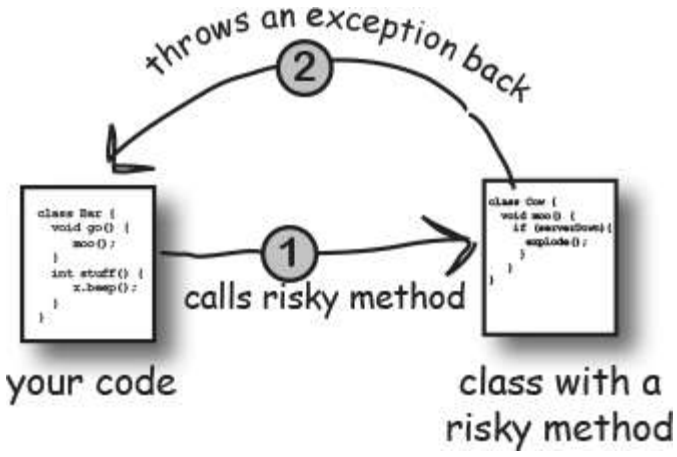

You'll spend much more of your Java coding time *handling* exceptions than you'll spend *creating* and *throwing* them yourself. For now, just know that when your code *calls* a risky method—a method that declares an exception—it's the risky method that *throws* the exception back to *you*, the caller.

In reality, it might be you who wrote both classes. It really doesn't matter who writes the code...what matters is knowing which method *throws* the exception and which method *catches* it.

When somebody writes code that could throw an exception, they must *declare* the exception.

- ① **Risky, exception-throwing code:**

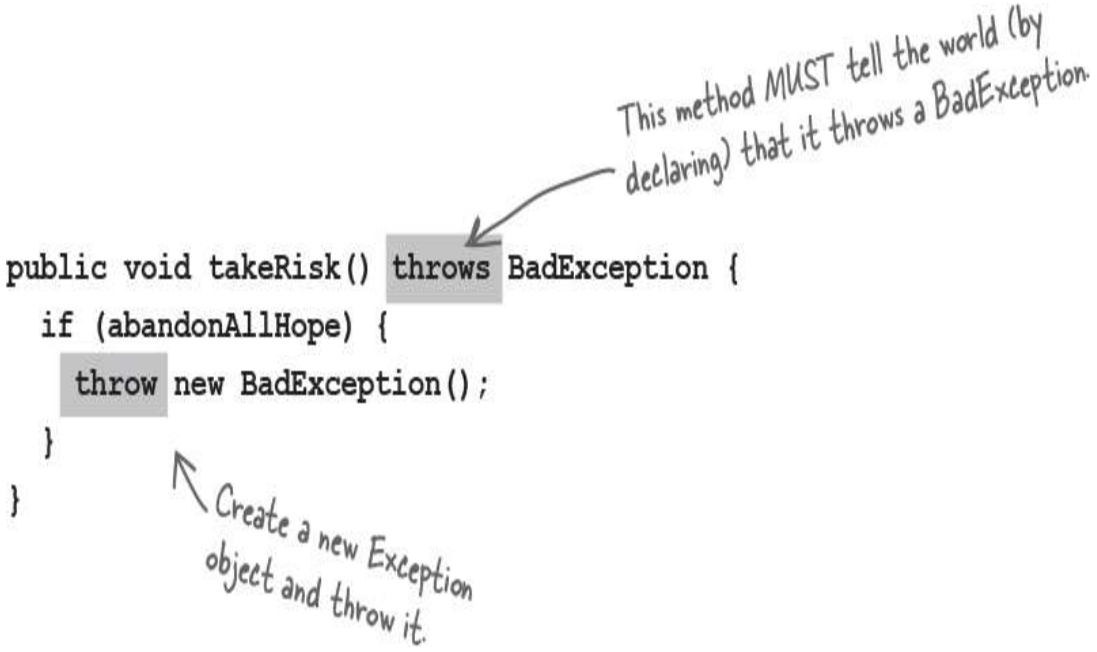

- ② **Your code that *calls* the risky method:**

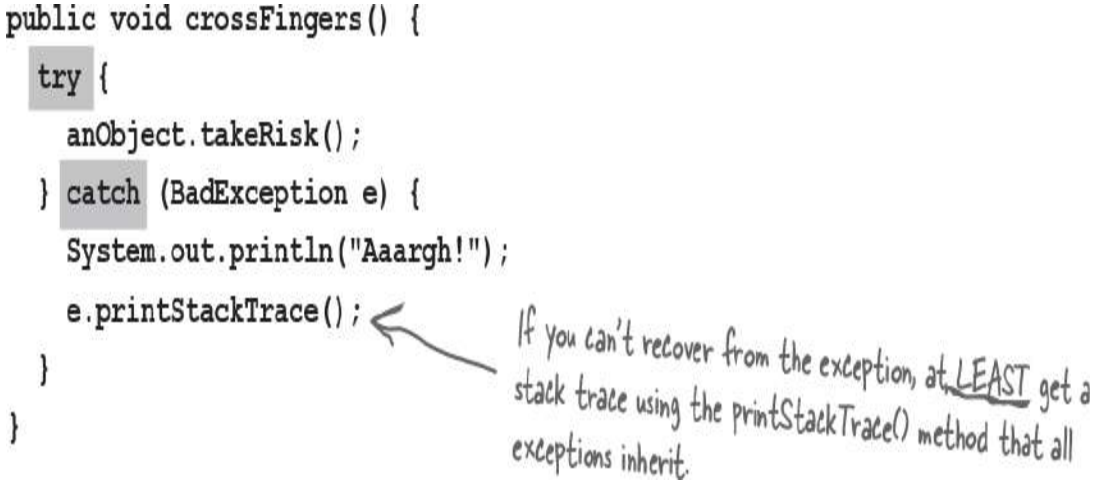

One method will catch what another method throws. An exception is always thrown back to the caller.

The method that throws has to declare that it might throw the exception.

The compiler checks for everything except RuntimeExceptions.

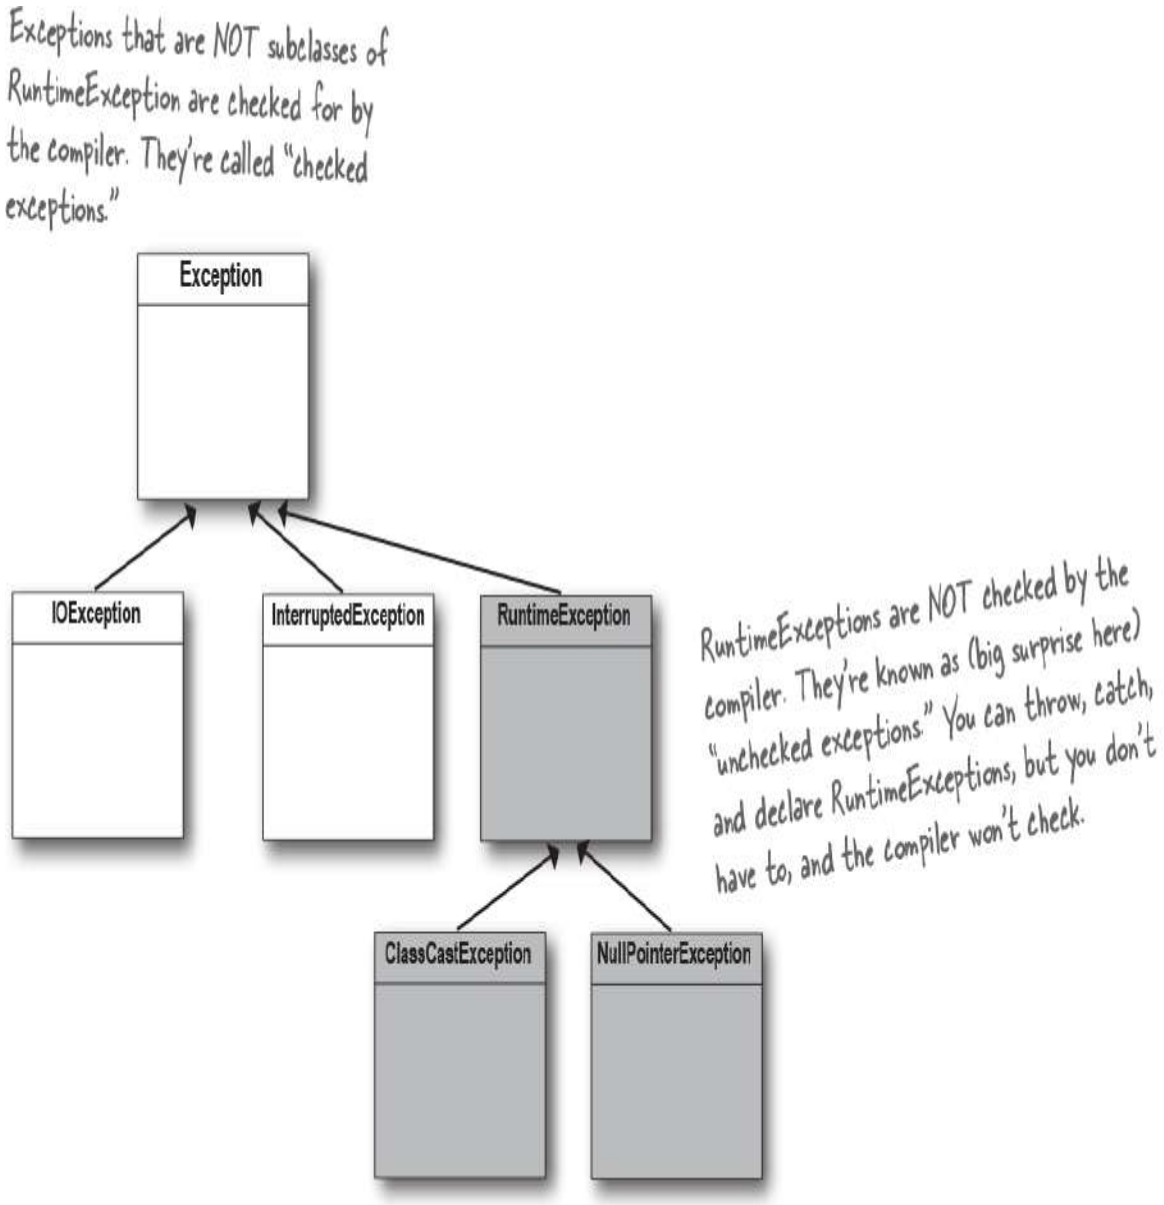

The compiler guarantees:

- ① If you *throw* an exception in your code, you *must* declare it using the *throws* keyword in your method declaration.
- ② If you *call* a method that throws an exception (in other words, a method that *declares* it throws an exception), you must *acknowledge* that you're aware of the exception possibility. One way to satisfy the compiler is to wrap the call in a try/catch. (There's a second way we'll look at a little later in this chapter.)

THERE ARE NO DUMB QUESTIONS

Q: Wait just a minute! How come this is the FIRST time we've had to try/catch an Exception? What about the exceptions I've already gotten like NullPointerException and the exception for DivideByZero? I even got a NumberFormatException from the Integer.parseInt() method. How come we didn't have to catch those?

A: The compiler cares about all subclasses of Exception, *unless* they are a special type, RuntimeException. Any exception class that extends RuntimeException gets a free pass. RuntimeExceptions can be thrown anywhere, with or without throws declarations or try/catch blocks. The compiler doesn't bother checking whether a method declares that it throws a RuntimeException, or whether the caller acknowledges that they might get that exception at runtime.

Q: I'll bite. WHY doesn't the compiler care about those runtime exceptions? Aren't they just as likely to bring the whole show to a stop?

A: Most RuntimeExceptions come from a problem in your code logic, rather than a condition that fails at runtime in ways that you cannot predict or prevent. You *cannot* guarantee the file is there. You *cannot* guarantee the server is up. But you *can* make sure your code doesn't index off the end of an array (that's what the .length attribute is for).

You WANT RuntimeExceptions to happen at development and testing time. You don't want to code in a try/catch, for example, and have the overhead that goes with it, to catch something that shouldn't happen in the first place.

A try/catch is for handling exceptional situations, not flaws in your code. Use your catch blocks to try to recover from situations you can't guarantee will succeed. Or at the very least, print out a message to the user and a stack trace so somebody can figure out what happened.

BULLET POINTS

- A method can throw an exception when something fails at runtime.
- An exception is always an object of type Exception. (This, as you remember from the polymorphism chapters (Chapter 7 and Chapter 8), means the object is from a class that has Exception somewhere up its inheritance tree.)
- The compiler does NOT pay attention to exceptions that are of type **RuntimeException**. A RuntimeException does not have to be declared or wrapped in a try/catch (although you're free to do either or both of those things).
- All Exceptions the compiler cares about are called "checked exceptions," which really means *compiler*-checked exceptions. Only RuntimeExceptions are excluded from compiler checking. All other exceptions must be acknowledged in your code.
- A method throws an exception with the keyword **`throw`**, followed by a new exception object:

```
throw new NoCaffeineException();
```

- Methods that *might* throw a checked exception ***must*** announce it with a **`throws SomeException`** declaration.
- If your code calls a checked-exception-throwing method, it must reassure the compiler that precautions have been taken.
- If you're prepared to handle the exception, wrap the call in a try/catch, and put your exception handling/recovery code in the catch block.
- If you're not prepared to handle the exception, you can still make the compiler happy by officially "ducking" the exception. We'll talk about ducking a little later in this chapter.

METACOGNITIVE TIP

If you're trying to learn something new, make that the *last* thing you try to learn before going to sleep. So, once you put this book down (assuming you can tear yourself away from it), don't read anything else more challenging than the back of a Cheerios™ box. Your brain needs time to process what you've read and learned. That could take a few *hours*. If you try to shove something new in right on top of your Java, some of the Java might not "stick."

Of course, this doesn't rule out learning a physical skill. Working on your latest Ballroom KickBoxing routine probably won't affect your Java learning.

For the best results, read this book (or at least look at the pictures) right before going to sleep.

SHARPEN YOUR PENCIL

	Things you want to do	What might go wrong
Which of these do you think might throw an exception that the compiler should care about? These are things that you CAN'T control in your code. We did the first one. (Because it was the easiest.)	✓ Connect to a remote server __ Access an array beyond its length __ Display a window on the screen __ Retrieve data from a database __ See if a text file is where you *think* it is __ Create a new file __ Read a character from the command line	The server is down _____ _____ _____ _____ _____ _____ _____

→ **Yours to solve.**

Flow control in try/catch blocks

When you call a risky method, one of two things can happen. The risky method either succeeds, and the try block completes, or the risky method throws an exception back to your calling method.

If the try succeeds

(doRiskyThing() does *not* throw an exception)

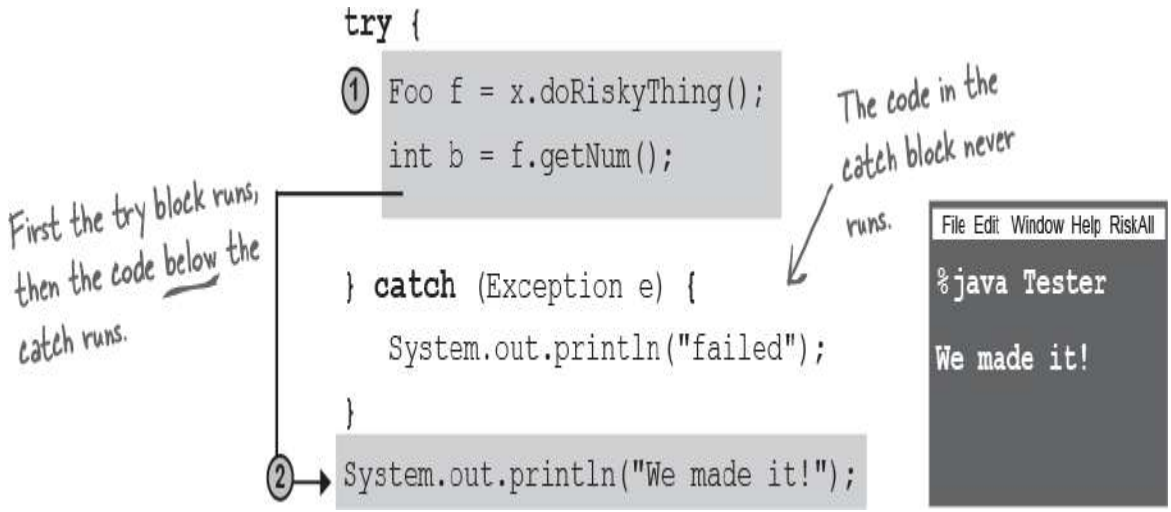

If the try fails

(because doRiskyThing() *does* throw an exception)

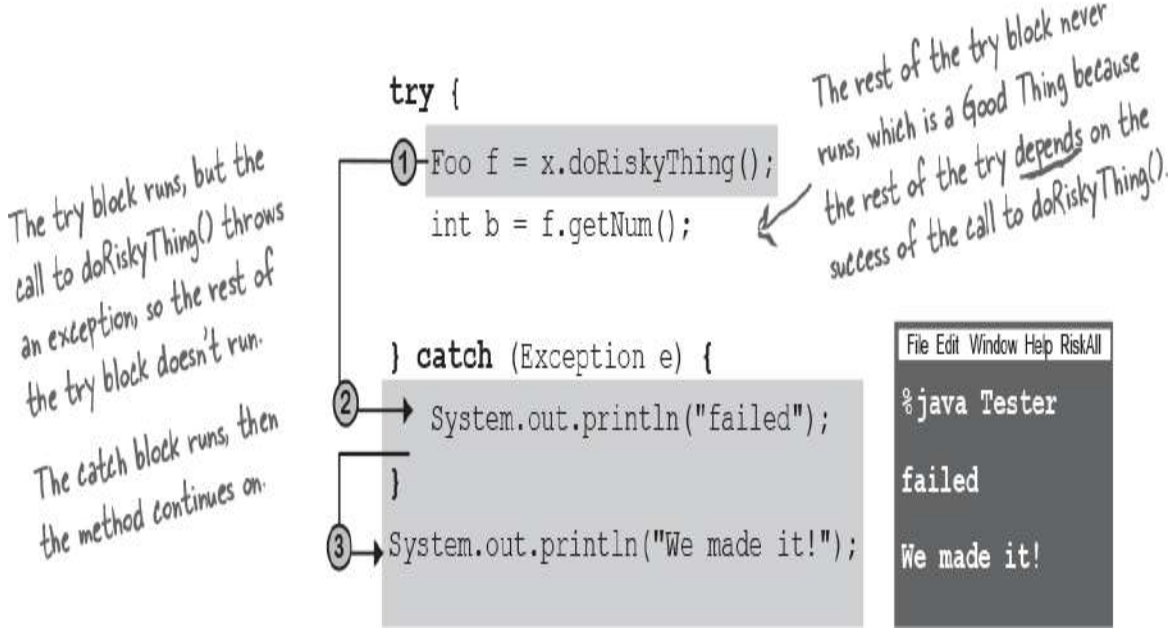

Finally: for the things you want to do no matter what

If you try to cook something, you start by turning on the oven.

If the thing you try is a complete **failure,** ***you have to turn off the oven.***

If the thing you try **succeeds,** ***you have to turn off the oven.***

You have to turn off the oven no matter what!

A finally block is where you put code that must run *regardless* of an exception.

```
try {
  turnOvenOn();
  x.bake();
} catch (BakingException e) {
  e.printStackTrace();
} finally {
  turnOvenOff();
}
```

Without finally, you have to put the turnOvenOff() in *both* the try and the catch because ***you have to turn off the oven no matter what.*** A finally block lets you put all your important cleanup code in *one* place instead of duplicating it like this:

```
try {
  turnOvenOn();
  x.bake();
  turnOvenOff();
} catch (BakingException e) {
  e.printStackTrace();
  turnOvenOff();
}
```

If the try block fails (an exception), flow control immediately moves to the catch block. When the catch block completes, the finally block runs. When the finally block completes, the rest of the method continues on.

If the try block succeeds (*no* exception), flow control skips over the catch block and moves to the finally block. When the finally block completes, the rest of the method continues on.

If the try or catch block has a return statement, finally will still run! Flow jumps to the finally, then back to the return.

Flow Control

→ **Yours to solve.**

Look at the code to the left. What do you think the output of this program would be? What do you think it would be if the third line of the program were changed to `String test = "yes";`? Assume ScaryException extends Exception.

```
public class TestExceptions {


  public static void main(String[] args) {
    String test = "no";
    try {
      System.out.println("start try");
      doRisky(test);
      System.out.println("end try");
    } catch (ScaryException se) {
      System.out.println("scary exception");
    } finally {
      System.out.println("finally");
    }
    System.out.println("end of main");
  }
```

Output when `test = "no"`

```
  static void doRisky(String test) throws ScaryException {
    System.out.println("start risky");
    if ("yes".equals(test)) {
      throw new ScaryException();
    }
    System.out.println("end risky");
  }
}

class ScaryException extends Exception {
}
```

Output when test = "yes"



When test = “no”: start try - start risky - end risky - end try - finally - end of main

When test = “yes”: start try - start risky - scary exception - finally - end of main

Did we mention that a method can throw more than one exception?

A method can throw multiple exceptions if it darn well needs to. But a method’s declaration must declare *all* the checked exceptions it can throw (although if two or more exceptions have a common superclass, the method can declare just the superclass).

Catching multiple exceptions

The compiler will make sure that you’ve handled *all* the checked exceptions thrown by the method you’re calling. Stack the *catch* blocks under the *try*,

one after the other. Sometimes the order in which you stack the catch blocks matters, but we'll get to that a little later.

Exceptions are polymorphic

Exceptions are objects, remember. There's nothing all that special about one, except that it is *a thing that can be **thrown***. So like all good objects,

Exceptions can be referred to polymorphically. A LingerieException *object*, for example, could be assigned to a ClothingException *reference*. A PantsException could be assigned to an Exception reference. You get the idea. The benefit for exceptions is that a method doesn't have to explicitly declare every possible exception it might throw; it can declare a superclass of the exceptions. Same thing with catch blocks—you don't have to write a catch for each possible exception as long as the catch (or catches) you have can handle any exception thrown.

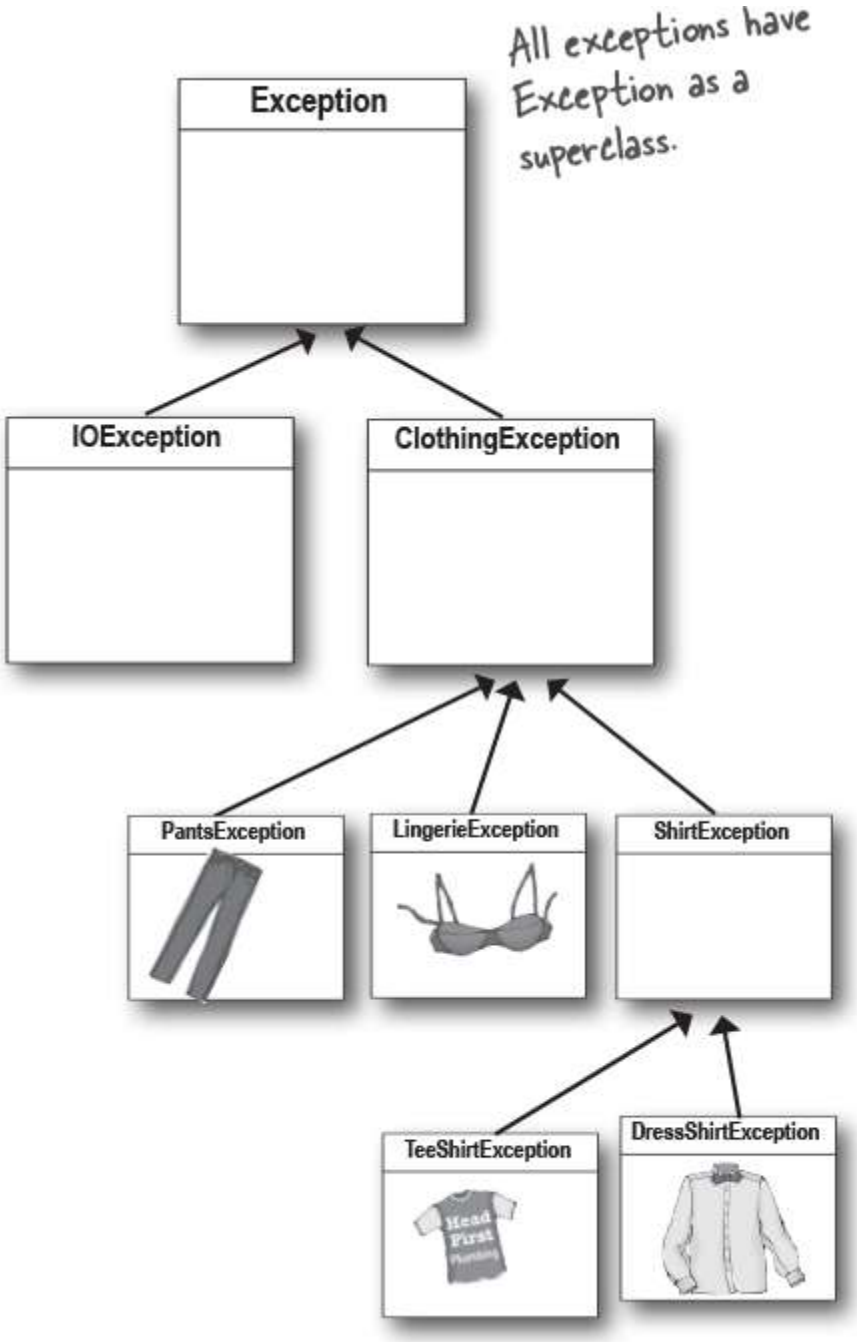

- ① **You can DECLARE exceptions using a superclass of the exceptions you throw.**

```
public void doLaundry() throws ClothingException {
```

Declaring a ClothingException lets you throw any subclass of ClothingException. That means doLaundry() can throw a PantsException, LingerieException, TeeShirtException, and DressShirtException without explicitly declaring them individually.

- **② You can CATCH exceptions using a superclass of the exception thrown.**

```
try {
  laundry.doLaundry();
} catch(ClothingException cex) {
  // recovery code
}
```

Can catch any ClothingException subclass

```
try {
  laundry.doLaundry();
} catch(ShirtException shex) {
  // recovery code
}
```

Can catch only TeeShirtException and DressShirtException

Just because you CAN catch everything with one big super polymorphic catch, doesn't always mean you SHOULD.

You *could* write your exception-handling code so that you specify only *one* catch block, using the superclass Exception in the catch clause, so that you'll be able to catch *any* exception that might be thrown.

```
try {
   laundry.doLaundry();
} catch(Exception ex) {
   // recovery code...
}
```

Recovery from WHAT? This catch block will catch ANY and all exceptions, so you won't automatically know what went wrong.

Write a different catch block for each exception that you need to handle uniquely.

For example, if your code deals with (or recovers from) a TeeShirtException differently than it handles a LingerieException, write a catch block for each. But if you treat all other types of ClothingException in the same way, then add a ClothingException catch to handle the rest.

```
try {
  laundry.doLaundry();

} catch (TeeShirtException tex) {
  // recovery from TeeShirtException

} catch (LingerieException lex) {
  // recovery from LingerieException

} catch (ClothingException cex) {
  // recovery from all others
}
```

TeeShirtExceptions and LingerieExceptions need different recovery code, so you should use different catch blocks.

All other ClothingExceptions are caught here.

Multiple catch blocks must be ordered from smallest to biggest

TeeShirtExceptions are caught here, but no other exceptions will fit

```
catch(TeeShirtException tex)
```

TeeShirtExceptions will never get here, but all other ShirtException subclasses are caught here.

```
catch(ShirtException sex)
```

All ClothingExceptions are caught here, although TeeShirtException and ShirtException will never get this far.

```
catch(ClothingException cex)
```

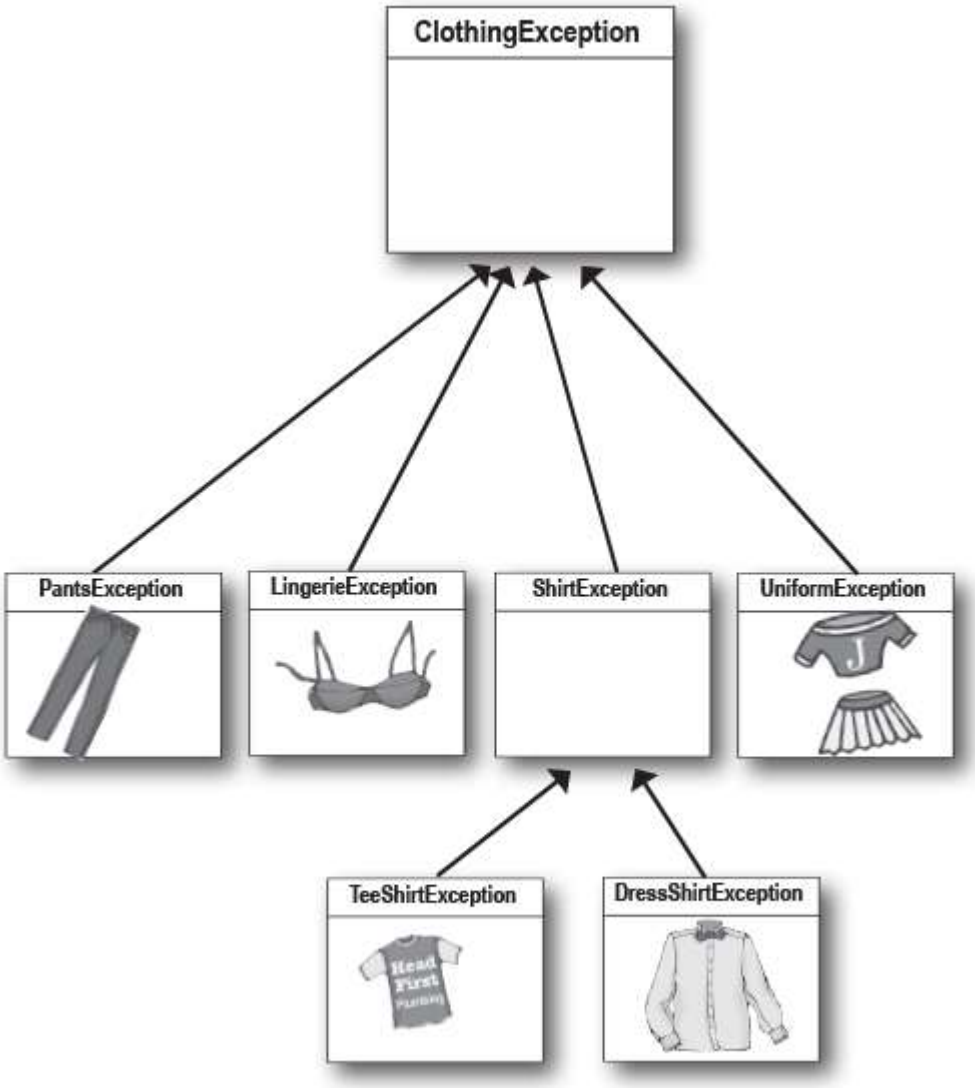

The higher up the inheritance tree, the bigger the catch "basket." As you move down the inheritance tree, toward more and more specialized Exception classes, the catch "basket" is smaller. It's just plain old polymorphism.

A ShirtException catch is big enough to take a TeeShirtException or a DressShirtException (and any future subclass of anything that extends ShirtException). A ClothingException is even bigger (i.e., there are more things that can be referenced using a ClothingException type). It can take an exception of type ClothingException (duh) and any ClothingException subclasses: PantsException, UniformException, LingerieException, and ShirtException. The mother of all catch arguments is type **Exception**; it will

catch *any* exception, including runtime (unchecked) exceptions, so you probably won't use it outside of testing.

You can't put bigger baskets above smaller baskets

Well, you *can,* but it won't compile. Catch blocks are not like overloaded methods where the best match is picked. With catch blocks, the JVM simply starts at the first one and works its way down until it finds a catch that's broad enough (in other words, high enough on the inheritance tree) to handle the exception. If your first catch block is **`catch(Exception ex)`**, the compiler knows there's no point in adding any others—they'll never be reached.

Don't do this!

```
try {
  laundry.doLaundry();
```

```
}  catch(ClothingException cex) {
  // recovery from ClothingException
```

```
}  catch(LingerieException lex) {
  // recovery from LingerieException
```

```
}  catch(ShirtException shex) {
  // recovery from ShirtException
}
```

NOTE

Siblings (exceptions at the same level of the hierarchy tree, like PantsException and LingerieException) can be in any order, because they can't catch one another's exceptions.

You could put ShirtException above LingerieException, and nobody would mind. Because even though ShirtException is a bigger (broader) type because it can catch other classes (its own subclasses), ShirtException can't catch a LingerieException, so there's no problem.

SHARPEN YOUR PENCIL

Assume the try/catch block here is legally coded. Your task is to draw two different class diagrams that can accurately reflect the Exception classes. In other words, what class inheritance structures would make the try/catch blocks in the sample code legal?

```
try {
  x.doRisky();
} catch(AlphaEx a) {
  // recovery from AlphaEx
} catch(BetaEx b) {
  // recovery from BetaEx
} catch(GammaEx c) {
  // recovery from GammaEx
} catch(DeltaEx d) {
  // recovery from DeltaEx
}
```

Your task is to create two different *legal* try/catch structures (similar to the one above left) to accurately represent the class diagram shown on the left. Assume ALL of these exceptions might be thrown by the method with the try block.

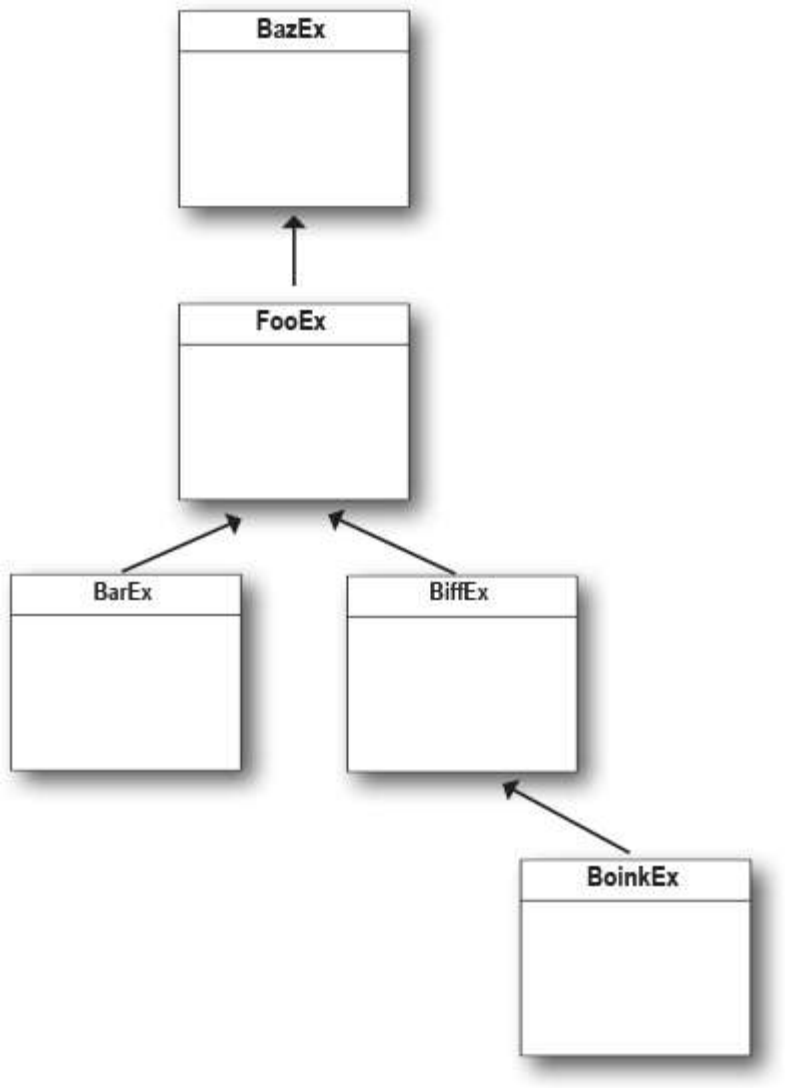

→ **Both answers in "Sharpen your pencil".**

When you don't want to handle an exception...

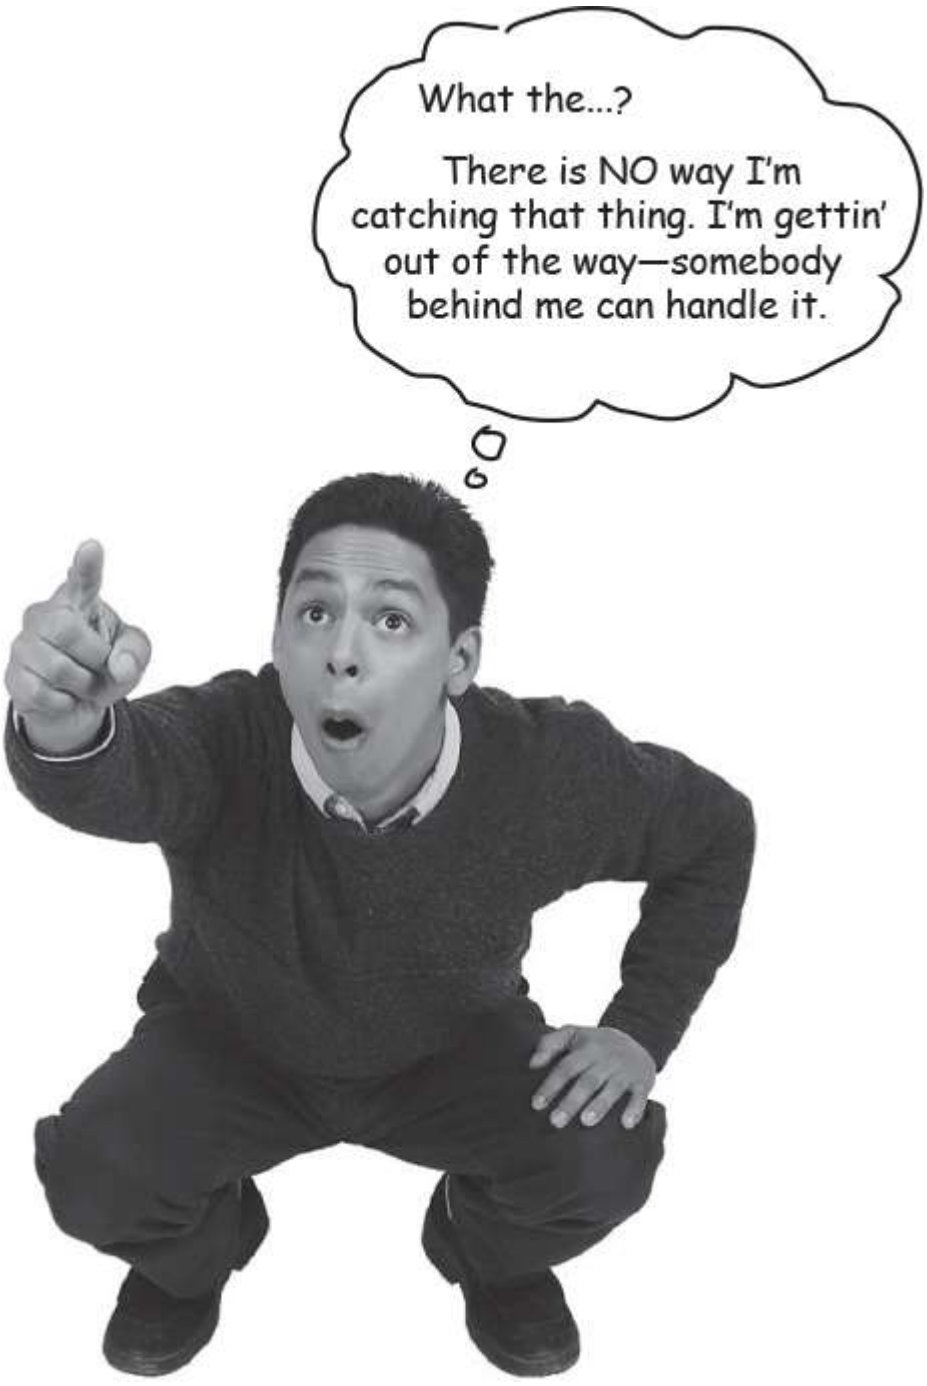
What the...?
There is NO way I'm catching that thing. I'm gettin' out of the way—somebody behind me can handle it.

If you don't want to handle an exception, you can duck it by declaring it.

When you call a risky method, the compiler needs you to acknowledge it. Most of the time, that means wrapping the risky call in a try/catch. But you have another alternative: simply duck it and let the method that called you catch the exception.

It's easy—all you have to do is *declare* that *you* throw the exceptions. Even though, technically, *you* aren't the one doing the throwing, it doesn't matter. You're still the one letting the exception whiz right on by.

But if you duck an exception, then you don't have a try/catch, so what happens when the risky method (doLaundry()) *does* throw the exception?

When a method throws an exception, that method is popped off the stack immediately, and the exception is thrown to the next method down the stack —the *caller*. But if the *caller* is a *ducker*, then there's no catch for it, so the *caller* pops off the stack immediately, and the exception is thrown to the next method and so on...where does it end? You'll see a little later.

```
public void foo() throws ReallyBadException {
    // call risky method without a try/catch
    laundry.doLaundry();
}
```

You don't REALLY throw it, but since you don't have a try/catch for the risky method you call, YOU are now the "risky method." Because now, whoever calls YOU has to deal with the exception.

Ducking (by declaring) only delays the inevitable

Sooner or later, *somebody* has to deal with it. But what if main() ducks the exception?

```
public class Washer {
  Laundry laundry = new Laundry();

  public void foo() throws ClothingException {
    laundry.doLaundry();
  }

  public static void main (String[] args) throws ClothingException {
    Washer a = new Washer();
    a.foo();
  }
}
```

Both methods duck the exception (by declaring it), so there's nobody to handle it! This compiles just fine.

- ❶ doLaundry() throws a ClothingException

```
main() calls foo()

foo() calls doLaundry()

doLaundry() is
```

```
running and throws a
ClothingException
```

- ❷ foo() ducks the exception

```
doLaundry() pops off the
stack immediately, and
the exception is thrown
back to foo().

But foo() doesn't have a
try/catch, so...
```

- ❸ main() ducks the exception

```
foo() pops off the
stack, and the excep-
tion is thrown back
to main(). But main()
doesn't have a try/
catch, so the excep-
tion is thrown back to…
who? What? There's
nobody left but the
JVM, and it's thinking,
```

```
"Don't expect ME to
get you out of this."
```

- ❹ The JVM shuts down

We're using the T-shirt to represent a Clothing Exception. We know, we know...you would have preferred the blue jeans.

Handle or Declare. It's the law.

So now we've seen both ways to satisfy the compiler when you call a risky (exception-throwing) method.

- ① **HANDLE**

```
Wrap the risky call in a try/catch
try {
  laundry.doLaundry();
} catch(ClothingException cex) {
  // recovery code
}
```

This had better be a big enough catch to handle all exceptions that doLaundry() might throw. Or else the compiler will still complain that you're not catching all of the exceptions.

- ② **DECLARE (duck it)**

  Declare that YOUR method throws the same exceptions as the risky method you're calling.

```
void foo() throws ClothingException {
  laundry.doLaundry();
}
```

The doLaundry() method throws a ClothingException, but by declaring the exception, the foo() method gets to duck the exception. No try/catch.

  But now this means that whoever calls the foo() method has to follow the Handle or Declare law. If foo() ducks the exception (by declaring it)

and main() calls foo(), then main() has to deal with the exception.

```
public class Washer {
  Laundry laundry = new Laundry();

  public void foo() throws ClothingException {
    laundry.doLaundry();
  }

  public static void main (String[] args) {
    Washer a = new Washer();
    a.foo();
  }
}
```

TROUBLE!!

Now main() won't compile, and we get an "unreported exception" error. As far as the compiler's concerned, the foo() method throws an exception.

Because the foo() method ducks the ClothingException thrown by doLaundry(), main() has to wrap a.foo() in a try/catch, or main() has to declare that it, too, throws ClothingException!

Getting back to our music code...

Now that you've completely forgotten, we started this chapter with a first look at some JavaSound code. We created a Sequencer object, but it wouldn't compile because the method Midi.getSequencer() declares a checked exception (MidiUnavailableException). But we can fix that now by wrapping the call in a try/catch.

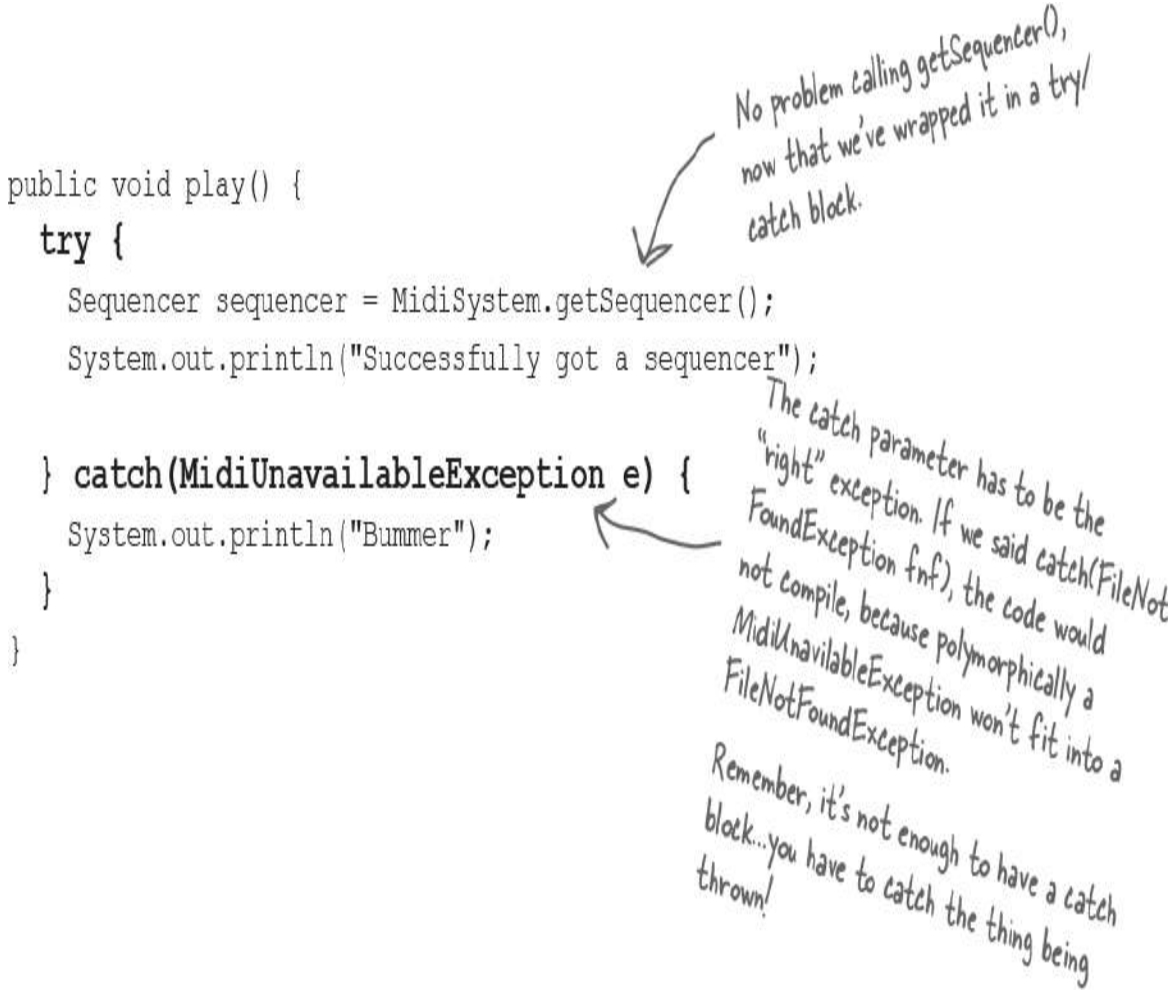

Exception Rules

- ① **You cannot have a catch or finally without a try.**

```
void go() {
  Foo f = new Foo();
  f.foof();
  catch(FooException ex) { }
}
```

NOT LEGAL!

Where's the try?

- ② **You cannot put code between the try and the catch.**

```
try {
  x.doStuff();
}
int y = 43;
} catch(Exception ex) { }
```

NOT LEGAL! You can't put code between the try and the catch.

- ③ **A try MUST be followed by either a catch or a finally.**

catch or a finally.

```
try {
  x.doStuff();
} finally {
  // cleanup
}
```

LEGAL because you have a finally, even though there's no catch. But you cannot have a try by itself.

- ④ **A try with only a finally (no catch) must still declare the exception.**

```
void go() throws FooException {
  try {
    x.doStuff();
  } finally { }
}
```

A try without a catch doesn't satisfy the handle or declare law.

Code Kitchen

Everything you see I made myself from scratch.
Was that more satisfying than using Ready-Bake Code?

You don't have to do it yourself, but it's a lot more fun if you do.

The rest of this chapter is optional; you can use Ready-Bake Code for all the music apps.

But if you want to learn more about JavaSound, turn the page.

Making actual sound

Remember near the beginning of the chapter, we looked at how MIDI data holds the instructions for *what* should be played (and *how* it should be played) and we also said that MIDI data doesn't actually *create any sound that you hear*. For sound to come out of the speakers, the MIDI data has to be sent through some kind of MIDI device that takes the MIDI instructions and renders them in sound, by triggering either a hardware instrument or a "virtual" instrument (software synthesizer). In this book, we're using only software devices, so here's how it works in JavaSound:

You need FOUR things:

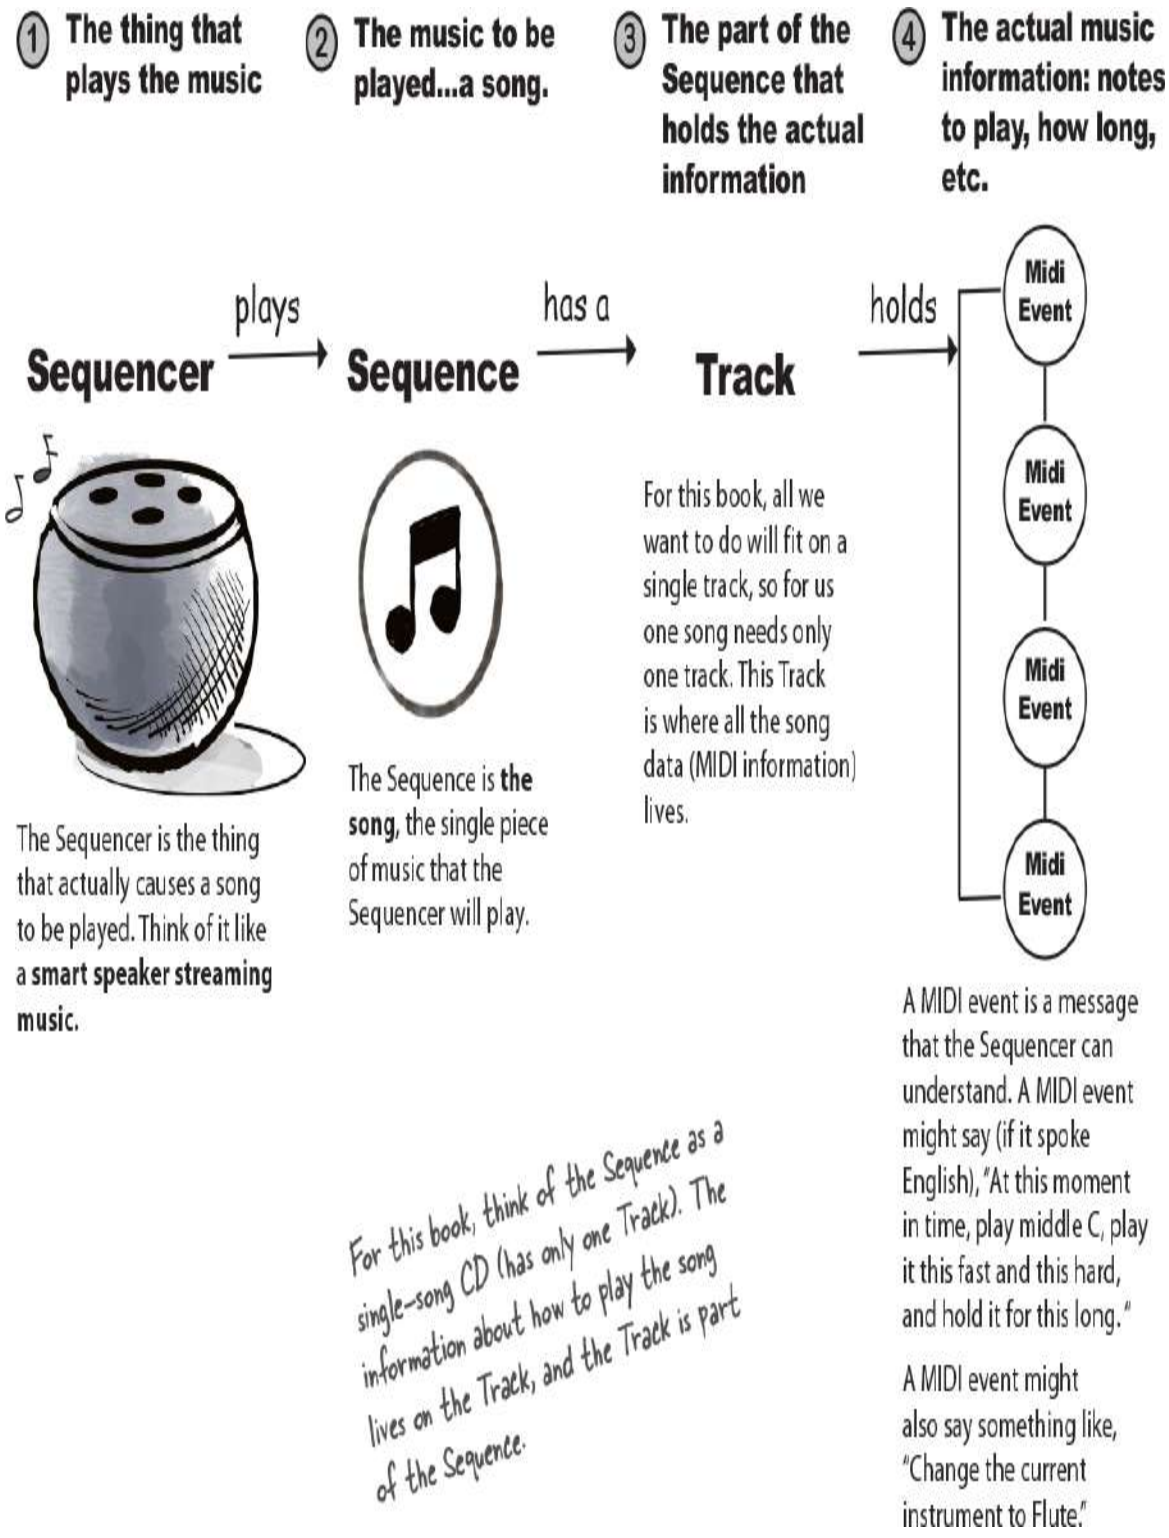

And you need FIVE steps:

- ① Get a **`Sequencer`** and open it

```
Sequencer player = MidiSystem.getSequencer();
player.open();
```

- ② Make a new **`Sequence`**

```
Sequence seq = new Sequence(timing,4);
```

- ③ Get a new **`Track`** from the Sequence

```
Track t = seq.createTrack();
```

- ④ Fill the Track with **`MidiEvents`** and give the Sequence to the Sequencer

```
t.add(myMidiEvent1);
player.setSequence(seq);
```

Version 1: Your very first sound player app

Type it in and run it. You'll hear the sound of someone playing a single note on a piano! (OK, maybe not some*one*, but some*thing*.)

```
import javax.sound.midi.*;
import static javax.sound.midi.ShortMessage.*;

public class MiniMiniMusicApp {
  public static void main(String[] args) {
    MiniMiniMusicApp mini = new MiniMiniMusicApp();
    mini.play();
  }

  public void play() {
    try {
```

Don't forget to import the midi package.

We're using a static import here so we can use the constants in the ShortMessage class.

```
1   Sequencer player = MidiSystem.getSequencer();
    player.open();

2   Sequence seq = new Sequence(Sequence.PPQ, 4);

3   Track track = seq.createTrack();

4   ShortMessage msg1 = new ShortMessage();
    msg1.setMessage(NOTE_ON, 1, 44, 100);
    MidiEvent noteOn = new MidiEvent(msg1, 1);
    track.add(noteOn);

    ShortMessage msg2 = new ShortMessage();
    msg2.setMessage(NOTE_OFF, 1, 44, 100);
    MidiEvent noteOff = new MidiEvent(msg2, 16);
    track.add(noteOff);

    player.setSequence(seq);

    player.start();

  } catch (Exception e) {
    e.printStackTrace();
  }
 }
}
```

Get a Sequencer and open it (so we can use it...a Sequencer doesn't come already open).

Don't worry about the arguments to the Sequence constructor. Just copy these (think of 'em as Ready-bake arguments).

Ask the Sequence for a Track. Remember, the Track lives in the Sequence, and the MIDI data lives in the Track.

Put some MidiEvents into the Track. This part is mostly Ready-Bake Code. The only thing you'll have to care about are the arguments to the setMessage() method, and the arguments to the MidiEvent constructor. We'll look at those arguments on the next page.

Give the Sequence to the Sequencer (like selecting the song to play).

start() the Sequencer (play the song).

Making a MidiEvent (song data)

A MidiEvent is an instruction for part of a song. A series of MidiEvents is kind of like sheet music, or a player piano roll. Most of the MidiEvents we care about describe ***a thing to do*** and the ***moment in time to do it***. The moment in time part matters, since timing is everything in music. This note follows this note and so on. And because MidiEvents are so detailed, you have to say at what moment to *start* playing the note (a NOTE ON event) and at what moment to *stop* playing the notes (NOTE OFF event). So you can imagine that firing the "stop playing note G" (NOTE OFF message) *before* the "start playing Note G" (NOTE ON) message wouldn't work.

The MIDI instruction actually goes into a Message object; the MidiEvent is a combination of the Message plus the moment in time when that message should "fire." In other words, the Message might say, "Start playing Middle C," while the MidiEvent would say, "Trigger this message at beat 4."

So we always need a Message and a MidiEvent.

The Message says *what* to do, and the MidiEvent says *when* to do it.

NOTE

A MidiEvent says what to do and when to do it.

Every instruction must include the timing for that instruction.

In other words, at which beat that thing should happen.

- ① Make a **Message**

```
ShortMessage msg = new ShortMessage();
```

- ② Put the **Instruction** in the Message

```
msg.setMessage(144, 1, 44, 100);
```

This message says, "start playing note 44" (we'll look at the other numbers on the next page).

- ③ Make a new **MidiEvent** using the Message

```
MidiEvent noteOn = new MidiEvent(a, 1);
```

The instructions are in the message, but the MidiEvent adds the moment in time when the instruction should be triggered. This MidiEvent says to trigger message 'a' at the first beat (beat 1).

- ④ Add the MidiEvent to the **Track**

```
track.add(noteOn);
```

A Track holds all the MidiEvent objects. The Sequence organizes them according to when each event is supposed to happen, and then the Sequencer plays them back in that order. You can have lots of events happening at the exact same moment in time. For example, you might want two notes played simultaneously, or even different instruments playing different sounds at the same time.

MIDI message: the heart of a MidiEvent

A MIDI message holds the part of the event that says *what* to do. It's the actual instruction you want the sequencer to execute. The first argument of an instruction is always the type of the message. The values you pass to the other three arguments depend on the type of message. For example, a message of type 144 means "NOTE ON." But in order to carry out a NOTE

ON, the sequencer needs to know a few things. Imagine the sequencer saying, "OK, I'll play a note, but *which channel*? In other words, do you want me to play a Drum note or a Piano note? And *which note*? Middle-C? D Sharp? And while we're at it, at *which velocity* should I play the note?

To make a MIDI message, make a ShortMessage instance and invoke setMessage(), passing in the four arguments for the message. But remember, the message says only *what* to do, so you still need to stuff the message into an event that adds *when* that message should "fire."

Anatomy of a message

The *first* argument to setMessage() always represents the message "type," while the *other t*hree arguments represent different things depending on the message type.

NOTE

The Message says what to do; the MidiEvent says when to do it.

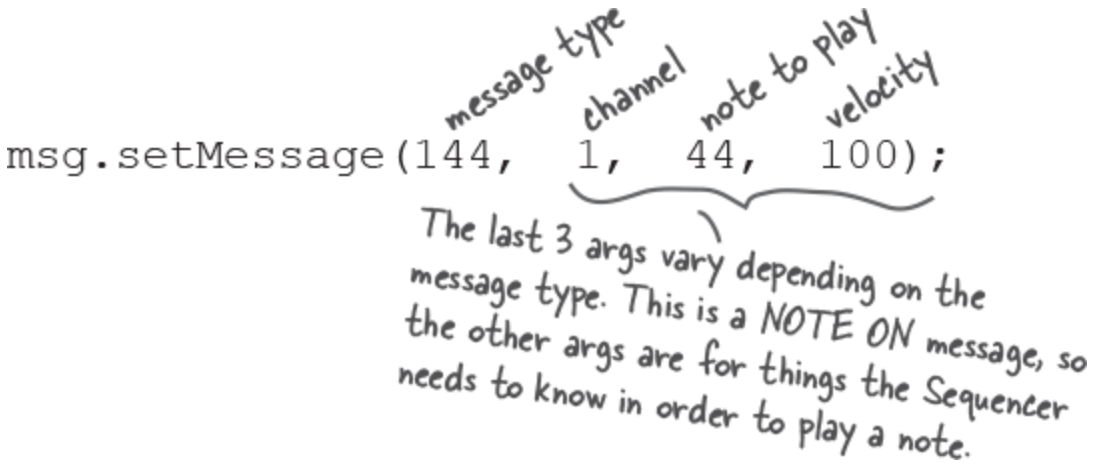

- ① **Message type**

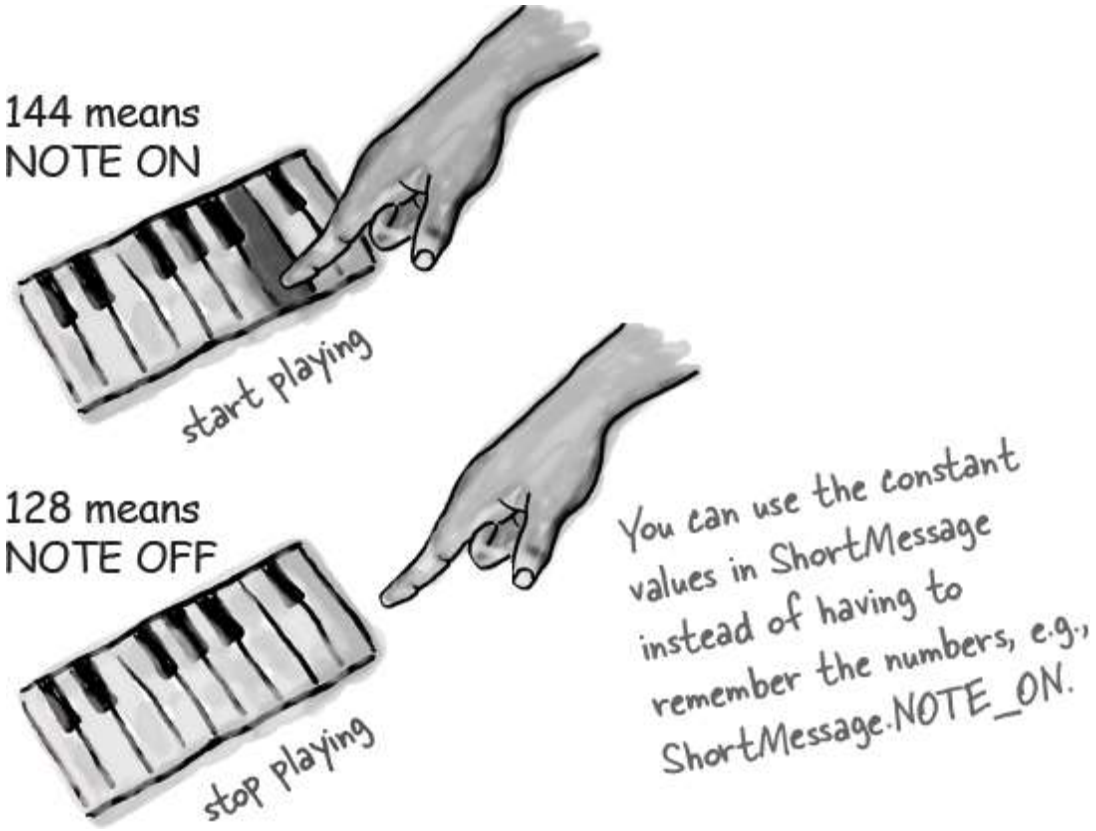

- ② **Channel**

  Think of a channel like a musician in a band. Channel 1 is musician 1 (the keyboard player), channel 9 is the drummer, etc.

- ③ **Note to play**

  A number from 0 to 127, going from low to high notes.

- ④ **Velocity**

How fast and hard did you press the key? 0 is so soft you probably won't hear anything, but 100 is a good default.

Change a message

Now that you know what's in a MIDI message, you can start experimenting. You can change the note that's played, how long the note is held, add more notes, and even change the instrument.

- ① **Change the note**

  Try a number between 0 and 127 in the note on and note off messages.

```
msg.setMessage(144, 1, 20, 100);
```

- ② **Change the duration of the note**

  Change the note off event (not the *message*) so that it happens at an earlier or later beat.

```
msg.setMessage(128, 1, 44, 100);
MidiEvent noteOff = new MidiEvent(b, 3 );
```

- ③ **Change the instrument**

  Add a new message, BEFORE the note-playing message, that sets the instrument in channel 1 to something other than the default piano. The change-instrument message is “192,” and the third argument represents the actual instrument (try a number between 0 and 127).

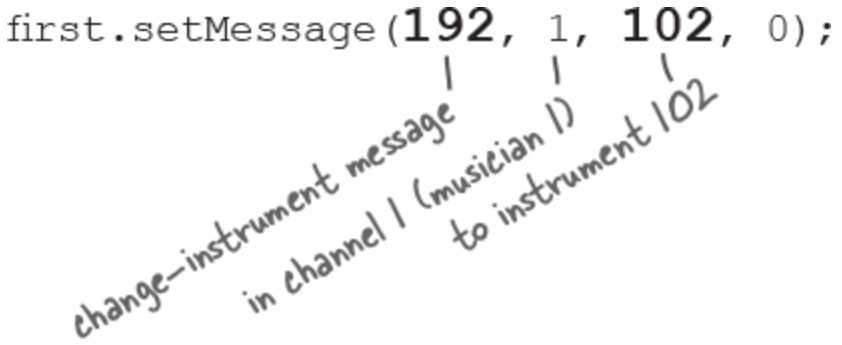

Version 2: Using command-line args to experiment with sounds

This version still plays just a single note, but you get to use command-line arguments to change the instrument and note. Experiment by passing in two int values from 0 to 127. The first int sets the instrument; the second int sets the note to play.

```
import javax.sound.midi.*;
import static javax.sound.midi.ShortMessage.*;

public class MiniMusicCmdLine {
  public static void main(String[] args) {
    MiniMusicCmdLine mini = new MiniMusicCmdLine();
    if (args.length < 2) {
      System.out.println("Don't forget the instrument and note args");
    } else {
      int instrument = Integer.parseInt(args[0]);
      int note = Integer.parseInt(args[1]);
      mini.play(instrument, note);
    }
  }

  public void play(int instrument, int note) {
    try {
      Sequencer player = MidiSystem.getSequencer();
      player.open();
      Sequence seq = new Sequence(Sequence.PPQ, 4);
      Track track = seq.createTrack();

      ShortMessage msg1 = new ShortMessage();
      msg1.setMessage(PROGRAM_CHANGE, 1, instrument, 0);
      MidiEvent changeInstrument = new MidiEvent(msg1, 1);
      track.add(changeInstrument);

      ShortMessage msg2 = new ShortMessage();
      msg2.setMessage(NOTE_ON, 1, note, 100);
      MidiEvent noteOn = new MidiEvent(msg2, 1);
      track.add(noteOn);

      ShortMessage msg3 = new ShortMessage();
      msg3.setMessage(NOTE_OFF, 1, note, 100);
      MidiEvent noteOff = new MidiEvent(msg3, 16);
      track.add(noteOff);

      player.setSequence(seq);
      player.start();

    } catch (Exception ex) {
      ex.printStackTrace();
    }
  }
}
```

Run it with two int args from 0 to 127. Try these for starters:

```
File Edit Window Help Attenuate
%java MiniMusicCmdLine 102 30
%java MiniMusicCmdLine 80 20
%java MiniMusicCmdLine 40 70
```

Where we’re headed with the rest of the CodeKitchens

Chapter 17: the goal

When we're done, we'll have a working BeatBox that's also a Drum Chat Client. We'll need to learn about GUIs (including event handling), I/O, networking, and threads. The next three (Chapter 14, Chapter 15, and Chapter 16) will get us there.

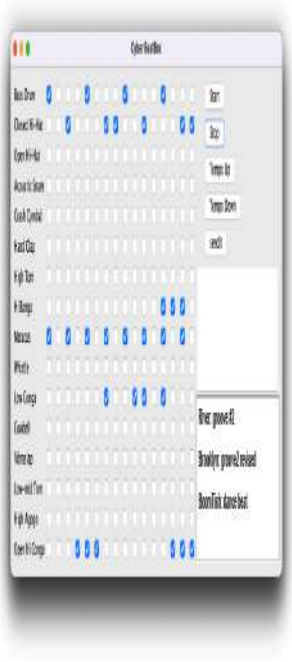

Chapter 14: MIDI events

This CodeKitchen lets us build a little "music video" (bit of a stretch to call it that...) that draws random rectangles to the beat of the MIDI music. We'll learn how to construct and play a lot of MIDI events (instead of just a couple, as we do in the current chapter).



Chapter 15: Standalone BeatBox

Now we'll actually build the real BeatBox, GUI and all. But it's limited—as soon as you change a pattern, the previous one is lost. There's no Save and Restore feature, and it doesn't communicate with the network. (But you can still use it to work on your drum pattern skills.)

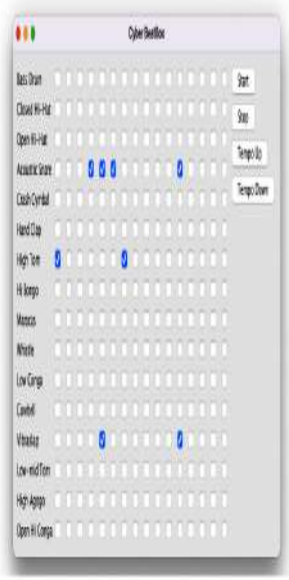

Chapter 16: Save and Restore

You've made the perfect pattern, and now you can save it to a file and reload it when you want to play it again. This gets us ready for the final version (Chapter 15), where instead of writing the pattern to a file, we send it over a network to the chat server.

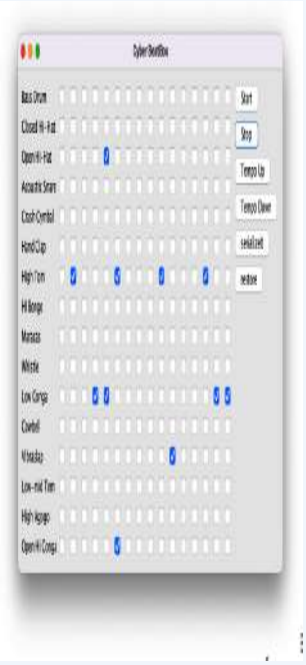

Exercise

This chapter explored the wonderful world of exceptions. Your job is to decide whether each of the following exception-related statements is true or false.

True or False

1. A try block must be followed by a catch and a finally block.
2. If you write a method that might cause a compiler-checked exception, you must wrap that risky code in a try/catch block.
3. Catch blocks can be polymorphic.
4. Only “compiler checked” exceptions can be caught.
5. If you define a try/catch block, a matching finally block is optional.
6. If you define a try block, you can pair it with a matching catch or finally block, or both.
7. If you write a method that declares that it can throw a compiler-checked exception, you must also wrap the exception throwing code in a try/catch block.
8. The main( ) method in your program must handle all unhandled exceptions thrown to it.
9. A single try block can have many different catch blocks.

10. A method can throw only one kind of exception.
11. A finally block will run regardless of whether an exception is thrown.
12. A finally block can exist without a try block.
13. A try block can exist by itself, without a catch block or a finally block.
14. Handling an exception is sometimes referred to as “ducking.”
15. The order of catch blocks never matters.
16. A method with a try block and a finally block can optionally declare a checked exception.
17. Runtime exceptions must be handled or declared.

→ **Answers in “True or False”.**

Code Magnets

A working Java program is scrambled up on the fridge. Can you reconstruct all the code snippets to make a working Java program that produces the output listed below? Some of the curly braces fell on the floor and they were too small to pick up, so feel free to add as many of those as you need!



```
System.out.print("r");
try {
System.out.print("t");
doRisky(test);
System.out.println("s");
} finally {
System.out.print("o");
class MyEx extends Exception { }
public class ExTestDrive {
System.out.print("w");
if ("yes".equals(t)) {
System.out.print("a");
throw new MyEx();
} catch (MyEx e) {
static void doRisky(String t) throws MyEx {
  System.out.print("h");
public static void main(String [] args) {
  String test = args[0];
```

```
File Edit Window Help ThrowUp
% java ExTestDrive yes
thaws

% java ExTestDrive no
throws
```

→ **Answers in "Code Magnets".**

JavaCross

→ **Answers in "JavaCross".**

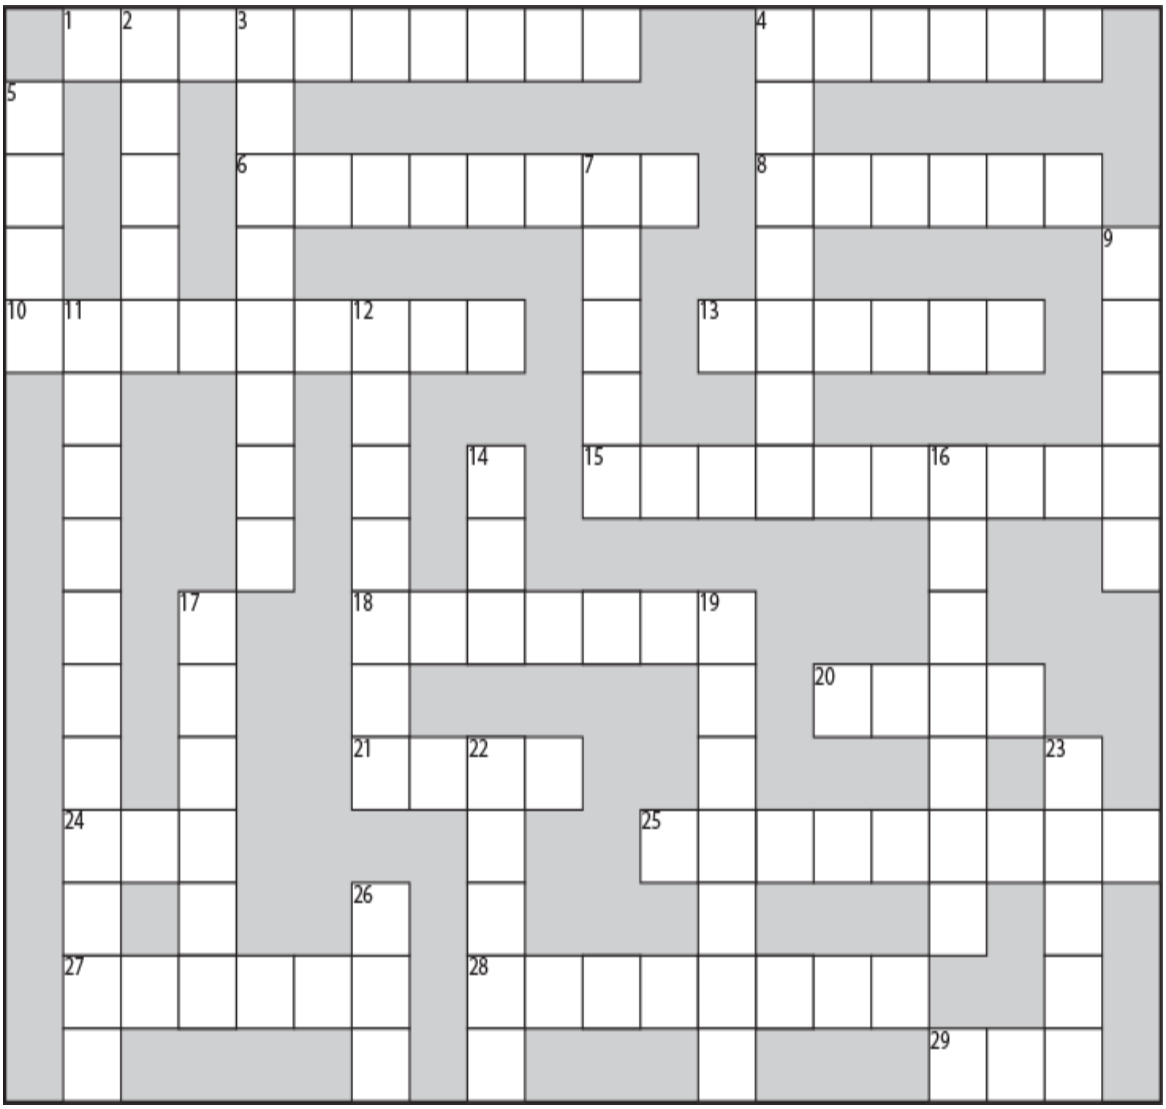

You know what to do!

Across

1. To give value
4. Flew off the top
6. All this and more!
8. Start
10. The family tree
13. No ducking
15. Problem objects
18. One of Java's '49'
20. Class hierarchy
21. Too hot to handle
24. Common primitive
25. Code recipe
27. Unruly method action
28. No Picasso here
29. Start a chain of events

Down

2. Currently usable
3. Template's creation
4. Don't show the kids
5. Mostly static API class
7. Not about behavior
9. The template
11. Roll another one off the line

12. Javac saw it coming

14. Attempt risk

16. Automatic acquisition

17. Changing method

19. Announce a duck

22. Deal with it

23. Create bad news

26. One of my roles

More Hints:

Across

6. A Java child

8. Start a method

13. Instead of declare

20. Also a type of collection

21. Quack

27. Starts a problem

28. Not Abstract

Down

2. Or a mouthwash

3. For _____ (not example)

5. Numbers . . .

9. Only public or default

16. _____ the family fortune

17. Not a ‘getter’

Sharpen your pencil

(from "Sharpen your pencil")

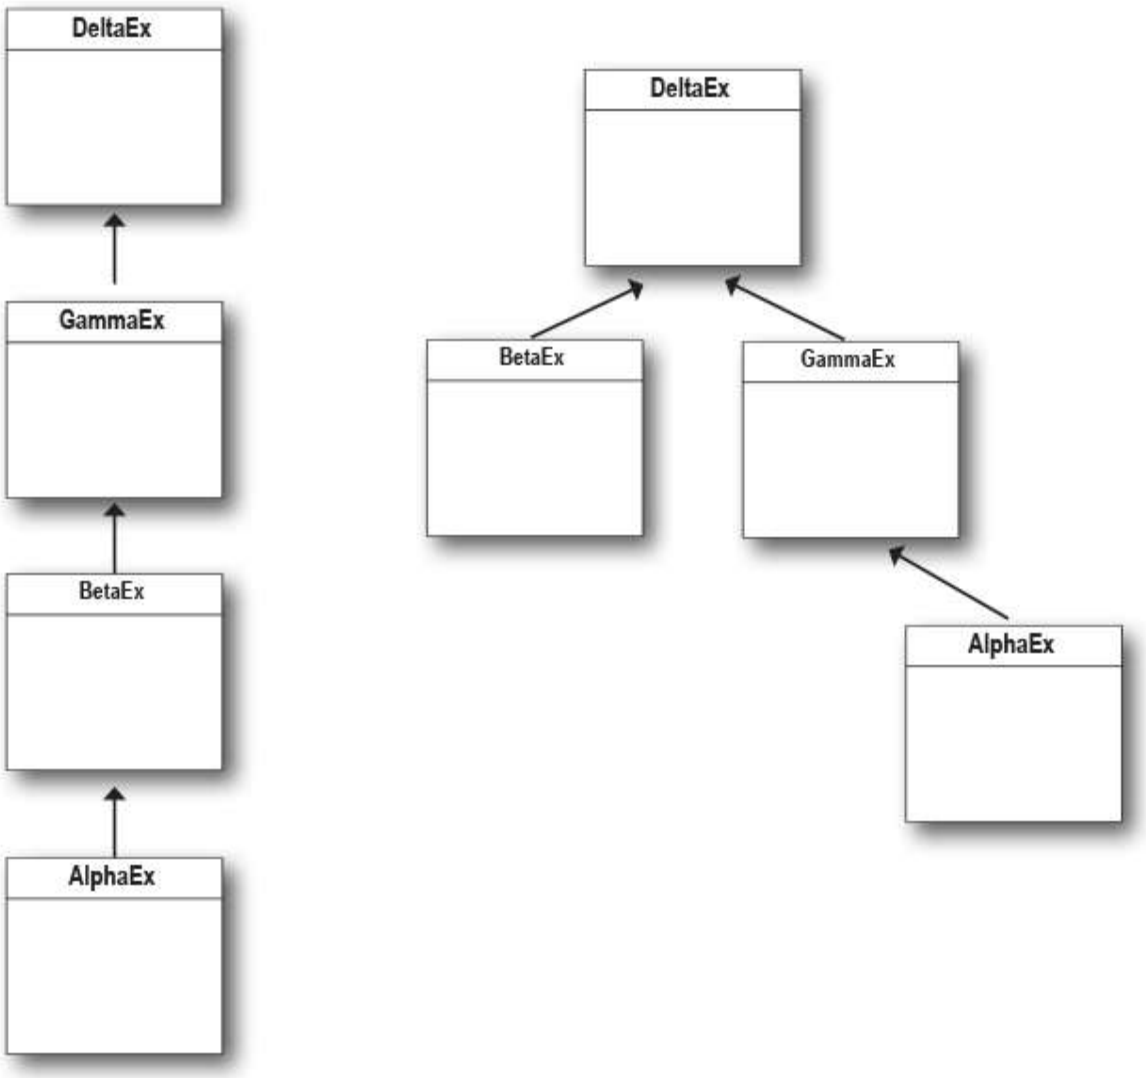

Exercise Solution

True or False

(from "True or False")

1. False, either or both.
2. False, you can declare the exception.
3. True.
4. False, runtime exception can be caught.
5. True.
6. True, both are acceptable.
7. False, the declaration is sufficient.
8. False, but if it doesn't, the JVM may shut down.
9. True.
10. False.
11. True. It's often used to clean up partially completed tasks.
12. False.
13. False.
14. False, ducking is synonymous with declaring.
15. False, broadest exceptions must be caught by the last catch blocks.
16. False, if you don't have a catch block, you must declare.

17. False.

Code Magnets

(from "Code Magnets")

```
class MyEx extends Exception { }

public class ExTestDrive {
  public static void main(String[] args) {
    String test = args[0];
    try {
      System.out.print("t");
      doRisky(test);
      System.out.print("o");
    } catch (MyEx e) {
      System.out.print("a");
    } finally {
      System.out.print("w");
    }
    System.out.println("s");
  }

  static void doRisky(String t) throws MyEx {
    System.out.print("h");

    if ("yes".equals(t)) {
      throw new MyEx();
    }

    System.out.print("r");
  }
}
```

```
File  Edit  Window  Help  Chill

% java ExTestDrive yes
thaws

% java ExTestDrive no
throws
```

JavaCross

(from "JavaCross")

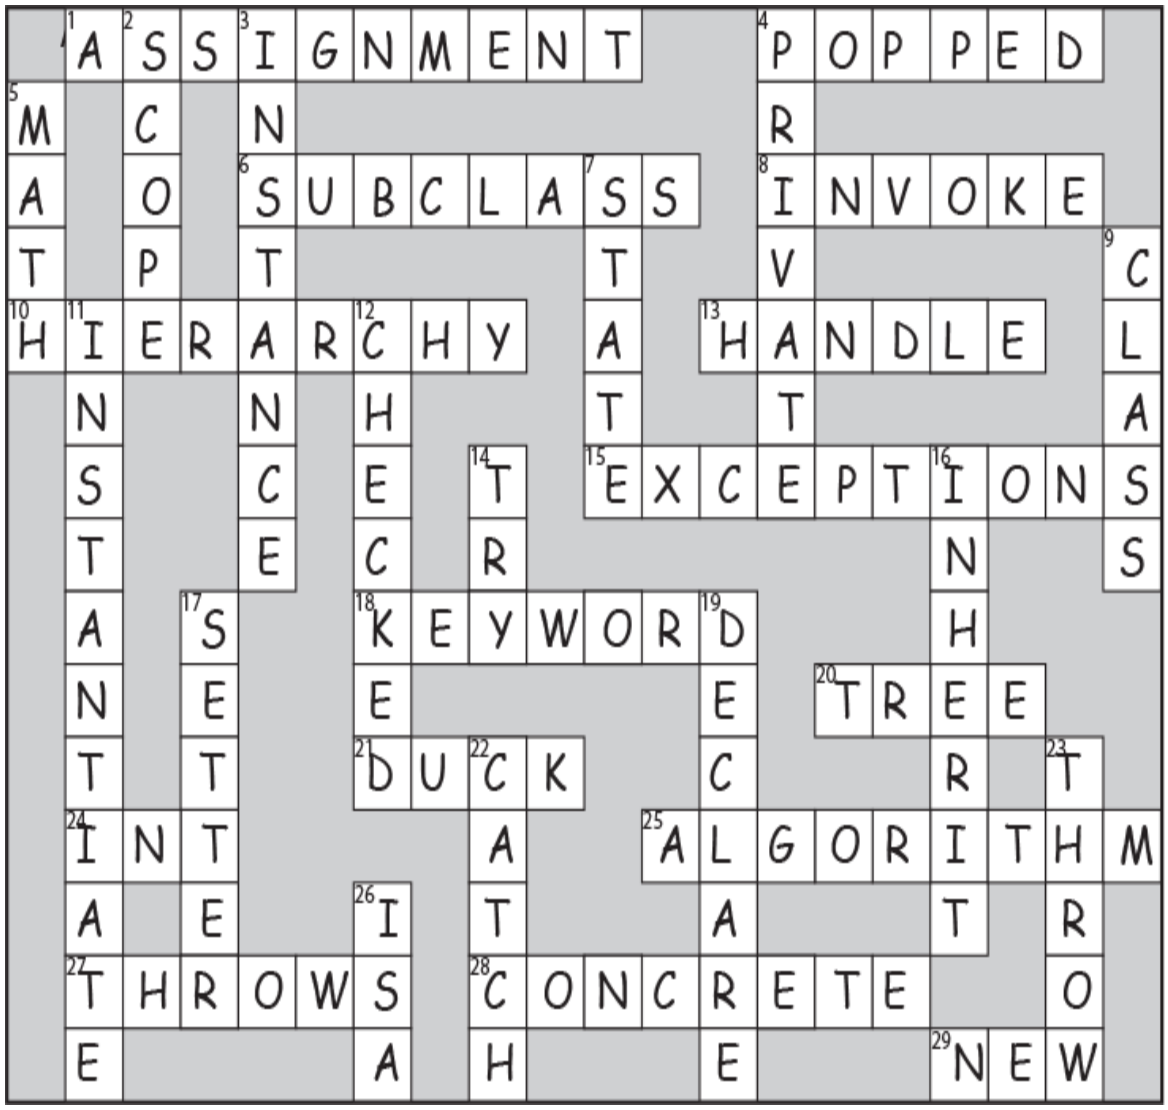
1 A S S I G N M E N T
4 P O P P E D
5 M C N R
A O 6 S U B C L A S S 7 8 I N V O K E
T P T T V 9 C
10 H 11 I E R A R 12 C H Y A 13 H A N D L E L
N N H T T A
S C E 14 T 15 E X C E P T 16 I O N S
T E C R N S
17 A S 18 K E Y W O R D 19 H
N E E E 20 T R E E
T T 21 D U 22 C K C R 23 T
24 I N T A 25 A L G O R I T H M
A E 26 I T A T R
27 T H R O W S 28 C O N C R E T E O
E A H E 29 N E W

Chapter 14. A Very Graphic Story: Getting Gui

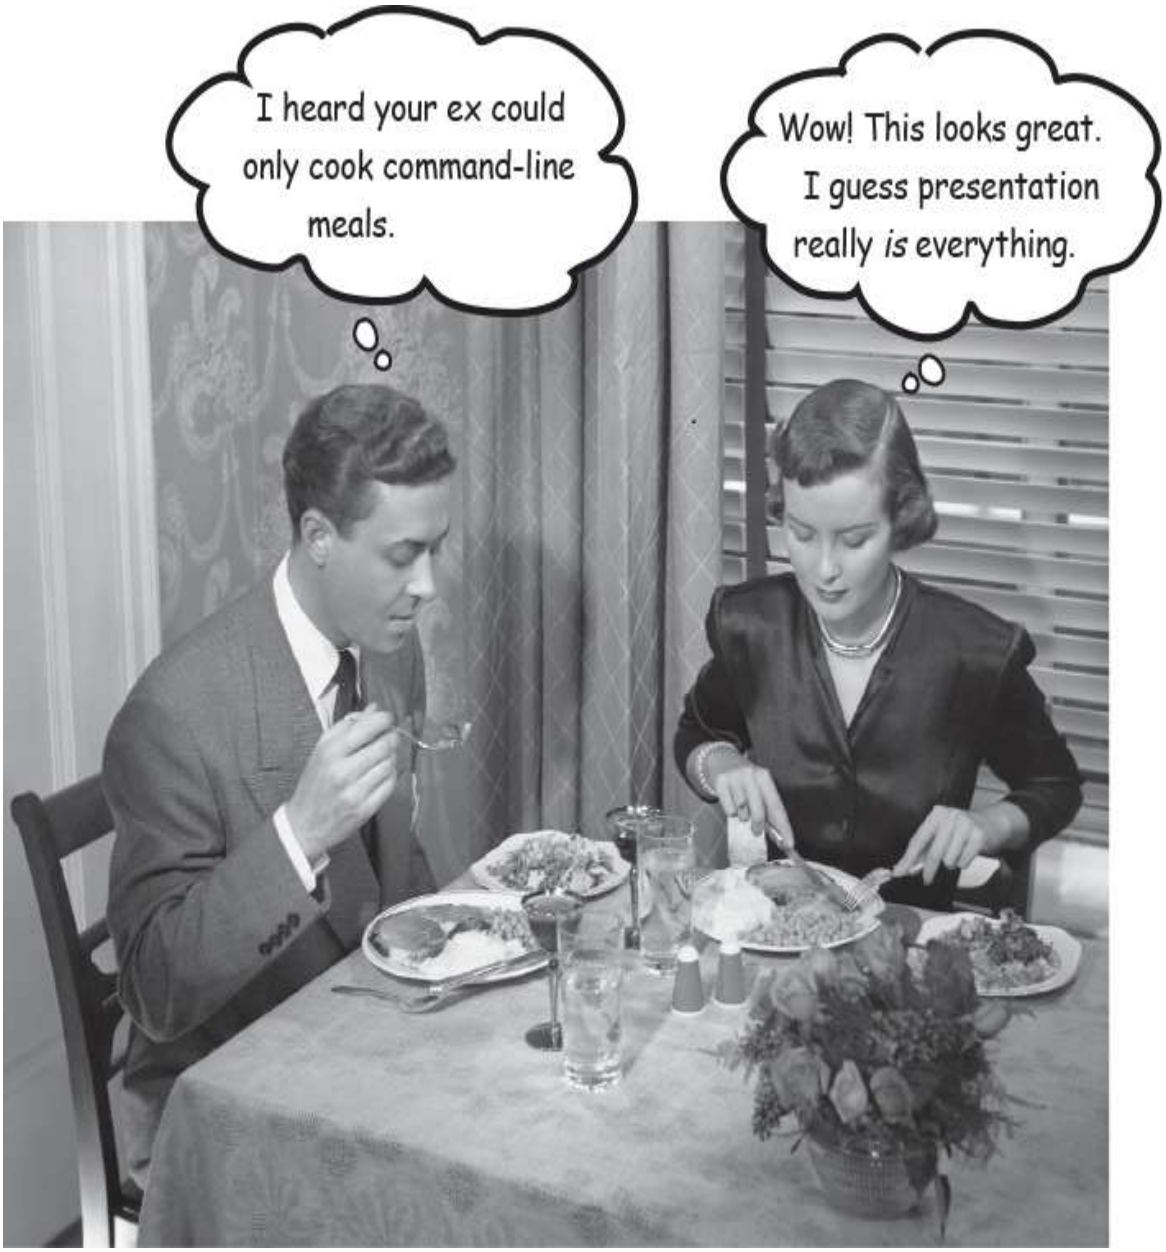

Face it, you need to make GUIs. If you're building applications that other people are going to use, you *need* a graphical interface. If you're building

programs for yourself, you *want* a graphical interface. Even if you believe that the rest of your natural life will be spent writing server-side code, where the client user interface is a web page, sooner or later you'll need to write tools, and you'll want a graphical interface. Sure, command-line apps are retro, but not in a good way. They're weak, inflexible, and unfriendly. We'll spend two chapters working on GUIs and learn key Java language features along the way including **Event Handling** and **Inner Classes** and **lambdas**. In this chapter, we'll put a button on the screen, and make it do something when you click it. We'll paint on the screen, we'll display a JPEG image, and we'll even do some (crude) animation.

It all starts with a window

She's asked a couple of really good questions. In a few pages we'll address these questions with an extra-special "No Dumb Questions."

A JFrame is the object that represents a window on the screen. It's where you put all the interface things like buttons, check boxes, text fields, and so on. It can have an honest-to-goodness menu bar with menu items. And it has all the little windowing icons for whatever platform you're on, for minimizing, maximizing, and closing the window.

The JFrame looks different depending on the platform you're on. This is a JFrame on an old Mac OS X:

A JFrame with a menu bar and two "widgets" (a button and a radio button)

Put widgets in the window

Once you have a JFrame, you can put things ("widgets") in it by adding them to the JFrame. There are a ton of Swing components you can add; look for them in the javax.swing package. The most common include JButton, JRadioButton, JCheckBox, JLabel, JList, JScrollPane, JSlider, JTextArea, JTextField, and JTable. Most are really simple to use, but some (like JTable) can be a bit more complicated.

Making a GUI is easy:

- ① Make a frame (a JFrame)

  ```
  JFrame frame = new JFrame();
  ```

- ② Make a widget (button, text field, etc.)

  ```
  JButton button = new JButton("click me");
  ```

- ③ Add the widget to the frame

  ```
  frame.getContentPane().add(button);
  ```

> **NOTE**
>
> You don't add things to the frame directly. Think of the frame as the trim around the window, and you add things to the window pane.

- ④ Display it (give it a size and make it visible)

```
frame.setSize(300,300);
frame.setVisible(true);
```

Your first GUI: a button on a frame

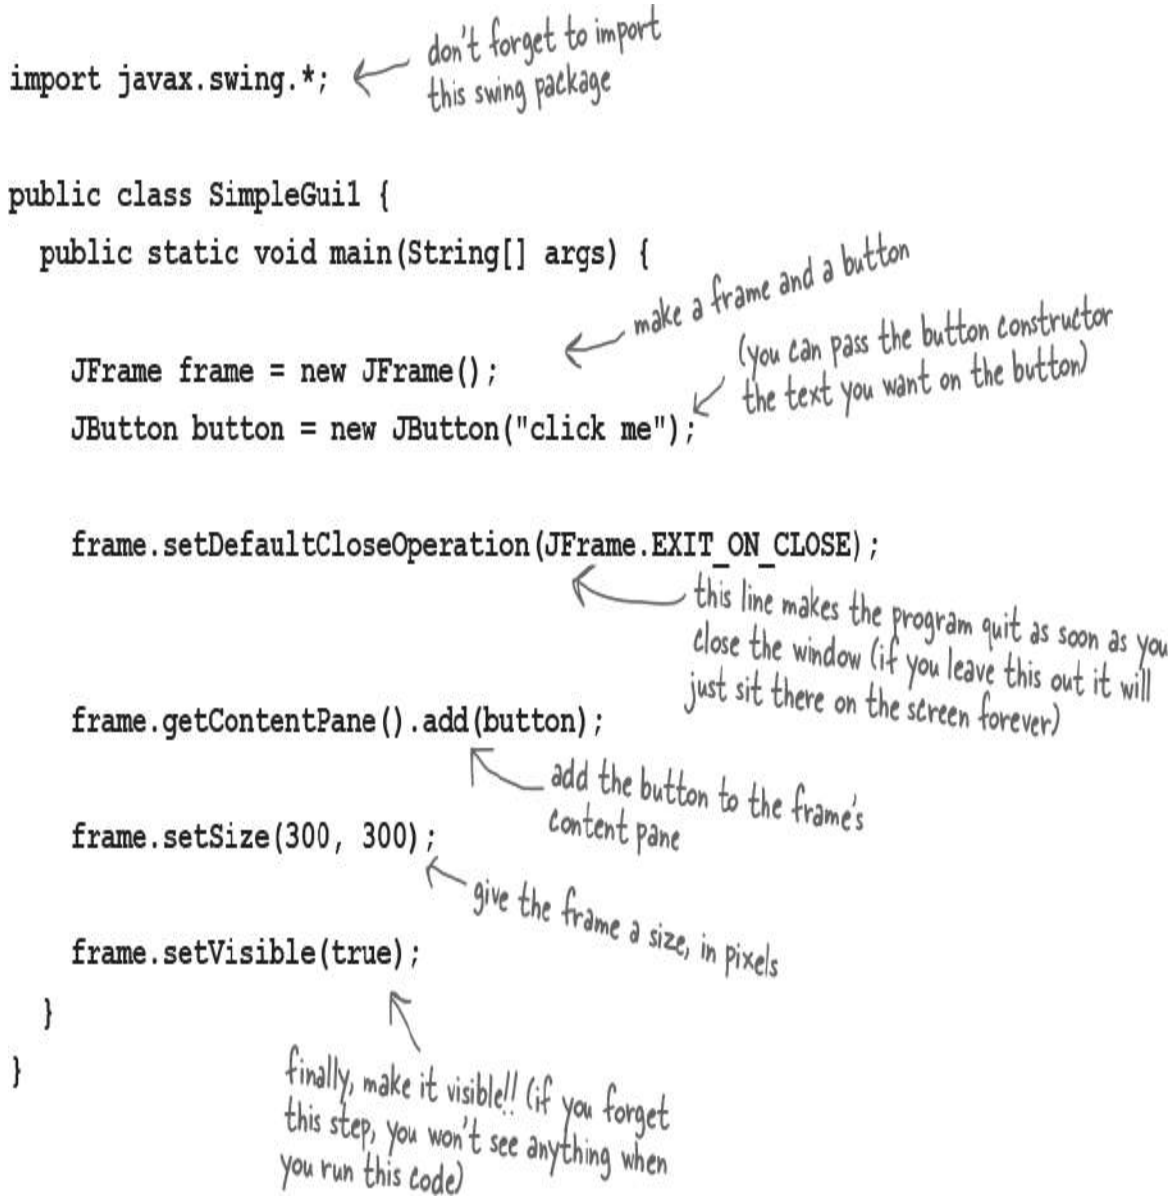

Let's see what happens when we run it:

```
%java SimpleGui1
```

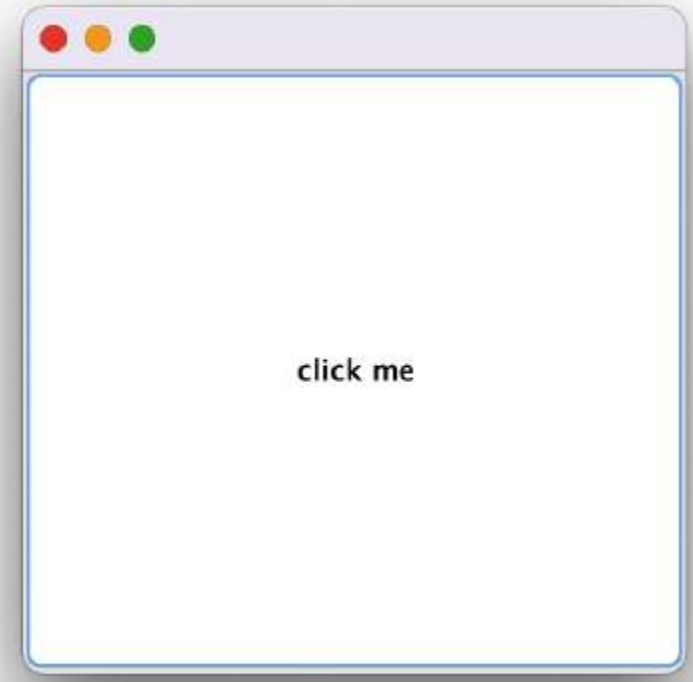

NOTE

Whoa! That's a Really Big Button.

The button fills all the available space in the frame. Later we'll learn to control where (and how big) the button is on the frame.

But nothing happens when I click it...

That's not exactly true. When you press the button, it shows that "pressed" or "pushed in" look (which changes depending on the platform look and feel, but it always does *something* to show when it's being pressed).

The real question is, "How do I get the button to do something specific when the user clicks it?"

We need two things:

- ① A ***method*** to be called when the user clicks (the thing you want to happen as a result of the button click).
- ② A way to ***know*** when to trigger that method. In other words, a way to know when the user clicks the button!

When the user clicks, we want to know.

We're interested in the user-takes-action-on-a-button event.

THERE ARE NO DUMB QUESTIONS

Q: I heard that nobody uses Swing anymore.

A: There are other options, like JavaFX. But there are no clear winners in the endless and ongoing "Which approach should I use to make GUIs in Java?" debate. The good news is that if you learn a little Swing, that knowledge will help you whichever way you end up going. For example, if you want to do Android development, your Swing knowledge will make learning to code Android apps easier.

Q: Will a button look like a Windows button when you run on Windows?

A: If you want it to. You can choose from a few "look and feels"—classes in the core library that control what the interface looks like. In most cases you can choose between at least two different looks. The screens in this book use a number of "look and feels," including the default system look and feel (for macOS), the OS X ***Aqua*** look and feel, or the ***Metal*** (cross platform) look and feel.

Q: Isn't Aqua really old?

A: Yes, but we like it.

Getting a user event

Imagine you want the text on the button to change from *click me* to *I've been clicked* when the user presses the button. First we can write a method that changes the text of the button (a quick look through the API will show you the method):

```
public void changeIt() {
  button.setText("I've been clicked!");
}
```

But *now* what? How will we *know* when this method should run? ***How will we know when the button is clicked?***

In Java, the process of getting and handling a user event is called *event-handling*. There are many different event types in Java, although most involve GUI user actions. If the user clicks a button, that's an event. An event that says "The user wants the action of this button to happen." If it's a "Slow the Tempo" button, the user wants the slow-the-music-tempo action to occur. If it's a Send button on a chat client, the user wants the send-my-message action to happen. So the most straightforward event is when the user clicked the button, indicating they want an action to occur.

With buttons, you usually don't care about any intermediate events like button-is-being-pressed and button-is-being-released. What you want to say to the button is, "I don't care how the user plays with the button, how long they hold the mouse over it, how many times they change their mind and roll off before letting go, etc. ***Just tell me when the user means business!*** In other words, don't call me unless the user clicks in a way that indicates he wants the darn button to do what it says it'll do!"

First, the button needs to know that we care.

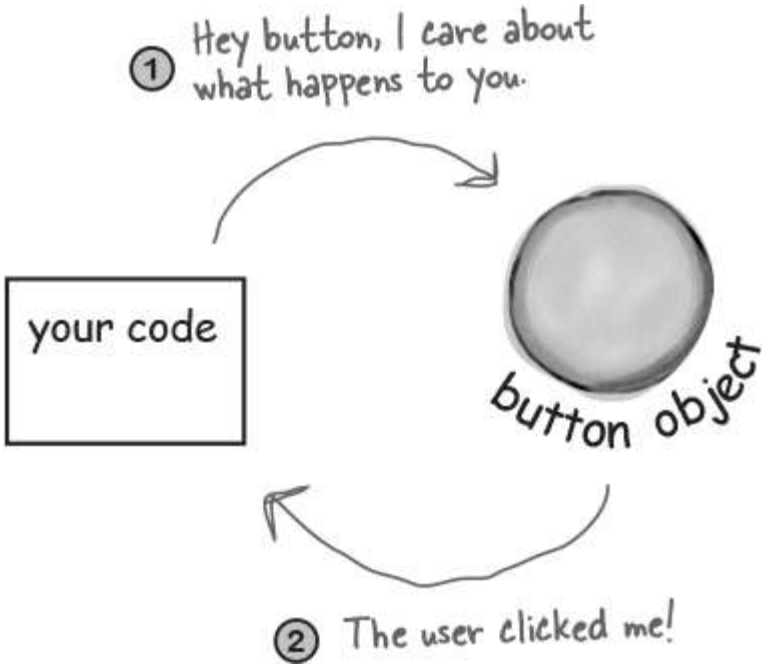

Second, the button needs a way to call us back when a button-clicked event occurs.

BRAIN POWER



1. How could you tell a button object that you care about its events? That you're a concerned listener?

2. How will the button call you back? Assume that there's no way for you to tell the button the name of your unique method (changeIt()). So what else can we use to reassure the button that we have a specific method it can call when the event happens? [hint: think Pet]

If you care about the button's events, implement an interface that says, "I'm listening for your events."

A **listener interface** is the bridge between the **listener** (you) and **event source** (the button).

The Swing GUI components are event sources. In Java terms, an event source is an object that can turn user actions (click a mouse, type a key, close a window) into events. And like virtually everything else in Java, an event is represented as an object. An object of some event class. If you scan through the java.awt.event package in the API, you'll see a bunch of event classes (easy to spot—they all have ***Event*** in the name). You'll find MouseEvent, KeyEvent, WindowEvent, ActionEvent, and several others.

An event ***source*** (like a button) creates an ***event object*** when the user does something that matters (like *click* the button). Most of the code you write (and all the code in this book) will *receive* events rather than *create* events. In other words, you'll spend most of your time as an event *listener* rather than an event *source*.

Every event type has a matching listener interface. If you want MouseEvents, implement the MouseListener interface. Want WindowEvents? Implement WindowListener. You get the idea. And remember your interface rules—to implement an interface you *declare* that you implement it (class Dog implements Pet), which means you must *write implementation methods* for every method in the interface.

Some interfaces have more than one method because the event itself comes in different flavors. If you implement MouseListener, for example, you can get events for mousePressed, mouseReleased, mouseMoved, etc. Each of those mouse events has a separate method in the interface, even though they all take a MouseEvent. If you implement MouseListener, the mousePressed() method is called when the user (you guessed it) presses the mouse. And when the user lets go, the mouseReleased() method is called. So for mouse events, there's only one event *object*, MouseEvent, but several different event *methods*, representing the different *types* of mouse events.

NOTE

When you implement a listener interface, you give the button a way to call you back. The interface is where the call-back method is declared.

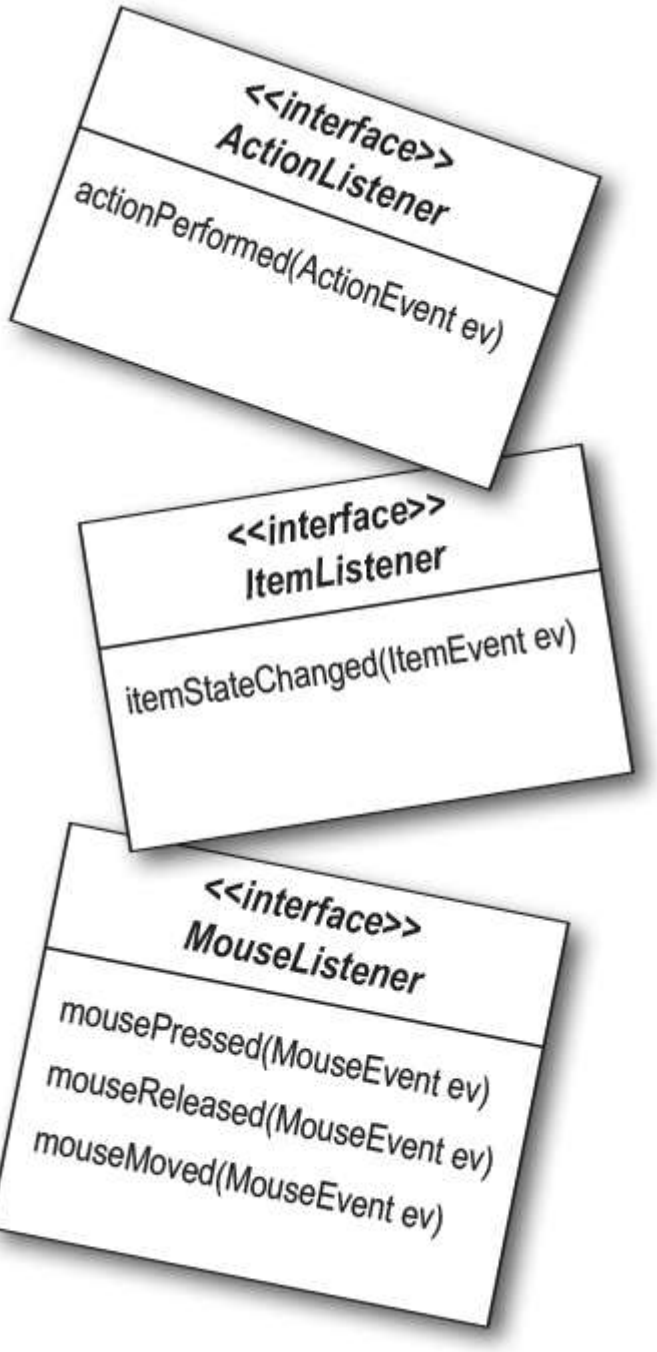

How the listener and source communicate:

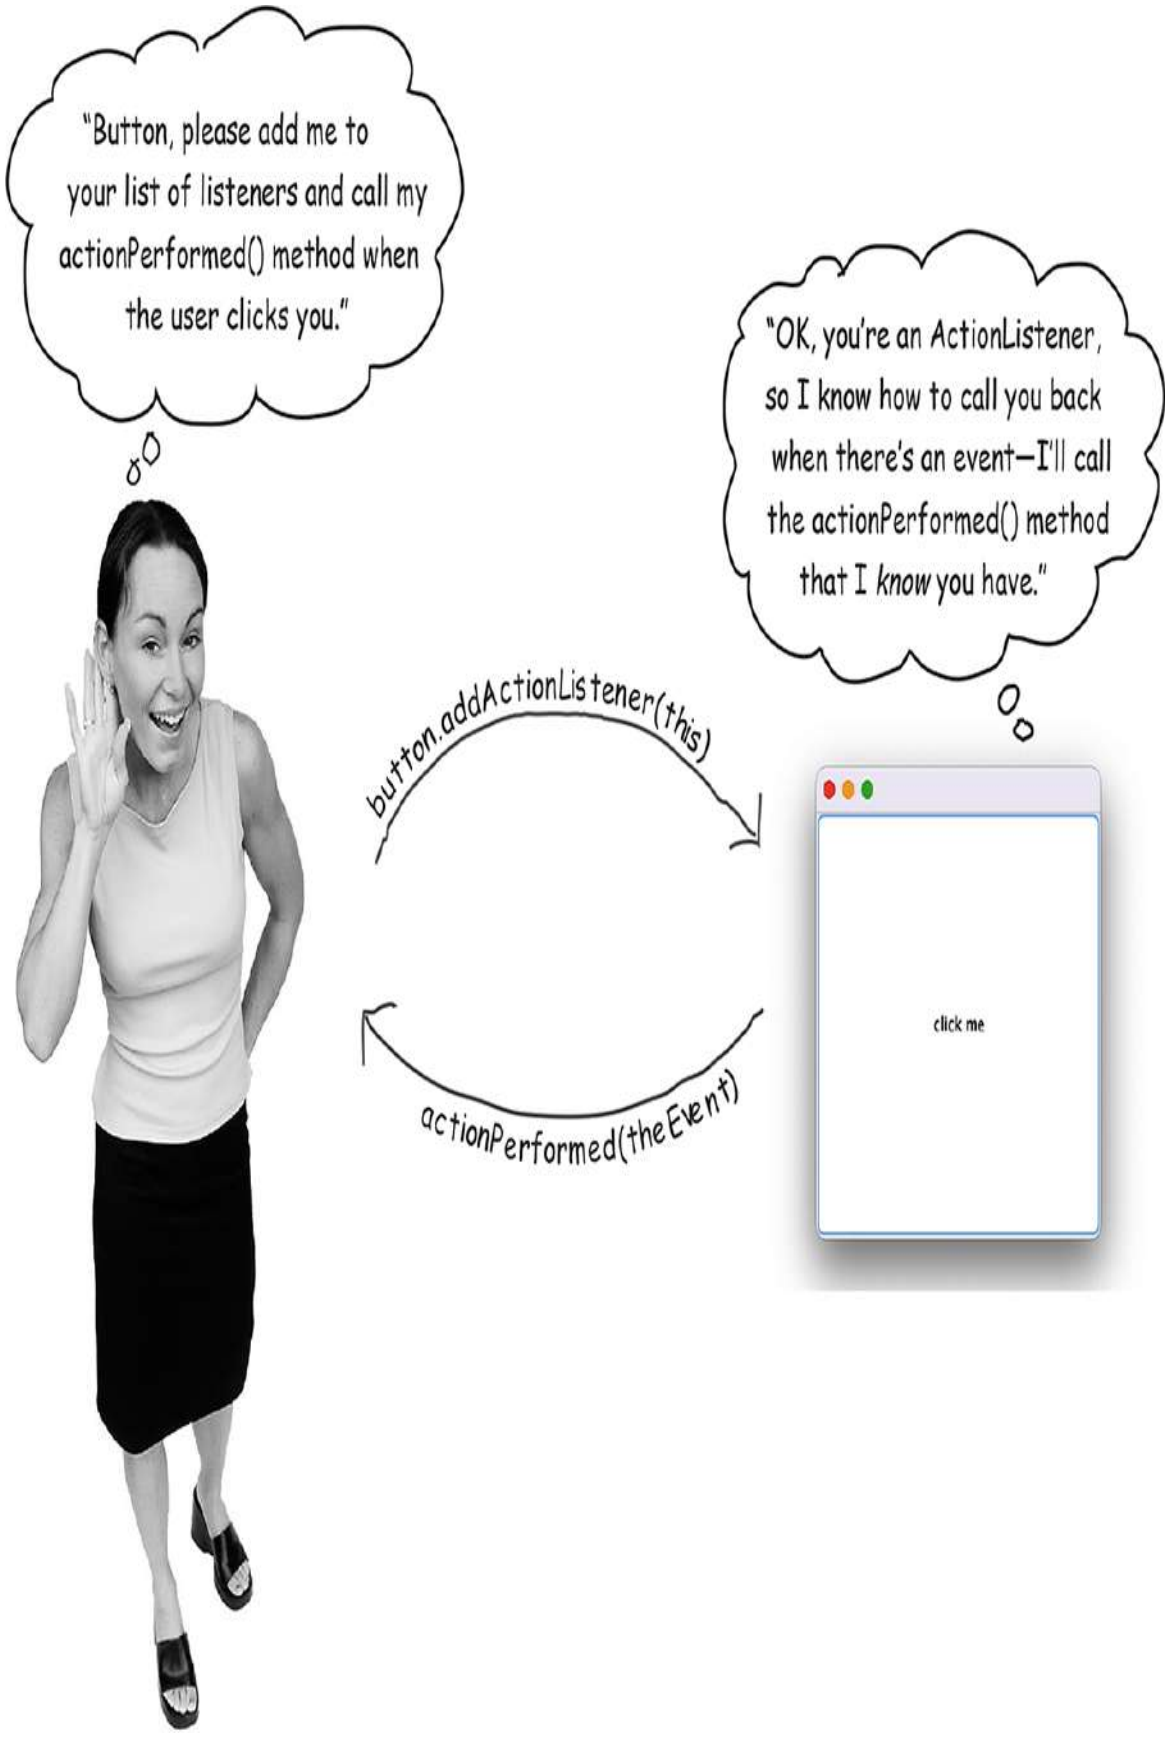
"Button, please add me to your list of listeners and call my actionPerformed() method when the user clicks you."
"OK, you're an ActionListener, so I know how to call you back when there's an event—I'll call the actionPerformed() method that I *know* you have."
button.addActionListener(this)
actionPerformed(theEvent)
click me

The Listener

If your class wants to know about a button's ActionEvents, you implement the ActionListener interface. The button needs to know you're interested, so you register with the button by calling its addActionListener(this) and passing an ActionListener reference to it. In our first example, *you* are the ActionListener so you pass *this*, but it's more common to create a specific class to do listen to events. The button needs a way to call you back when the event happens, so it calls the method in the listener interface. As an ActionListener, you *must* implement the interface's sole method, actionPerformed(). The compiler guarantees it.

The Event Source

A button is a source of ActionEvents, so it has to know which objects are interested listeners. The button has an addActionListener() method to give interested objects (listeners) a way to *tell* the button they're interested.

When the button's addActionListener() runs (because a potential listener invoked it), the button takes the parameter (a reference to the listener object) and stores it in a list. When the user clicks the button, the button "fires" the event by calling the actionPerformed() method on each listener in the list.

Getting a button's ActionEvent

- ① Implement the ActionListener interface
- ② Register with the button (tell it you want to listen for events)
- ③ Define the event-handling method (implement the actionPerformed() method from the ActionListener interface)

```
import javax.swing.*;
import java.awt.event.*;

public class SimpleGui2 implements ActionListener {
  private JButton button;

  public static void main(String[] args) {
    SimpleGui2 gui = new SimpleGui2();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    button = new JButton("click me");

    button.addActionListener(this);

    frame.getContentPane().add(button);
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    frame.setSize(300, 300);
    frame.setVisible(true);
  }

  public void actionPerformed(ActionEvent event) {
    button.setText("I've been clicked!");
  }
}
```

A new import statement for the package that ActionListener and ActionEvent are in.

1

Implement the interface. This says, "an instance of SimpleGui2 IS-A ActionListener."

(The button will give events only to ActionListener implementers.)

NOTE: You wouldn't usually make your main GUI class implement ActionListener like this; this is just the simplest way to get started. We'll see better ways of creating ActionListeners as we go through this chapter.

2

Register your interest with the button. This says to the button, "Add me to your list of listeners." The argument you pass MUST be an object from a class that implements ActionListener!!

3

Implement the ActionListener interface's actionPerformed() method. This is the actual event-handling method!

The button calls this method to let you know an event happened. It sends you an ActionEvent object as the argument, but we don't need it here. Knowing the event happened is enough info for us.

Listeners, Sources, and Events

For most of your stellar Java career, *you* will not be the *source* of events.

(No matter how much you fancy yourself the center of your social universe.)

Get used to it. ***Your job is to be a good listener.***

(Which, if you do it sincerely, *can* improve your social life.)

As a listener, my job is to **implement** the interface, **register** with the button, and **provide** the event-handling.

Listener GETS the event

As an event source, my job is to **accept** registrations (from listeners), **get** events from the user, and **call** the listener's event-handling method (when the user clicks me).

Source SENDS the event

Hey, what about me? I'm a player too, you know! As an event object, I'm the **argument** to the event call-back method (from the interface), and my job is to **carry data** about the event back to the listener.

Event object HOLDS DATA about the event

THERE ARE NO DUMB QUESTIONS

Q: Why can't I be a source of events?

A: You CAN. We just said that *most* of the time you'll be the receiver and not the originator of the event (at least in the *early* days of your brilliant Java career). Most of the events you might care about are "fired" by classes in the Java API, and all you have to do is be a listener for them. You might, however, design a program where you need a custom event, say, StockMarketEvent thrown when your stock market watcher app finds something it deems important. In that case, you'd make the StockWatcher object be an event source, and you'd do the same things a button (or any other source) does—make a listener interface for your custom event, provide a registration method (addStockListener()), and when somebody calls it, add the caller (a listener) to the list of listeners. Then, when a stock event happens, instantiate a StockEvent object (another class you'll write) and send it to the listeners in your list by calling their stockChanged(StockEvent ev) method. And don't forget that for every *event type* there must be a *matching listener interface* (so you'll create a StockListener interface with a stockChanged() method).

Q: I don't see the importance of the event object that's passed to the event call-back methods. If somebody calls my mousePressed method, what other info would I need?

A: A lot of the time, for most designs, you don't need the event object. It's nothing more than a little data carrier, to send along more info about the event. But sometimes you might need to query the event for specific details about the event. For example, if your mousePressed() method is called, you know the mouse was pressed. But what if you want to know exactly where the mouse was pressed? In other words, what if you want to know the X and Y screen coordinates for where the mouse was pressed?

Or sometimes you might want to register the *same* listener with *multiple* objects. An on-screen calculator, for example, has 10 numeric keys, and

since they all do the same thing, you might not want to make a separate listener for every single key. Instead, you might register a single listener with each of the 10 keys, and when you get an event (because your event call-back method is called), you can call a method on the event object to find out *who* the real event source was. In other words, *which key sent this event*.

SHARPEN YOUR PENCIL

Each of these widgets (user interface objects) is the source of one or more events. Match the widgets with the events they might cause. Some widgets might be a source of more than one event, and some events can be generated by more than one widget.

Widgets	Event methods
check box	windowClosing()
text field	actionPerformed()
scrolling list	itemStateChanged()
button	mousePressed()
dialog box	keyTyped()
radio button	mouseExited()
menu item	focusGained()

How do you KNOW if an object is an event source?

Look in the API.

OK. Look for what?

A method that starts with "add," ends with "Listener," and takes a listener interface argument. If you see:

```
addKeyListener(KeyListener k)
```

you know that a class with this method is a source of KeyEvents. There's a naming pattern.

→ **Yours to solve.**

Getting back to graphics...

Now that we know a little about how events work (we'll learn more later), let's get back to putting stuff on the screen. We'll spend a few minutes playing with some fun ways to get graphic, before returning to event handling.

Three ways to put things on your GUI:

- ① **Put widgets on a frame**

  Add buttons, menus, radio buttons, etc.

  ```
  frame.getContentPane().add(myButton);
  ```

  The javax.swing package has more than a dozen widget types.

- **② Draw 2D graphics on a widget**

  Use a graphics object to paint shapes.

  ```
  graphics.fillOval(70,70,100,100);
  ```

  You can paint a lot more than boxes and circles; the Java2D API is full of fun, sophisticated graphics methods.

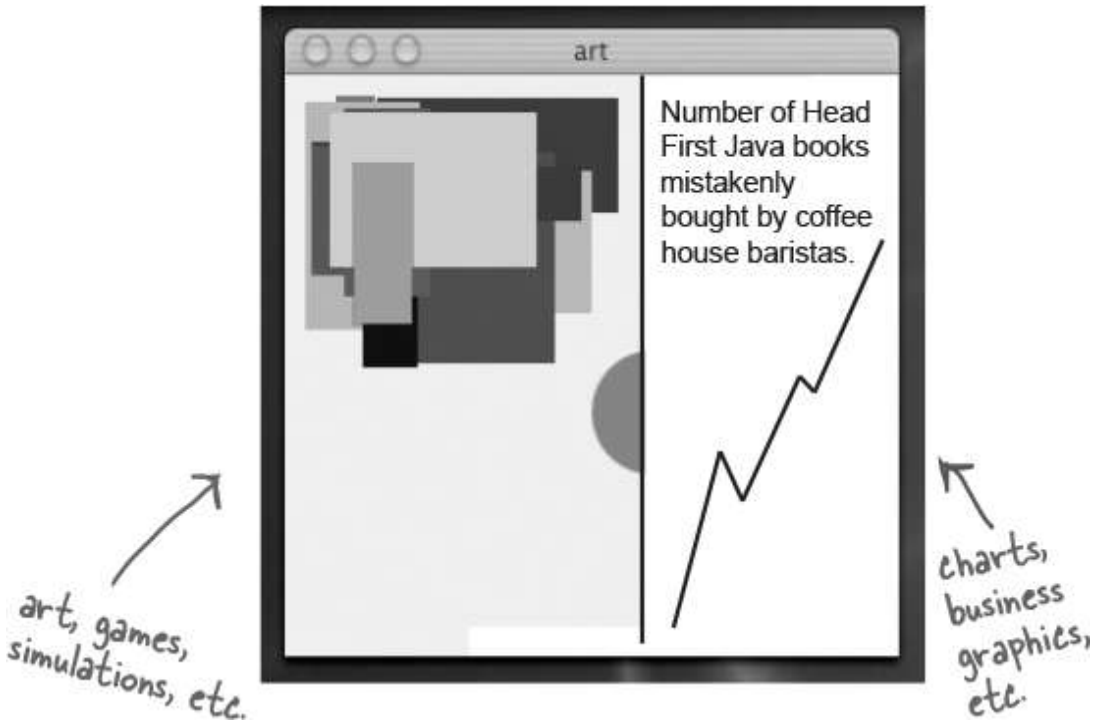

- **③ Put a JPEG on a widget**

  You can put your own images on a widget.

```
graphics.drawImage(myPic,10,10,this);
```

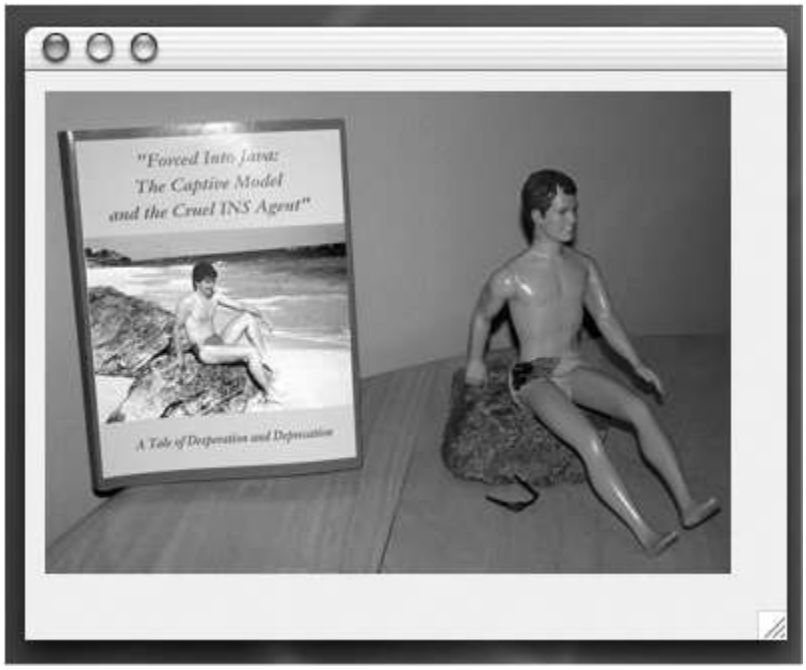

Make your own drawing widget

If you want to put your own graphics on the screen, your best bet is to make your own paintable widget. You plop that widget on the frame, just like a button or any other widget, but when it shows up, it will have your images on it. You can even make those images move, in an animation, or make the colors on the screen change every time you click a button.

It's a piece of cake.

Make a subclass of JPanel and override one method, paintComponent().

All of your graphics code goes inside the paintComponent() method. Think of the paintComponent() method as the method called by the system to say, "Hey widget, time to paint yourself." If you want to draw a circle, the paintComponent() method will have code for drawing a circle. When the frame holding your drawing panel is displayed, paintComponent() is called and your circle appears. If the user iconifies/minimizes the window, the JVM knows the frame needs "repair" when it gets de-iconified, so it calls

paintComponent() again. Anytime the JVM thinks the display needs refreshing, your paintComponent() method will be called.

One more thing, ***you never call this method yourself!*** The argument to this method (a Graphics object) is the actual drawing canvas that gets slapped onto the *real* display. You can't get this by yourself; it must be handed to you by the system. You'll see later, however, that you *can* ask the system to refresh the display (repaint()), which ultimately leads to paintComponent() being called.

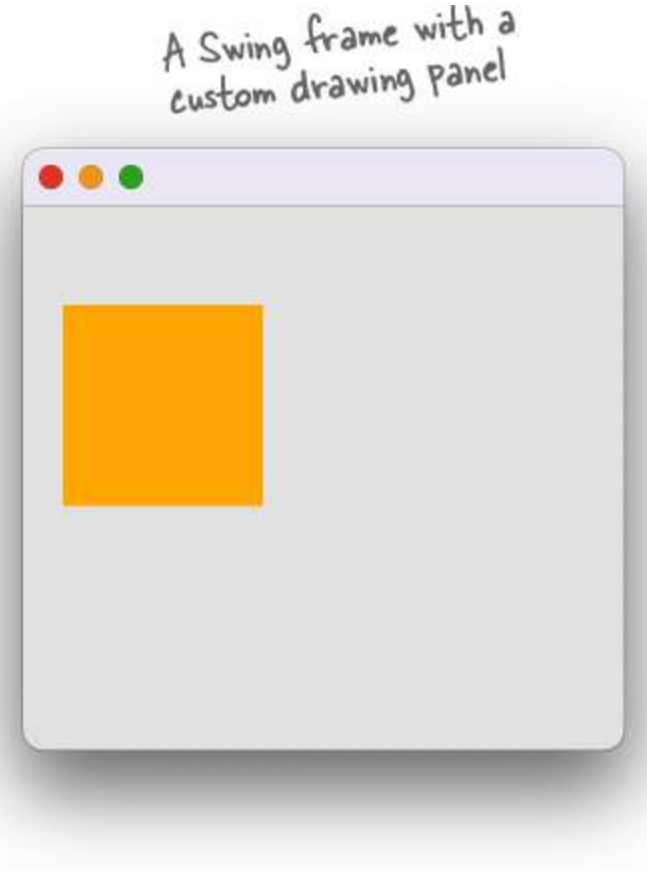

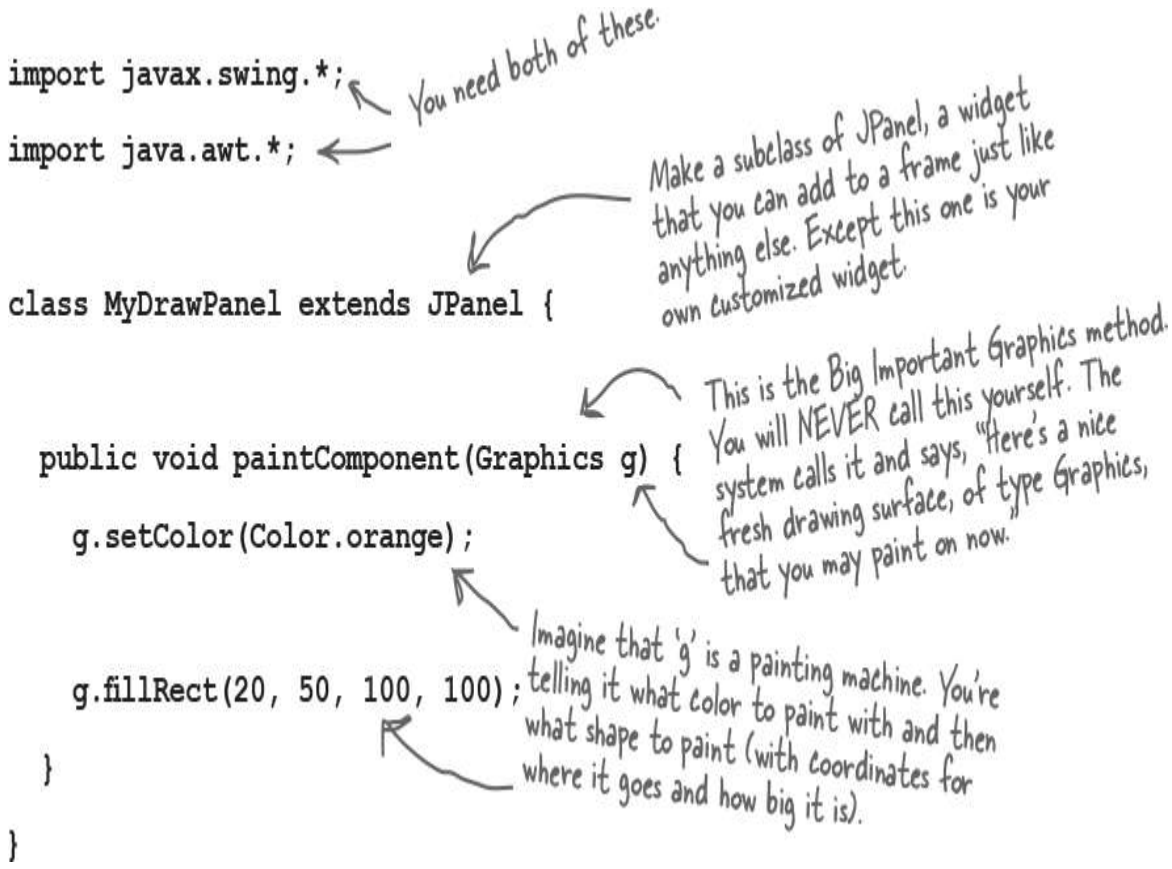

Fun things to do in paintComponent()

Let's look at a few more things you can do in paintComponent(). The most fun, though, is when you start experimenting yourself. Try playing with the numbers, and check the API for class Graphics (later we'll see that there's even *more* you can do besides what's in the Graphics class).

Display a JPEG

```
public void paintComponent(Graphics g) {

  Image image = new ImageIcon("catzilla.jpg").getImage();

  g.drawImage(image, 3, 4, this);

}
```

Your filename goes here. Note: If you're using an IDE and have difficulty, try this line of code instead:
Image image = new ImageIcon(getClass().getResource("catzilla.jpg")).getImage();

The x,y coordinates for where the picture's top-left corner should go. This says "3 pixels from the left edge of the panel and 4 pixels from the top edge of the panel." These numbers are always relative to the widget (in this case your JPanel subclass), not the entire frame.

Paint a randomly colored circle on a black background

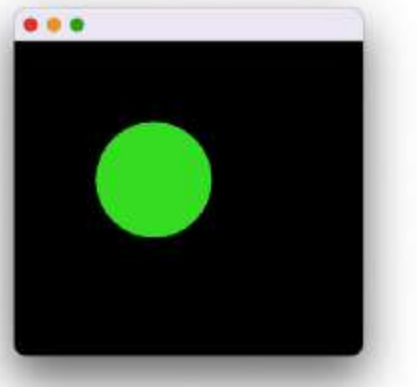

```
public void paintComponent(Graphics g) {

  g.fillRect(0, 0, this.getWidth(), this.getHeight());

  Random random = new Random();
  int red = random.nextInt(256);
  int green = random.nextInt(256);
  int blue = random.nextInt(256);

  Color randomColor = new Color(red, green, blue);
  g.setColor(randomColor);
  g.fillOval(70, 70, 100, 100);
}
```

Fill the entire panel with black (the default color).

The first two args define the (x,y) upper-left corner, relative to the panel, for where drawing starts, so 0, 0 means "start 0 pixels from the left edge and 0 pixels from the top edge." The other two args say, "Make the width of this rectangle as wide as the panel (this.width()), and make the height as tall as the panel (this.height)."

Earlier, we used Math.random, but now we know how to use the Java libraries we can use java.util.Random. It has a nextInt method that takes a max value and returns a number between 0 (inclusive) and this max value (not inclusive). In this case 0–256.

You can make a color by passing in 3 ints to represent the RGB values.

Start 70 pixels from the left, 70 from the top, make it 100 pixels wide, and 100 pixels tall.

Behind every good Graphics reference is a Graphics2D object

The argument to paintComponent() is declared as type Graphics (java.awt.Graphics).

```
public void paintComponent(Graphics g) { }
```

So the parameter "g" IS-A Graphics object. This means it *could* be a *subclass* of Graphics (because of polymorphism). And in fact, it *is*.

The object referenced by the "g" parameter is actually an instance of the Graphics2D ***class.***

Why do you care? Because there are things you can do with a Graphics2D reference that you can't do with a Graphics reference. A Graphics2D object can do more than a Graphics object, and it really is a Graphics2D object lurking behind the Graphics reference.

Remember your polymorphism. The compiler decides which methods you can call based on the reference type, not the object type. If you have a Dog object referenced by an Animal reference variable:

```
Animal a = new Dog();
```

You CANNOT say:

```
a.bark();
```

Even though you know it's really a Dog back there. The compiler looks at "a," sees that it's of type Animal, and finds that there's no remote control button for bark() in the Animal class. But you can still get the object back to the Dog it really *is* by saying:

```
Dog d = (Dog) a;
d.bark();
```

So the bottom line with the Graphics object is this:

If you need to use a method from the Graphics2D class, you can't *use* the paintComponent parameter ("g") straight from the method. But you can *cast* it with a new Graphics2D variable:

```
Graphics2D g2d = (Graphics2D) g;
```

Methods you can call on a `Graphics` reference:

drawImage()

drawLine()

drawPolygon

drawRect()

drawOval()

fillRect()

fillRoundRect()

setColor()

To cast the `Graphics2D` *object* to a `Graphics2D` *reference*:

```
Graphics2D g2d = (Graphics2D) g;
```

Methods you can call on a `Graphics2D` reference:

fill3DRect()

draw3DRect()

rotate()

scale()

shear()

transform()

setRenderingHints()

> **NOTE**
>
> (These are not complete method lists; check the API for more)

Because life’s too short to paint the circle a solid color when there’s a gradient blend waiting for you

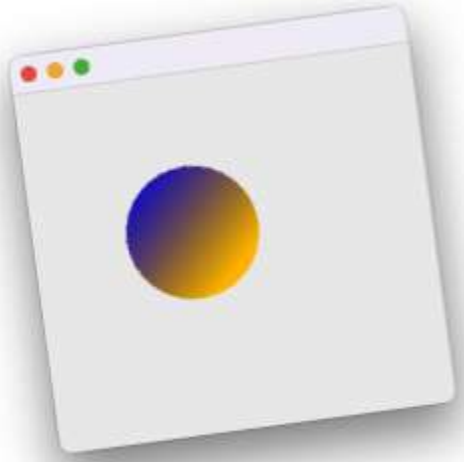

```
public void paintComponent(Graphics g) {

    Graphics2D g2d = (Graphics2D) g;

    GradientPaint gradient = new GradientPaint(70, 70, Color.blue, 150, 150, Color.orange);

    g2d.setPaint(gradient);

    g2d.fillOval(70, 70, 100, 100);

}
```

It's really a Graphics2D object masquerading as a mere Graphics object

Cast it so we can call something that Graphics2D has but Graphics doesn't

Starting point

Starting color

Ending point

Ending color

This sets the virtual paint brush to a gradient instead of a solid color.

The fillOval() method really means "fill the oval with whatever is loaded on your paintbrush (i.e., the gradient)."

```
public void paintComponent(Graphics g) {
  Graphics2D g2d = (Graphics2D) g;

  Random random = new Random();
  int red = random.nextInt(256);
  int green = random.nextInt(256);
  int blue = random.nextInt(256);
  Color startColor = new Color(red, green, blue);

  red = random.nextInt(256);
  green = random.nextInt(256);
  blue = random.nextInt(256);
  Color endColor = new Color(red, green, blue);

  GradientPaint gradient = new GradientPaint(70, 70, startColor, 150, 150, endColor);
  g2d.setPaint(gradient);
  g2d.fillOval(70, 70, 100, 100);
}
```

This is just like the one above, except it makes random colors for the start and stop colors of the gradient. Try it!

Bullet Points

EVENTS

- To make a GUI, start with a window, usually a JFrame:

  `JFrame frame = new JFrame();`

- You can add widgets (buttons, text fields, etc.) to the JFrame using:

  `frame.getContentPane().add(button);`

- Unlike most other components, the JFrame doesn't let you add to it directly, so you must add to the JFrame's content pane.

- To make the window (JFrame) display, you must give it a size and tell it to be visible:

```
frame.setSize(300,300);
frame.setVisible(true);
```

- To know when the user clicks a button (or takes some other action on the user interface) you need to listen for a GUI event.

- To listen for an event, you must register your interest with an event source. An event source is the thing (button, check box, etc.) that "fires" an event based on user interaction.

- The listener interface gives the event source a way to call you back, because the interface defines the method(s) the event source will call when an event happens.

- To register for events with a source, call the source's registration method. Registration methods always take the form of ***add<EventType>Listener***. To register for a button's ActionEvents, for example, call:

  `button.addActionListener(this);`

- Implement the listener interface by implementing all of the interface's event-handling methods. Put your event-handling code in

the listener call-back method. For ActionEvents, the method is:

```
public void actionPerformed(ActionEvent
                        event) {
 button.setText("you clicked!");
}
```

- The event object passed into the event-handler method carries information about the event, including the source of the event.

GRAPHICS

- You can draw 2D graphics directly on to a widget.
- You can draw a .gif or .jpeg directly on to a widget.
- To draw your own graphics (including a .gif or .jpeg), make a subclass of JPanel and override the paintComponent() method.
- The paintComponent() method is called by the GUI system. YOU NEVER CALL IT YOURSELF. The argument to paintComponent() is a Graphics object that gives you a surface to draw on, which will end up on the screen. You cannot construct that object yourself.
- Typical methods to call on a Graphics object (the paintComponent parameter) are:

```
g.setColor(Color.blue);
g.fillRect(20, 50, 100, 120);
```

- To draw a .jpg, construct an Image using:

  `Image image = new ImageIcon("catzilla.jpg").getImage();`

  and draw the image using:

  `g.drawImage(image,3,4,this);`

- The object referenced by the Graphics parameter to paintComponent() is actually an instance of the Graphics2D class. The Graphics 2D class has a variety of methods including:

  fill3DRect(), draw3DRect(), rotate(), scale(), shear(), transform()

- To invoke the Graphics2D methods, you must cast the parameter from a Graphics object to a Graphics2D object:

  `Graphics2D g2d = (Graphics2D) g;`

We can get an event. We can paint graphics. But can we paint graphics *when* we get an event?

Let's hook up an event to a change in our drawing panel. We'll make the circle change colors each time you click the button. Here's how the program flows:

- ❶ The frame is built with the two widgets (your drawing panel and a button). A listener is created and registered with the button. Then the frame is displayed, and it just waits for the user to click.

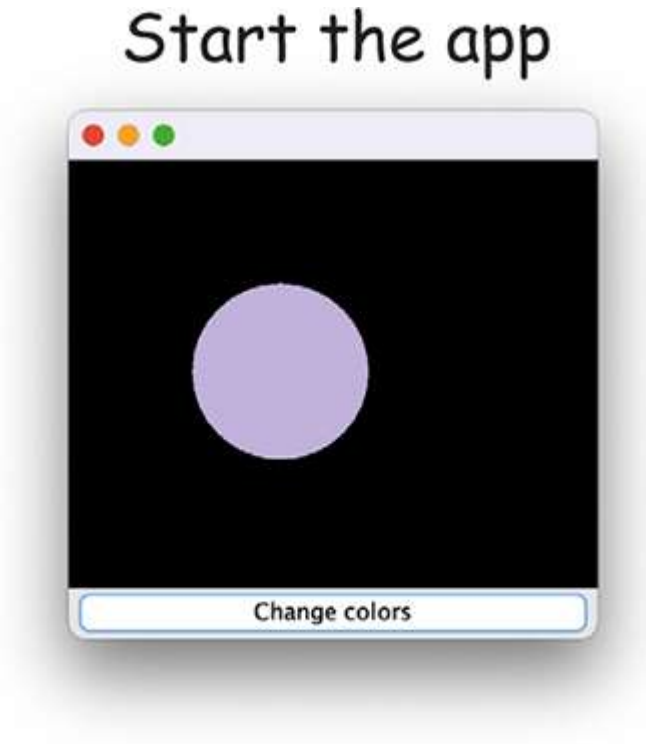

- ❷ The user clicks the button, and the button creates an event object and calls the listener's event handler.

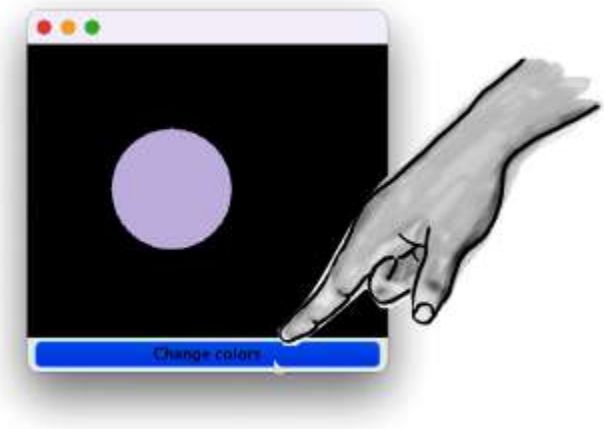

- ❸ The event handler calls repaint() on the frame. The system calls paintComponent() on the drawing panel.
- ❹ Voilà! A new color is painted because paintComponent() runs again, filling the circle with a random color.

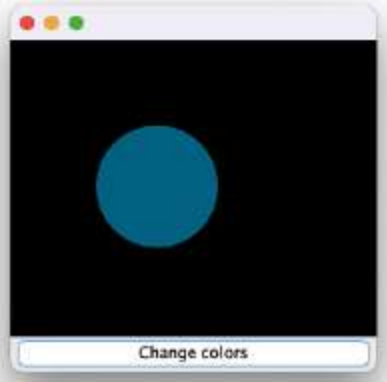

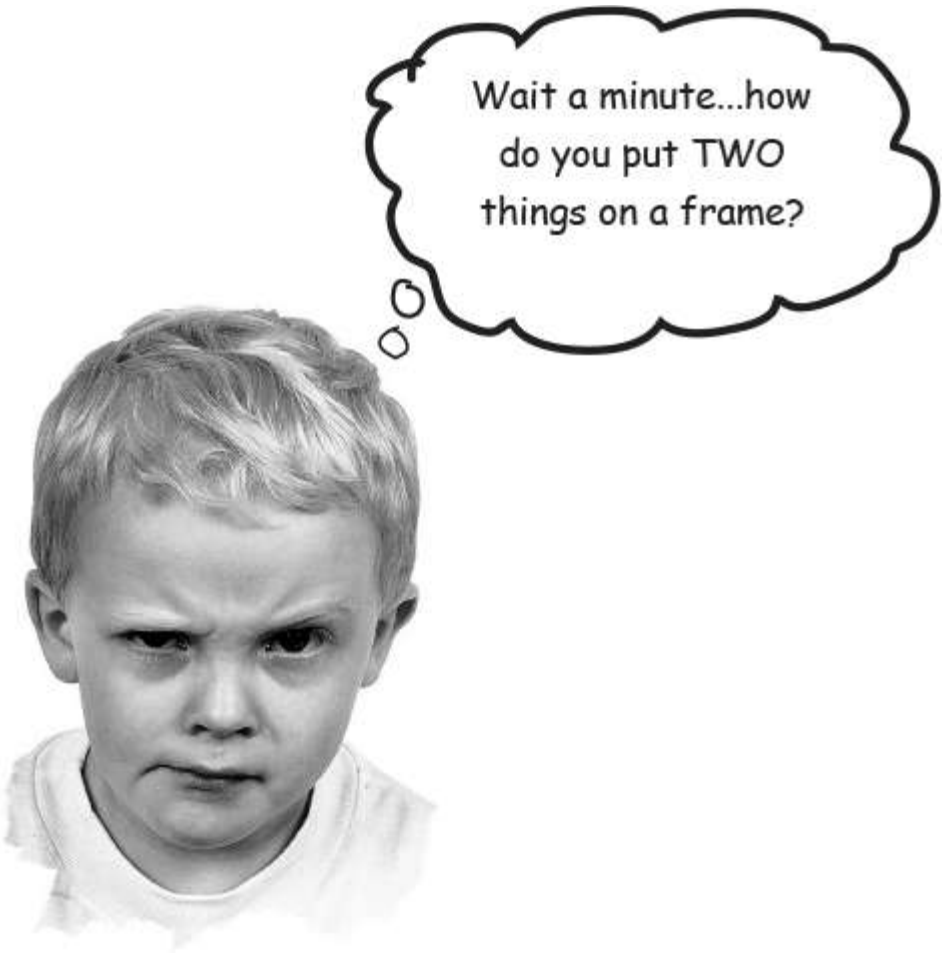

GUI layouts: putting more than one widget on a frame

We cover GUI layouts in the *next* chapter, but we'll do a quickie lesson here to get you going. By default, a frame has five regions you can add to. You can add only *one* thing to each region of a frame, but don't panic! That one thing might be a panel that holds three other things including a panel that holds two more things and...you get the idea. In fact, we were "cheating" when we added a button to the frame using:

```
frame.getContentPane().add(button);
```

This isn't really the way you're supposed to do it (the one-arg add method).

This is the better (and usually mandatory) way to add to a frame's default content pane. Always specify WHERE (which region) you want the widget to go.

```
frame.getContentPane().add(BorderLayout.CENTER, button);
```

We call the two-argument add method that takes a region (using a constant) and the widget to add to that region.

When you call the single-arg add method (the one we shouldn't use), the widget will automatically land in the center region.

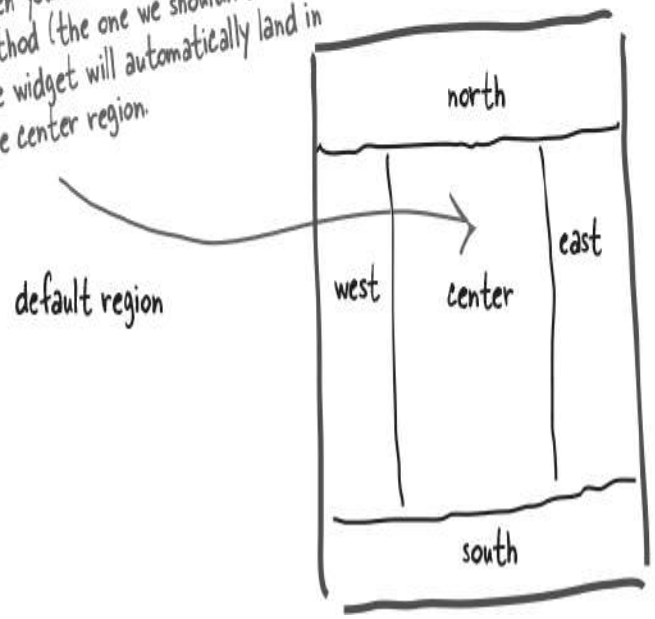

SHARPEN YOUR PENCIL

Given the pictures in "We can get an event. We can paint graphics. But can we paint graphics *when* we get an event?", write the code that adds the button and the panel to the frame.

→ **Yours to solve.**

The circle changes color each time you click the button.

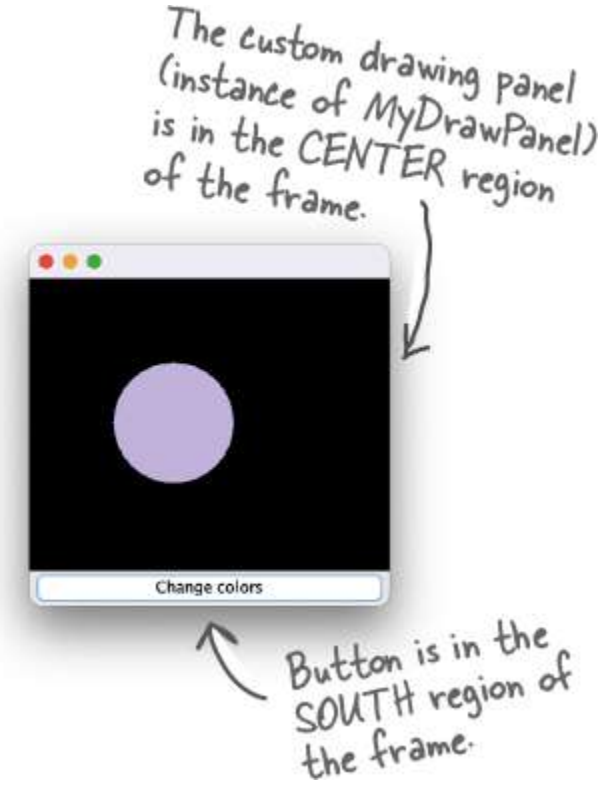

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class SimpleGui3 implements ActionListener {
  private JFrame frame;

  public static void main(String[] args) {
    SimpleGui3 gui = new SimpleGui3();
    gui.go();
  }

  public void go() {
    frame = new JFrame();
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

    JButton button = new JButton("Change colors");
    button.addActionListener(this);

    MyDrawPanel drawPanel = new MyDrawPanel();

    frame.getContentPane().add(BorderLayout.SOUTH, button);
    frame.getContentPane().add(BorderLayout.CENTER, drawPanel);
    frame.setSize(300, 300);
    frame.setVisible(true);
  }

  public void actionPerformed(ActionEvent event) {
    frame.repaint();
  }
}
```

Add the listener (this) to the button.

Add the two widgets (button and drawing panel) to the two regions of the frame.

When the user clicks, tell the frame to repaint() itself. That means paintComponent() is called on every widget in the frame!

```
class MyDrawPanel extends JPanel {

   public void paintComponent(Graphics g) {
     // Code to fill the oval with a random color
     // See page 365 for the code
   }

}
```

The drawing panel's paintComponent() method is called every time the user clicks.

Let's try it with TWO buttons

The south button will act as it does now, simply calling repaint on the frame. The second button (which we'll stick in the east region) will change the text on a label. (A label is just text on the screen.)

So now we need FOUR widgets

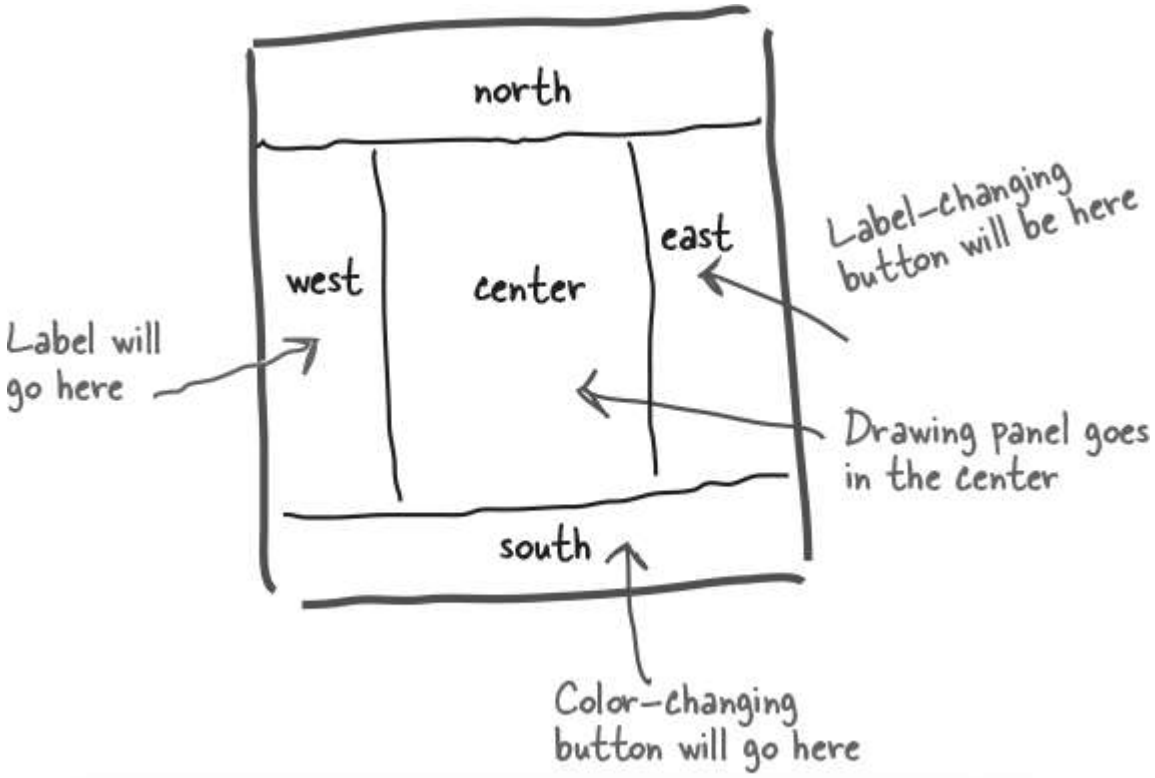

And we need to get TWO events

Uh-oh.

Is that even possible? How do you get *two* events when you have only *one* actionPerformed() method?

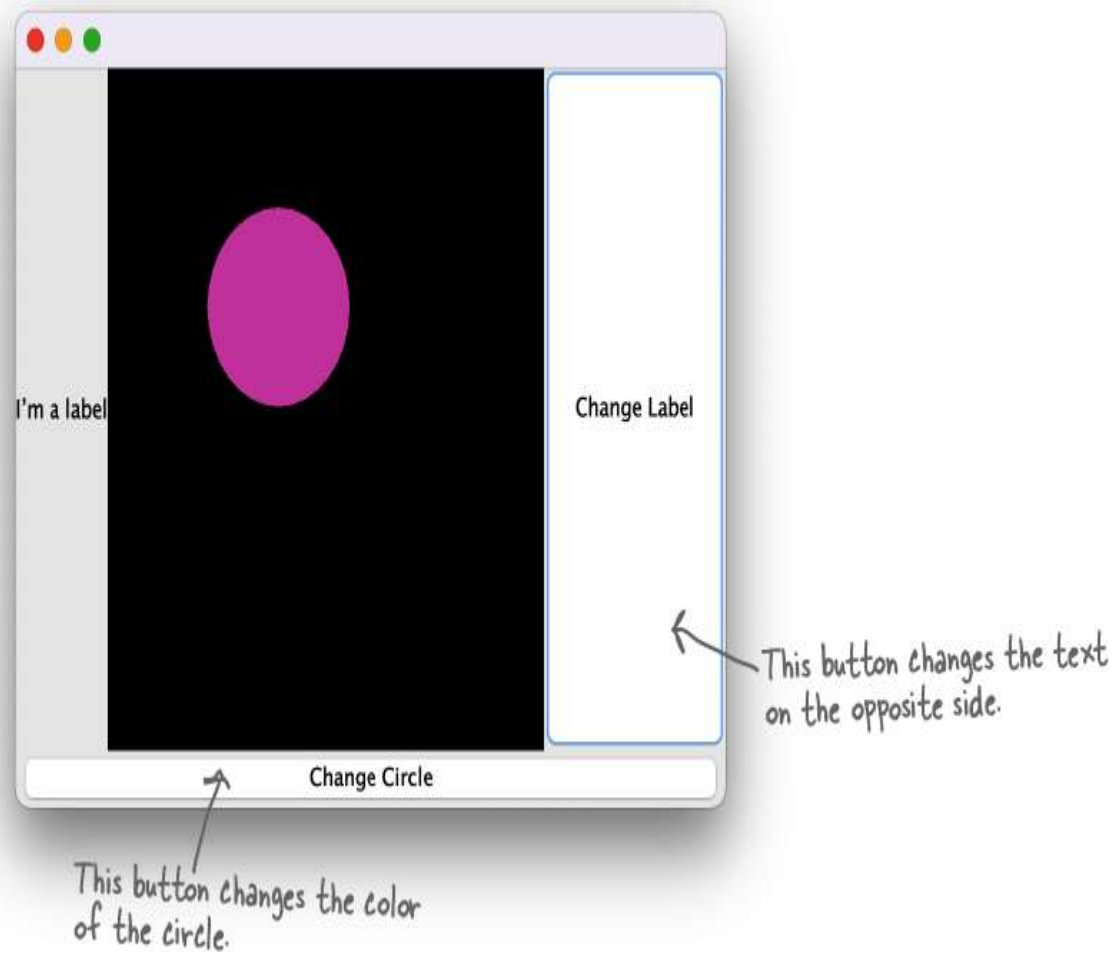

How do you get action events for two different buttons when each button needs to do something different?

- ① ***Option One*** **Implement <u>two</u> actionPerformed() methods**

```
class MyGui implements ActionListener {
  // lots of code here and then:

  public void actionPerformed(ActionEvent event) {
    frame.repaint();
  }

  public void actionPerformed(ActionEvent event) {
    label.setText("That hurt!");
  }
}
```



Flaw: You can't! You can't implement the same method twice in a Java class. It won't compile. And even if you *could*, how would the event source know *which* of the two methods to call?

- ② ***Option Two*** **Register the same listener with <u>both</u> buttons.**

```
class MyGui implements ActionListener {
  // declare a bunch of instance variables here

  public void go() {
    // build gui
    colorButton = new JButton();
    labelButton = new JButton();
    colorButton.addActionListener(this);
    labelButton.addActionListener(this);
    // more gui code here ...
  }

  public void actionPerformed(ActionEvent event) {
    if (event.getSource() == colorButton) {
      frame.repaint();
    } else {
      label.setText("That hurt!");
    }
  }
}
```

Register the same listener with both buttons.

Query the event object to find out which button actually fired it, and use that to decide what to do.

Flaw: this does work, but in most cases it's not very OO. One event handler doing many different things means that you have a single method doing many different things. If you need to change how *one* source is handled, you have to mess with *everybody's* event handler. Sometimes it *is* a good solution, but usually it hurts maintainability and extensibility.

- ③ ***Option Three*** **Create two <u>separate</u> ActionListener classes**

```
class MyGui {
  private JFrame frame;
  private JLabel label;

  void gui() {
    // code to instantiate the two listeners and register one
    // with the color button and the other with the label button
  }
}
```

```
class ColorButtonListener implements ActionListener {
  public void actionPerformed(ActionEvent event) {
    frame.repaint();
  }
}
```

↖ Won't work! This class doesn't have a reference to the 'frame' variable of the MyGui class.

```
class LabelButtonListener implements ActionListener {
  public void actionPerformed(ActionEvent event) {
    label.setText("That hurt!");
  }
}
```

↖ Problem! This class has no reference to the variable "label."

Flaw: these classes won't have access to the variables they need to act on, "frame" and "label." You could fix it, but you'd have to give each of the listener classes a reference to the main GUI class, so that inside the actionPerformed() methods the listener could use the GUI class reference to access the variables of the GUI class. But that's breaking encapsulation, so we'd probably need to make getter methods for the GUI widgets (getFrame(), getLabel(), etc.). And you'd probably need to add a constructor to the listener class so that you can pass the

GUI reference to the listener at the time the listener is instantiated. And, well, it gets messier and more complicated.

There has got to be a better way!

Wouldn't it be wonderful if you could have two different listener classes, but the listener classes could access the instance variables of the main GUI class, almost as if the listener classes *belonged* to the other class. Then you'd have the best of both worlds. Yeah, that would be dreamy. But it's just a fantasy...

Inner class to the rescue!

You *can* have one class nested inside another. It's easy. Just make sure that the definition for the inner class is *inside* the curly braces of the outer class.

Simple inner class:

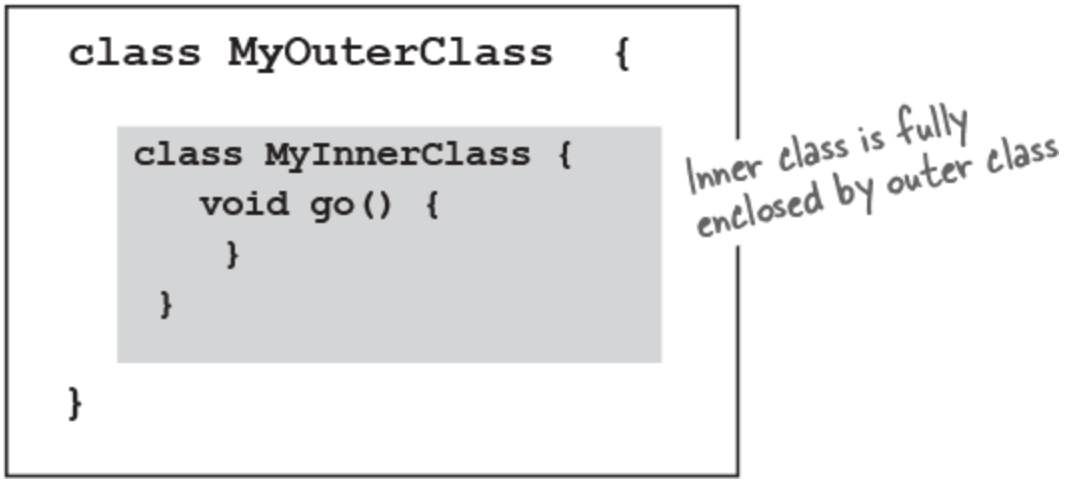

An inner class gets a special pass to use the outer class's stuff. *Even the private stuff.* And the inner class can use those private variables and methods of the outer class as if the variables and members were defined in the inner class. That's what's so handy about inner classes—they have most of the benefits of a normal class, but with special access rights.

An inner class can use all the methods and variables of the outer class, even the private ones.

The inner class gets to use those variables and methods just as if the methods and variables were declared within the inner class.

Inner class using an outer class variable

```
class MyOuterClass   {

  private int x;

  class MyInnerClass {
    void go() {
      x = 42;
    }
  } // close inner class

} // close outer class
```



An inner class instance must be tied to an outer class instance*

Remember, when we talk about an inner *class* accessing something in the outer class, we're really talking about an *instance* of the inner class accessing something in an *instance* of the outer class. But *which* instance?

Can *any* arbitrary instance of the inner class access the methods and variables of *any* instance of the outer class? **No!**

*An **inner** object must be tied to a specific **outer** object on the heap.*

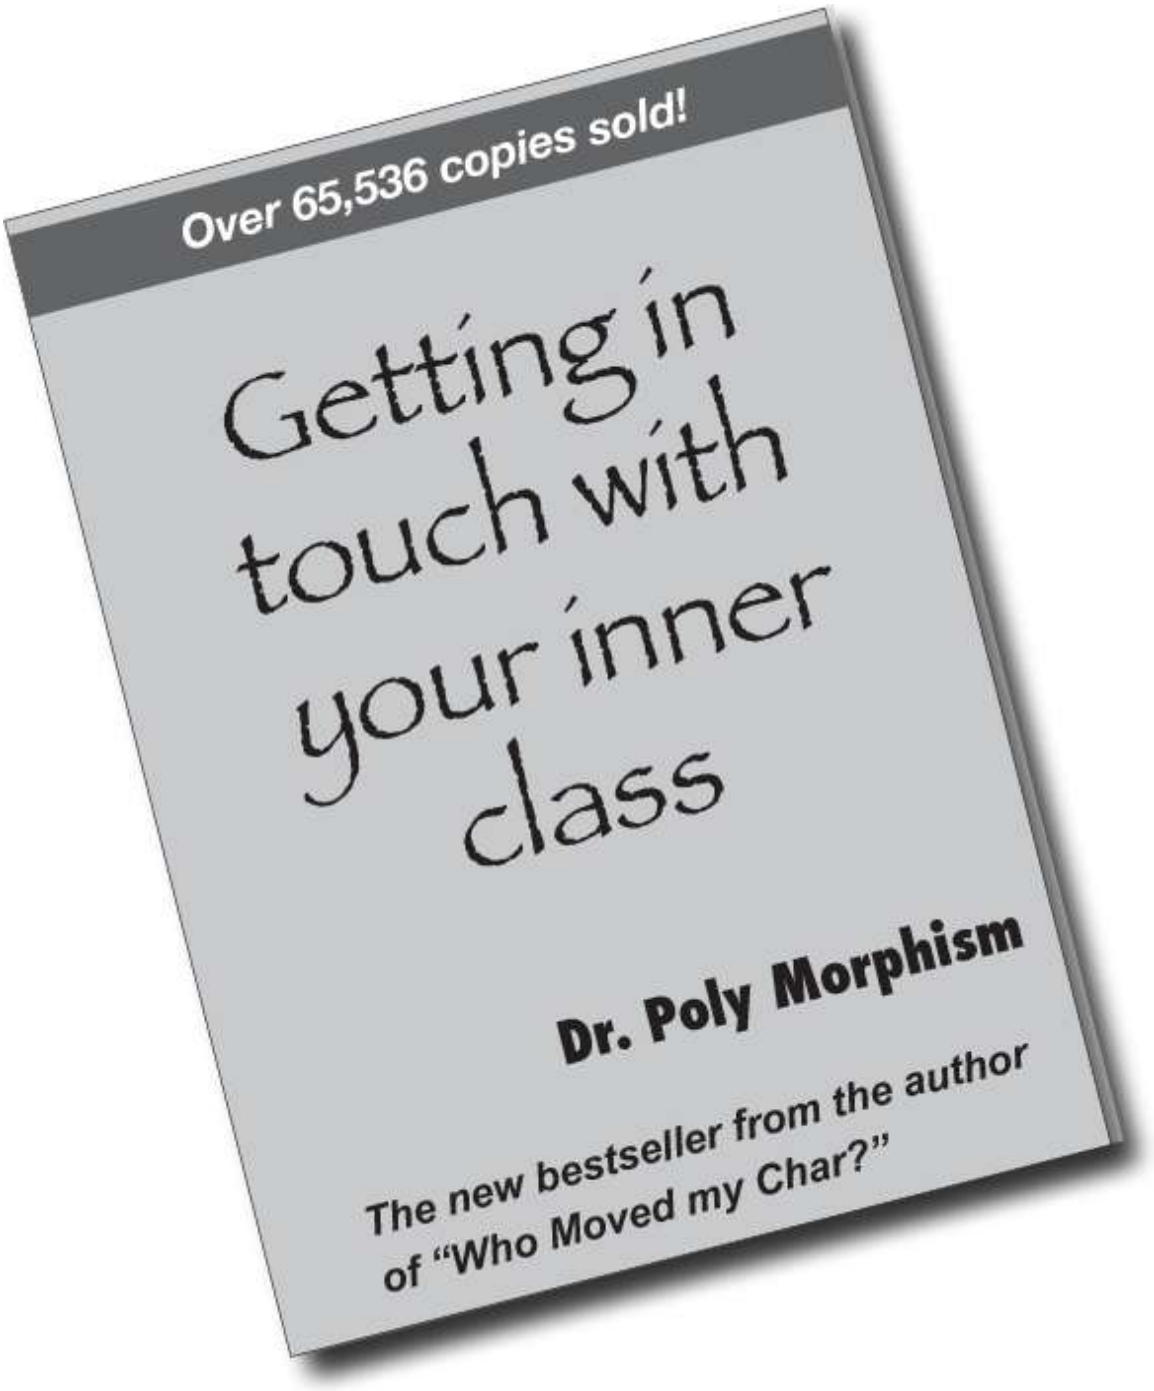

An inner object shares a special bond with an outer object.

- ① Make an instance of the outer class

- ② Make an instance of the inner class, by using the instance of the outer class.

- ③ The outer and inner objects are now intimately linked.

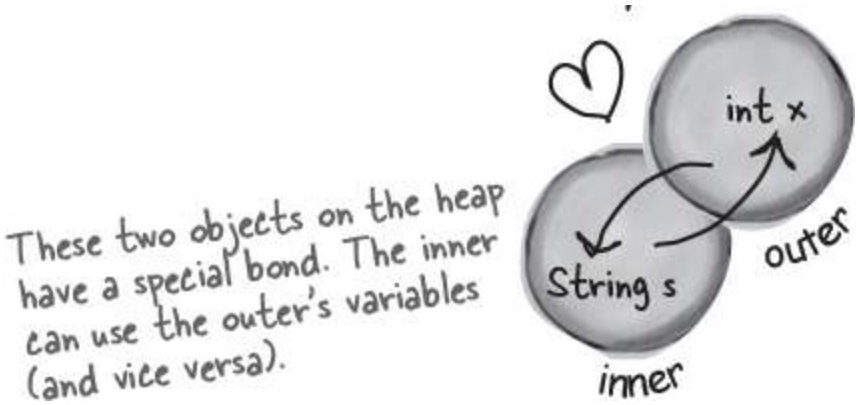

* There's an exception to this, for a very special case—an inner class defined within a static method. But we're not going there, and you might go your entire Java life without ever encountering one of these.

How to make an instance of an inner class

If you instantiate an inner class from code *within* an outer class, the instance of the outer class is the one that the inner object will "bond" with. For

example, if code within a method instantiates the inner class, the inner object will bond to the instance whose method is running.

Code in an outer class can instantiate one of its own inner classes, in exactly the same way it instantiates any other class...**`new MyInner()`**.

```
class MyOuter  {

  private int x;

  MyInner inner = new MyInner();

  public void doStuff() {
    inner.go();
  }

  class MyInner {
    void go() {
      x = 42;
    }
  } // close inner class

} // close outer class
```

The outer class has a private instance variable "x."

Make an instance of the inner class.

Call a method on the inner class.

The method in the inner class uses the outer class instance variable "x," as if "x" belonged to the inner class.

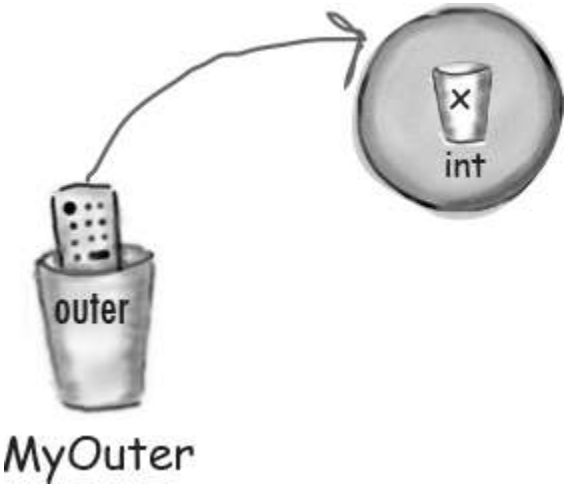

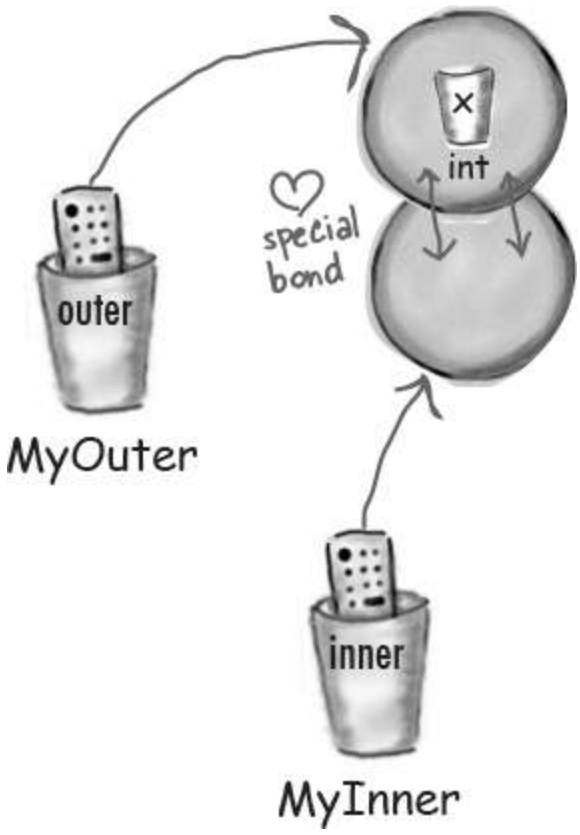

SIDEBAR

You *can* instantiate an inner instance from code running *outside* the outer class, but you have to use a special syntax. Chances are you'll go through your entire Java life and never need to make an inner class from outside, but just in case you're interested...

```
class Foo {
 public static void main (String[] args) {
   MyOuter outerObj = new MyOuter();
   MyOuter.MyInner innerObj = outerObj.new MyInner();
 }
}
```

Now we can get the two-button code working

```
public class TwoButtons {
  private JFrame frame;
  private JLabel label;

  public static void main(String[] args) {
    TwoButtons gui = new TwoButtons();
    gui.go();
  }

  public void go() {
    frame = new JFrame();
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

    JButton labelButton = new JButton("Change Label");
    labelButton.addActionListener(new LabelListener());

    JButton colorButton = new JButton("Change Circle");
    colorButton.addActionListener(new ColorListener());

    label = new JLabel("I'm a label");
    MyDrawPanel drawPanel = new MyDrawPanel();

    frame.getContentPane().add(BorderLayout.SOUTH, colorButton);
    frame.getContentPane().add(BorderLayout.CENTER, drawPanel);
    frame.getContentPane().add(BorderLayout.EAST, labelButton);
    frame.getContentPane().add(BorderLayout.WEST, label);

    frame.setSize(500, 400);
    frame.setVisible(true);
  }

  class LabelListener implements ActionListener {
    public void actionPerformed(ActionEvent event) {
      label.setText("Ouch!");
    }
  }

  class ColorListener implements ActionListener {
    public void actionPerformed(ActionEvent event) {
      frame.repaint();
    }
  }
}
```

Much better: the main GUI class doesn't implement ActionListener now.

Instead of passing (this) to the button's listener registration method, pass a new instance of the appropriate listener class.

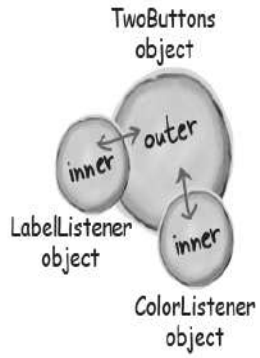

Now we get to have TWO ActionListeners in a single class!

Inner class knows about "label."

The inner class gets to use the 'frame' instance variable, without having an explicit reference to the outer class object.

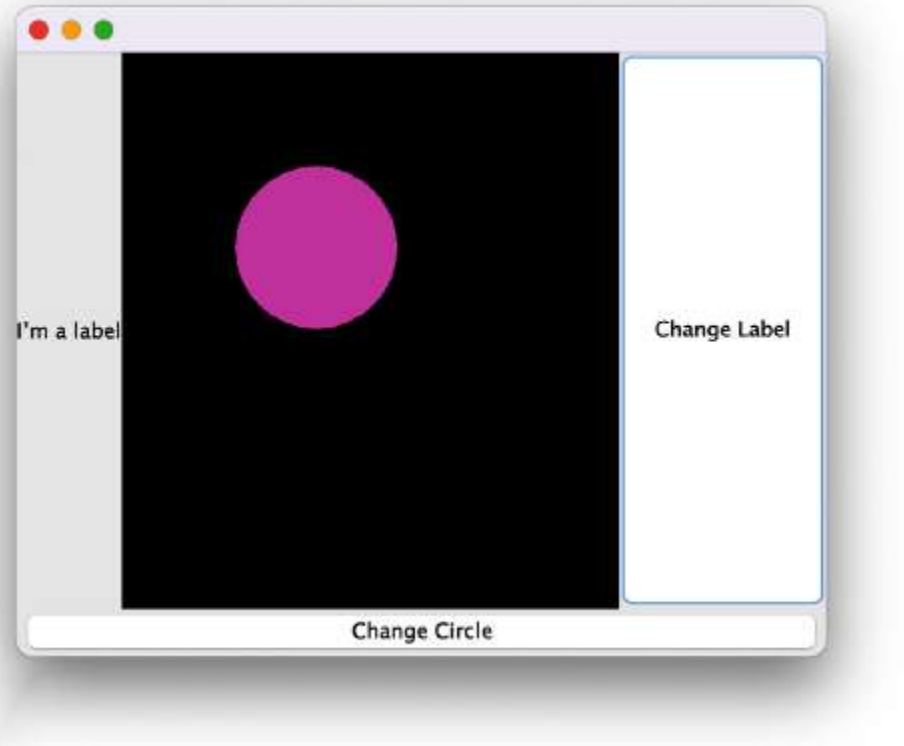

Java Exposed

This week's interview: Instance of an Inner Class

HeadFirst: What makes inner classes important?

Inner object: Where do I start? We give you a chance to implement the same interface more than once in a class. Remember, you can't implement a method more than once in a normal Java class. But using *inner* classes, each inner class can implement the *same* interface, so you can have all these *different* implementations of the very same interface methods.

HeadFirst: *Why would you ever* want to implement the same method twice?

Inner object: *Let's revisit GUI event handlers. Think about it...if you want* three *buttons to each have a different event behavior, then use* three inner classes, all implementing ActionListener—which means each class gets to implement its own actionPerformed method.

HeadFirst: So are event handlers the only reason to use inner classes?

Inner object: *Oh, gosh no. Event handlers are just an obvious example. Anytime you need a separate class but still want that class to behave as if it were part of* another *class, an inner class is the best—and sometimes* only—way to do it.

HeadFirst: *I'm still confused here. If you want the inner class to* behave *like it belongs to the outer class, why have a separate class in the first place? Why wouldn't the inner class code just be* in the outer class in the first place?

Inner object: *I just* gave *you one scenario, where you need more than one implementation of an interface. But even when you're not using interfaces, you might need two different* classes *because those classes represent two different* things. It's good OO.

HeadFirst: *Whoa. Hold on here. I thought a big part of OO design is about reuse and maintenance. You know, the idea that if you have two separate classes, they can each be modified and used independently, as opposed to stuffing it all into one class yada yada yada. But with an* inner *class, you're still just working with one* real class in the end, right? The enclosing class is the only one that's reusable and separate from everybody else. Inner classes aren't exactly reusable. In fact, I've heard them called "Reuseless—useless over and over again."

Inner object: Yes, it's true that the inner class is not *as* reusable, in fact sometimes not reusable at all, because it's intimately tied to the instance variables and methods of the outer class. But it—

HeadFirst: —which only proves my point! If they're not reusable, why bother with a separate class? I mean, other than the interface issue, which

sounds like a workaround to me.

Inner object: As I was saying, you need to think about IS-A and polymorphism.

HeadFirst: OK. And I'm thinking about them because...

Inner object: *Because the outer and inner classes might need to pass* different *IS-A tests! Let's start with the polymorphic GUI listener example. What's the declared argument type for the button's listener registration method? In other words, if you go to the API and check, what kind of* thing (class or interface type) do you have to pass to the addActionListener() method?

HeadFirst: You have to pass a listener. Something that implements a particular listener interface, in this case ActionListener. Yeah, we know all this. What's your point?

Inner object: *My point is that polymorphically, you have a method that takes only one particular* type. *Something that passes the IS-A test for ActionListener. But—and here's the big thing—what if your class needs to be an IS-A of something that's a* class type rather than an interface?

HeadFirst: *Wouldn't you have your class just* extend the class you need to be a part of? Isn't that the whole point of how subclassing works? If B is a subclass of A, then anywhere an A is expected a B can be used. The whole pass-a-Dog-where-an-Animal-is-the-declared-type thing.

Inner object: Yes! Bingo! So now what happens if you need to pass the IS-A test for two different classes? Classes that aren't in the same inheritance hierarchy?

HeadFirst: *Oh, well you just...hmmm. I think I'm getting it. You can always* implement *more than one interface, but you can* extend *only* one *class. You can be only one kind of IS-A when it comes to* class types.

Inner object: *Well done! Yes, you can't be both a Dog and a Button. But if you're a Dog that needs to sometimes be a Button (in order to pass yourself to methods that take a Button), the Dog class (which extends*

Animal so it can't extend Button) can have an inner class that acts on the Dog's behalf as a Button, by extending Button, and thus wherever a Button is required, the Dog can pass his inner Button instead of himself. In other words, instead of saying x.takeButton(this), the Dog object calls x.takeButton(new MyInnerButton()).

HeadFirst: Can I get a clear example?

Inner object: Remember the drawing panel we used, where we made our own subclass of JPanel? Right now, that class is a separate, non-inner, class. And that's fine, because the class doesn't need special access to the instance variables of the main GUI. But what if it did? What if we're doing an animation on that panel, and it's getting its coordinates from the main application (say, based on something the user does elsewhere in the GUI). In that case, if we make the drawing panel an inner class, the drawing panel class gets to be a subclass of JPanel, while the outer class is still free to be a subclass of something else.

HeadFirst: Yes, I see! And the drawing panel isn't reusable enough to be a separate class anyway, since what it's actually painting is specific to this one GUI application.

Inner object: Yes! You've got it!

HeadFirst: *Good. Then we can move on to the nature of the* relationship between you and the outer instance.

Inner object: What is it with you people? Not enough sordid gossip in a serious topic like polymorphism?

HeadFirst: Hey, you have no idea how much the public is willing to pay for some good old tabloid dirt. So, someone creates you, and you become instantly bonded to the outer object, is that right?

Inner object: Yes, that's right.

HeadFirst: What about the outer object? Can it be associated with any other inner objects?

Inner object: *So now we have it. This is what you* really *wanted. Yes, yes. My so-called* "mate" can have as many inner objects as it wants.

HeadFirst: Is that like, serial monogamy? Or can it have them all at the same time?

Inner object: All at the same time. There. Satisfied?

HeadFirst: *Well, it does make sense. And let's not forget, it was* you extolling the virtues of "multiple implementations of the same interface." So it makes sense that if the outer class has three buttons, it would need three different inner classes (and thus three different inner class objects) to handle the events.

Inner objects: You got it!

HeadFirst: One more question. I've heard that when lambdas came along, you were almost put out of a job?

Inner objects: Ouch, that really hurts! Okay, full disclosure, there are many cases for which a lambda is an easier to read, more concise way to do what I do. But inner classes have been around for a long time, and you're sure to encounter us in older code. Plus, those pesky lambdas aren't better at everything..

He thinks he's got it made, having *two* inner class objects. But *we* have access to all his private data, so just imagine the damage we could do...

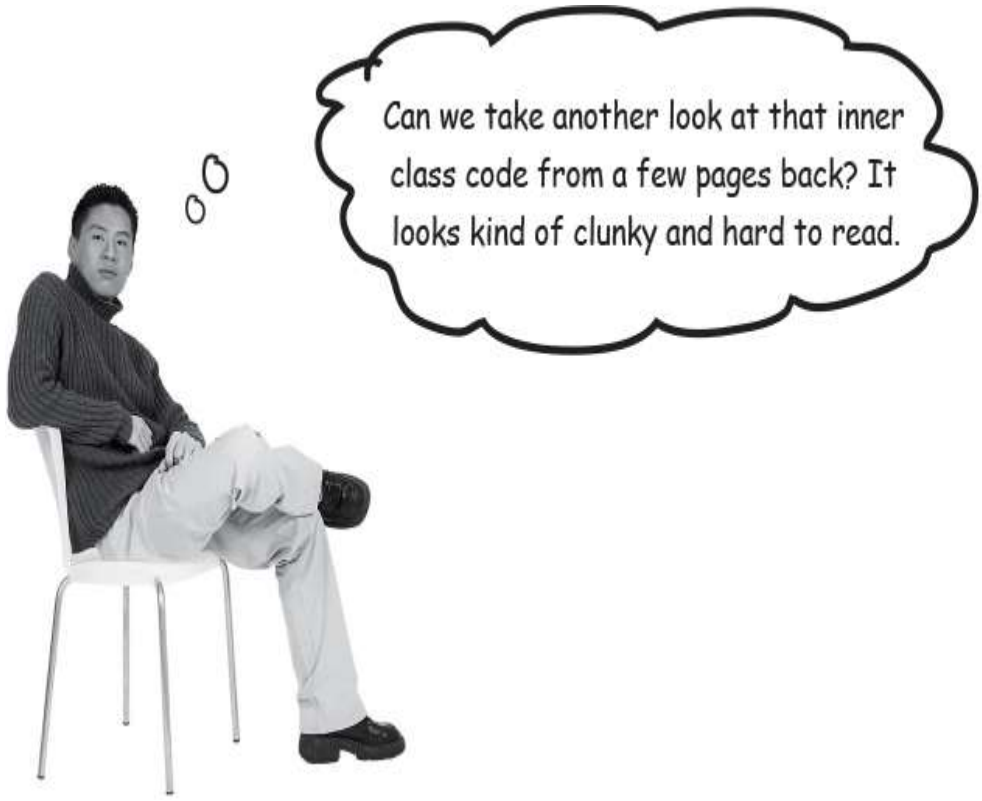

Lambdas to the rescue! (again)

He's not wrong! One way to interpret the two highlighted lines of code would be:

"When the `labelButton` *ActionListener gets an event,* `setText("Ouch");`"

Not only are those two ideas separated from each other in the code, the inner class takes FIVE lines of code to invoke the setText method. And of course, everything we've said about the labelButton code is also true about the colorButton code.

Remember a few pages back we said that in order to implement the ActionListener interface you had provide code for its actionPerformed method? Hmmm...does that ring any bells?

```
...
  public void go() {
    frame = new JFrame();
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

    JButton labelButton = new JButton("Change Label");
    labelButton.addActionListener(new LabelListener());

    JButton colorButton = new JButton("Change Circle");
    colorButton.addActionListener(new ColorListener());

    label = new JLabel("I'm a label");
    MyDrawPanel drawPanel = new MyDrawPanel();

    // code to add widgets, here
    frame.setSize(500, 400);
    frame.setVisible(true);
  }

  class LabelListener implements ActionListener {
    public void actionPerformed(ActionEvent event) {
      label.setText("Ouch!");
    }
  }

  class ColorListener implements ActionListener {
    public void actionPerformed(ActionEvent event) {
      frame.repaint();
    }
  }
```

ActionListener is a Functional Interface

Remember that a lambda provides an implementation for a functional interface's *one and only* abstract method.

Since ActionListener is a functional interface, you can replace the inner classes we saw on the previous page with lambda expressions.

```
  ...
public void go() {
  frame = new JFrame();
  frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

  JButton labelButton = new JButton("Change Label");
  labelButton.addActionListener(event -> label.setText("Ouch!"));

  JButton colorButton = new JButton("Change Circle");
  colorButton.addActionListener(event -> frame.repaint());

  label = new JLabel("I'm a label");
  MyDrawPanel drawPanel = new MyDrawPanel();

  // code to add widgets, here
  frame.setSize(500, 400);
  frame.setVisible(true);
}
```

These two pieces of highlighted code are the lambdas that replace the inner classes.

```
class LabelListener implements ActionListener {
  public void actionPerformed(ActionEvent event) {
    label.setText("Ouch!");
  }
}

class ColorListener implements ActionListener {
  public void actionPerformed(ActionEvent event) {
    frame.repaint();
  }
}
```

All of the inner class code is gone! Not needed! Bye bye.

Lambdas, clearer and more concise

Well, maybe not quite yet, but once you get used to reading lambdas, we're pretty sure you'll agree that they make your code clearer.

Using an inner class for animation

We saw why inner classes are handy for event listeners, because you get to implement the same event-handling method more than once. But now we'll look at how useful an inner class is when used as a subclass of something the outer class doesn't extend. In other words, when the outer class and inner class are in different inheritance trees!

Our goal is to make a simple animation, where the circle moves across the screen from the upper left down to the lower right.

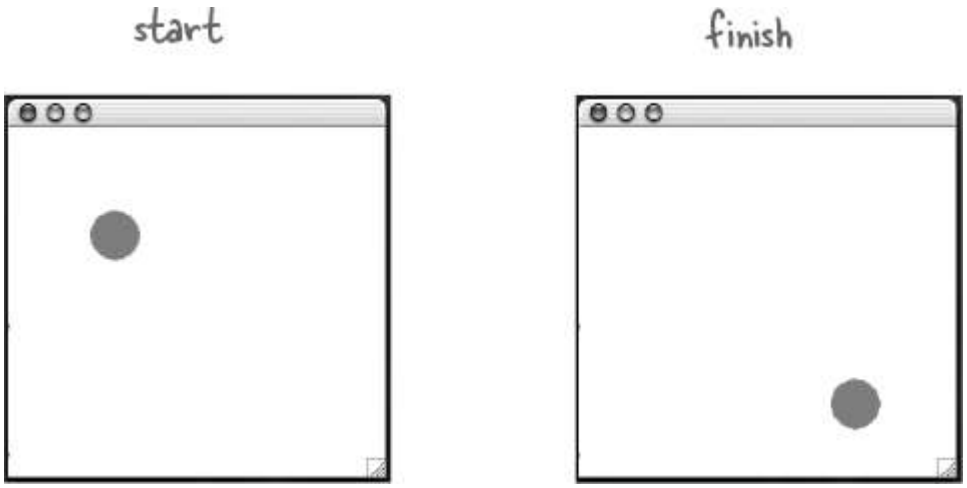

How simple animation works

- ① Paint an object at a particular x and y coordinate.

```
g.fillOval(20,50,100,100);
```

20 pixels from the left,
50 pixels from the top

- ② Repaint the object at a different x and y coordinate.

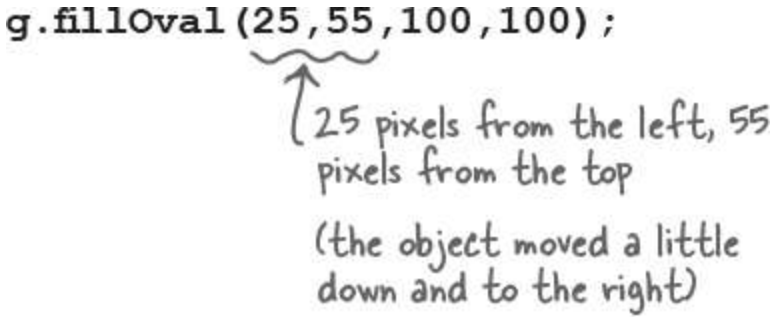

- ③ Repeat the previous step with changing x and y values for as long as the animation is supposed to continue.

THERE ARE NO DUMB QUESTIONS

Q: Why are we learning about animation here? I doubt if I'm going to be making games.

A: You might not be making games, but you might be creating simulations where things change over time to show the results of a process. Or you might be building a visualization tool that, for example, updates a graphic to show how much memory a program is using or to show you how much traffic is coming through your load-balancing server. Anything that needs to take a set of continuously changing numbers and translate them into something useful for getting information out of the numbers.

Doesn't that all sound business-like? That's just the "official justification," of course. The real reason we're covering it here is just because it's a simple way to demonstrate another use of inner classes. (And because we just *like* animation.)

What we <u>really</u> want is something like...

```
class MyDrawPanel extends JPanel {

  public void paintComponent(Graphics g) {

    g.setColor(Color.orange);

    g.fillOval(x, y, 100, 100);

  }

}
```

Remember! The system invokes the paintComponent method; you don't have to.

Each time paintComponent() is called, the oval gets painted at a different location.

SHARPEN YOUR PENCIL

→ **Answers in ???.**

But where do we get the new x and y coordinates?

And who calls repaint()?

See if you can **design a simple solution** to get the ball to animate from the top left of the drawing panel down to the bottom right. Our answer is on the next page, so don't turn this page until you're done!

Big Huge Hint: make the drawing panel an inner class.

Another Hint: don't put any kind of repeat loop in the paintComponent() method.

Write your ideas (or the code) here:

The complete simple animation code

```
import javax.swing.*;
import java.awt.*;
import java.util.concurrent.TimeUnit;

public class SimpleAnimation {
  private int xPos = 70;
  private int yPos = 70;

  public static void main(String[] args) {
    SimpleAnimation gui = new SimpleAnimation();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

    MyDrawPanel drawPanel = new MyDrawPanel();

    frame.getContentPane().add(drawPanel);
    frame.setSize(300, 300);
    frame.setVisible(true);

    for (int i = 0; i < 130; i++) {
      xPos++;
      yPos++;

      drawPanel.repaint();

      try {
        TimeUnit.MILLISECONDS.sleep(50);
      } catch (Exception e) {
        e.printStackTrace();
      }
    }
  }

  class MyDrawPanel extends JPanel {
    public void paintComponent(Graphics g) {
      g.setColor(Color.green);
      g.fillOval(xPos, yPos, 40, 40);
    }
  }
}
```

Make two instance variables in the main GUI class, for the x and y coordinates of the circle.

Nothing new here. Make the widgets and put them in the frame.

This is where the action is!

Repeat this 130 times.

increment the x and y coordinates

Tell the panel to repaint itself (so we can see the circle in the new location).

Pause between repaints (otherwise it will move so quickly you won't SEE it move). Don't worry, you weren't supposed to already know this. We'll look at this in Chapter 17.

Now it's an inner class.

Use the continually updated x and y coordinates of the outer class.

Did it work?

You might not have got the smooth animation that you expected.

What did we do wrong?

There's one little flaw in the paintComponent() method.

We need to <u>erase</u> what was already there! Or we might get trails.

To fix it, all we have to do is fill in the entire panel with the background color, before painting the circle each time. The code below adds two lines at the start of the method: one to set the color to white (the background color of the drawing panel) and the other to fill the entire panel rectangle with that color. In English, the code below says, "Fill a rectangle starting at x and y of 0 (0 pixels from the left and 0 pixels from the top) and make it as wide and as high as the panel is currently.

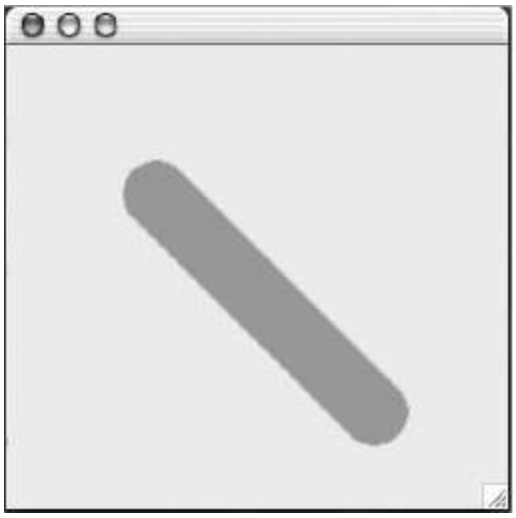

Uh-oh. It didn't move...it smeared.

```
public void paintComponent(Graphics g) {
  g.setColor(Color.white);
  g.fillRect(0, 0, this.getWidth(), this.getHeight());

  g.setColor(Color.green);
  g.fillOval(x, y, 40, 40);
}
```

getWidth() and getHeight() are methods inherited from JPanel.

→ **Yours to solve.**

SHARPEN YOUR PENCIL (OPTIONAL, JUST FOR FUN)

What changes would you make to the x and y coordinates to produce the animations below?

(Assume the first example moves in 3-pixel increments.)

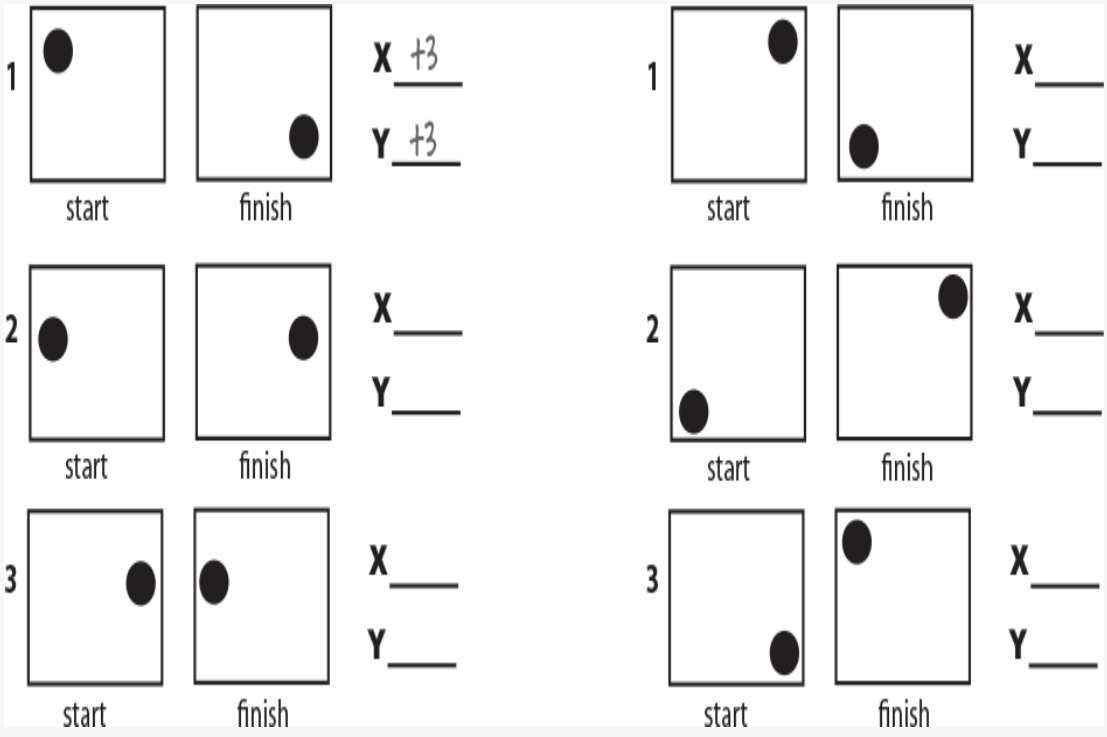

Code Kitchen

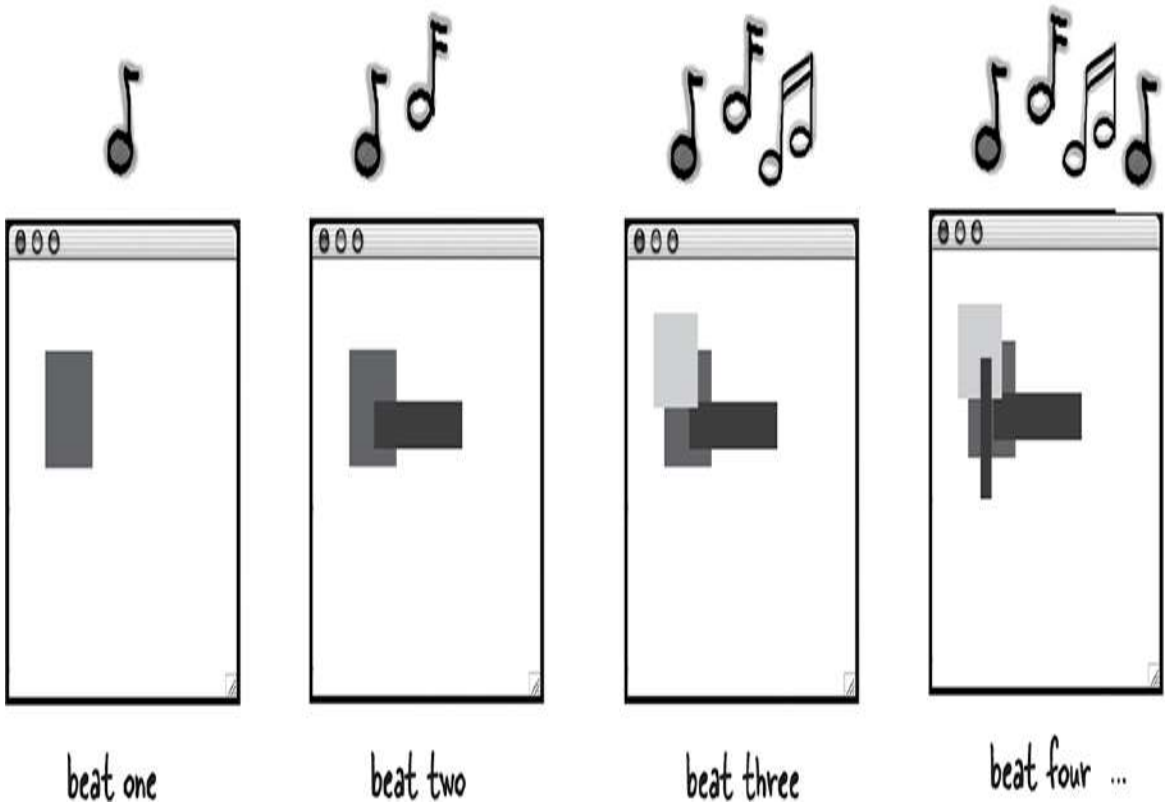

Let's make a music video. We'll use Java-generated random graphics that keep time with the music beats.

Along the way we'll register (and listen for) a new kind of non-GUI event, triggered by the music itself.

NOTE

Remember, this part is all optional. But we think it's good for you. And you'll like it. And you can use it to impress people.

(OK, sure, it might work only on people who are really easy to impress, but still....)

Listening for a non-GUI event

OK, maybe not a music video, but we *will* make a program that draws random graphics on the screen with the beat of the music. In a nutshell, the

program listens for the beat of the music and draws a random graphic rectangle with each beat.

That brings up some new issues for us. So far, we've listened for only GUI events, but now we need to listen for a particular kind of MIDI event. Turns out, listening for a non-GUI event is just like listening for GUI events: you implement a listener interface, register the listener with an event source, and then sit back and wait for the event source to call your event-handler method (the method defined in the listener interface).

The simplest way to listen for the beat of the music would be to register and listen for the actual MIDI events so that whenever the sequencer gets the event, our code will get it too and can draw the graphic. But...there's a problem. A bug, actually, that won't let us listen for the MIDI events *we're* making (the ones for NOTE ON).

So we have to do a little workaround. There is another type of MIDI event we can listen for, called a ControllerEvent. Our solution is to register for ControllerEvents and then make sure that for every NOTE ON event, there's a matching ControllerEvent fired at the same "beat." How do we make sure the ControllerEvent is fired at the same time? We add it to the track just like the other events! In other words, our music sequence goes like this:

BEAT 1 - NOTE ON, CONTROLLER EVENT

BEAT 2 - NOTE OFF

BEAT 3 - NOTE ON, CONTROLLER EVENT

BEAT 4 - NOTE OFF

and so on.

Before we dive into the full program, though, let's make it a little easier to make and add MIDI messages/events since in *this* program, we're gonna make a lot of them.

What the music art program needs to do:

- ① Make a series of MIDI messages/events to play random notes on a piano (or whatever instrument you choose).
- ② Register a listener for the events.
- ③ Start the sequencer playing.
- ④ Each time the listener's event handler method is called, draw a random rectangle on the drawing panel, and call repaint.

We'll build it in three iterations:

- ① Version One: Code that simplifies making and adding MIDI events, since we'll be making a lot of them.
- ② Version Two: Register and listen for the events, but without graphics. Prints a message at the command line with each beat.
- ③ Version Three: The real deal. Adds graphics to version two.

An easier way to make messages/events

Right now, making and adding messages and events to a track is tedious. For each message, we have to make the message instance (in this case, ShortMessage), call setMessage(), make a MidiEvent for the message, and add the event to the track. In the previous chapter's code, we went through each step for every message. That means eight lines of code just to make a note play and then stop playing! Four lines to add a NOTE ON event, and four lines to add a NOTE OFF event.

```
ShortMessage msg1 = new ShortMessage();
msg1.setMessage(NOTE_ON, 1, 44, 100);
MidiEvent noteOn = new MidiEvent(msg1, 1);
track.add(noteOn);

ShortMessage msg2 = new ShortMessage();
msg2.setMessage(NOTE_OFF, 1, 44, 100);
```

```
MidiEvent noteOff = new MidiEvent(msg2, 16);
track.add(noteOff);
```

Things that have to happen for each event:

- ① Make a message instance

  ```
  ShortMessage msg = new ShortMessage();
  ```

- ② Call setMessage() with the instructions

  ```
  msg.setMessage(NOTE_ON, 1, instrument, 0);
  ```

- ③ Make a MidiEvent instance for the message

  ```
  MidiEvent noteOn = new MidiEvent(msg, 1);
  ```

- ④ Add the event to the track

  ```
  track.add(noteOn);
  ```

Let's build a static utility method that makes a message and returns a MidiEvent

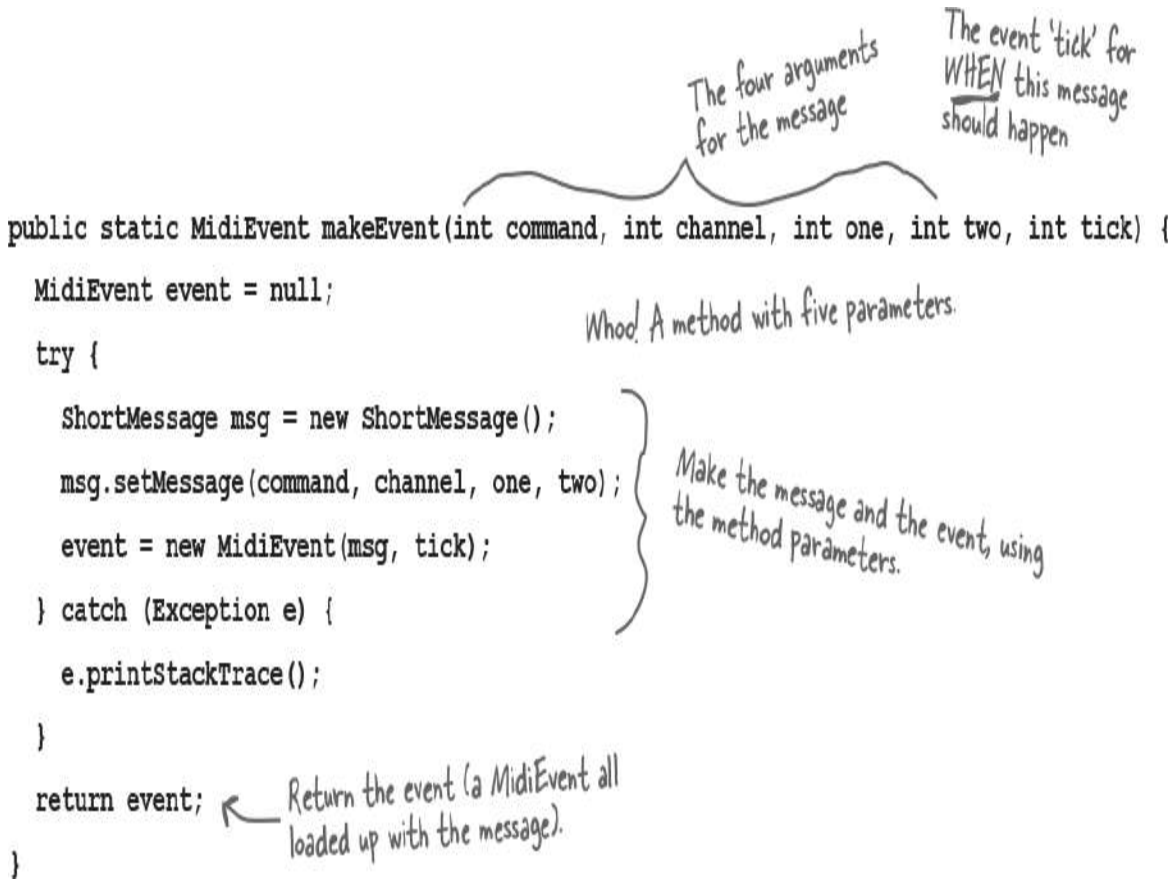

Version One: using the new static makeEvent() method

There's no event handling or graphics here, just a sequence of 15 notes that go up the scale. The point of this code is simply to learn how to use our new makeEvent() method. The code for the next two versions is much smaller and simpler thanks to this method.

```
import javax.sound.midi.*;
import static javax.sound.midi.ShortMessage.*;

public class MiniMusicPlayer1 {
  public static void main(String[] args) {
    try {
      Sequencer sequencer = MidiSystem.getSequencer();
      sequencer.open();

      Sequence seq = new Sequence(Sequence.PPQ, 4);
      Track track = seq.createTrack();

      for (int i = 5; i < 61; i += 4) {
        track.add(makeEvent(NOTE_ON, 1, i, 100, i));
        track.add(makeEvent(NOTE_OFF, 1, i, 100, i + 2));
      }

      sequencer.setSequence(seq);
      sequencer.setTempoInBPM(220);
      sequencer.start();
    } catch (Exception ex) {
      ex.printStackTrace();
    }
  }

  public static MidiEvent makeEvent(int cmd, int chnl, int one, int two, int tick) {
    MidiEvent event = null;
    try {
      ShortMessage msg = new ShortMessage();
      msg.setMessage(cmd, chnl, one, two);
      event = new MidiEvent(msg, tick);
    } catch (Exception e) {
      e.printStackTrace();
    }
    return event;
  }
}
```

Don't forget the imports.

Make (and open) a sequencer.

Make a sequence and a track.

Make a bunch of events to make the notes keep going up (from piano note 5 to piano note 61).

Call our new makeEvent() method to make the message and event; then add the result (the MidiEvent returned from makeEvent()) to the track. These are NOTE ON and NOTE OFF pairs.

Start it running

Version Two: registering and getting ControllerEvents

```
import javax.sound.midi.*;
import static javax.sound.midi.ShortMessage.*;

public class MiniMusicPlayer2 {
  public static void main(String[] args) {
    MiniMusicPlayer2 mini = new MiniMusicPlayer2();
    mini.go();
  }

  public void go() {
    try {
      Sequencer sequencer = MidiSystem.getSequencer();
      sequencer.open();

      int[] eventsIWant = {127};
      sequencer.addControllerEventListener(event -> System.out.println("la"), eventsIWant);

      Sequence seq = new Sequence(Sequence.PPQ, 4);
      Track track = seq.createTrack();

      for (int i = 5; i < 60; i += 4) {
        track.add(makeEvent(NOTE_ON, 1, i, 100, i));

        track.add(makeEvent(CONTROL_CHANGE, 1, 127, 0, i));

        track.add(makeEvent(NOTE_OFF, 1, i, 100, i + 2));
      }

      sequencer.setSequence(seq);
      sequencer.setTempoInBPM(220);
      sequencer.start();
    } catch (Exception ex) {
      ex.printStackTrace();
    }
  }

  public static MidiEvent makeEvent(int cmd, int chnl, int one, int two, int tick) {
    MidiEvent event = null;
    try {
      ShortMessage msg = new ShortMessage();
      msg.setMessage(cmd, chnl, one, two);
      event = new MidiEvent(msg, tick);
    } catch (Exception e) {
      e.printStackTrace();
    }
    return event;
  }
}
```

Register for events with the sequencer. The event registration method takes the listener AND an int array representing the list of ControllerEvents you want. We want care about one event, #127.

Each time we get the event, we'll print "la" to the command line. We're using a lambda expression here to handle this ControllerEvent.

Here's how we pick up the beat—we insert our OWN ControllerEvent (CONTROL_CHANGE) with an argument for event number #127. This event will do NOTHING! We put it in JUST so that we can get an event each time a note is played. In other words, its sole purpose is so that something will fire that WE can listen for (we can't listen for NOTE ON/OFF events). We're making this event happen at the SAME tick as the NOTE_ON. So when the NOTE_ON event happens, we'll know about it because OUR event will fire at the same time.

NOTE

Code that's different from the previous version is highlighted in gray (and we've moved the code out of the main() method into its own go() method).

Version Three: drawing graphics in time with the music

This final version builds on Version Two by adding the GUI parts. We build a frame and add a drawing panel to it, and each time we get an event, we draw a new rectangle and repaint the screen. The only other change from Version Two is that the notes play randomly as opposed to simply moving up the scale.

The most important change to the code (besides building a simple GUI) is that we make the drawing panel implement the ControllerEventListener rather than the program itself. So when the drawing panel (an inner class) gets the event, it knows how to take care of itself by drawing the rectangle.

Complete code for this version is on the next page.

The drawing panel inner class:

```
class MyDrawPanel extends JPanel implements ControllerEventListener {

  private boolean msg = false;

  public void controlChange(ShortMessage event) {
    msg = true;
    repaint();
  }

  public void paintComponent(Graphics g) {
    if (msg) {
      int r = random.nextInt(250);
      int gr = random.nextInt(250);
      int b = random.nextInt(250);

      g.setColor(new Color(r, gr, b));

      int height = random.nextInt(120) + 10;
      int width = random.nextInt(120) + 10;

      int xPos = random.nextInt(40) + 10;
      int yPos = random.nextInt(40) + 10;

      g.fillRect(xPos, yPos, width, height);
      msg = false;
    }
  }
}
```

The drawing panel is a listener.

We set a flag to false, and we'll set it to true only when we get an event.

We got an event, so we set the flag to true and call repaint()

The event handler method (from the ControllerEvent listener interface). We're not using a lambda expression this time, because we want the Panel to listen to ControllerEvents.

We have to use a flag because OTHER things might trigger a repaint(), and we want to paint ONLY when there's a ControllerEvent.

The rest is code to generate a random color and paint a semirandom rectangle.

→ **Yours to solve.**

SHARPEN YOUR PENCIL

This is the complete code listing for Version Three. It builds directly on Version Two. Try to annotate it yourself, without looking at the previous pages.

```
import javax.sound.midi.*;
import javax.swing.*;
import java.awt.*;
import java.util.Random;

import static javax.sound.midi.ShortMessage.*;

public class MiniMusicPlayer3 {
  private MyDrawPanel panel;
  private Random random = new Random();

  public static void main(String[] args) {
    MiniMusicPlayer3 mini = new MiniMusicPlayer3();
    mini.go();
  }

  public void setUpGui() {
    JFrame frame = new JFrame("My First Music Video");
    panel = new MyDrawPanel();
    frame.setContentPane(panel);
    frame.setBounds(30, 30, 300, 300);
    frame.setVisible(true);
  }

  public void go() {
    setUpGui();

    try {
      Sequencer sequencer = MidiSystem.getSequencer();
```

```
    sequencer.open();
    sequencer.addControllerEventListener(panel, new int[]{127});
    Sequence seq = new Sequence(Sequence.PPQ, 4);
    Track track = seq.createTrack();

    int note;
    for (int i = 0; i < 60; i += 4) {
      note = random.nextInt(50) + 1;
      track.add(makeEvent(NOTE_ON, 1, note, 100, i));
      track.add(makeEvent(CONTROL_CHANGE, 1, 127, 0, i));
      track.add(makeEvent(NOTE_OFF, 1, note, 100, i + 2));
    }

    sequencer.setSequence(seq);
    sequencer.start();
    sequencer.setTempoInBPM(120);
  } catch (Exception ex) {
    ex.printStackTrace();
  }
 }
public static MidiEvent makeEvent(int cmd, int chnl, int one, int
two, int tick) {
  MidiEvent event = null;
  try {
    ShortMessage msg = new ShortMessage();
    msg.setMessage(cmd, chnl, one, two);
    event = new MidiEvent(msg, tick);
  } catch (Exception e) {
    e.printStackTrace();
  }
  return event;
}

class MyDrawPanel extends JPanel implements
ControllerEventListener {
  private boolean msg = false;

  public void controlChange(ShortMessage event) {
    msg = true;
    repaint();
  }

  public void paintComponent(Graphics g) {
```

```
    if (msg) {
      int r = random.nextInt(250);
      int gr = random.nextInt(250);
      int b = random.nextInt(250);

      g.setColor(new Color(r, gr, b));

      int height = random.nextInt(120) + 10;
      int width = random.nextInt(120) + 10;

      int xPos = random.nextInt(40) + 10;
      int yPos = random.nextInt(40) + 10;

      g.fillRect(xPos, yPos, width, height);
      msg = false;
    }
   }
  }

}
```

Exercise

A bunch of Java hotshots, in full costume, are playing the party game "Who am I?" They give you a clue, and you try to guess who they are, based on what they say. Assume they always tell the truth about themselves. If they happen to say something that could be true for more than one guy, then write down all for whom that sentence applies. Fill in the blanks next to the sentence with the names of one or more attendees.

Who Am I?

Tonight's attendees:

Any of the charming personalities from this chapter just might show up!

I got the whole GUI, in my hands.	_____
Every event type has one of these.	_____
The listener's key method.	_____
This method gives JFrame its size.	_____
You add code to this method but never call it.	_____
When the user actually does something, it's an _____ .	_____
Most of these are event sources.	_____
I carry data back to the listener.	_____
An addXxxListener( ) method says an object is an _____ .	_____
How a listener signs up.	_____
The method where all the graphics code goes.	_____
I'm typically bound to an instance.	_____
The "g" in (Graphics g) is really of this class.	_____
The method that gets paintComponent( ) rolling.	_____
The package where most of the Swingers reside.	_____

→ Answers in "Who am I?".

BE the Compiler

NOTE

The Java file on this page represents a complete source file. Your job is to play compiler and determine whether this file will compile. If it won't compile, how would you fix it, and if it does compile, what would it do?

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

class InnerButton {
  private JButton button;

  public static void main(String[] args) {
    InnerButton gui = new InnerButton();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    frame.setDefaultCloseOperation(
            JFrame.EXIT_ON_CLOSE);

    button = new JButton("A");
    button.addActionListener();

    frame.getContentPane().add(
            BorderLayout.SOUTH, button);
    frame.setSize(200, 100);
```

```
    frame.setVisible(true);
  }

  class ButtonListener extends ActionListener {
    public void actionPerformed(ActionEvent e) {
      if (button.getText().equals("A")) {
        button.setText("B");
      } else {
        button.setText("A");
      }
    }
  }
}
```

→ **Answers in "BE the Compiler".**

Pool Puzzle

Your ***job*** is to take code snippets from the pool and place them into the blank lines in the code. You **may** use the same snippet more than once, and you won't need to use all the snippets. Your ***goal*** is to make a class that will compile and run and produce the output listed.

Output

The Amazing, Shrinking, Blue Rectangle. This program will produce a blue rectangle that will shrink and shrink and disappear into a field of white.

Note: Each snippet from the pool can be used more than once!

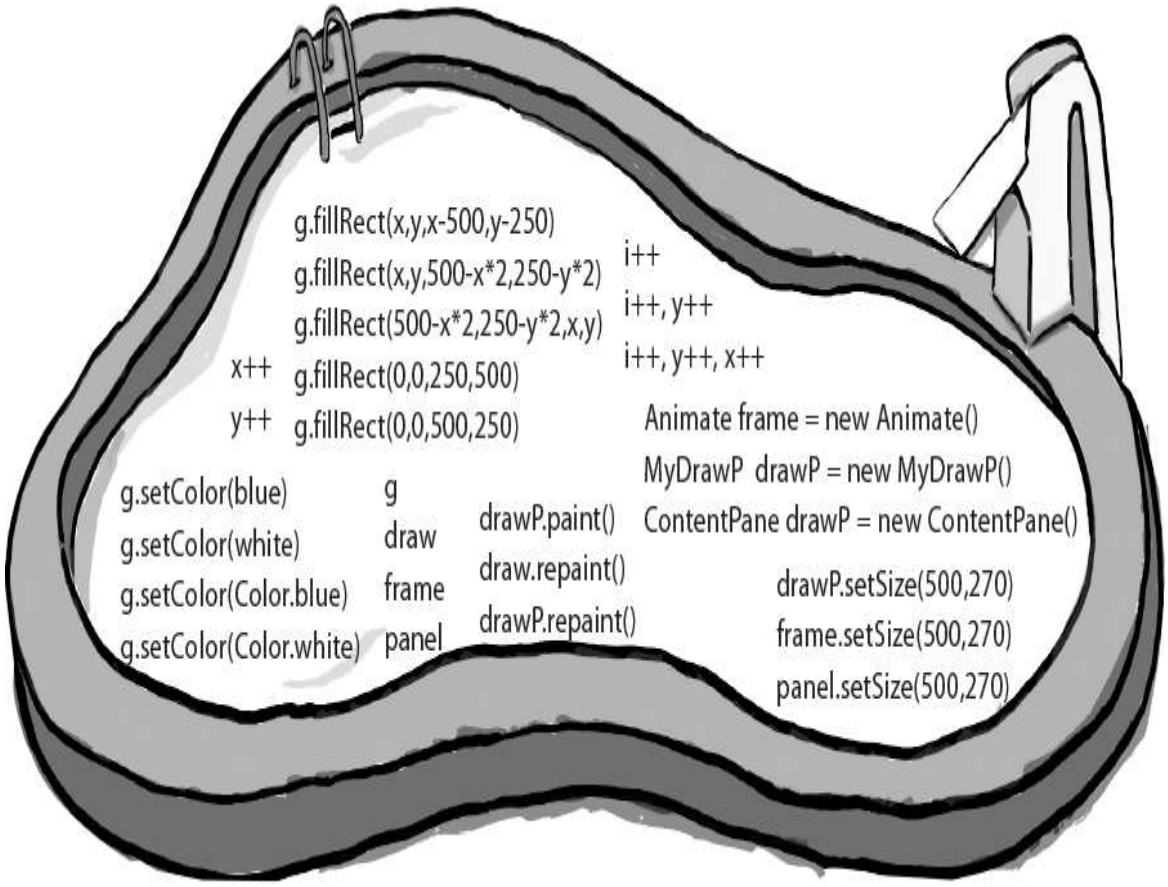


```
import javax.swing.*;
import java.awt.*;
```

```
import java.util.concurrent.TimeUnit;
public class Animate {
    int x = 1;
    int y = 1;
    public static void main(String[] args) {
       Animate gui = new Animate ();
       gui.go();
   }
   public void go() {
       JFrame _________ = new JFrame();
       frame.setDefaultCloseOperation(
                     JFrame.EXIT_ON_CLOSE);
       ____________________________________;
       _________.getContentPane().add(drawP);
       ____________________________;
       _________.setVisible(true);
       for (int i=0; i<124; _________________) {
       ____________________;
       ____________________;
       try {
        TimeUnit.MILLISECONDS.sleep(50);
       } catch(Exception ex) { }
       }
   }
   class MyDrawP extends JPanel {
       public void paintComponent (Graphics
                                   _________) {
          ____________________________________;
          ____________________________________;
          ____________________________________;
          ____________________________________;
       }
   }
}
```

→ **Answers in “Pool Puzzle”.**

Exercise Solutions

Who am I?

(from "Exercise")

I got the whole GUI, in my hands.	JFrame
Every event type has one of these.	listener interface
The listener's key method.	actionPerformed( )
This method gives JFrame its size.	setSize( )
You add code to this method but never call it.	paintComponent( )
When the user actually does something, it's an ____ .	event
Most of these are event sources.	swing components
I carry data back to the listener.	event object
An addXxxListener( ) method says an object is an ___ .	event source
How a listener signs up.	addXxxListener( )
The method where all the graphics code goes.	paintComponent( )
I'm typically bound to an instance.	inner class
The "g" in (Graphics g) is really of this class.	Graphics2D
The method that gets paintComponent( ) rolling.	repaint( )
The package where most of the Swingers reside.	javax.swing

BE the Compiler

(from "BE the Compiler")

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

class InnerButton {
  private JButton button;

  public static void main(String[] args) {
    InnerButton gui = new InnerButton();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    frame.setDefaultCloseOperation(
            JFrame.EXIT_ON_CLOSE);

    button = new JButton("A");
    button.addActionListener(new ButtonListener());

    frame.getContentPane().add(
            BorderLayout.SOUTH, button);
    frame.setSize(200, 100);
    frame.setVisible(true);
  }

  class ButtonListener implements ActionListener {
    public void actionPerformed(ActionEvent e) {
      if (button.getText().equals("A")) {
        button.setText("B");
      } else {
        button.setText("A");
      }
    }
  }
}
```

Once this code is fixed, it will create a GUI with a button that toggles between A and B when you click it.

The addActionListener( ) method takes a class that implements the ActionListener interface.

ActionListener is an interface; interfaces are implemented, not extended.

Pool Puzzle

(from "Pool Puzzle")

```
import javax.swing.*;
import java.awt.*;
import java.util.concurrent.TimeUnit;

public class Animate {
  int x = 1;
  int y = 1;
  public static void main(String[] args) {
    Animate gui = new Animate ();
    gui.go();
  }
  public void go() {
    JFrame frame = new JFrame();
    frame.setDefaultCloseOperation(
            JFrame.EXIT_ON_CLOSE);
    MyDrawP drawP = new MyDrawP();
    frame.getContentPane().add(drawP);
    frame.setSize(500, 270);
    frame.setVisible(true);
    for (int i = 0; i < 124; i++,y++,x++ ) {
      x++;
      drawP.repaint();
      try {
        TimeUnit.MILLISECONDS.sleep(50);
      } catch(Exception ex) { }
    }
  }
  class MyDrawP extends JPanel {
    public void paintComponent(Graphics g ) {
      g.setColor(Color.white);
      g.fillRect(0, 0, 500, 250);
      g.setColor(Color.blue);
```

```
      g.fillRect(x, y, 500-x*2, 250-y*2);
    }
  }
}
```

The Amazing, Shrinking, Blue Rectangle.

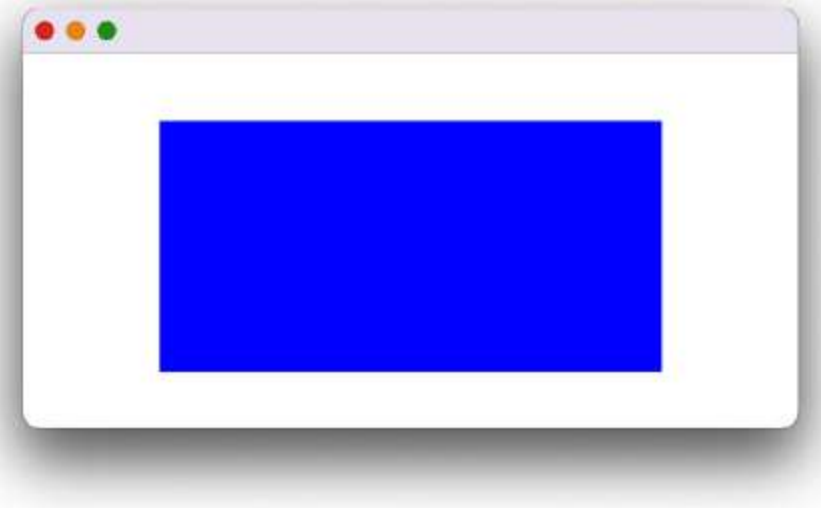

Chapter 15. Work on Your Swing: Using Swing

Swing is easy. Unless you actually *care* where things end up on the screen. Swing code *looks* easy, but then you compile it, run it, look at it, and think, "hey, *that's* not supposed to go *there*." The thing that makes it *easy* to *code* is

the thing that makes it *hard* to *control*—the **Layout Manager**. Layout Manager objects control the size and location of the widgets in a Java GUI. They do a ton of work on your behalf, but you won't always like the results. You want two buttons to be the same size, but they aren't. You want the text field to be three inches long, but it's nine. Or one. And *under* the label instead of *next* to it. But with a little work, you can get layout managers to submit to your will. Learning a little Swing will give you a head start for most GUI programming you'll ever do. Wanna write an Android app? Working through this chapter will give you a head start.

Swing components

Component is the more correct term for what we've been calling a *widget*. The *things* you put in a GUI. *The things a user sees and interacts with*. Text fields, buttons, scrollable lists, radio buttons, etc., are all components. In fact, they all extend **`javax.swing.JComponent`**.

Components can be nested

In Swing, virtually *all* components are capable of holding other components. In other words, *you can stick just about anything into anything else*. But most of the time, you'll add *user interactive* components such as buttons and lists into *background* components (often called containers) such as frames and panels. Although it's *possible* to put, say, a panel inside a button, that's pretty weird and won't win you any usability awards.

With the exception of JFrame, though, the distinction between *interactive* components and *background* components is artificial. A JPanel, for example, is usually used as a background for grouping other components, but even a JPanel can be interactive. Just as with other components, you can register for the JPanel's events including mouse clicks and keystrokes.

NOTE

A widget is technically a Swing Component. Almost everything you can stick in a GUI extends from javax.swing.JComponent.

Four steps to making a GUI (review)

- ① Make a window (a JFrame)

  ```
  JFrame frame = new JFrame();
  ```

- ② Make a component (button, text field, etc.)

  ```
  JButton button = new JButton("click me");
  ```

- ③ Add the component to the frame

  ```
  frame.getContentPane().add(BorderLayout.EAST,
  button);
  ```

- ④ Display it (give it a size and make it visible)

```
frame.setSize(300,300);
frame.setVisible(true);
```

Put interactive components:	Into background components:

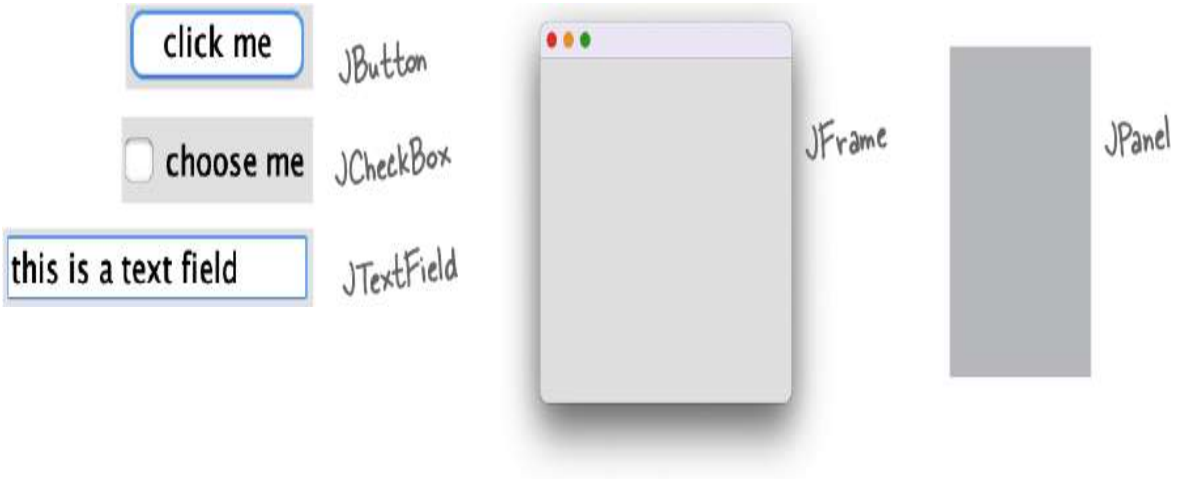

Layout Managers

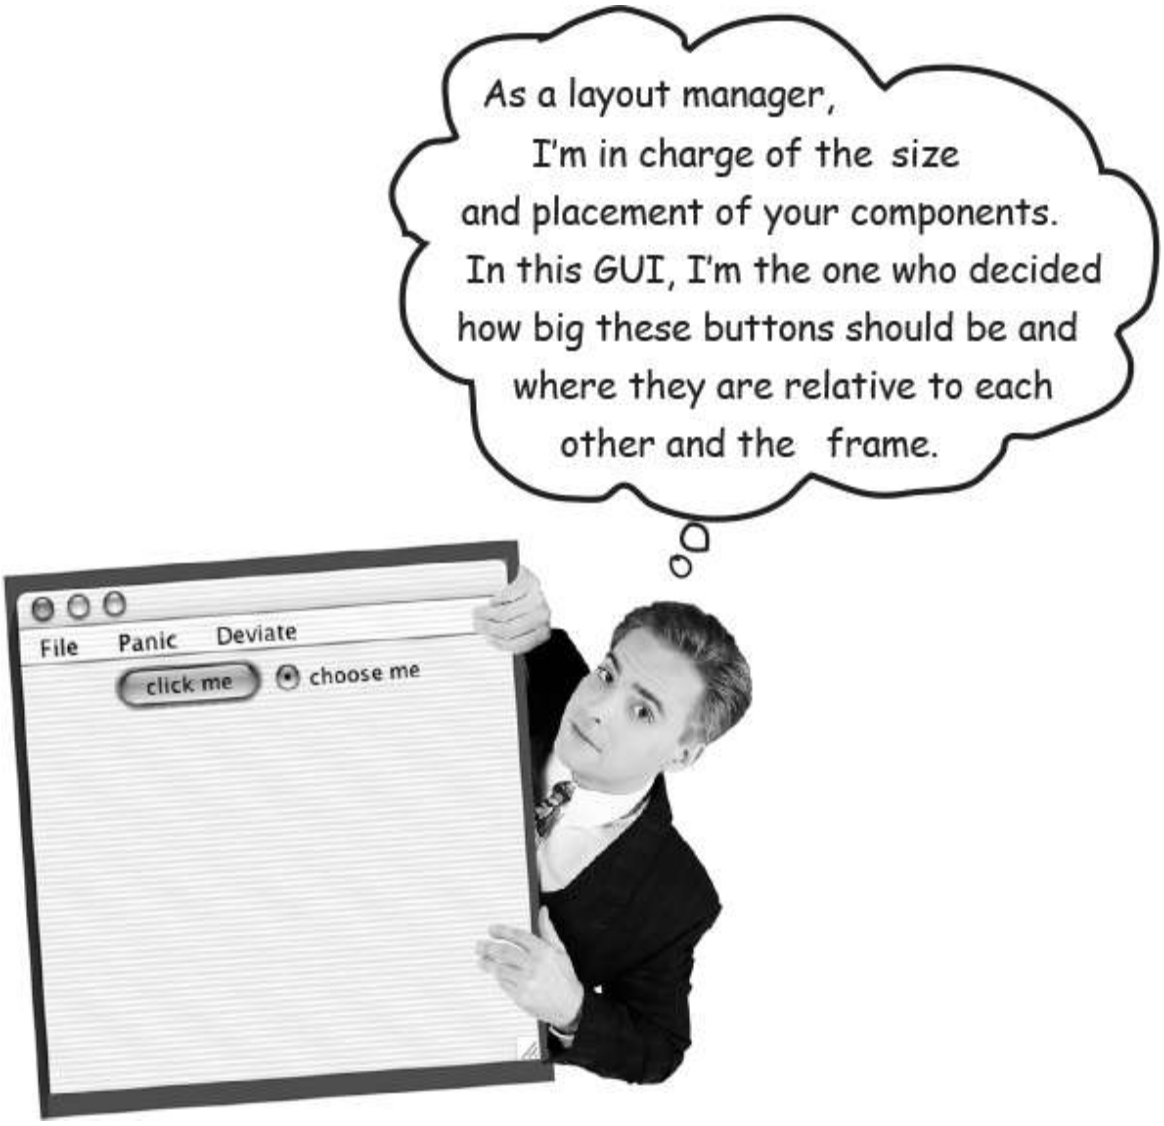

A layout manager is a Java object associated with a particular component, almost always a *background* component. The layout manager controls the components contained *within* the component the layout manager is associated with. In other words, if a frame holds a panel, and the panel holds a button, the panel's layout manager controls the size and placement of the button, while the frame's layout manager controls the size and placement of the panel. The button, on the other hand, doesn't need a layout manager because the button isn't holding other components.

If a panel holds five things, the size and location of the five things in the panel are all controlled by the panel's layout manager. If those five things, in turn, hold *other* things (e.g., if any of those five things are panels or other containers that hold other things), then those *other* things are placed according to the layout manager of the thing holding them.

When we say *hold,* we really mean *add* as in, a panel *holds* a button because the button was *added* to the panel using something like:

```
myPanel.add(button);
```

Layout managers come in several flavors, and each background component can have its own layout manager. Layout managers have their own policies to follow when building a layout. For example, one layout manager might insist that all components in a panel must be the same size, arranged in a grid, while another layout manager might let each component choose its own size but stack them vertically. Here's an example of nested layouts:

```
JPanel panelA = new JPanel();
JPanel panelB = new JPanel();
panelB.add(new JButton("button 1"));
panelB.add(new JButton("button 2"));
panelB.add(new JButton("button 3"));
panelA.add(panelB);
```

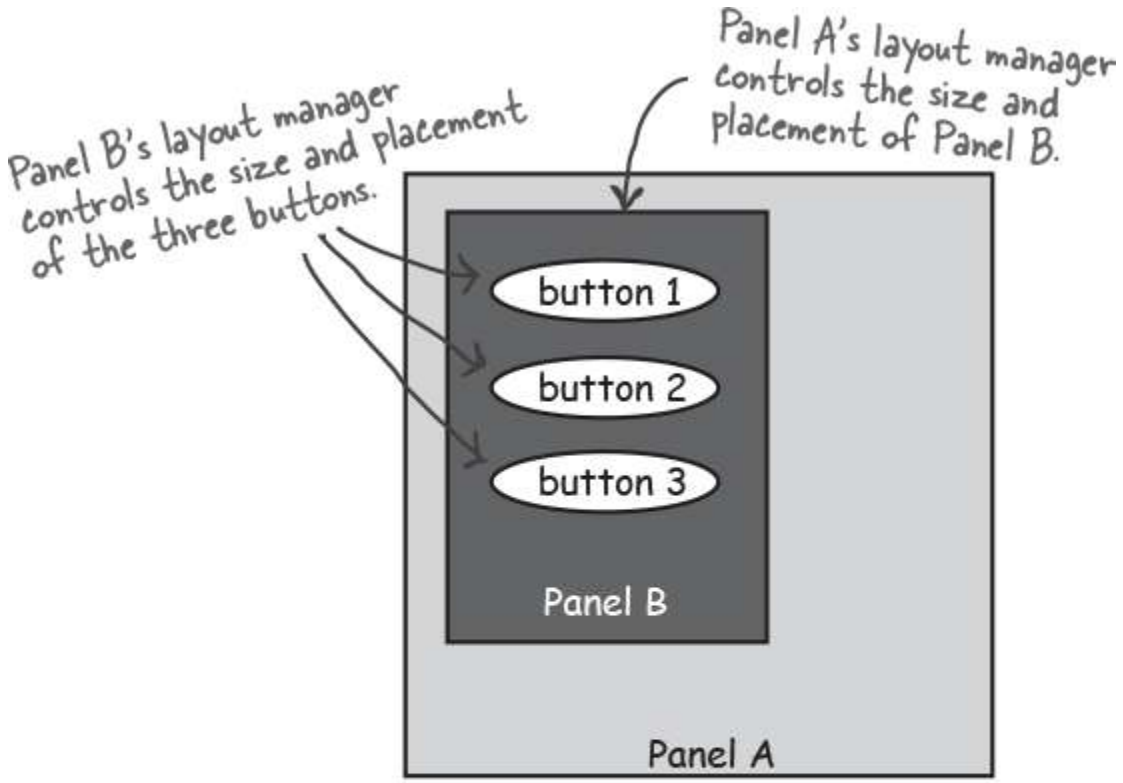

Panel A's layout manager has NOTHING to say about the three buttons. The hierarchy of control is only one level—Panel A's layout manager controls only the things added directly to Panel A, and does not control anything nested within those added components.

How does the layout manager decide?

Different layout managers have different policies for arranging components (like, arrange in a grid, make them all the same size, stack them vertically, etc.), but the components being laid out do get at least some small say in the matter. In general, the process of laying out a background component looks something like this:

A layout scenario

- ① Make a panel and add three buttons to it.
- ② The panel's layout manager asks each button how big that button prefers to be.

- ③ The panel's layout manager uses its layout policies to decide whether it should respect all, part, or none of the buttons' preferences.
- ④ Add the panel to a frame.
- ⑤ The frame's layout manager asks the panel how big the panel prefers to be.
- ⑥ The frame's layout manager uses its layout policies to decide whether it should respect all, part, or none of the panel's preferences.

Different layout managers have different policies

Some layout managers respect the size the component wants to be. If the button wants to be 30 pixels by 50 pixels, that's what the layout manager allocates for that button. Other layout managers respect only part of the component's preferred size. If the button wants to be 30 pixels by 50 pixels, it'll be 30 pixels by however wide the button's background *panel* is. Still other layout managers respect the preference of only the *largest* of the components being laid out, and the rest of the components in that panel are all made that same size. In some cases, the work of the layout manager can get very complex, but most of the time you can figure out what the layout manager will probably do, once you get to know that layout manager's policies.

The Big Three layout managers: border, flow, and box

BorderLayout

A BorderLayout manager divides a background component into five regions. You can add only one component per region to a background controlled by a BorderLayout manager. Components laid out by this manager usually don't get to have their preferred size. **BorderLayout is the default layout manager for a frame!**

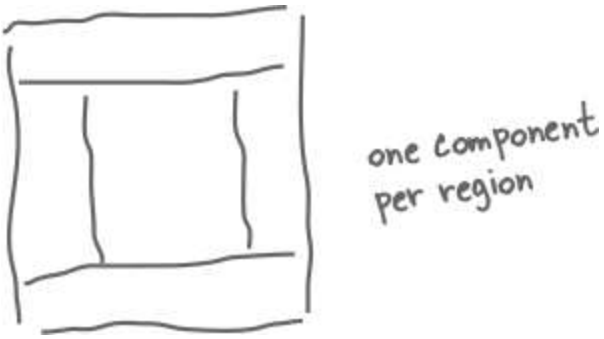

FlowLayout

A FlowLayout manager acts kind of like a word processor, except with components instead of words. Each component is the size it wants to be, and they're laid out left to right in the order that they're added, with "word wrap" turned on. So when a component won't fit horizontally, it drops to the next "line" in the layout. **FlowLayout is the default layout manager for a panel!**

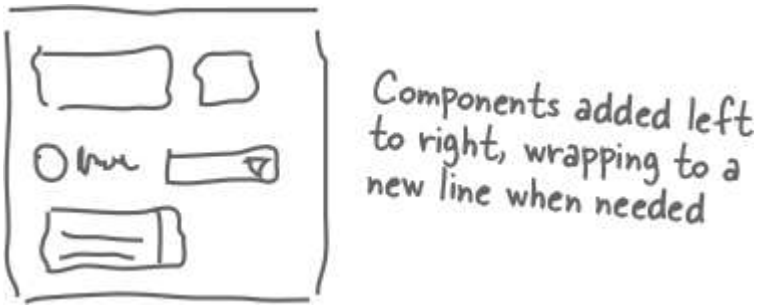

BoxLayout

A BoxLayout manager is like FlowLayout in that each component gets to have its own size, and the components are placed in the order in which they're added. But, unlike FlowLayout, a BoxLayout manager can stack the components vertically (or arrange them horizontally, but usually we're just concerned with vertically). It's like a FlowLayout but instead of having automatic "component wrapping," you can insert a sort of "component return key" and **force** the components to start a new line.

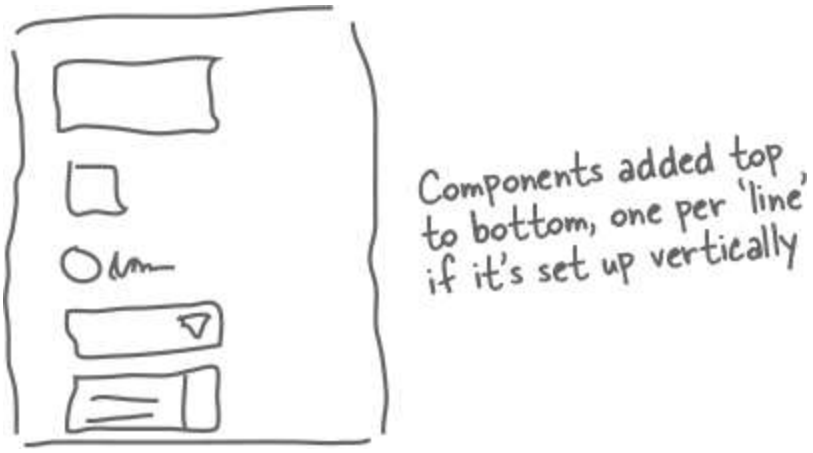

BorderLayout cares about five regions: east, west, north, south, and center



Let's add a button to the <u>east</u> region:

```
import javax.swing.*;
import java.awt.*;

public class Button1 {
  public static void main(String[] args) {
    Button1 gui = new Button1();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    JButton button = new JButton("click me");
    frame.getContentPane().add(BorderLayout.EAST, button);
    frame.setSize(200, 200);
    frame.setVisible(true);
  }
}
```

BorderLayout is in the java.awt package.

Specify the region.

BRAIN BARBELL

How did the BorderLayout manager come up with this size for the button?

What are the factors the layout manager has to consider?

Why isn't it wider or taller?

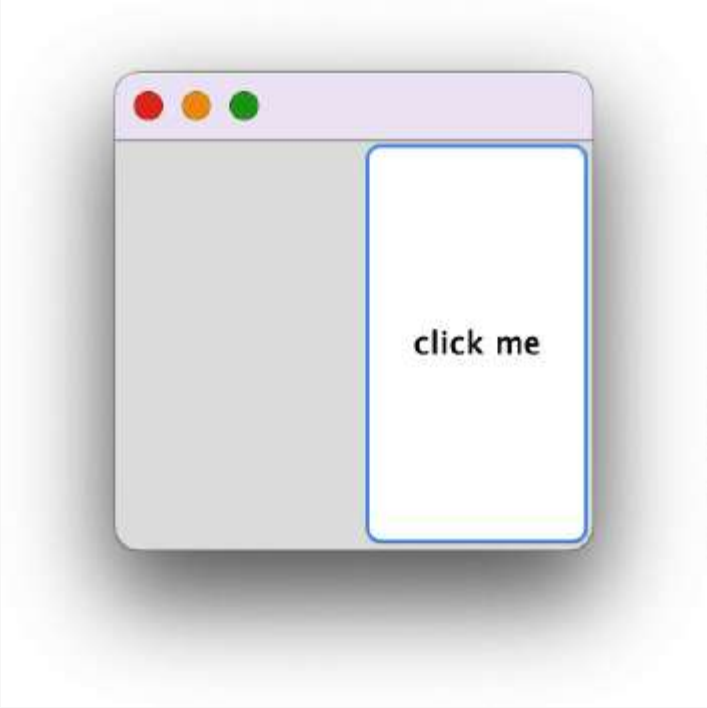

Watch what happens when we give the button more characters...

We changed only the text on the button.

```
public void go() {
  JFrame frame = new JFrame();
  JButton button = new JButton("click like you mean it");
  frame.getContentPane().add(BorderLayout.EAST, button);
  frame.setSize(200, 200);
  frame.setVisible(true);
}
```

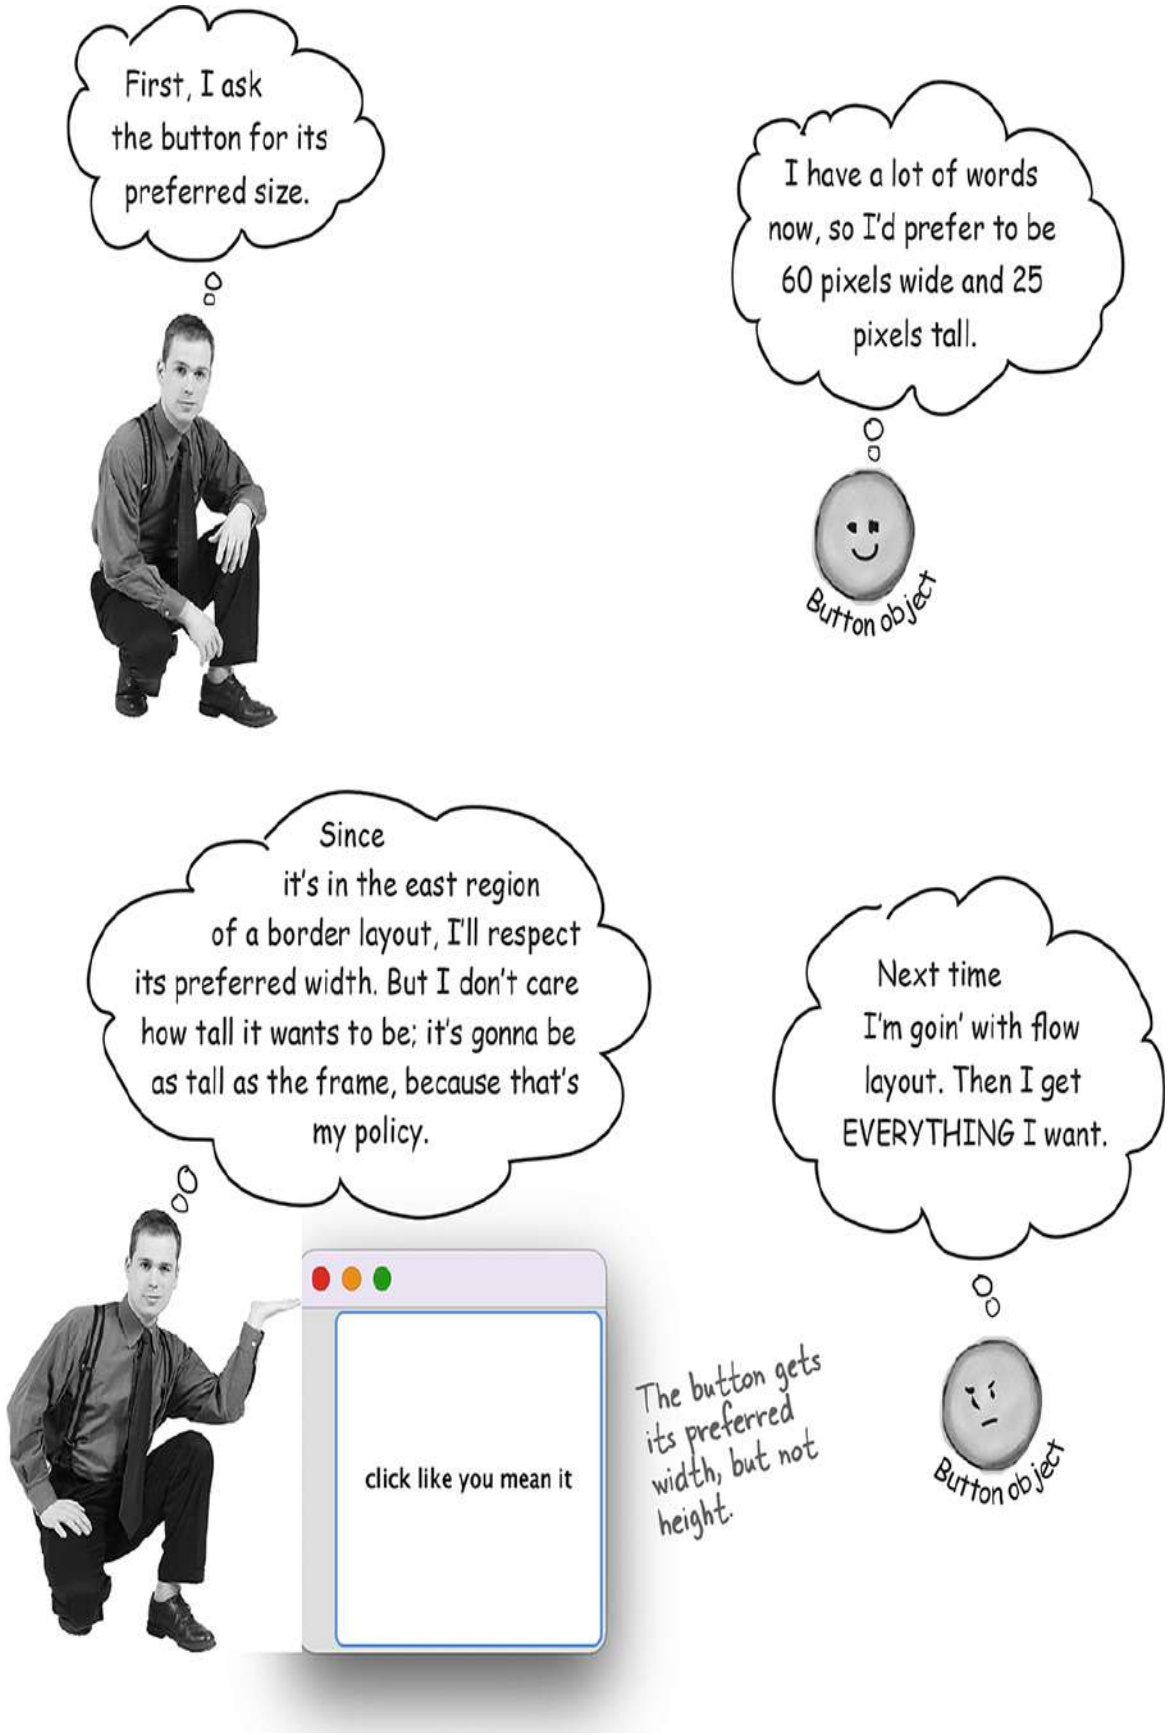
First, I ask the button for its preferred size.
I have a lot of words now, so I'd prefer to be 60 pixels wide and 25 pixels tall.
Button object
Since it's in the east region of a border layout, I'll respect its preferred width. But I don't care how tall it wants to be; it's gonna be as tall as the frame, because that's my policy.
Next time I'm goin' with flow layout. Then I get EVERYTHING I want.
click like you mean it
The button gets its preferred width, but not height.
Button object

Let's try a button in the NORTH region

```
public void go() {
  JFrame frame = new JFrame();
  JButton button = new JButton("There is no spoon...");
  frame.getContentPane().add(BorderLayout.NORTH, button);
  frame.setSize(200, 200);
  frame.setVisible(true);
}
```

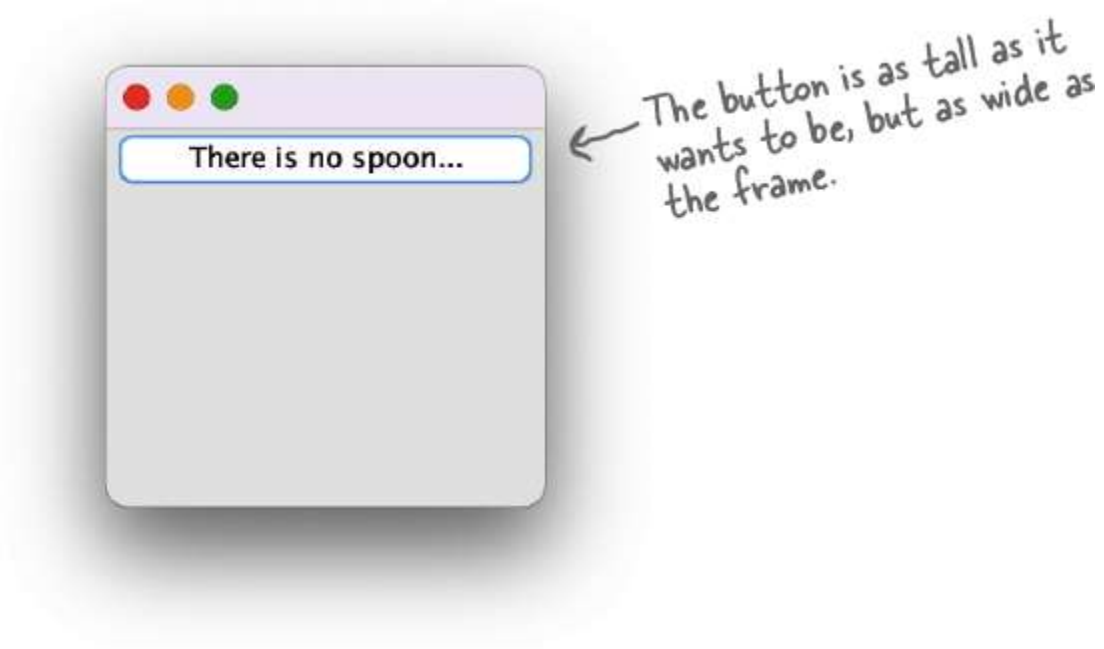

Now let's make the button ask to be taller

How do we do that? The button is already as wide as it can ever be—as wide as the frame. But we can try to make it taller by giving it a bigger font.

```
public void go() {
  JFrame frame = new JFrame();
  JButton button = new JButton("Click This!");
  Font bigFont = new Font("serif", Font.BOLD, 28);
  button.setFont(bigFont);
  frame.getContentPane().add(BorderLayout.NORTH, button);
  frame.setSize(200, 200);
  frame.setVisible(true);
}
```

A bigger font will force the frame to allocate more space for the button's height.

The width stays the same, but now the button is taller. The north region stretched to accommodate the button's new preferred height.

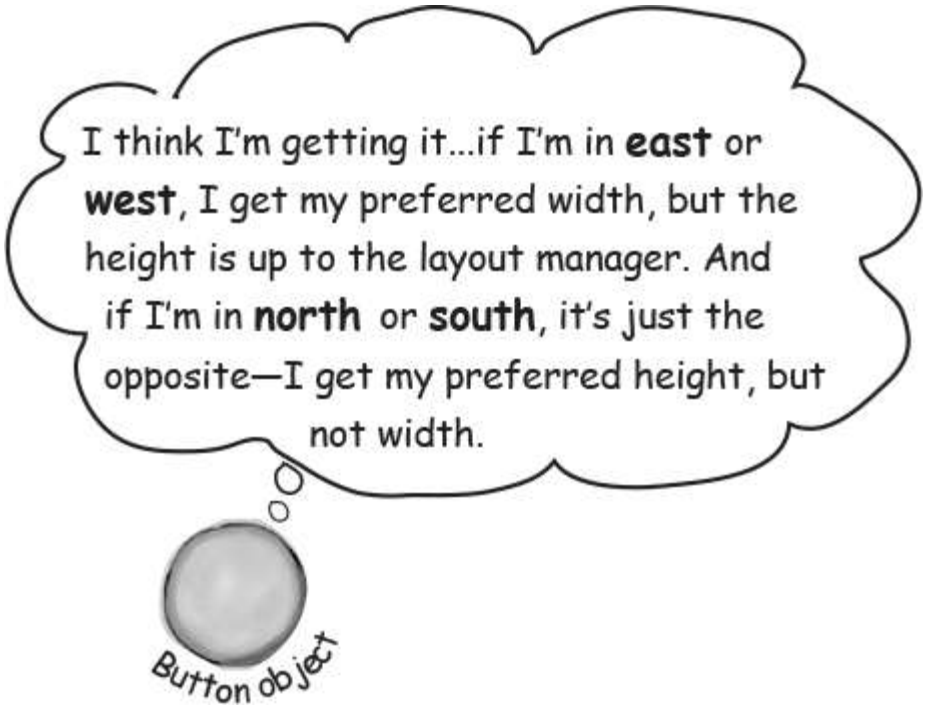

But what happens in the <u>center</u> region?

The center region gets whatever's left!

(except in one special case we'll look at later)

```
public void go() {
  JFrame frame = new JFrame();

  JButton east = new JButton("East");
  JButton west = new JButton("West");
  JButton north = new JButton("North");
  JButton south = new JButton("South");
  JButton center = new JButton("Center");

  frame.getContentPane().add(BorderLayout.EAST, east);
  frame.getContentPane().add(BorderLayout.WEST, west);
  frame.getContentPane().add(BorderLayout.NORTH, north);
  frame.getContentPane().add(BorderLayout.SOUTH, south);
  frame.getContentPane().add(BorderLayout.CENTER, center);

  frame.setSize(300, 300);
  frame.setVisible(true);
}
```

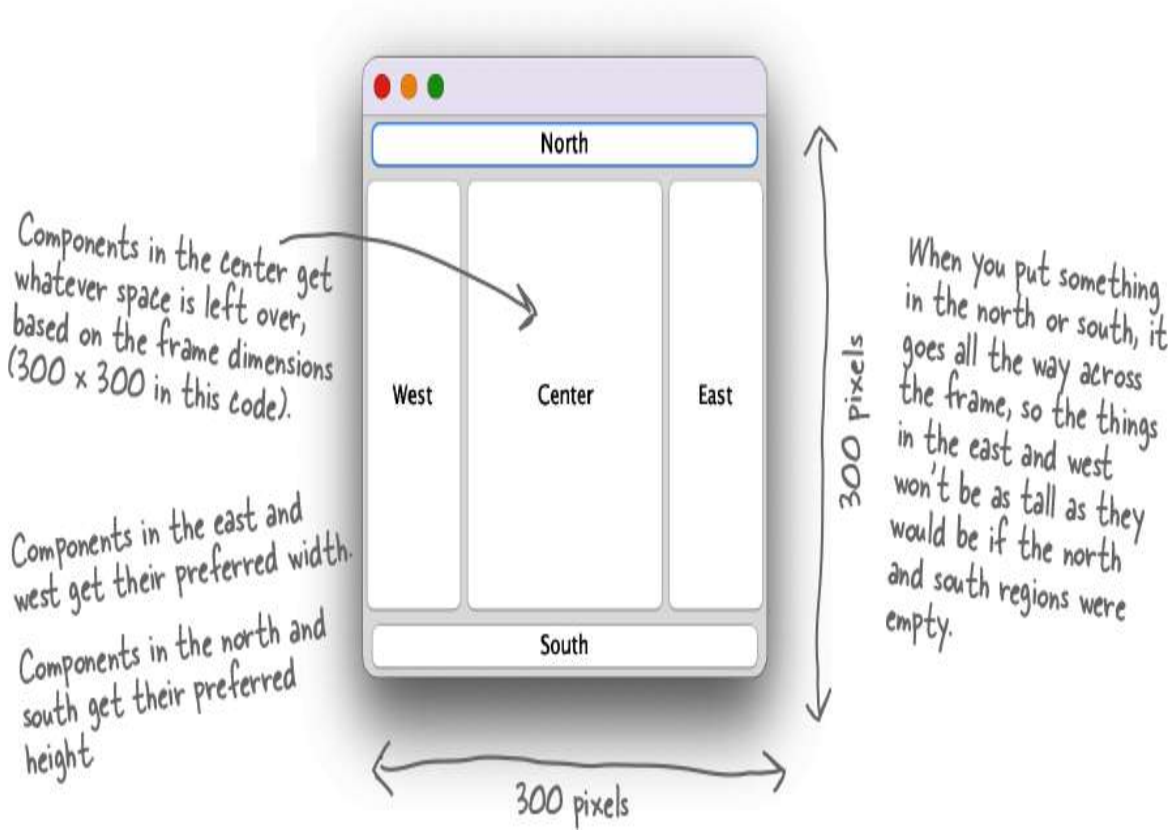

FlowLayout cares about the flow of the components: left to right, top to bottom, in the order they were added.

Let's add a panel to the east region:

A JPanel's layout manager is FlowLayout, by default. When we add a panel to a frame, the size and placement of the panel are still under the BorderLayout manager's control. But anything *inside* the *panel* (in other words, components added to the panel by calling **`panel.add(aComponent)`**) are under the panel's FlowLayout

manager's control. We'll start by putting an empty panel in the frame's east region, and on the next pages we'll add things to the panel.

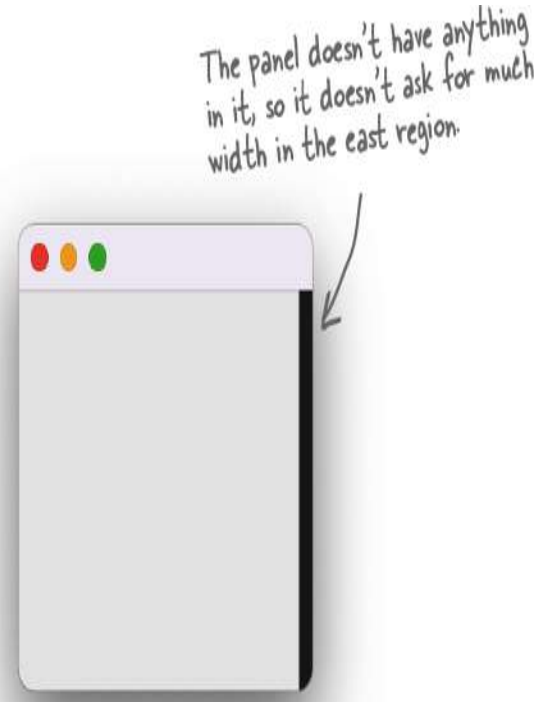


```
import javax.swing.*;
import java.awt.*;

public class Panel1 {

  public static void main(String[] args) {
    Panel1 gui = new Panel1();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    JPanel panel = new JPanel();
    panel.setBackground(Color.darkGray);
    frame.getContentPane().add(BorderLayout.EAST, panel);
    frame.setSize(200, 200);
    frame.setVisible(true);
  }
}
```

Make the panel gray so we can see where it is on the frame.

Let's add a button to the panel

```
public void go() {
  JFrame frame = new JFrame();
  JPanel panel = new JPanel();
  panel.setBackground(Color.darkGray);

  JButton button = new JButton("shock me");
  panel.add(button);

  frame.getContentPane().add(BorderLayout.EAST, panel);
  frame.setSize(200, 200);
  frame.setVisible(true);
}
```

Add the button to the panel...

...and add the panel to the frame.

The panel's layout manager (flow) controls the button, and the frame's layout manager (border) controls the panel.

The panel expanded!

And the button got its preferred size in both dimensions, because the panel uses flow layout, and the button is part of the panel (not the frame).

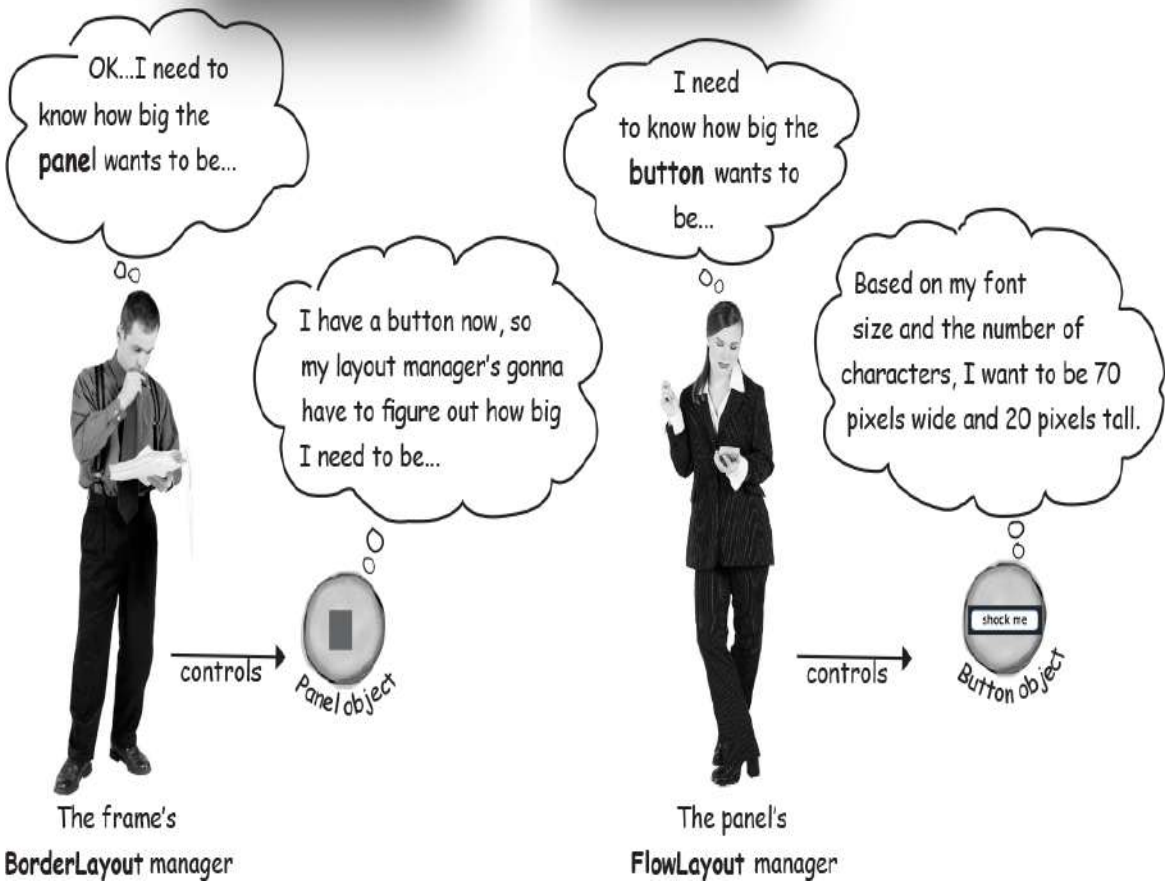

What happens if we add TWO buttons to the panel?

```
public void go() {
  JFrame frame = new JFrame();
  JPanel panel = new JPanel();
  panel.setBackground(Color.darkGray);

  JButton button = new JButton("shock me");
  JButton buttonTwo = new JButton("bliss");

  panel.add(button);
  panel.add(buttonTwo);

  frame.getContentPane().add(BorderLayout.EAST, panel);
  frame.setSize(250, 200);
  frame.setVisible(true);
}
```

Make TWO buttons

Add BOTH to the panel

what we *wanted*:

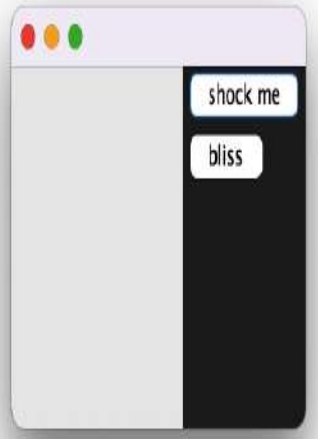

We want the buttons stacked on top of each other.

what we *got*:

The panel expanded to fit both buttons side by side.

Notice that the 'bliss' button is smaller than the 'shock me' button...that's how flow layout works. The button gets just what it needs (and no more).

SHARPEN YOUR PENCIL

Yours to solve.

If the code above were modified to the code below, what would the GUI look like?

```
JButton button = new JButton("shock me");
JButton buttonTwo = new JButton("bliss");
JButton buttonThree = new JButton("huh?");
panel.add(button);
panel.add(buttonTwo);
panel.add(buttonThree);
```

Draw what you think the GUI would look like if you ran the code to the left.

(Then try it!)

BoxLayout to the rescue!
It keeps components stacked, even if there's room to put them side by side.

Unlike FlowLayout, BoxLayout can force a "new line" to make the components wrap to the next line, even if there's room for them to fit horizontally.

But now you'll have to change the panel's layout manager from the default FlowLayout to BoxLayout.

```
public void go() {
  JFrame frame = new JFrame();
  JPanel panel = new JPanel();
  panel.setBackground(Color.darkGray);

  panel.setLayout(new BoxLayout(panel, BoxLayout.Y_AXIS));

  JButton button = new JButton("shock me");
  JButton buttonTwo = new JButton("bliss");
  panel.add(button);
  panel.add(buttonTwo);
  frame.getContentPane().add(BorderLayout.EAST, panel);
  frame.setSize(250,200);
  frame.setVisible(true);
}
```

Change the layout manager to be a new instance of BoxLayout.

The BoxLayout constructor needs to know the component it's laying out (i.e., the panel) and which axis to use (we use Y_AXIS for a vertical stack).

Notice how the panel is narrower again, because it doesn't need to fit both buttons horizontally. So the panel told the frame it needed enough room for only the largest button, "shock me."

THERE ARE NO DUMB QUESTIONS

Q: How come you can't add directly to a frame the way you can to a panel?

A: A JFrame is special because it's where the rubber meets the road in making something appear on the screen. While all your Swing components are pure Java, a JFrame has to connect to the underlying OS in order to access the display. Think of the content pane as a 100% pure Java layer that sits on *top* of the JFrame. Or think of it as though JFrame is the window frame and the content pane is the...glass. You know, the window *pane*. And you can even swap the content pane with your own JPanel, to make your JPanel the frame's content pane, using:

```
myFrame.setContentPane(myPanel);
```

Q: Can I change the layout manager of the frame? What if I want the frame to use flow instead of border?

A: The easiest way to do this is to make a panel, build the GUI the way you want in the panel, and then make that panel the frame's content pane using the code in the previous answer (rather than changing the default content pane).

Q: What if I want a different preferred size? Is there a setSize() method for components?

A: Yes, there is a setSize(), but the layout managers will ignore it. There's a distinction between the *preferred size* of the component and the size *you* want it to be. The preferred size is based on the size the component actually *needs* (the component makes that decision for itself). The layout manager calls the component's getPreferredSize() method, and *that* method doesn't *care* if you've previously called setSize() on the component.

Q: Can't I just put things where I want them? Can I turn the layout managers off?

A: Yep. On a container-by-container basis, you can call **`setLayout(null)`**, and then it's up to you to hard-code the exact screen locations and dimensions. In the long run, though, it's almost always easier to use layout managers.

BULLET POINTS

- Layout managers control the size and location of components nested within other components.
- When you add a component to another component (sometimes referred to as a *background* component, but that's not a technical distinction), the added component is controlled by the layout manager of the *background* component.
- A layout manager asks components for their preferred size, before making a decision about the layout. Depending on the layout manager's policies, it might respect all, some, or none of the component's wishes.
- The BorderLayout manager lets you add a component to one of five regions. You must specify the region when you add the component, using the following syntax: `add(BorderLayout.EAST, panel);`
- With BorderLayout, components in the north and south get their preferred height, but not width. Components in the east and west get their preferred width, but not height. The component in the center gets whatever is left over.
- FlowLayout places components left to right, top to bottom, in the order they were added, wrapping to a new line of components only when the components won't fit horizontally.
- FlowLayout gives components their preferred size in both dimensions.
- BoxLayout lets you align components stacked vertically, even if they could fit side-by-side. Like FlowLayout, BoxLayout uses the preferred size of the component in both dimensions.
- BorderLayout is the default layout manager for a frame's content pane; FlowLayout is the default for a panel.

- If you want a panel to use something other than flow, you have to call **`setLayout()`** on the panel.

Playing with Swing components

You've learned the basics of layout managers, so now let's try out a few of the most common components: a text field, scrolling text area, checkbox, and list. We won't show you the whole darn API for each of these, just a few highlights to get you started. If you do want to find out more, read *Java Swing* by Dave Wood, Marc Loy, and Robert Eckstein.

How to use it

- ① Get text out of it

  ```
  System.out.println(field.getText());
  ```

- ② Put text in it

```
field.setText("whatever");
field.setText("");
```
This clears the field

③ Get an ActionEvent when the user presses return or enter

You can also register for key events if you really want to hear about it every time the user presses a key.

```
field.addActionListener(myActionListener);
```

- ④ Select/Highlight the text in the field

```
field.selectAll();
```

- ⑤ Put the cursor back in the field (so the user can just start typing)

```
field.requestFocus();
```

JTextArea

Unlike JTextField, JTextArea can have more than one line of text. It takes a little configuration to make one, because it doesn't come out of the box with scroll bars or line wrapping. To make a JTextArea scroll, you have to stick it in a JScrollPane. A JScrollPane is an object that really loves to scroll and will take care of the text area's scrolling needs.

Constructor

```
JTextArea text = new JTextArea(10, 20);
```

10 means 10 lines (sets the preferred height).

20 means 20 columns (sets the preferred width).

How to use it

① Make it have a vertical scrollbar only

```
JScrollPane scroller = new JScrollPane(text);
text.setLineWrap(true);

scroller.setVerticalScrollBarPolicy(ScrollPaneConstants.VERTICAL_SCROLLBAR_ALWAYS);
scroller.setHorizontalScrollBarPolicy(ScrollPaneConstants.HORIZONTAL_SCROLLBAR_NEVER);

panel.add(scroller);
```

Make a JScrollPane and give it the text area that it's going to scroll for.

Turn on line wrapping

Tell the scroll pane to use only a vertical scrollbar.

Important!! You give the text area to the scroll pane (through the scroll pane constructor), and then add the scroll pane to the panel. You don't add the text area directly to the panel!

② Replace the text that's in it

```
text.setText("Not all who are lost are wandering");
```

③ Append to the text that's in it

```
text.append("button clicked");
```

④ Select/highlight the text in the field

```
text.selectAll();
```

⑤ Put the cursor back in the field (so the user can just start typing)

```
text.requestFocus();
```

JTextArea example

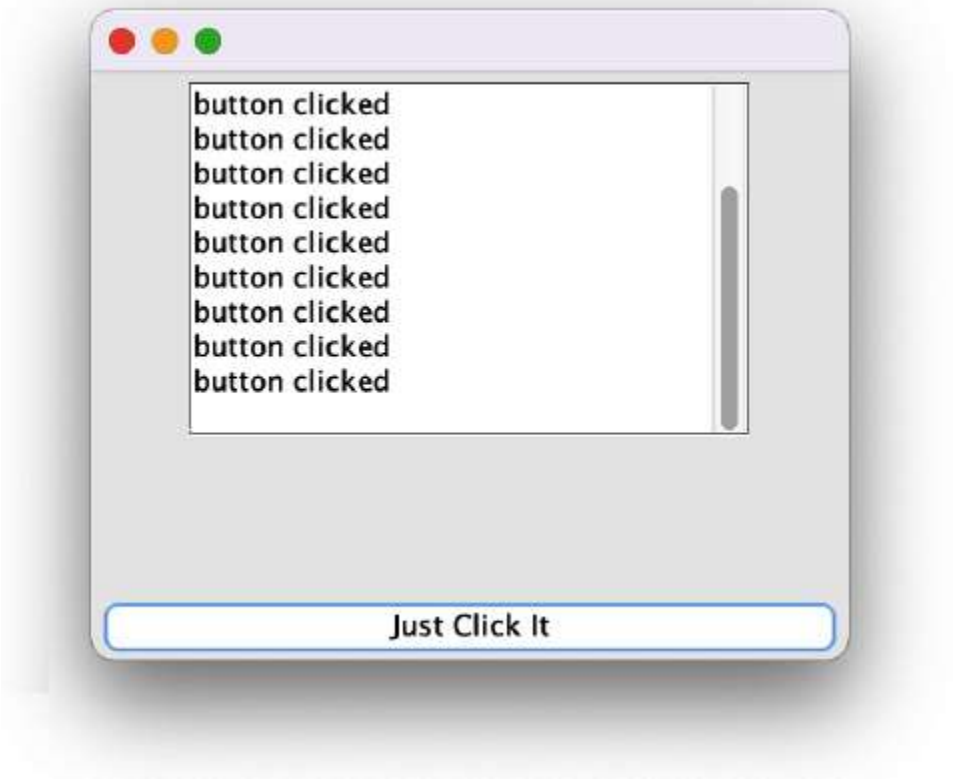

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class TextArea1 {
  public static void main(String[] args) {
    TextArea1 gui = new TextArea1();
    gui.go();
  }

  public void go() {
    JFrame frame = new JFrame();
    JPanel panel = new JPanel();

    JButton button = new JButton("Just Click It");

    JTextArea text = new JTextArea(10, 20);
    text.setLineWrap(true);
    button.addActionListener(e -> text.append("button clicked \n"));

    JScrollPane scroller = new JScrollPane(text);
    scroller.setVerticalScrollBarPolicy(ScrollPaneConstants.VERTICAL_SCROLLBAR_ALWAYS);
    scroller.setHorizontalScrollBarPolicy(ScrollPaneConstants.HORIZONTAL_SCROLLBAR_NEVER);

    panel.add(scroller);

    frame.getContentPane().add(BorderLayout.CENTER, panel);
    frame.getContentPane().add(BorderLayout.SOUTH, button);

    frame.setSize(350, 300);
    frame.setVisible(true);
  }
}
```

Lambda expression to implement the button's ActionListener.

Insert a new line so the words go on a separate line each time the button is clicked. Otherwise, they'll run together.

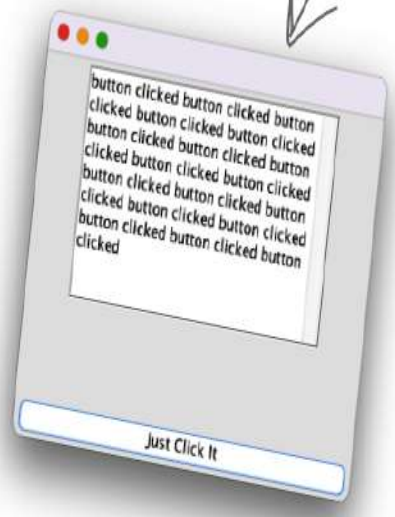

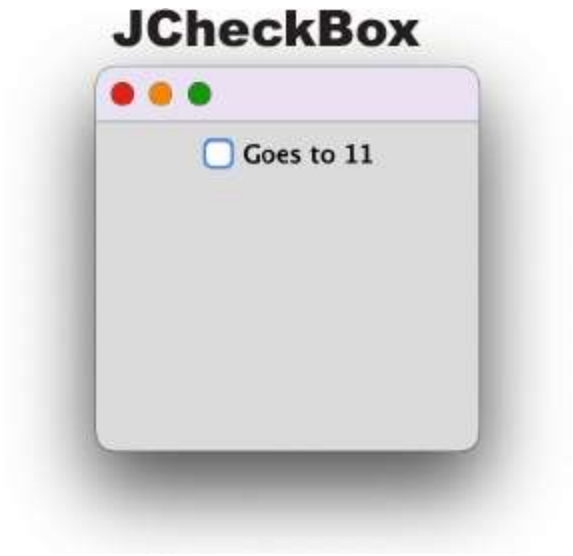

Constructor

```
JCheckBox check = new JCheckBox("Goes to 11");
```

How to use it

- ① Listen for an item event (when it's selected or deselected)

  ```
  check.addItemListener(this);
  ```

- ② Handle the event (and find out whether or not it's selected)

  ```
  public void itemStateChanged(ItemEvent e) {
    String onOrOff = "off";
    if (check.isSelected()) {
      onOrOff = "on";
    }
    System.out.println("Check box is " + onOrOff);
  }
  ```

- ③ Select or deselect it in code

```
check.setSelected(true);
check.setSelected(false);
```

THERE ARE NO DUMB QUESTIONS

Q: Aren't the layout managers just more trouble than they're worth? If I have to go to all this trouble, I might as well just hard-code the size and coordinates for where everything should go.

A: Getting the exact layout you want from a layout manager can be a challenge. But think about what the layout manager is really doing for you. Even the seemingly simple task of figuring out where things should go on the screen can be complex. For example, the layout manager takes care of keeping your components from overlapping one another. In other words, it knows how to manage the spacing between components (and between the edge of the frame). Sure, you can do that yourself, but what happens if you want components to be very tightly packed? You might get them placed just right, by hand, but that's only good for your JVM!

Why? Because the components can be slightly different from platform to platform, especially if they use the underlying platform's native "look and feel." Subtle things like the bevel of the buttons can be different in such a way that components that line up neatly on one platform suddenly squish together on another.

And we haven't even covered the really Big Thing that layout managers do. Think about what happens when the user resizes the window! Or your GUI is dynamic, where components come and go. If you had to keep track of re-laying out all the components every time there's a change in the size or contents of a background component...yikes!

NOTE

JList constructor takes an array of any object type. They don't have to be Strings, but a String representation will appear in the list.

Constructor

```
String[] listEntries = {"alpha", "beta", "gamma", "delta",
                        "epsilon", "zeta", "eta", "theta "};
JList<String> list = new JList<>(listEntries);
```

JList is a generic class, so you can declare what type of objects are in the list.

The diamond operator from Chapter 11.

NOTE

This is just like with JTextArea—you make a JScrollPane (and give it the list), and then add the scroll pane (NOT the list) to the panel.

How to use it

- ① Make it have a vertical scrollbar

```
JScrollPane scroller = new JScrollPane(list);
scroller.setVerticalScrollBarPolicy(ScrollPaneConstants.VERTI
CAL_SCROLLBAR_ALWAYS);
scroller.setHorizontalScrollBarPolicy(ScrollPaneConstants.HOR
IZONTAL_SCROLLBAR_NEVER);

panel.add(scroller);
```

- ② Set the number of lines to show before scrolling

```
list.setVisibleRowCount(4);
```

- ③ Restrict the user to selecting only ONE thing at a time

```
list.setSelectionMode(ListSelectionModel.SINGLE_SELECTION);
```

- ④ Register for list selection events

```
list.addListSelectionListener(this);
```

- ⑤ Handle events (find out which thing in the list was selected)

```
public void valueChanged(ListSelectionEvent e) {
  if (!e.getValueIsAdjusting()) {
    String selection = list.getSelectedValue();
    System.out.println(selection);
  }
}
```

You'll get the event TWICE if you don't put in this if test.

getSelectedValue() actually returns an Object. A list isn't limited to only String objects.

Code Kitchen

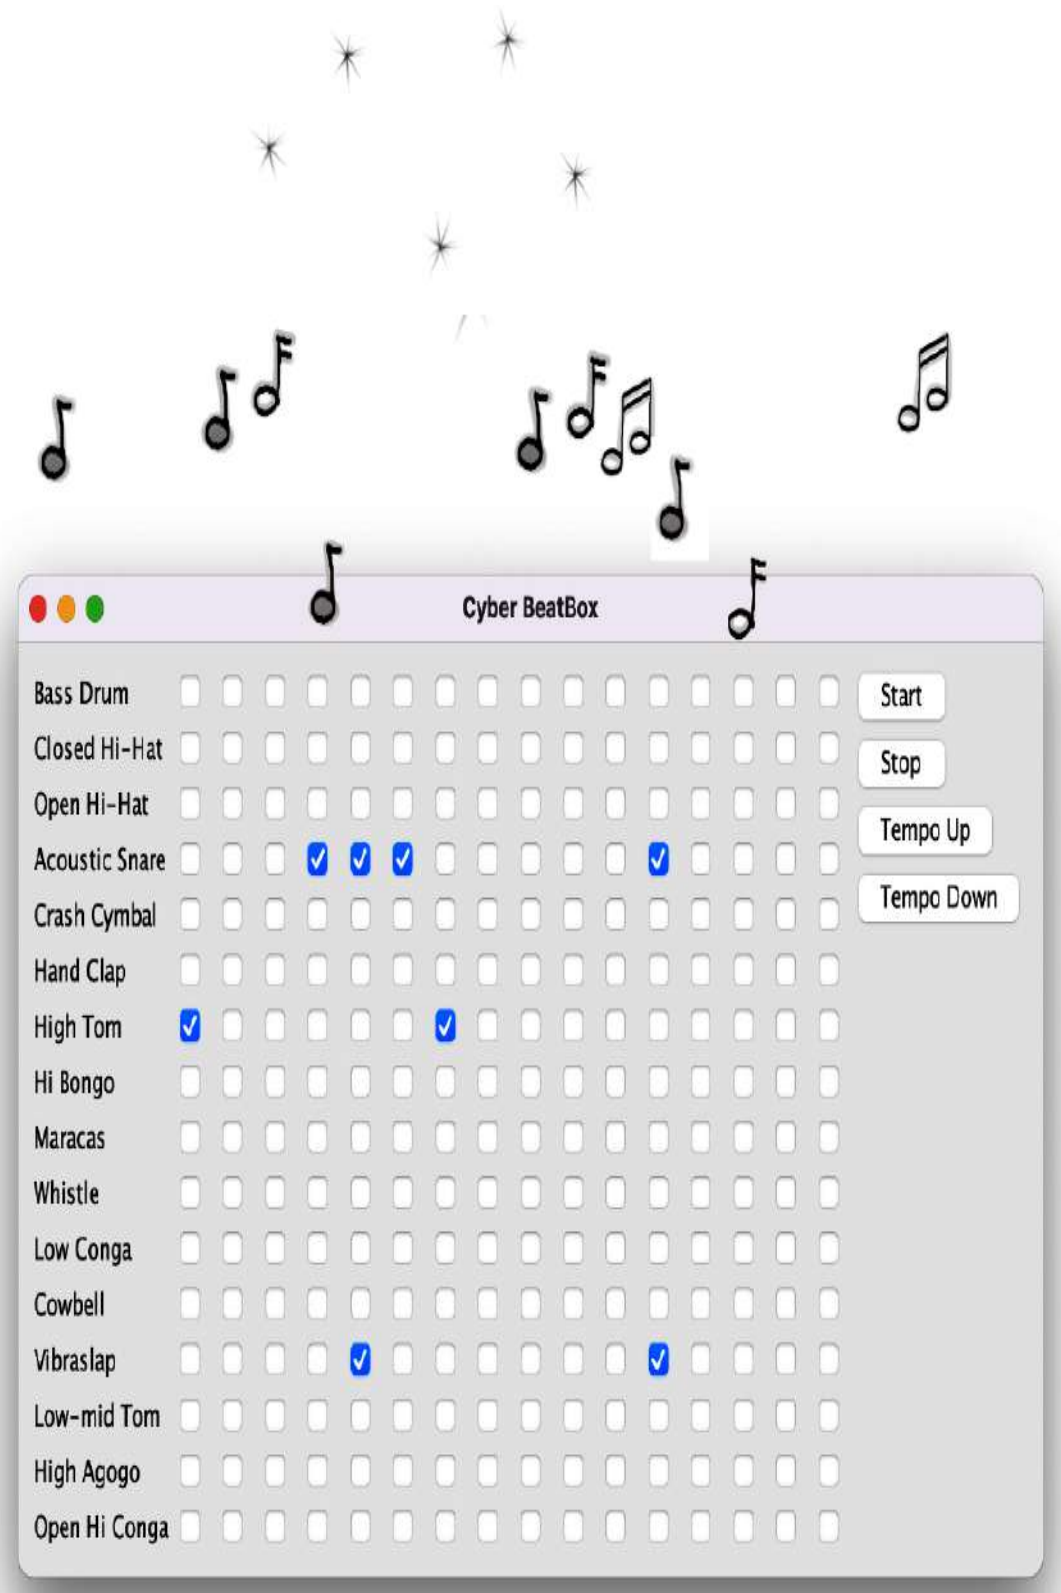
Cyber BeatBox
Bass Drum
Closed Hi-Hat
Open Hi-Hat
Acoustic Snare
Crash Cymbal
Hand Clap
High Tom
Hi Bongo
Maracas
Whistle
Low Conga
Cowbell
Vibraslap
Low-mid Tom
High Agogo
Open Hi Conga
Start
Stop
Tempo Up
Tempo Down

This part's optional. We're making the full BeatBox, GUI and all. In Chapter 16, Saving Objects, we'll learn how to save and restore drum patterns. Finally, in Chapter 17, Make a Connection, we'll turn the BeatBox into a working chat client.

Making the BeatBox

This is the full code listing for this version of the BeatBox, with buttons for starting, stopping, and changing the tempo. The code listing is complete, and fully annotated, but here's the overview:

- ① Build a GUI that has 256 checkboxes (JCheckBox) that start out unchecked, 16 labels (JLabel) for the instrument names, and four buttons.
- ② Register an ActionListener for each of the four buttons. We don't need listeners for the individual checkboxes, because we aren't trying to change the pattern sound dynamically (i.e., as soon as the user checks a box). Instead, we wait until the user hits the "start" button, and then walk through all 256 checkboxes to get their state and make a MIDI track.
- ③ Set up the MIDI system (you've done this before) including getting a Sequencer, making a Sequence, and creating a track. We are using a sequencer method, setLoopCount(), that allows you to specify how many times you want a sequence to loop. We're also using the sequence's tempo factor to adjust the tempo up or down, and maintain the new tempo from one iteration of the loop to the next.
- ④ When the user hits "start," the real action begins. The event-handling method for the "start" button calls the buildTrackAndStart() method. In that method, we walk through all 256 checkboxes (one row at a time, a single instrument across all 16 beats) to get their state, and then use the information to build a MIDI track (using the handy makeEvent() method

we used in the previous chapter). Once the track is built, we start the sequencer, which keeps playing (because we're looping it) until the user hits "stop."

```
import javax.sound.midi.*;
import javax.swing.*;
import java.awt.*;
import java.util.ArrayList;

import static javax.sound.midi.ShortMessage.*;

public class BeatBox {
  private ArrayList<JCheckBox> checkboxList;
  private Sequencer sequencer;
  private Sequence sequence;
  private Track track;

  String[] instrumentNames = {"Bass Drum", "Closed Hi-Hat",
          "Open Hi-Hat", "Acoustic Snare", "Crash Cymbal", "Hand Clap",
          "High Tom", "Hi Bongo", "Maracas", "Whistle", "Low Conga",
          "Cowbell", "Vibraslap", "Low-mid Tom", "High Agogo",
          "Open Hi Conga"};
  int[] instruments = {35, 42, 46, 38, 49, 39, 50, 60, 70, 72, 64, 56, 58, 47, 67, 63};

  public static void main(String[] args) {
    new BeatBox().buildGUI();
  }

  public void buildGUI() {
    JFrame frame = new JFrame("Cyber BeatBox");
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    BorderLayout layout = new BorderLayout();
    JPanel background = new JPanel(layout);
    background.setBorder(BorderFactory.createEmptyBorder(10, 10, 10, 10));

    Box buttonBox = new Box(BoxLayout.Y_AXIS);

    JButton start = new JButton("Start");
    start.addActionListener(e -> buildTrackAndStart());
    buttonBox.add(start);

    JButton stop = new JButton("Stop");
    stop.addActionListener(e -> sequencer.stop());
    buttonBox.add(stop);

    JButton upTempo = new JButton("Tempo Up");
    upTempo.addActionListener(e -> changeTempo(1.03f));
    buttonBox.add(upTempo);

    JButton downTempo = new JButton("Tempo Down");
    downTempo.addActionListener(e -> changeTempo(0.97f));
    buttonBox.add(downTempo);
```

We store the checkboxes in an ArrayList.

These are the names of the instruments, as a String array, for building the GUI labels (on each row).

These represent the actual drum "keys." The drum channel is like a piano, except each "key" on the piano is a different drum. So the number "35" is the key for the Bass drum, 42 is Closed Hi-Hat, etc.

An "empty border" gives us a margin between the edges of the panel and where the components are placed. Purely aesthetic.

Lambda expressions are perfect for these event handlers, since when these buttons are pressed, all we want to do is call a specific method.

The default tempo is 1.0, so we're adjusting +/- 3% per click.

```
    Box nameBox = new Box(BoxLayout.Y_AXIS);
    for (String instrumentName : instrumentNames) {
      JLabel instrumentLabel = new JLabel(instrumentName);
      instrumentLabel.setBorder(BorderFactory.createEmptyBorder(4, 1, 4, 1));
      nameBox.add(instrumentLabel);
    }

    background.add(BorderLayout.EAST, buttonBox);
    background.add(BorderLayout.WEST, nameBox);

    frame.getContentPane().add(background);

    GridLayout grid = new GridLayout(16, 16);
    grid.setVgap(1);
    grid.setHgap(2);

    JPanel mainPanel = new JPanel(grid);
    background.add(BorderLayout.CENTER, mainPanel);

    checkboxList = new ArrayList<>();
    for (int i = 0; i < 256; i++) {
      JCheckBox c = new JCheckBox();
      c.setSelected(false);
      checkboxList.add(c);
      mainPanel.add(c);
    }

    setUpMidi();

    frame.setBounds(50, 50, 300, 300);
    frame.pack();
    frame.setVisible(true);
  }

  private void setUpMidi() {
    try {
      sequencer = MidiSystem.getSequencer();
      sequencer.open();
      sequence = new Sequence(Sequence.PPQ, 4);
      track = sequence.createTrack();
      sequencer.setTempoInBPM(120);

    } catch (Exception e) {
      e.printStackTrace();
    }
  }
```

This border on each instrument name helps them line up with the checkboxes.

Still more GUI setup code. Nothing remarkable.

Another layout manager, this one lets you put the components in a grid with rows and columns.

Make the checkboxes, set them to 'false' (so they aren't checked), and add them to the ArrayList AND to the GUI panel.

The usual MIDI setup stuff for getting the Sequencer, the Sequence, and the Track. Again, nothing special.

This is where it all happens! Where we turn checkbox state into MIDI events and add them to the Track.

```
private void buildTrackAndStart() {
  int[] trackList;

  sequence.deleteTrack(track);
  track = sequence.createTrack();

  for (int i = 0; i < 16; i++) {
    trackList = new int[16];

    int key = instruments[i];

    for (int j = 0; j < 16; j++) {
      JCheckBox jc = checkboxList.get(j + 16 * i);
      if (jc.isSelected()) {
        trackList[j] = key;
      } else {
        trackList[j] = 0;
      }
    }

    makeTracks(trackList);
    track.add(makeEvent(CONTROL_CHANGE, 1, 127, 0, 16));
  }

  track.add(makeEvent(PROGRAM_CHANGE, 9, 1, 0, 15));

  try {
    sequencer.setSequence(sequence);
    sequencer.setLoopCount(sequencer.LOOP_CONTINUOUSLY);
    sequencer.setTempoInBPM(120);
    sequencer.start();
  } catch (Exception e) {
    e.printStackTrace();
  }
}

private void changeTempo(float tempoMultiplier) {
  float tempoFactor = sequencer.getTempoFactor();
  sequencer.setTempoFactor(tempoFactor * tempoMultiplier);
}
```

We'll make a 16-element array to hold the values for one instrument, across all 16 beats. If the instrument is supposed to play on that beat, the value at that element will be the key. If that instrument is NOT supposed to play on that beat, put in a zero.

Get rid of the old track, make a fresh one.

do this for each of the 16 ROWS (i.e., Bass, Congo, etc.)

Set the "key" that represents which instrument this is (Bass, Hi-Hat, etc.). The instruments array holds the actual MIDI numbers for each instrument.

Do this for each of the BEATS for this row.

Is the checkbox at this beat selected? If yes, put the key value in this slot in the array (the slot that represents this beat). Otherwise, the instrument is NOT supposed to play at this beat, so set it to zero.

For this instrument, and for all 16 beats, make events and add them to the track.

We always want to make sure that there IS an event at beat 16 (it goes 0 to 15). Otherwise, the BeatBox might not go the full 16 beats before it starts over.

Lets you specify the number of loop iterations, or in this case, continuous looping.

NOW PLAY THE THING!!

The Tempo Factor scales the sequencer's tempo by the factor provided, slowing the beat down or speeding it up.

```
  private void makeTracks(int[] list) {
    for (int i = 0; i < 16; i++) {
      int key = list[i];

      if (key != 0) {
        track.add(makeEvent(NOTE_ON, 9, key, 100, i));
        track.add(makeEvent(NOTE_OFF, 9, key, 100, i + 1));
      }
    }
  }

  public static MidiEvent makeEvent(int cmd, int chnl, int one, int two, int tick) {
    MidiEvent event = null;
    try {
      ShortMessage msg = new ShortMessage();
      msg.setMessage(cmd, chnl, one, two);
      event = new MidiEvent(msg, tick);
    } catch (Exception e) {
      e.printStackTrace();
    }
    return event;
  }

}
```

This makes events for one instrument at a time, for all 16 beats. So it might get an int[ ] for the Bass drum, and each index in the array will hold either the key of that instrument or a zero. If it's a zero, the instrument isn't supposed to play at that beat. Otherwise, make an event and add it to the track.

Make the NOTE ON and NOTE OFF events, and add them to the Track.

This is the utility method from the previous chapter's Code Kitchen. Nothing new.

Exercise

Which code goes with which layout?

Five of the six screens below were made from one of the code fragments on the opposite page. Match each of the five code fragments with the layout that fragment would produce.

⟶ **Answers in “GUI-Cross”.**

Code Fragments

A
```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
panel.add(button);
frame.getContentPane().add(BorderLayout.NORTH, buttonTwo);
frame.getContentPane().add(BorderLayout.EAST, panel);
```

B
```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.CENTER, button);
frame.getContentPane().add(BorderLayout.EAST, panel);
```

C
```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.CENTER, button);
```

D
```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
frame.getContentPane().add(BorderLayout.NORTH, panel);
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.CENTER, button);
```

```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
frame.getContentPane().add(BorderLayout.SOUTH, panel);
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.NORTH, button);
```

GUI-Cross

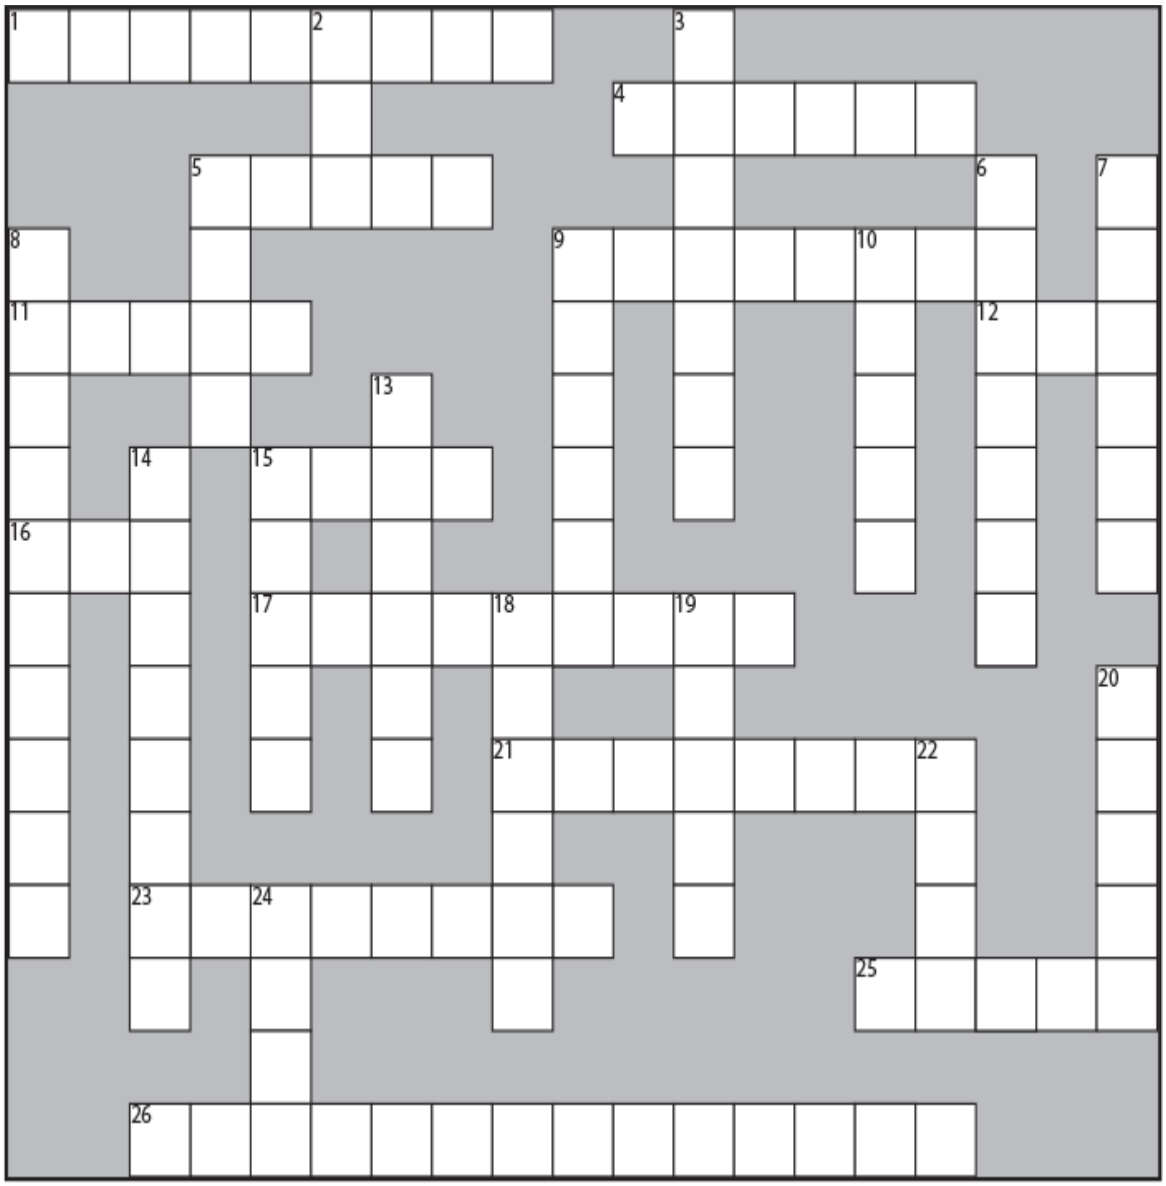

You can do it.

Across

1. Artist’s sandbox

4. Border’s catchall

5. Java look

9. Generic waiter

11. A happening

12. Apply a widget

15. JPanel’s default

16. Polymorphic test

17. Shake it, baby

21. Lots to say

23. Choose many

25. Button’s pal

26. Home of actionPerformed

Down

2. Swing’s dad

3. Frame’s purview

5. Help’s home

6. More fun than text

7. Component slang

8. Romulin command

9. Arrange

10. Border’s top

13. Manager’s rules

14. Source’s behavior

15. Border by default

18. User’s behavior

19. Inner’s squeeze

20. Backstage widget

22. Classic Mac look

24. Border's right

⟶ **Answers in "GUI-Cross".**

Exercise Solutions

Which code goes with which layout?

(from "Which code goes with which layout?")

1

C

```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.CENTER,
button);
```

2

D

```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
frame.getContentPane().add(BorderLayout.NORTH,
panel);
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.CENTER,
button);
```

3

E

```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
frame.getContentPane().add(BorderLayout.SOUTH,
panel);
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.NORTH,
button);
```

4

A

```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
panel.add(button);
frame.getContentPane().add(BorderLayout.NORTH,
buttonTwo);
frame.getContentPane().add(BorderLayout.EAST,
panel);
```

6

B

```
JFrame frame = new JFrame();
JPanel panel = new JPanel();
panel.setBackground(Color.darkGray);
JButton button = new JButton("tesuji");
JButton buttonTwo = new JButton("watari");
panel.add(buttonTwo);
frame.getContentPane().add(BorderLayout.CENTER,
button);
frame.getContentPane().add(BorderLayout.EAST,
panel);
```

GUI-Cross

(from "GUI-Cross")

DRAWPANEL
S
W
CENTER
METAL
T
G
W
S
E
LISTENER
I
EVENT
AI
O
ADD
T
U
P
YZ
R
P
G
V
C
FLOW
OE
T
H
E
ISA
R
L
U
H
I
T
SLANIMATION
C
I
L
MC
C
U
P
B
BE
Y
TEXTAREA
A
A
L
A
I
E
Q
N
ECHECKBOX
R
U
E
K
A
N
LABEL
S
ACTIONLISTENER

Chapter 16. Saving Objects (and Text): Serialization and File I/O

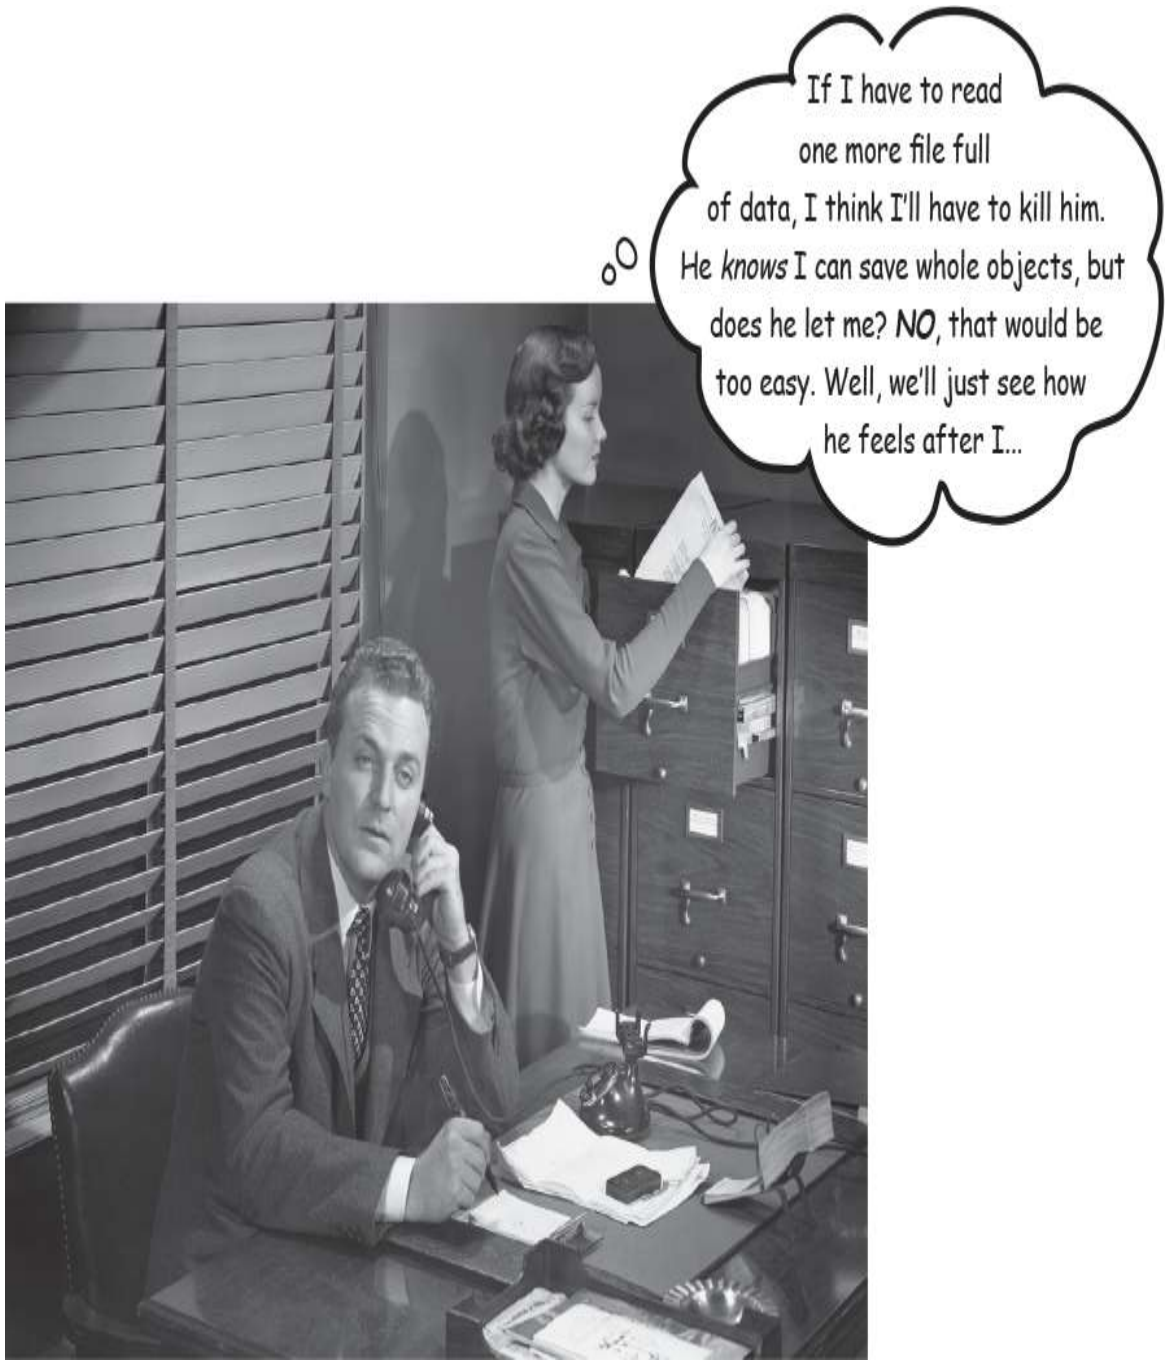

Objects can be flattened and inflated. Objects have state and behavior. *Behavior* lives in the *class*, but *state* lives within each individual *object*. So what happens when it's time to *save* the state of an object? If you're writing a game, you're gonna need a Save/Restore Game feature. If you're writing an app that creates charts, you're gonna need a Save/Open File feature. If your program needs to save state, *you can do it the hard way*, interrogating each object, then painstakingly writing the value of each instance variable to a file, in a format you create. Or, **you can do it the easy OO way**—you simply freeze-dry/flatten/persist/dehydrate the object itself, and reconstitute/inflate/restore/rehydrate it to get it back. But you'll still have to do it the hard way *sometimes*, especially when the file your app saves has to be read by some other non-Java application, so we'll look at both in this chapter. And since all I/O operations are risky, we'll take a look at how to do even better exceptions handling.

Capture the beat

You've *made* the perfect pattern. You want to *save* the pattern. You could grab a piece of paper and start scribbling it down, but instead you hit the ***Save*** button (or choose Save from the File menu). Then you give it a name, pick a directory, and exhale knowing that your masterpiece won't go out the window during a random computer crash.

You have lots of options for how to save the state of your Java program, and what you choose will probably depend on how you plan to *use* the saved state. Here are the options we'll be looking at in this chapter.

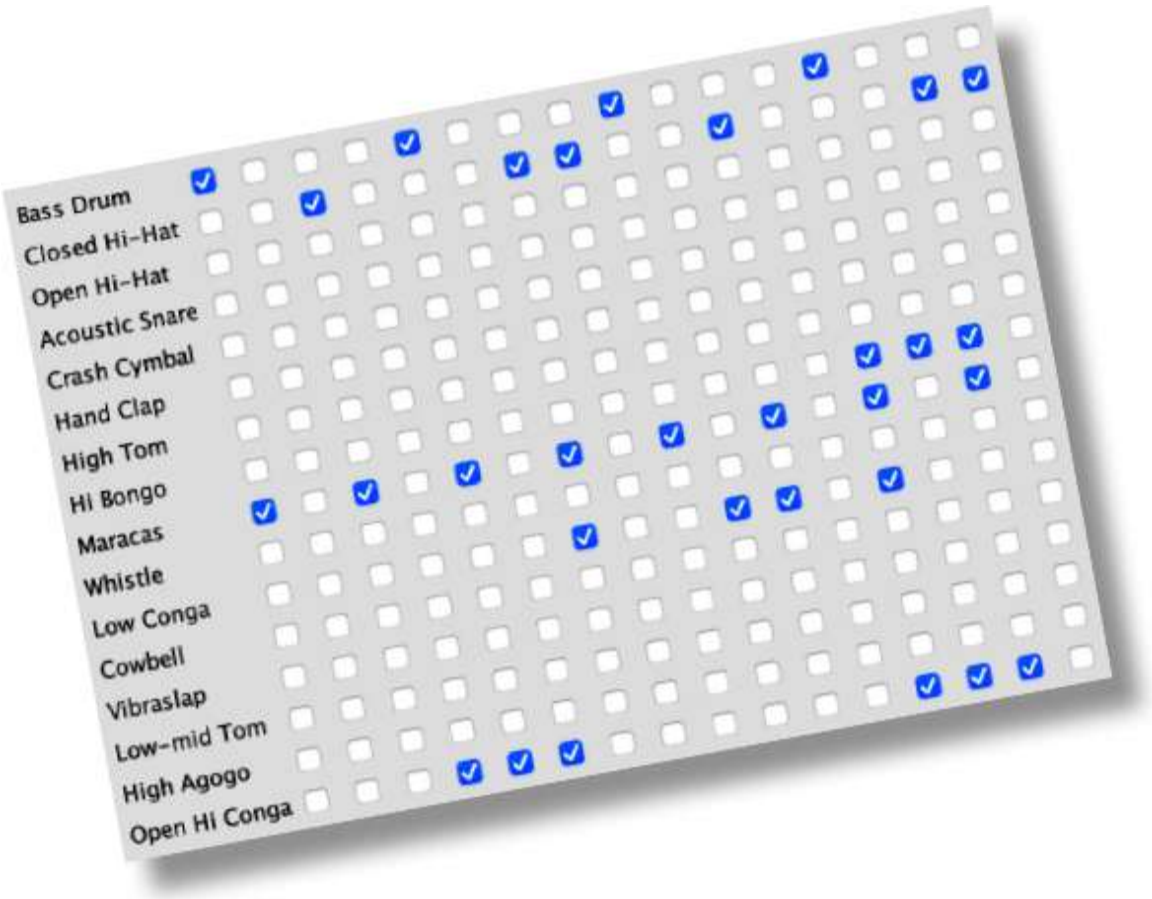

If your data will be used by only the Java program that generated it:

- ① **Use serialization**

  Write a file that holds flattened (serialized) objects. Then have your program read the serialized objects from the file and inflate them back into living, breathing, heap-inhabiting objects.

  If your data will be used by *other* programs:

- ② **Write a plain-text file**

  Write a file, with delimiters that other programs can parse. For example, a tab-delimited file that a spreadsheet or database application can use.

These aren't the only options, but if we had to pick only two approaches to doing I/O in Java, we'd probably pick these. Of course, you can save data in

any format you choose. Instead of writing characters, for example, you can write your data as bytes. Or you can write out any kind of Java primitive *as* a Java primitive—there are methods to write ints, longs, booleans, etc. But regardless of the method you use, the fundamental I/O techniques are pretty much the same: write some data to *something*, and usually that something is either a file on disk or a stream coming from a network connection. Reading the data is the same process in reverse: read some data from either a file on disk or a network connection. Everything we talk about in this part is for times when you aren't using an actual database.

Saving state

Imagine you have a program, say, a fantasy adventure game, that takes more than one session to complete. As the game progresses, characters in the game become stronger, weaker, smarter, etc., and gather and use (and lose) weapons. You don't want to start from scratch each time you launch the game—it took you forever to get your characters in top shape for a spectacular battle. So, you need a way to save the state of the characters, and a way to restore the state when you resume the game. And since you're also the game programmer, you want the whole save and restore thing to be as easy (and foolproof) as possible.

NOTE

Imagine you have three game characters to save...

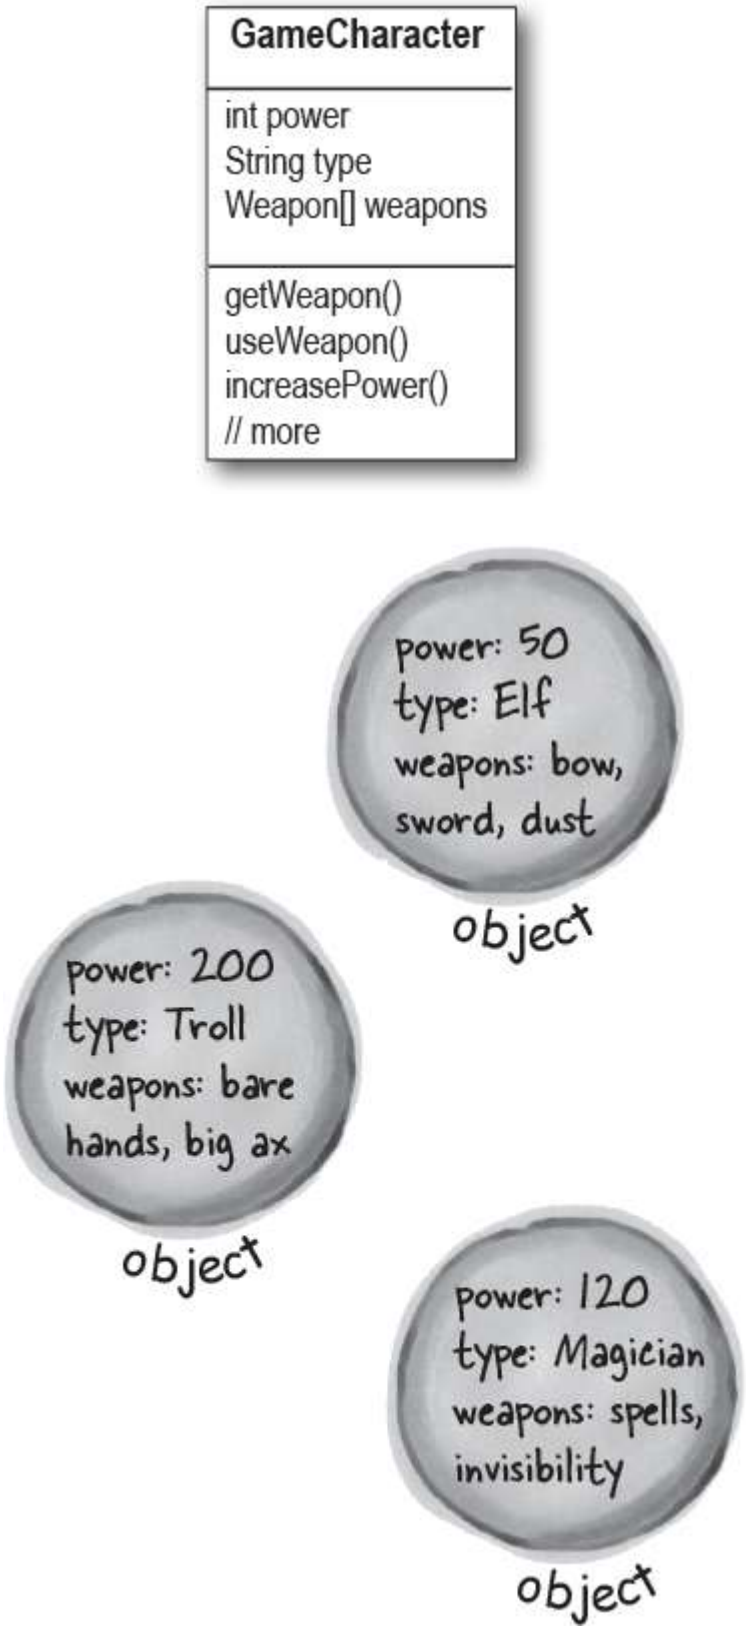
GameCharacter
int power
String type
Weapon[] weapons
getWeapon()
useWeapon()
increasePower()
// more
power: 50
type: Elf
weapons: bow, sword, dust
object
power: 200
type: Troll
weapons: bare hands, big ax
object
power: 120
type: Magician
weapons: spells, invisibility
object

- ① Option one

  Write the three serialized character objects to a file

  Create a file and write three lines of text, one per character, separating the pieces of state with commas:

```
¨¨srGameCharacter
¨¨%gê8MÛIpowerLjava/lang/
String;[weaponst[Ljava/lang/
String;xp2tlfur[Ljava.lang.String;≠"VÁ
È{Gxptbowtswordtdustsq»tTrolluqtb
are handstbig axsqxtMagicianuqtspe
llstinvisibility
```

- ② Option two

  Write a plain-text file

  Create a file and write three lines of text, one per character, separating the pieces of state with commas:

```
50,Elf,bow, sword,dust
200,Troll,bare hands,big ax
120,Magician,spells,invisibility
```

NOTE

The serialized file is much harder for humans to read, but it's much easier (and safer) for your program to restore the three objects from serialization than from reading in the object's variable values that were saved to a text file. For example, imagine all the ways in which you could accidentally read back the values in the wrong order! The type might become "dust" instead of "Elf," while the Elf becomes a weapon...

Writing a serialized object to a file

Here are the steps for serializing (saving) an object. Don't bother memorizing all this; we'll go into more detail later in this chapter.

If the file "MyGame.ser" doesn't exist, it will be created automatically.

1 Make a FileOutputStream

```
FileOutputStream fileStream = new FileOutputStream("MyGame.ser");
```

Make a FileOutputStream object. FileOutputStream knows how to connect to (and create) a file.

2 Make an ObjectOutputStream

```
ObjectOutputStream os = new ObjectOutputStream(fileStream);
```

ObjectOutputStream lets you write objects, but it can't directly connect to a file. It needs to be fed a "helper." This is actually called "chaining" one stream to another.

3 Write the object

```
os.writeObject(characterOne);
os.writeObject(characterTwo);
os.writeObject(characterThree);
```

Serializes the objects referenced by characterOne, characterTwo, and characterThree, and writes them in this order to the file "MyGame.ser."

4 Close the ObjectOutputStream

```
os.close();
```

Closing the stream at the top closes the ones underneath, so the FileOutputStream (and the file) will close automatically.

Data moves in streams from one place to another

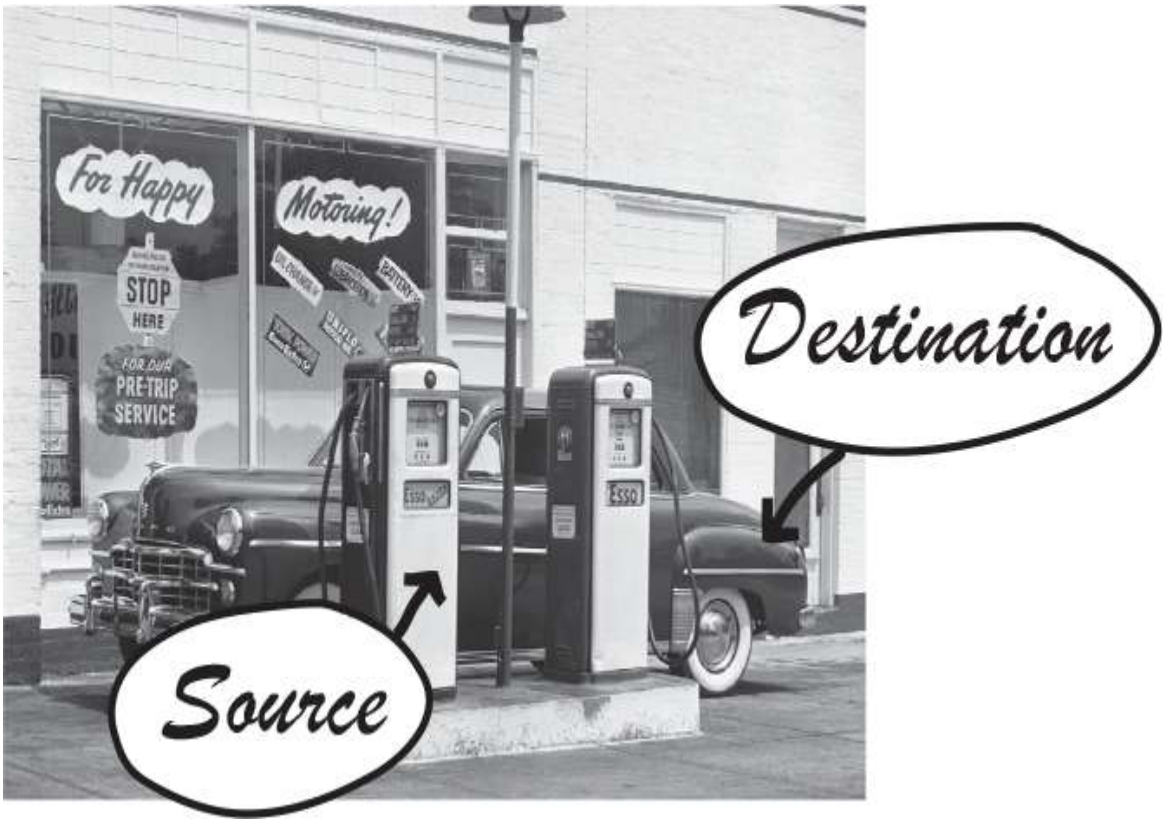

NOTE

Connection streams represent a connection to a source or destination (file, network socket, etc.), while chain streams can't connect on their own and must be chained to a connection stream.

The Java I/O API has ***connection*** streams, which represent connections to destinations and sources such as files or network sockets, and ***chain*** streams that work only if chained to other streams.

Often, it takes at least two streams hooked together to do something useful—*one* to represent the connection and *another* to call methods on. Why two?

Because *connection* streams are usually too low-level. FileOutputStream (a connection stream), for example, has methods for writing *bytes*. But we don't want to write *bytes*! We want to write *objects*, so we need a higher-level *chain* stream.

OK, then why not have just a single stream that does *exactly* what you want? One that lets you write objects but underneath converts them to bytes? Think good OO. Each class does *one* thing well. FileOutputStreams write bytes to a file. ObjectOutputStreams turn objects into data that can be written to a stream. So we make a FileOutputStream (a connection stream) that lets us write to a file, and we hook an ObjectOutputStream (a chain stream) on the end of it. When we call writeObject() on the ObjectOutputStream, the object gets pumped into the stream and then moves to the FileOutputStream where it ultimately gets written as bytes to a file.

The ability to mix and match different combinations of connection and chain streams gives you tremendous flexibility! If you were forced to use only a *single* stream class, you'd be at the mercy of the API designers, hoping they'd thought of *everything* you might ever want to do. But with chaining, you can patch together your own *custom* chains.

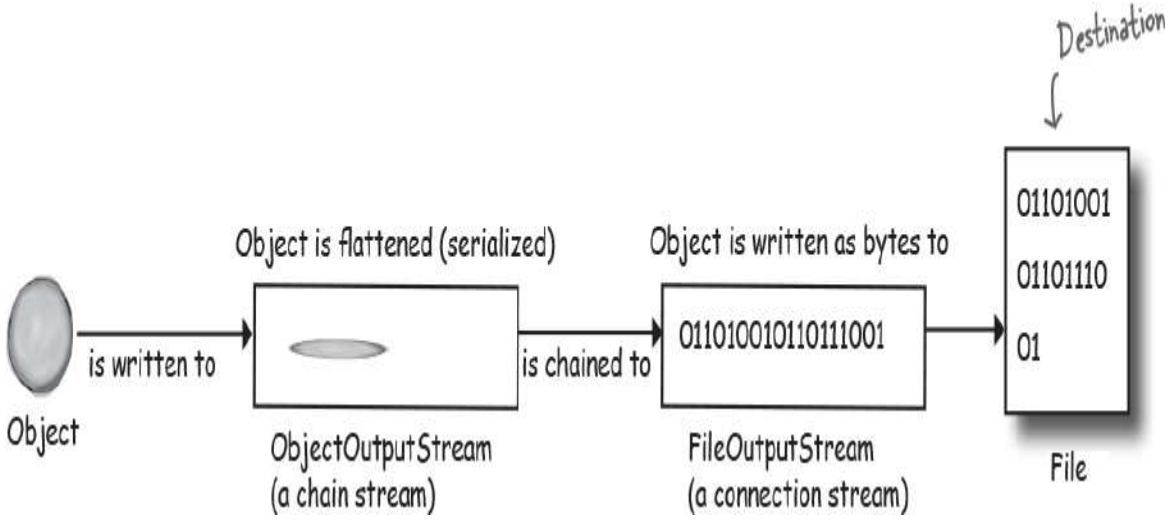

What really happens to an object when it's serialized?

- ❶ **Object on the heap**

Objects on the heap have state—the value of the object's instance variables. These values make one instance of a class different from another instance of the same class.

- ❷ Object serialized

Serialized objects **save the values of the instance variables** so that an identical instance (object) can be brought back to life on the heap.

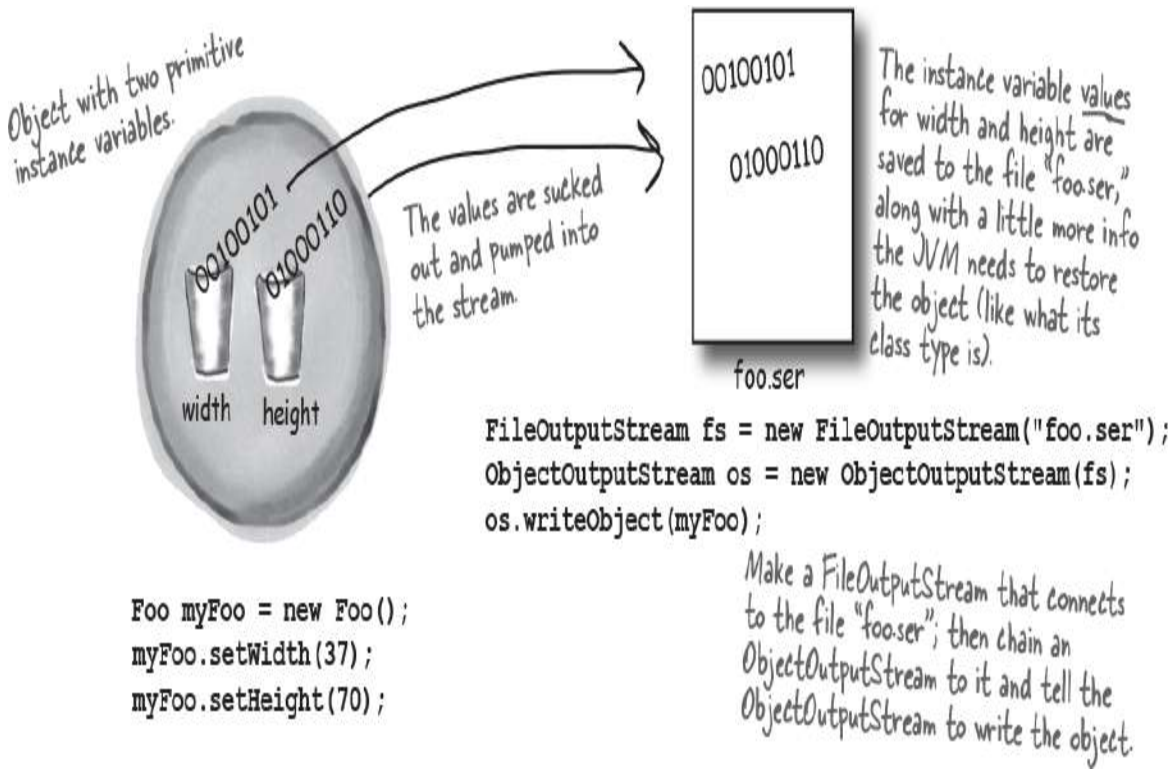

But what exactly IS an object's state? What needs to be saved?

Now it starts to get interesting. Easy enough to save the *primitive* values 37 and 70. But what if an object has an instance variable that's an object *reference*? What about an object that has five instance variables that are object references? What if those object instance variables themselves have instance variables?

Think about it. What part of an object is potentially unique? Imagine what needs to be restored in order to get an object that's identical to the one that was saved. It will have a different memory location, of course, but we don't care about that. All we care about is that out there on the heap, we'll get an object that has the same state the object had when it was saved.

BRAIN BARBELL

What has to happen for the Car object to be saved in such a way that it can be restored to its original state?

Think of what—and how—you might need to save the Car.

And what happens if an Engine object has a reference to a Carburetor? And what's inside the Tire[] array object?

The Car object has two instance variables that reference two other objects.

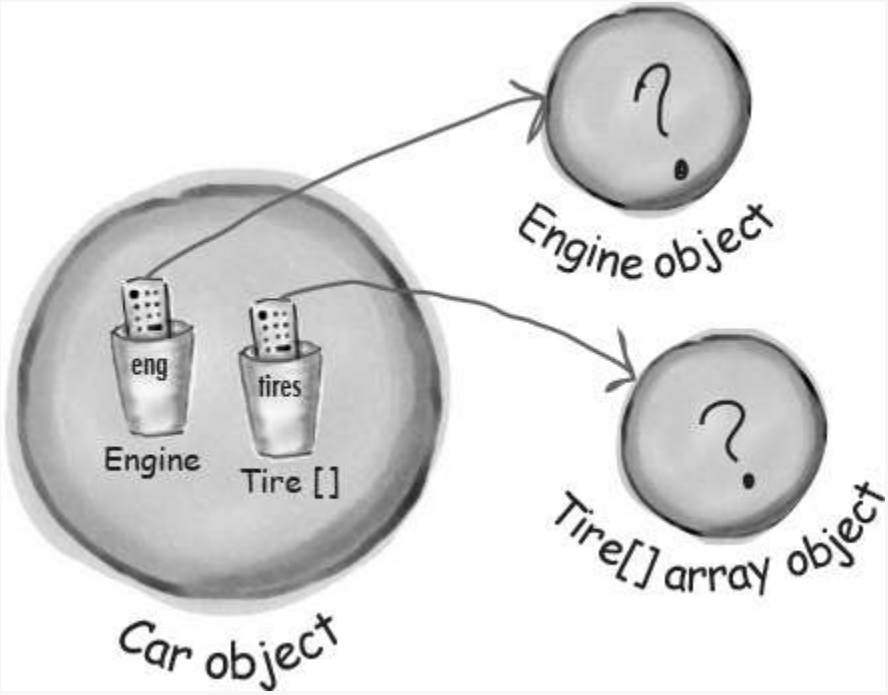

What does it take to save a Car object?

When an object is serialized, all the objects it refers to from instance variables are *also* serialized. And all the objects *those* objects refer to are serialized. And all the objects those objects refer to are serialized...and the best part is, it happens automatically!

This Kennel object has a reference to a Dog[] array object. The Dog[] holds references to two Dog objects. Each Dog object holds a reference to a String and a Collar object. The String objects have a collection of characters, and the Collar objects have an int.

> **Serialization saves the entire object graph—all objects referenced by instance variables, starting with the object being serialized.**

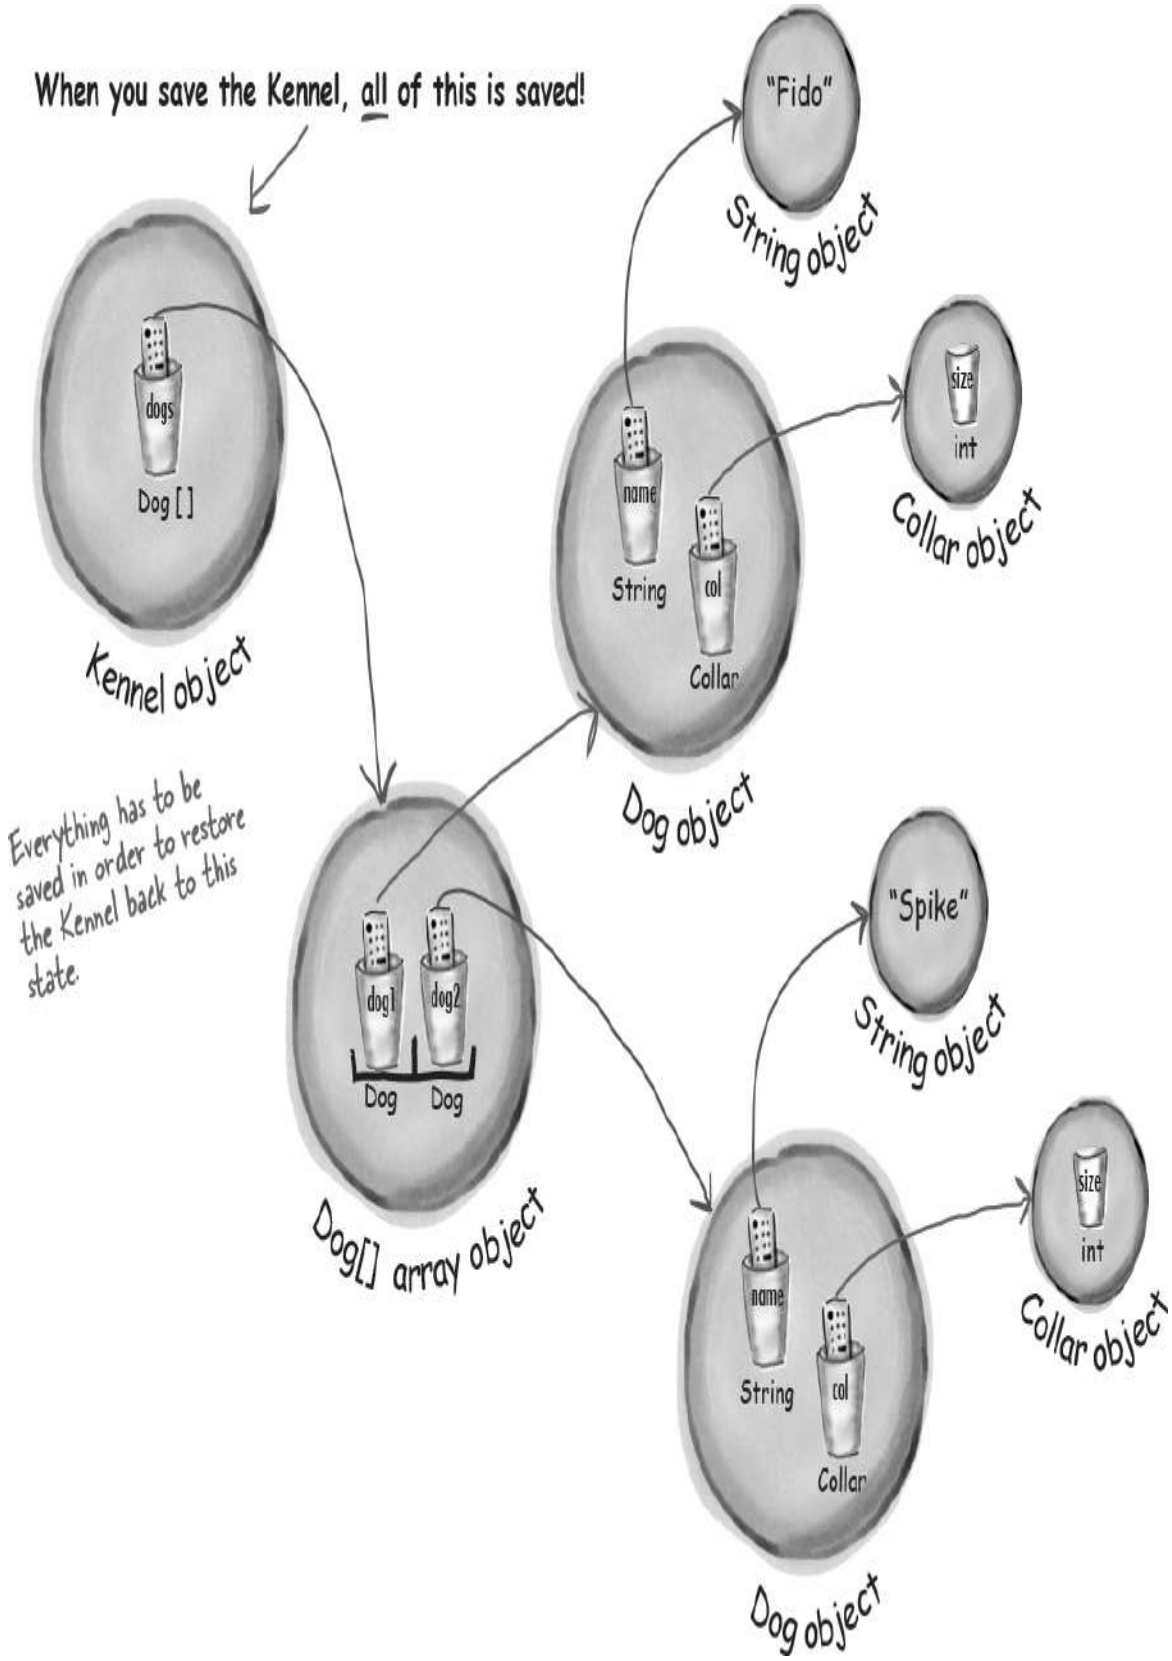
When you save the Kennel, all of this is saved!
"Fido"
String object
dogs
Dog [ ]
Kennel object
name
String
col
Collar
Dog object
size
int
Collar object
Everything has to be saved in order to restore the Kennel back to this state.
dog1
dog2
Dog
Dog
Dog[] array object
"Spike"
String object
name
String
col
Collar
Dog object
size
int
Collar object

If you want your class to be serializable, implement Serializable

The Serializable interface is known as a *marker* or *tag* interface, because the interface doesn't have any methods to implement. Its sole purpose is to announce that the class implementing it is, well, *serializable*. In other words, objects of that type are saveable through the serialization mechanism. If any superclass of a class is serializable, the subclass is automatically serializable even if the subclass doesn't explicitly declare "implements Serializable." (This is how interfaces always work. If your superclass "IS-A" Serializable, you are too.)

```
objectOutputStream.writeObject(mySquare);
```

Whatever goes here MUST implement Serializable or it will fail at runtime.

```
import java.io.*;
```

Serializable is in the java.io package, so you need the import

```
public class Square implements Serializable {
```

No methods to implement, but when you say "implements Serializable," it says to the JVM, "it's OK to serialize objects of this type."

```
  private int width;
  private int height;
```

These two values will be saved.

```
  public Square(int width, int height) {
    this.width = width;
    this.height = height;
  }

  public static void main(String[] args) {
    Square mySquare = new Square(50, 20);

    try {
      FileOutputStream fs = new FileOutputStream("foo.ser");
      ObjectOutputStream os = new ObjectOutputStream(fs);
      os.writeObject(mySquare);
      os.close();
    } catch (Exception ex) {
      ex.printStackTrace();
    }
  }
}
```

I/O operations can throw exceptions.

Connect to a file named "foo.ser" if it exists. If it doesn't, make a new file named "foo.ser."

Make an ObjectOutputStream chained to the connection stream.

Tell it to write the object.

Serialization is all or nothing.

Can you imagine what would happen if some of the object's state didn't save correctly?

Either the entire object graph is serialized correctly or serialization fails.

You can't serialize a Pond object if its Duck instance variable refuses to be serialized (by not implementing Serializable).

```
import java.io.*;

public class Pond implements Serializable {

  private Duck duck = new Duck();

  public static void main(String[] args) {
    Pond myPond = new Pond();
    try {
      FileOutputStream fs = new FileOutputStream("Pond.ser");
      ObjectOutputStream os = new ObjectOutputStream(fs);

      os.writeObject(myPond);
      os.close();
    } catch (Exception ex) {
      ex.printStackTrace();
    }
  }
}
```

Pond objects can be serialized.

Class Pond has one instance variable, a Duck.

When you serialize myPond (a Pond object), its Duck instance variable automatically gets serialized.

```
public class Duck {
  // duck code here
}
```

Argh!! Duck is not serializable! It doesn't implement Serializable, so when you try to serialize a Pond object, it fails because the Pond's Duck instance variable can't be saved.

When you try to run the main in class Pond:

File Edit Window Help Regret

```
% java Pond
java.io.NotSerializableException: Duck
        at Pond.main(Pond.java:13)
```

It's hopeless, then? I'm completely screwed if the idiot who wrote the class for my instance variable forgot to make it Serializable?

Mark an instance variable as transient if it can't (or shouldn't) be saved.

If you want an instance variable to be skipped by the serialization process, mark the variable with the **`transient`** keyword.

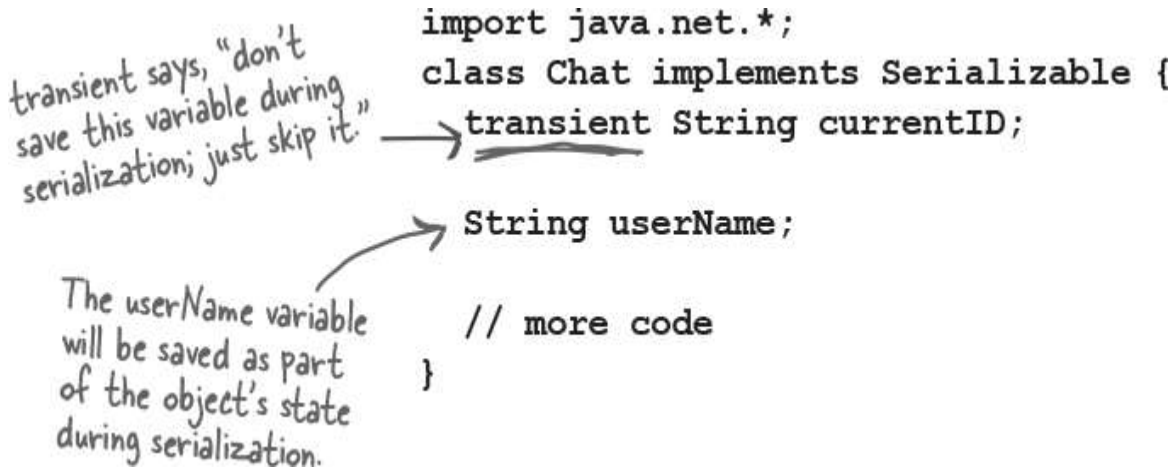

If you have an instance variable that can't be saved because it isn't serializable, you can mark that variable with the transient keyword and the serialization process will skip right over it.

So why would a variable not be serializable? It could be that the class designer simply *forgot* to make the class implement Serializable. Or it might be because the object relies on runtime-specific information that simply can't be saved. Although most things in the Java class libraries are serializable, you can't save things like network connections, threads, or file objects. They're all dependent on (and specific to) a particular runtime "experience." In other words, they're instantiated in a way that's unique to a particular run of your program, on a particular platform, in a particular JVM. Once the program shuts down, there's no way to bring those things back to life in any meaningful way; they have to be created from scratch each time.

THERE ARE NO DUMB QUESTIONS

Q: If serialization is so important, why isn't it the default for all classes? Why doesn't class Object implement Serializable, and then all subclasses will be automatically Serializable?

A: Even though most classes will, and should, implement Serializable, you always have a choice. And you must make a conscious decision on a class-by-class basis, for each class you design, to "enable" serialization by implementing Serializable. First of all, if serialization were the default, how would you turn it off? Interfaces indicate functionality, not a *lack* of functionality, so the model of polymorphism wouldn't work correctly if you had to say, "implements NonSerializable" to tell the world that you cannot be saved.

Q: Why would I ever write a class that *wasn't* serializable?

A: There are very few reasons, but you might, for example, have a security issue where you don't want a password object stored. Or you might have an object that makes no sense to save, because its key instance variables are themselves not serializable, so there's no useful way for you to make *your* class serializable.

Q: If a class I'm using isn't serializable but there's no good reason, can I subclass the "bad" class and make the *subclass* serializable?

A: Yes! If the class itself is extendable (i.e., not final), you can make a serializable subclass and just substitute the subclass everywhere your code is expecting the superclass type. (Remember, polymorphism allows this.) That brings up another interesting issue: what does it *mean* if the superclass is not serializable?

Q: You brought it up: what *does* it mean to have a serializable subclass of a non-serializable superclass?

A: First we have to look at what happens when a class is deserialized, (we'll talk about that on the next few pages). In a nutshell, when an object is deserialized and its superclass is *not* serializable, the

superclass constructor will run just as though a new object of that type were being created. If there's no decent reason for a class to not be serializable, making a serializable subclass might be a good solution.

Q: Whoa! I just realized something big...if you make a variable "transient," this means the variable's value is skipped over during serialization. Then what happens to it? We solve the problem of having a non-serializable instance variable by making the instance variable transient, but don't we NEED that variable when the object is brought back to life? In other words, isn't the whole point of serialization to preserve an object's state?

A: Yes, this is an issue, but fortunately there's a solution. If you serialize an object, a transient reference instance variable will be brought back as *null*, regardless of the value it had at the time it was saved. That means the entire object graph connected to that particular instance variable won't be saved. This could be bad, obviously, because you probably need a non-null value for that variable.

You have two options:

1. When the object is brought back, reinitialize that null instance variable back to some default state. This works if your deserialized object isn't dependent on a particular value for that transient variable. In other words, it might be important that the Dog have a Collar, but perhaps all Collar objects are the same, so it doesn't matter if you give the resurrected Dog a brand new Collar; nobody will know the difference.

2. If the value of the transient variable *does* matter (say, if the color and design of the transient Collar are unique for each Dog), then you need to save the key values of the Collar and use them when the Dog is brought back to essentially re-create a brand new Collar that's identical to the original.

Q: What happens if two objects in the object graph are the same object? Like, if you have two different Cat objects in the Kennel,

but both Cats have a reference to the same Owner object. Does the Owner get saved twice? I'm hoping not.

A: Excellent question! Serialization is smart enough to know when two objects in the graph are the same. In that case, only *one* of the objects is saved, and during deserialization, any references to that single object are restored.

Deserialization: restoring an object

The whole point of serializing an object is so that you can restore it to its original state at some later date, in a different "run" of the JVM (which might not even be the same JVM that was running at the time the object was serialized). Deserialization is a lot like serialization in reverse.

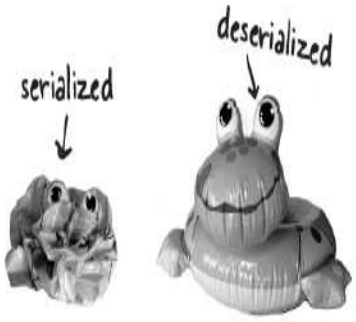

1 Make a FileInputStream

If the file "MyGame.ser" doesn't exist, you'll get an exception.

```
FileInputStream fileStream = new FileInputStream("MyGame.ser");
```

Make a FileInputStream object. The FileInputStream knows how to connect to an existing file.

2 Make an ObjectInputStream

```
ObjectInputStream os = new ObjectInputStream(fileStream);
```

ObjectInputStream lets you read objects, but it can't directly connect to a file. It needs to be chained to a connection stream, in this case a FileInputStream.

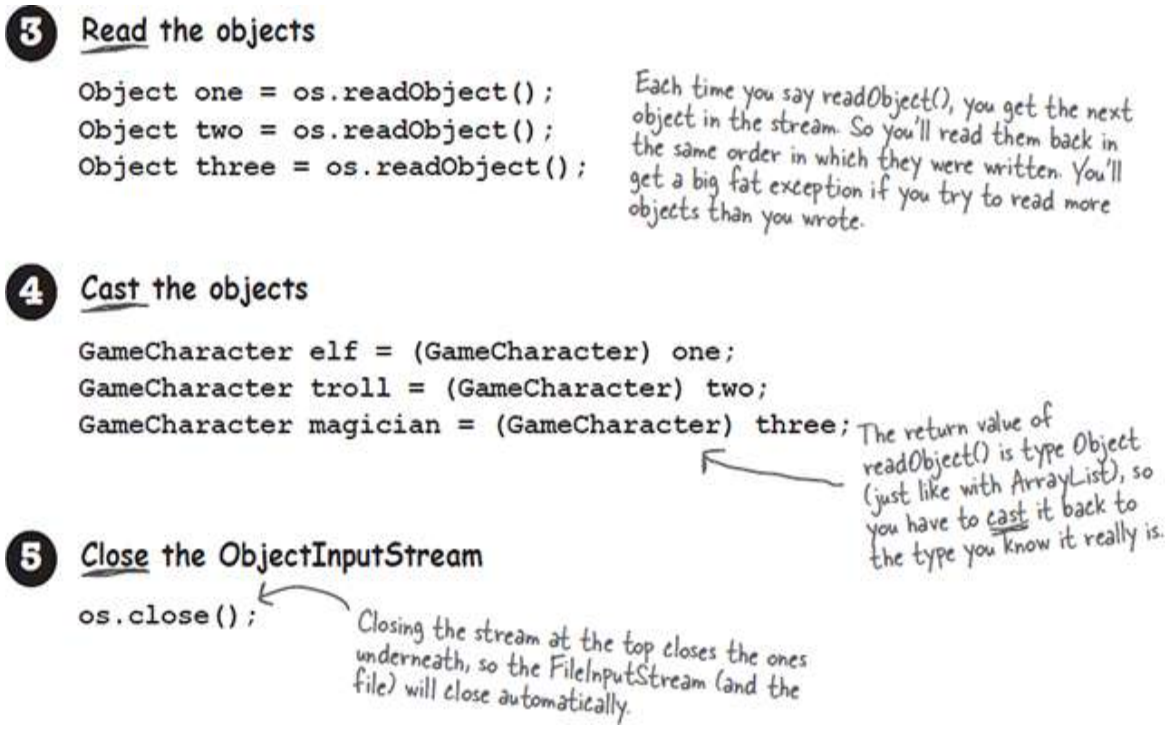

What happens during deserialization?

When an object is deserialized, the JVM attempts to bring the object back to life by making a new object on the heap that has the same state the serialized object had at the time it was serialized. Well, except for the transient variables, which come back either null (for object references) or as default primitive values.

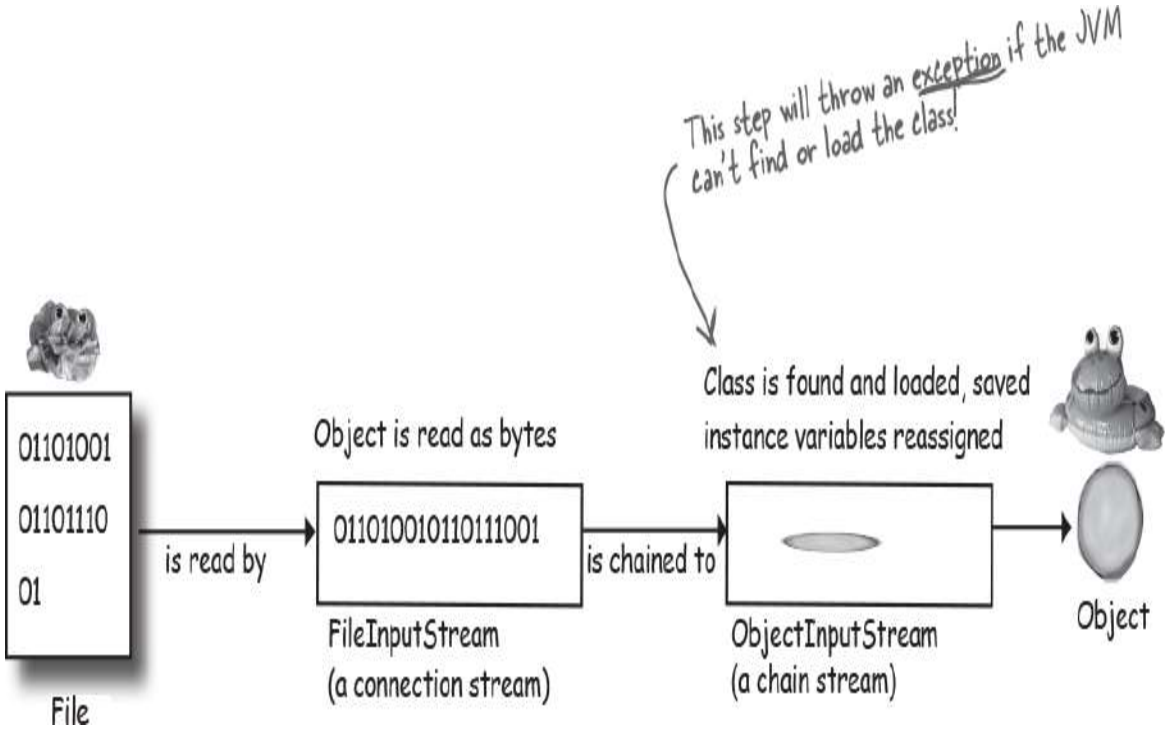

- ❶ The object is **read** from the stream.
- ❷ The JVM determines (through info stored with the serialized object) the object's **class type.**
- ❸ The JVM attempts to **find and load** the object's **class**. If the JVM can't find and/or load the class, the JVM throws an exception and the deserialization fails.
- ❹ A new object is given space on the heap, but the **serialized object's constructor does NOT run**! Obviously, if the constructor ran, it would restore the state of the object to its original "new" state, and that's not what we want. We want the object to be restored to the state it had *when it was serialized*, not when it was first created.
- ❺ If the object has a non-serializable class somewhere up its inheritance tree, the **constructor for that non-serializable class will run** along with any constructors above that (even if they're serializable). Once the constructor chaining begins, you can't stop it,

which means all superclasses, beginning with the first non-serializable one, will reinitialize their state.

- ❻ The object's i**nstance variables are given the values from the serialized state**. Transient variables are given a value of null for object references and defaults (0, false, etc.) for primitives.

THERE ARE NO DUMB QUESTIONS

Q: Why doesn't the class get saved as part of the object? That way you don't have the problem with whether the class can be found.

A: Sure, they could have made serialization work that way. But what a tremendous waste and overhead. And while it might not be such a hardship when you're using serialization to write objects to a file on a local hard drive, serialization is also used to send objects over a network connection. If a class was bundled with each serialized (shippable) object, bandwidth would become a much larger problem than it already is.

For objects serialized to ship over a network, though, there actually *is* a mechanism where the serialized object can be "stamped" with a URL for where its class can be found. This is used in Java's Remote Method Invocation (RMI) so that you can send a serialized object as part of, say, a method argument, and if the JVM receiving the call doesn't have the class, it can use the URL to fetch the class from the network and load it, all automatically. You may see RMI used in the wild, although you may also see objects serialized to XML or JSON (or other human-readable formats) to send over a network.

Q: What about static variables? Are they serialized?

A: Nope. Remember, static means "one per class" not "one per object." Static variables are not saved, and when an object is deserialized, it will have whatever static variable its class *currently* has. The moral: don't make serializable objects dependent on a dynamically changing static variable! It might not be the same when the object comes back.

Saving and restoring the game characters

```
import java.io.*;

public class GameSaverTest {
  public static void main(String[] args) {
    GameCharacter one = new GameCharacter(50, "Elf",
                                          new String[]{"bow", "sword", "dust"});
    GameCharacter two = new GameCharacter(200, "Troll",
                                          new String[]{"bare hands", "big ax"});
    GameCharacter three = new GameCharacter(120, "Magician",
                                            new String[]{"spells", "invisibility"});

    // imagine code that does things with the characters that changes their state values

    try {
      ObjectOutputStream os = new ObjectOutputStream(new FileOutputStream("Game.ser"));
      os.writeObject(one);
      os.writeObject(two);
      os.writeObject(three);
      os.close();
    } catch (IOException ex) {
      ex.printStackTrace();
    }

    try {
      ObjectInputStream is = new ObjectInputStream(new FileInputStream("Game.ser"));
      GameCharacter oneRestore = (GameCharacter) is.readObject();
      GameCharacter twoRestore = (GameCharacter) is.readObject();
      GameCharacter threeRestore = (GameCharacter) is.readObject();

      System.out.println("One's type: " + oneRestore.getType());
      System.out.println("Two's type: " + twoRestore.getType());
      System.out.println("Three's type: " + threeRestore.getType());
    } catch (Exception ex) {
      ex.printStackTrace();
    }
  }
}
```

Make some characters...

Serialize the characters.

Now read them back in from the file...

Restore the characters.

Check to see if it worked.

The GameCharacter class

```
import java.io.*;
import java.util.Arrays;

public class GameCharacter implements Serializable {
  private final int power;
  private final String type;
  private final String[] weapons;

  public GameCharacter(int power, String type, String[] weapons) {
    this.power = power;
    this.type = type;
    this.weapons = weapons;
  }

  public int getPower() {
    return power;
  }

  public String getType() {
    return type;
  }
```

```
  public String getWeapons() {
    return Arrays.toString(weapons);
  }
}
```

> **NOTE**
>
> This is a basic class just for testing the Serialization code on the last page. We don't have an actual game, but we'll leave that to you to experiment.

Version ID: A big serialization gotcha

Now you've seen that I/O in Java is actually pretty simple, especially if you stick to the most common connection/chain combinations. But there's one issue you might *really* care about.

Version Control is crucial!

If you serialize an object, you must have the class in order to deserialize and use the object. OK, that's obvious. But it might be less obvious what happens if you ***change the class*** in the meantime. Yikes. Imagine trying to bring back a Dog object when one of its instance variables (non-transient) has changed from a double to a String. That violates Java's type-safe sensibilities in a Big Way. But that's not the only change that might hurt compatibility. Think about the following:

Changes to a class that can hurt deserialization:

- Deleting an instance variable
- Changing the declared type of an instance variable
- Changing a non-transient instance variable to transient
- Moving a class up or down the inheritance hierarchy
- Changing a class (anywhere in the object graph) from Serializable to not Serializable (by removing 'implements Serializable' from a class

declaration)

- Changing an instance variable to static

Changes to a class that are usually OK:

- Adding new instance variables to the class (existing objects will deserialize with default values for the instance variables they didn't have when they were serialized)
- Adding classes to the inheritance tree
- Removing classes from the inheritance tree
- Changing the access level (public, private, etc.) of an instance variable has no effect on the ability of deserialization to assign a value to the variable
- Changing an instance variable from transient to non-transient (previously serialized objects will simply have a default value for the previously transient variables)

1. You write a Dog class.



class version ID #343

---

2. You serialize a Dog object using that class.

---

3. You change the Dog class.



class version ID #728

---

4. You deserialize a Dog object using the changed class.

Object is stamped with version #343

class version is #728

---

5. Serialization fails!!

The JVM says, "you can't teach an old Dog new code."

Using the serialVersionUID

Each time an object is serialized, the object (including every object in its graph) is "stamped" with a version ID number for the object's class. The ID is called the serialVersionUID, and it's computed based on information about the class structure. As an object is being deserialized, if the class has changed since the object was serialized, the class could have a different serialVersionUID, and deserialization will fail! But you can control this.

If you think there is ANY possibility that your class might *evolve*, put a serial version ID in your class.

When Java tries to deserialize an object, it compares the serialized object's serialVersionUID with that of the class the JVM is using for deserializing the object. For example, if a Dog instance was serialized with an ID of, say 23 (in reality a serialVersionUID is much longer), when the JVM deserializes the Dog object, it will first compare the Dog object serialVersionUID with the Dog class serialVersionUID. If the two numbers don't match, the JVM assumes the class is not compatible with the previously serialized object, and you'll get an exception during deserialization.

So, the solution is to put a serialVersionUID in your class, and then as the class evolves, the serialVersionUID will remain the same and the JVM will say, "OK, cool, the class is compatible with this serialized object," even though the class has actually changed.

This works *only* if you're careful with your class changes! In other words, *you* are taking responsibility for any issues that come up when an older object is brought back to life with a newer class.

To get a serialVersionUID for a class, use the serialver tool that ships with your Java development kit.

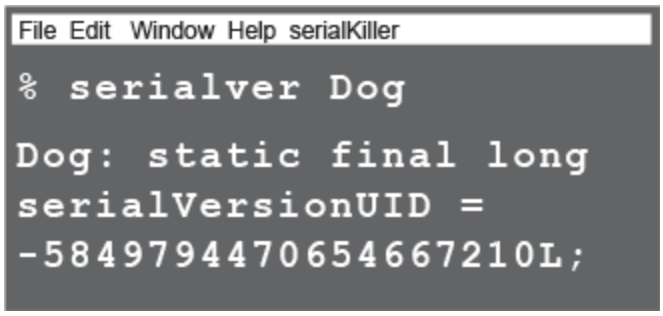

When you think your class might evolve after someone has serialized objects from it...

- ① Use the serialver command-line tool to get the version ID for your class.

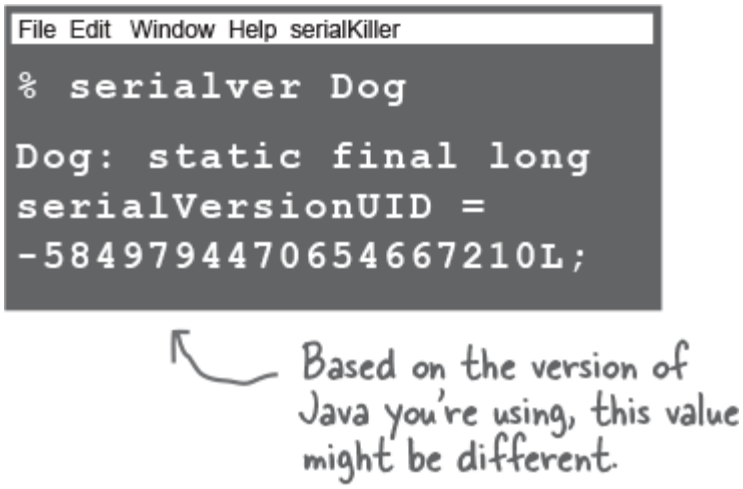

- ② Paste the output into your class.

```
public class Dog {

  static final long serialVersionUID =
             -5849794470654667210L;

  private String name;
  private int size;
```

```
 // method code here
}
```

- ③ Be sure that when you make changes to the class, you take responsibility in your code for the consequences of the changes you made to the class! For example, be sure that your new Dog class can deal with an old Dog being deserialized with default values for instance variables added to the class *after* the Dog was serialized.

Object Serialization

BULLET POINTS

- You can save an object's state by serializing the object.
- To serialize an object, you need an ObjectOutputStream (from the java.io package).
- Streams are either connection streams or chain streams.
- Connection streams can represent a connection to a source or destination, typically a file, network socket connection, or the console.
- Chain streams cannot connect to a source or destination and must be chained to a connection (or other) stream.
- To serialize an object to a file, make a FileOutputStream and chain it into an ObjectOutputStream.
- To serialize an object, call *writeObject(theObject)* on the ObjectOutputStream. You do not need to call methods on the FileOutputStream.
- To be serialized, an object must implement the Serializable interface. If a superclass of the class implements Serializable, the subclass will automatically be serializable even if it does not specifically declare *implements Serializable*.
- When an object is serialized, its entire object graph is serialized. That means any objects referenced by the serialized object's instance variables are serialized, and any objects referenced by those objects...and so on.
- If any object in the graph is not serializable, an exception will be thrown at runtime, unless the instance variable referring to the object is skipped.
- Mark an instance variable with the *transient* keyword if you want serialization to skip that variable. The variable will be restored as

null (for object references) or default values (for primitives).

- During deserialization, the class of all objects in the graph must be available to the JVM.
- You read objects in (using readObject()) in the order in which they were originally written.
- The return type of readObject() is type Object, so deserialized objects must be cast to their real type.
- Static variables are not serialized! It doesn't make sense to save a static variable value as part of a specific object's state, since all objects of that type share only a single value—the one in the class.
- If a class that implements Serializable might change over time, put a *static final long serialVersionUID* on that class. This version ID should be changed when the serialized variables in that class change.

Writing a String to a Text File

Saving objects, through serialization, is the easiest way to save and restore data between runnings of a Java program. But sometimes you need to save data to a plain old text file. Imagine your Java program has to write data to a simple text file that some other (perhaps non-Java) program needs to read. You might, for example, have a servlet (Java code running within your web server) that takes form data the user typed into a browser and writes it to a text file that somebody else loads into a spreadsheet for analysis.

Writing text data (a String, actually) is similar to writing an object, except you write a String instead of an object, and you use something like a FileWriter instead of a FileOutputStream (and you don't chain it to an ObjectOutputStream).

What the game character data might look like if you wrote it out as a human-readable text file.

To write a serialized object:

```
objectOutputStream.writeObject(someObject);
```

To write a String:

```
fileWriter.write("My first String to save");
```

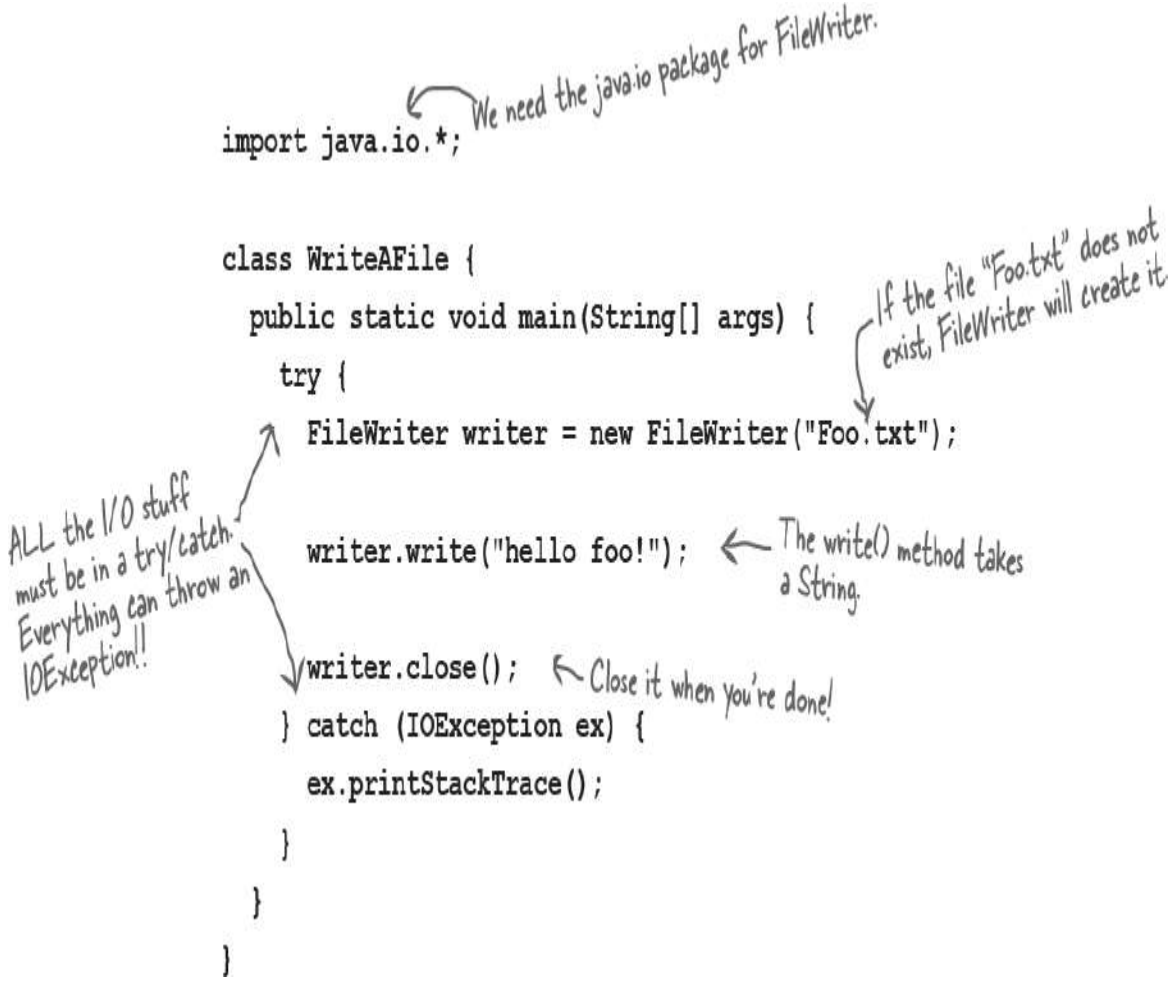

Text file example: e-Flashcards

Remember those flashcards you used in school? Where you had a question on one side and the answer on the back? They aren't much help when you're trying to understand something, but nothing beats 'em for raw drill-and-practice and rote memorization. *When you have to burn in a fact.* And they're also great for trivia games.

We're going to make an electronic version that has three classes:

1. ***QuizCardBuilder***, a simple authoring tool for creating and saving a set of e-Flashcards.

2. ***QuizCardPlayer***, a playback engine that can load a flashcard set and play it for the user.

3. ***QuizCard***, a simple class representing card data. We'll walk through the code for the builder and the player, and have you make the QuizCard class yourself, using this:

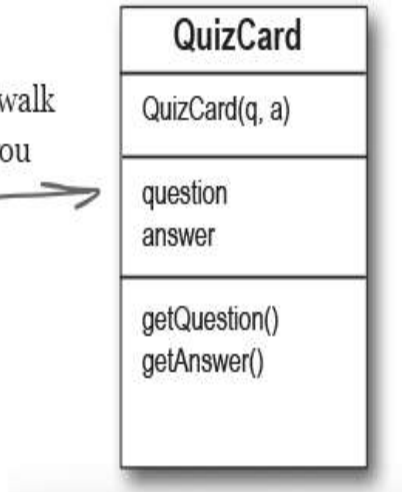

QuizCardBuilder

Has a File menu with a “Save” option for saving the current set of cards to a text file.

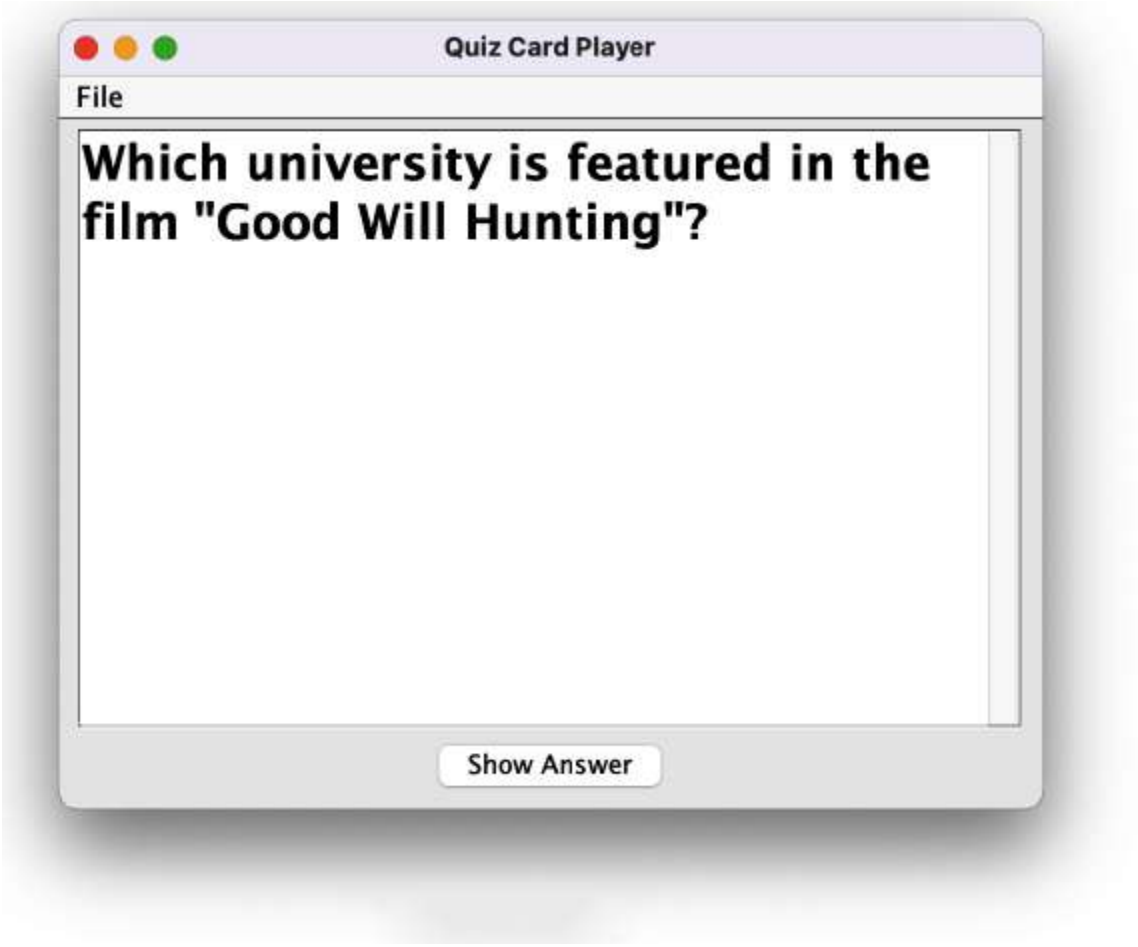

QuizCardPlayer

Has a File menu with a “Load” option for loading a set of cards from a text file.

Quiz Card Builder (code outline)

```
public class QuizCardBuilder {
  public void go() {
    // build and display gui
  }

  private void nextCard() {
    // add the current card to the list
    // and clear the text areas
  }

  private void saveCard() {
    // bring up a file dialog box
    // let the user name and save the set
  }

  private void clearCard() {
    // clear out the text areas
  }

  private void saveFile(File file) {
    // iterate through the list of cards and write
    // each one out to a text file in a parseable way
    // (in other words, with clear separations between parts)
  }
}
```

Builds and displays the GUI, including making and registering event listeners.

Call when user hits 'Next Card' button; means the user wants to store that card in the list and start a new card.

Call when user chooses 'Save' from the File menu; means the user wants to save all the cards in the current list as a 'set' (like, Quantum Mechanics Set, Hollywood Trivia, Java Rules, etc.).

Will need to clear the screen when the user chooses 'New' from the File menu or moves to the next card.

Called by the SaveMenuListener; does the actual file writing.

JAVA I/O TO NIO TO NIO.2

The Java API has included I/O features since day one, you know, back in the last millennium. In 2002, Java 1.4 was released, and it included a new approach to I/O called "NIO," short for non-blocking I/O. In 2011, Java 7 was released, and it included big enhancements to NIO. This yet again newer approach to I/O was dubbed "NIO.2." Why should you care? When you're writing new I/O, you should use the latest and greatest features. But you're almost certainly going to encounter older code that uses the NIO approach. We want you to be covered for both situations, so in this chapter:

- We'll use original I/O for a while.
- Then we'll show some NIO.2.

You'll see more I/O, NIO, and NIO.2 features in Chapter 17, *Make a Connection*, when we look at network connections.

NOTE

Reminder: For the next eight pages or so we'll be using older-style I/O code!

```
import javax.swing.*;
import java.awt.*;
import java.io.*;
import java.util.ArrayList;

public class QuizCardBuilder {
  private ArrayList<QuizCard> cardList = new ArrayList<>();
  private JTextArea question;
  private JTextArea answer;
  private JFrame frame;

  public static void main(String[] args) {
    new QuizCardBuilder().go();
  }

  public void go() {
    frame = new JFrame("Quiz Card Builder");
    JPanel mainPanel = new JPanel();
    Font bigFont = new Font("sanserif", Font.BOLD, 24);

    question = createTextArea(bigFont);
    JScrollPane qScroller = createScroller(question);
    answer = createTextArea(bigFont);
    JScrollPane aScroller = createScroller(answer);

    mainPanel.add(new JLabel("Question:"));
    mainPanel.add(qScroller);
    mainPanel.add(new JLabel("Answer:"));
    mainPanel.add(aScroller);

    JButton nextButton = new JButton("Next Card");
    nextButton.addActionListener(e -> nextCard());
    mainPanel.add(nextButton);

    JMenuBar menuBar = new JMenuBar();
    JMenu fileMenu = new JMenu("File");

    JMenuItem newMenuItem = new JMenuItem("New");
    newMenuItem.addActionListener(e -> clearAll());

    JMenuItem saveMenuItem = new JMenuItem("Save");
    saveMenuItem.addActionListener(e -> saveCard());

    fileMenu.add(newMenuItem);
    fileMenu.add(saveMenuItem);
    menuBar.add(fileMenu);
    frame.setJMenuBar(menuBar);

    frame.getContentPane().add(BorderLayout.CENTER, mainPanel);
    frame.setSize(500, 600);
    frame.setVisible(true);
  }
```

This is all GUI code here. Nothing special, although you might want to look at the code for the new GUI components MenuBar, Menu, and MenuItems.

Next Card button calls the nextCard method when it's pressed.

When the user clicks "New" on the menu, the clearAll method is called.

When the user clicks "Save" on the menu, the saveCard method is called.

We make a menu bar, make a File menu, then put 'New' and 'Save' menu items into the File menu. We add the menu to the menu bar, and then tell the frame to use this menu bar. Menu items can fire an ActionEvent.

```
  private JScrollPane createScroller(JTextArea textArea) {
    JScrollPane scroller = new JScrollPane(textArea);
    scroller.setVerticalScrollBarPolicy(ScrollPaneConstants.VERTICAL_SCROLLBAR_ALWAYS);
    scroller.setHorizontalScrollBarPolicy(ScrollPaneConstants.HORIZONTAL_SCROLLBAR_NEVER);
    return scroller;
  }

  private JTextArea createTextArea(Font font) {
    JTextArea textArea = new JTextArea(6, 20);
    textArea.setLineWrap(true);
    textArea.setWrapStyleWord(true);
    textArea.setFont(font);
    return textArea;
  }

  private void nextCard() {
    QuizCard card = new QuizCard(question.getText(), answer.getText());
    cardList.add(card);
    clearCard();
  }

  private void saveCard() {
    QuizCard card = new QuizCard(question.getText(), answer.getText());
    cardList.add(card);

    JFileChooser fileSave = new JFileChooser();
    fileSave.showSaveDialog(frame);
    saveFile(fileSave.getSelectedFile());
  }

  private void clearAll() {
    cardList.clear();
    clearCard();
  }

  private void clearCard() {
    question.setText("");
    answer.setText("");
    question.requestFocus();
  }

  private void saveFile(File file) {
    try {
      BufferedWriter writer = new BufferedWriter(new FileWriter(file));
      for (QuizCard card : cardList) {
        writer.write(card.getQuestion() + "/");
        writer.write(card.getAnswer() + "\n");
      }
      writer.close();
    } catch (IOException e) {
      System.out.println("Couldn't write the cardList out: " + e.getMessage());
    }
  }
}
```

Creating a scroll pane or a text area needs a lot of similar-looking code. We've put the code into a couple of helper methods that we can call when we need a text area or scroll pane.

Brings up a file dialog box and waits on this line until the user chooses 'Save' from the dialog box. All the file dialog navigation and selecting a file, etc., is done for you by the JFileChooser! It really is this easy.

When we want a new set of cards, we need to clear out the card list AND the text areas.

The method that does the actual file writing (called by the SaveMenuListener's event handler). The argument is the 'File' object the user is saving. We'll look at the File class on the next page.

We chain a BufferedWriter on to a new FileWriter to make writing more efficient. (We'll talk about that in a few pages.)

Walk through the ArrayList of cards and write them out, one card per line, with the question and answer separated by a "/", and then add a newline character ("\n").

The java.io.File class

The `java.io.File` class is another example of an older class in the Java API. It's been "replaced" by two classes in the newer `java.nio.file` package, but you'll undoubtedly encounter code that uses the `File` class. **For new code, we recommend using the `java.nio.file` package instead of the `java.io.File` class.** In a few pages, we'll take a look at a few of the most important capabilities in the `java.nio.file` package. With that said...

The `java.io.File` class *represents* a file on disk but doesn't actually represent the *contents* of the file. What? Think of a File object as something more like a *path name* of a file (or even a *directory*) rather than The Actual File Itself. The File class does not, for example, have methods for reading and writing. One VERY useful thing about a File object is that it offers a much safer way to represent a file than just using a String filename. For example, most classes that take a String filename in their constructor (like FileWriter or FileInputStream) can take a File object instead. You can construct a File object, verify that you've got a valid path, etc., and then give that File object to the FileWriter or FileInputStream.

NOTE

A File object represents the name and path of a file or directory on disk, for example:

/Users/Kathy/Data/Game.txt

But it does NOT represent, or give you access to, the data *in* the file!

Some things you can do with a File object:

- ① **Make a File object representing an existing file**

  ```
  File f = new File("MyCode.txt");
  ```

- ② **Make a new directory**

  ```
  File dir = new File("Chapter7");
  dir.mkdir();
  ```

- ③ **List the contents of a directory**

  ```
  if (dir.isDirectory()) {
    String[] dirContents = dir.list();
    for (String dirContent : dirContents) {
      System.out.println(dirContent);
    }
  }
  ```

- ④ **Delete a file or directory (returns true if successful)**

  ```
  boolean isDeleted = f.delete();
  ```

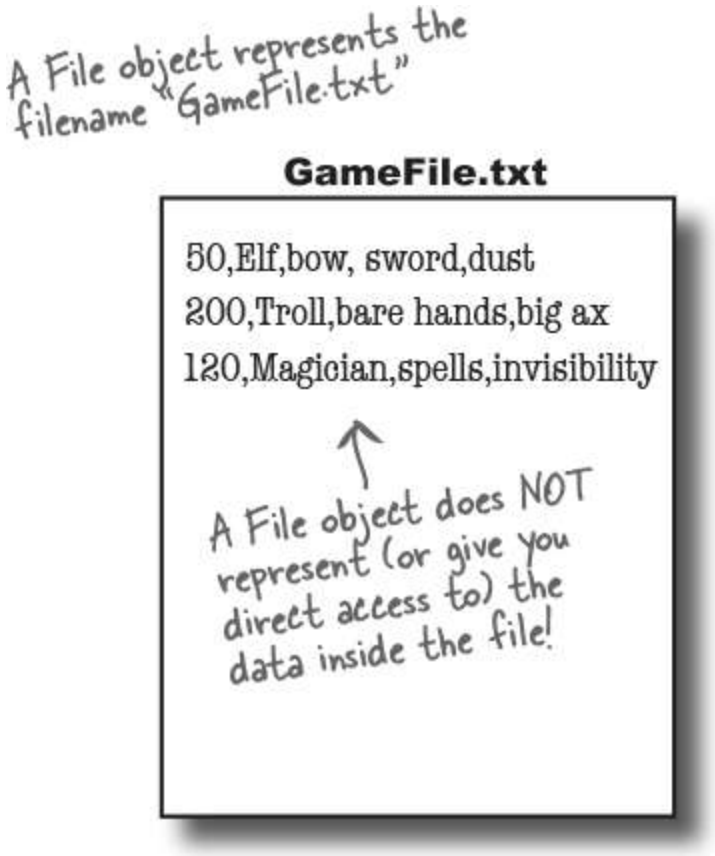

The beauty of buffers

If there were no buffers, it would be like shopping without a cart. You'd have to carry each thing out to your car, one soup can or toilet paper roll at a time.

Buffers give you a temporary holding place to group things until the holder (like the cart) is full. You get to make far fewer trips when you use a buffer.

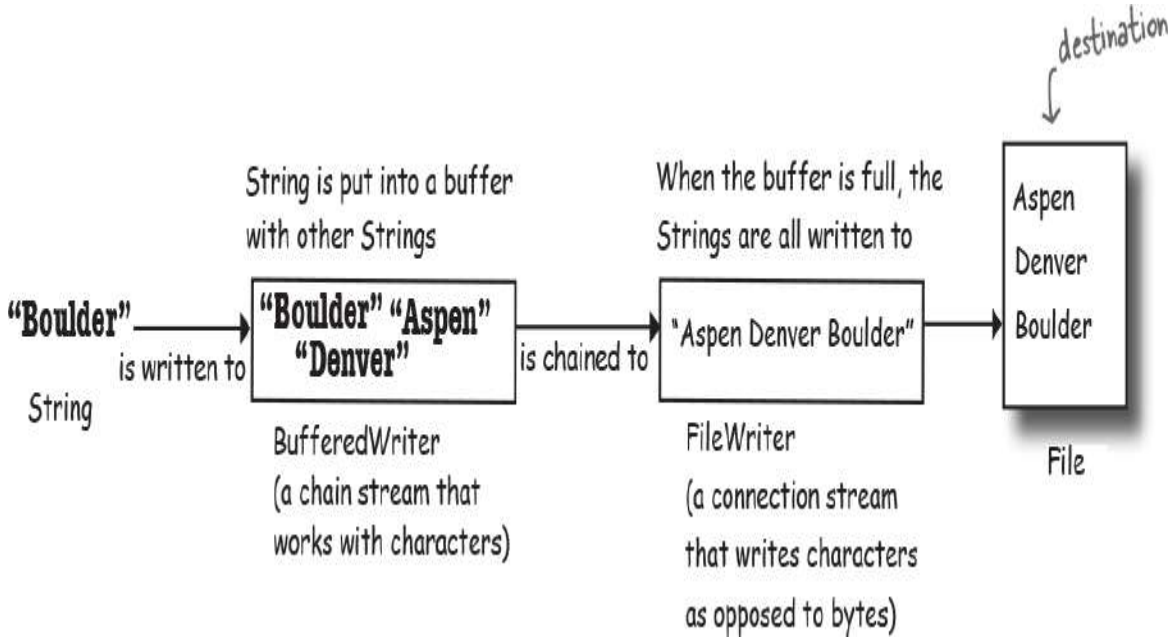

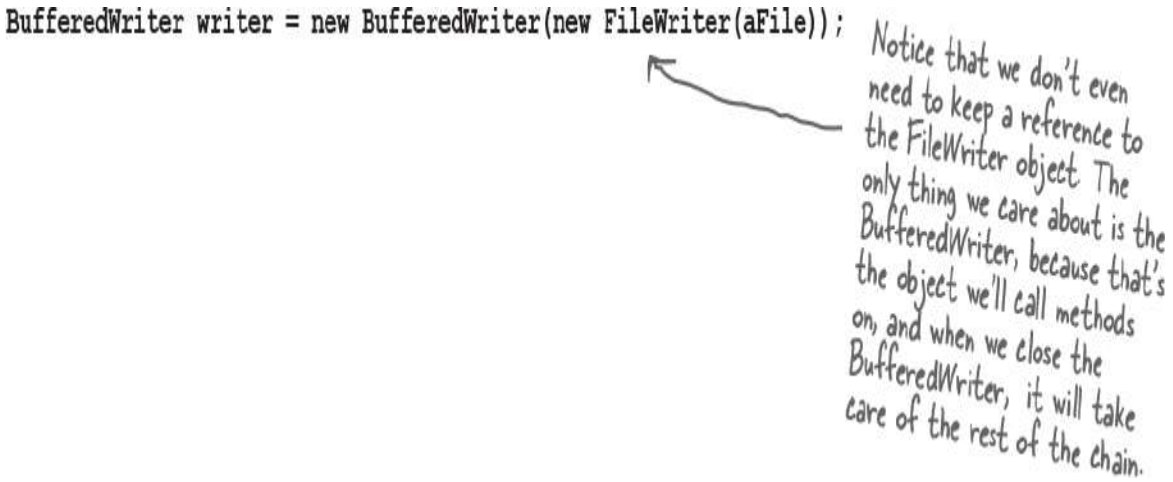

Using buffers is *much* more efficient than working without them. You can write to a file using FileWriter alone, by calling write(someString), but FileWriter writes each and every thing you pass to the file each and every time. That's overhead you don't want or need, since every trip to the disk is a Big Deal compared to manipulating data in memory. By chaining a BufferedWriter onto a FileWriter, the BufferedWriter will hold all the stuff you write to it until it's full. *Only when the buffer is full will the FileWriter actually be told to write to the file on disk.*

If you do want to send data *before* the buffer is full, you do have control. ***Just Flush It***. Calls to writer.flush() say, "send whatever's in the buffer, ***now***!"

Reading from a text file

Reading text from a file is simple, but this time we'll use a File object to represent the file, a FileReader to do the actual reading, and a BufferedReader to make the reading more efficient.

The read happens by reading lines in a *while* loop, ending the loop when the result of a readLine() is null. That's the most common style for reading data (pretty much anything that's not a Serialized object): read stuff in a while loop (actually a while loop *test*), terminating when there's nothing left to read (which we know because the result of whatever read method we're using is null).

A file with two lines of text

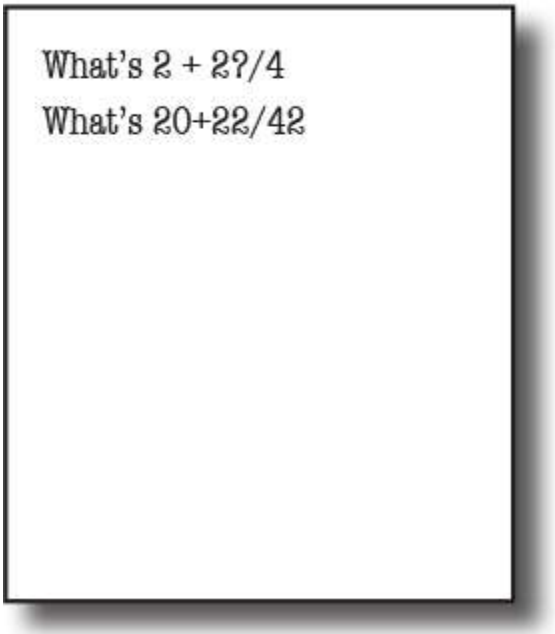

MyText.txt

```
import java.io.*;

class ReadAFile {
  public static void main(String[] args) {
    try {
      File myFile = new File("MyText.txt");
      FileReader fileReader = new FileReader(myFile);

      BufferedReader reader = new BufferedReader(fileReader);

      String line;
      while ((line = reader.readLine()) != null) {
        System.out.println(line);
      }
      reader.close();

    } catch (IOException e) {
      e.printStackTrace();
    }
  }
}
```

Don't forget the import.

A FileReader is a connection stream for characters that connects to a text file.

Chain the FileReader to a BufferedReader for more efficient reading. It'll go back to the file to read only when the buffer is empty (because the program has read everything in it).

Make a String variable to hold each line as the line is read

This says, "Read a line of text, and assign it to the String variable "line." While that variable is not null (because there WAS something to read), print out the line that was just read."

Or another way of saying it, "While there are still lines to read, read them and print them."

JAVA 8 STREAMS AND I/O

If you're using Java 8 and you feel comfortable using the Streams API, you can replace all the code inside the try block with the following:

```
Files.lines(Path.of("MyText.txt"))
     .forEach(line -> System.out.println(line));
```

We'll see the Files and Path classes later in this chapter.

Quiz Card Player (code outline)

```
public class QuizCardPlayer {

  public void go() {
    // build and display gui
  }

  private void nextCard() {
    // if this is a question, show the answer, otherwise show
    // next question set a flag for whether we're viewing a
    // question or answer
  }

  private void open() {
    // bring up a file dialog box
    // let the user navigate to and choose a card set to open
  }

  private void loadFile(File file) {
    // must build an ArrayList of cards, by reading them from
    // a text file called from the OpenMenuListener event handler,
    // reads the file one line at a time and tells the makeCard()
    // method to make a new card out of the line (one line in the
    // file holds both the question and answer, separated by a "/")
  }

  private void makeCard(String lineToParse) {
    // called by the loadFile method, takes a line from the text file
    // and parses into two pieces—question and answer—and creates a
```

```
    // new QuizCard and adds it to the ArrayList called CardList
  }
}
```

```
import javax.swing.*;
import java.awt.*;
import java.io.*;
import java.util.ArrayList;

public class QuizCardPlayer {
  private ArrayList<QuizCard> cardList;
  private int currentCardIndex;
  private QuizCard currentCard;
  private JTextArea display;
  private JFrame frame;
  private JButton nextButton;
  private boolean isShowAnswer;

  public static void main(String[] args) {
    QuizCardPlayer reader = new QuizCardPlayer();
    reader.go();
  }

  public void go() {
    frame = new JFrame("Quiz Card Player");
    JPanel mainPanel = new JPanel();
    Font bigFont = new Font("sanserif", Font.BOLD, 24);

    display = new JTextArea(10, 20);
    display.setFont(bigFont);
    display.setLineWrap(true);
    display.setEditable(false);

    JScrollPane scroller = new JScrollPane(display);
    scroller.setVerticalScrollBarPolicy(ScrollPaneConstants.VERTICAL_SCROLLBAR_ALWAYS);
    scroller.setHorizontalScrollBarPolicy(ScrollPaneConstants.HORIZONTAL_SCROLLBAR_NEVER);
    mainPanel.add(scroller);

    nextButton = new JButton("Show Question");
    nextButton.addActionListener(e -> nextCard());
    mainPanel.add(nextButton);

    JMenuBar menuBar = new JMenuBar();
    JMenu fileMenu = new JMenu("File");
    JMenuItem loadMenuItem = new JMenuItem("Load card set");
    loadMenuItem.addActionListener(e -> open());
    fileMenu.add(loadMenuItem);
    menuBar.add(fileMenu);
    frame.setJMenuBar(menuBar);

    frame.getContentPane().add(BorderLayout.CENTER, mainPanel);
    frame.setSize(500, 400);
    frame.setVisible(true);
  }
```

Just GUI code on this page; nothing special.

```
private void nextCard() {
  if (isShowAnswer) {
    // show the answer because they've seen the question
    display.setText(currentCard.getAnswer());
    nextButton.setText("Next Card");
    isShowAnswer = false;
  } else { // show the next question
    if (currentCardIndex < cardList.size()) {
      showNextCard();
    } else {
      // there are no more cards!
      display.setText("That was last card");
      nextButton.setEnabled(false);
    }
  }
}
```

Check the isShowAnswer boolean flag to see if they're currently viewing a question or an answer, and do the appropriate thing depending on the answer.

```
  private void open() {
    JFileChooser fileOpen = new JFileChooser();
    fileOpen.showOpenDialog(frame);
    loadFile(fileOpen.getSelectedFile());
  }

  private void loadFile(File file) {
    cardList = new ArrayList<>();
    currentCardIndex = 0;
    try {
      BufferedReader reader = new BufferedReader(new FileReader(file));
      String line;
      while ((line = reader.readLine()) != null) {
        makeCard(line);
      }
      reader.close();
    } catch (IOException e) {
      System.out.println("Couldn't write the cardList out: " + e.getMessage());
    }
    showNextCard();
  }

  private void makeCard(String lineToParse) {
    String[] result = lineToParse.split("/");
    QuizCard card = new QuizCard(result[0], result[1]);
    cardList.add(card);
    System.out.println("made a card");
  }

  private void showNextCard() {
    currentCard = cardList.get(currentCardIndex);
    currentCardIndex++;
    display.setText(currentCard.getQuestion());
    nextButton.setText("Show Answer");
    isShowAnswer = true;
  }
}
```

Bring up the file dialog box and let them navigate to and choose the file to open.

Make a BufferedReader chained to a new FileReader, giving the FileReader the File object the user chose from the open file dialog.

Read a line at a time, passing the line to the makeCard() method that parses it and turns it into a real QuizCard and adds it to the ArrayList.

Now time to start, show the first card.

Each line of text corresponds to a single flashcard, but we have to parse out the question and answer as separate pieces. We use the String split() method to break the line into two tokens (one for the question and one for the answer). We'll look at the split() method on the next page.

Parsing with String split()

Imagine you have a flashcard like this:

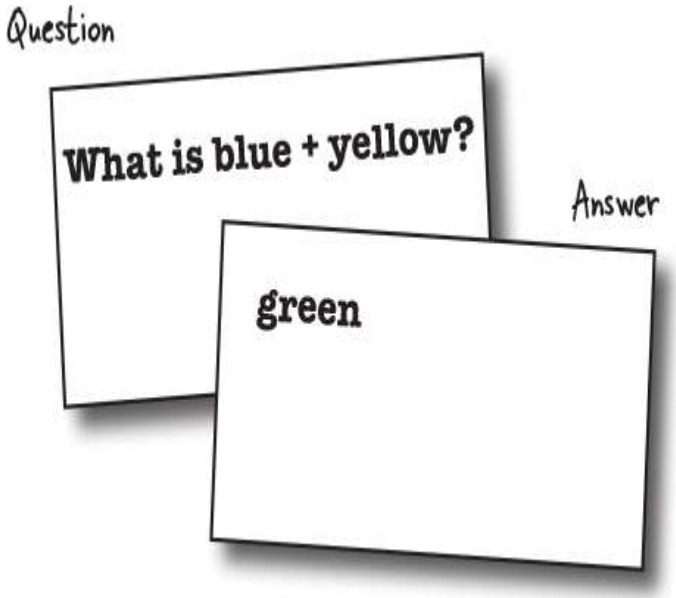

Saved in a question file like this:

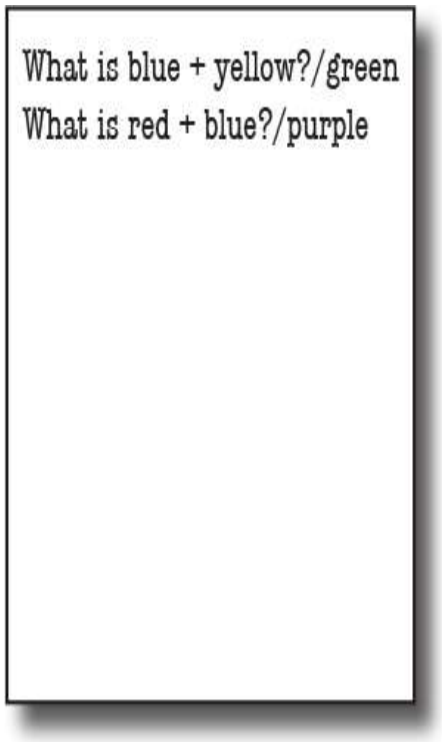

How do you separate the question and answer?

When you read the file, the question and answer are smooshed together in one line, separated by a forward slash "/" (because that's how we wrote the file in the QuizCardBuilder code).

String split() lets you break a String into pieces.

The split() method says, "give me a separator, and I'll break out all the pieces of this String for you and put them in a String array."

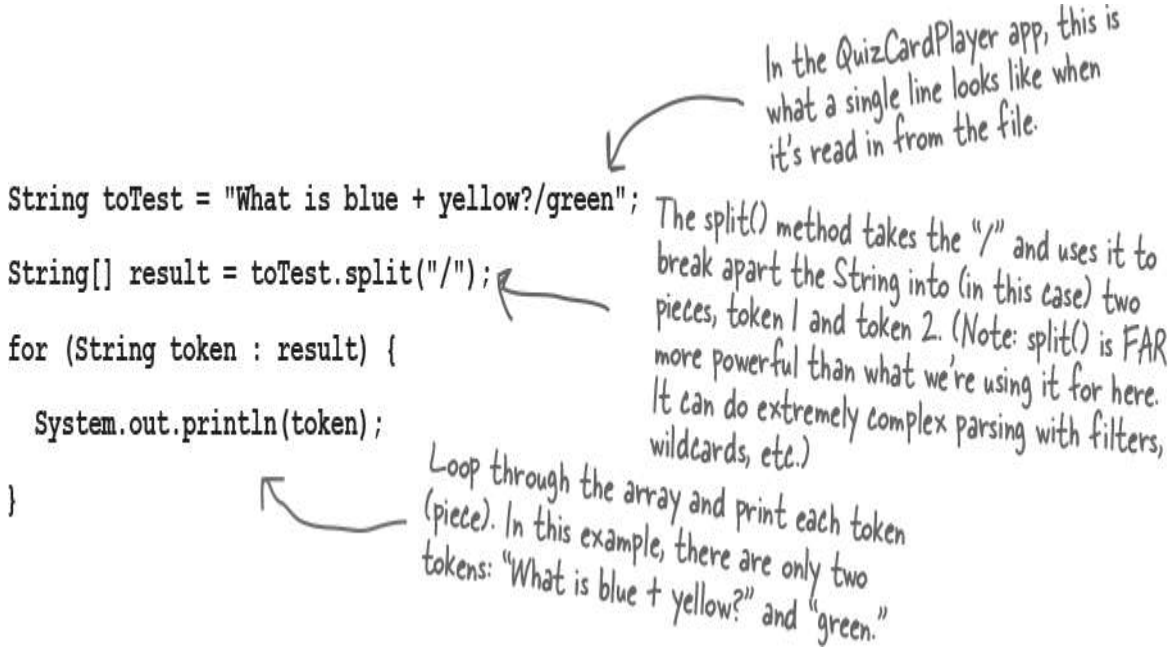
In the QuizCardPlayer app, this is what a single line looks like when it's read in from the file.
String toTest = "What is blue + yellow?/green";
String[] result = toTest.split("/");
The split() method takes the "/" and uses it to break apart the String into (in this case) two pieces, token 1 and token 2. (Note: split() is FAR more powerful than what we're using it for here. It can do extremely complex parsing with filters, wildcards, etc.)
for (String token : result) {
System.out.println(token);
}
Loop through the array and print each token (piece). In this example, there are only two tokens: "What is blue + yellow?" and "green."

THERE ARE NO DUMB QUESTIONS

Q: OK, I look in the API and there are about five million classes in the java.io package. How the heck do you know which ones to use?

A: The I/O API uses the modular "chaining" concept so that you can hook together connection streams and chain streams (also called "filter" streams) in a wide range of combinations to get just about anything you could want.

The chains don't have to stop at two levels; you can hook multiple chain streams to one another to get just the right amount of processing you need.

Most of the time, though, you'll use the same small handful of classes. If you're writing text files, BufferedReader and BufferedWriter (chained to FileReader and FileWriter) are probably all you need. If you're writing serialized objects, you can use ObjectOutputStream and ObjectInputStream (chained to FileInputStream and FileOutputStream).

In other words, 90% of what you might typically do with Java I/O can use what we've already covered.

Q: You just said we've already learned 90% of what we'll probably use, but we haven't seen the fabled NIO.2 stuff yet. What gives?

A: NIO.2 is coming up on the very next page! But for reading and writing text files, BufferedReaders and BufferedWriters are still usually the way to go. So we'll be looking at how NIO.2 makes using them easier.

Q: My brain is a little tired, and I've heard NIO.2 is pretty complicated.

A: We're going to focus on a few key concepts in the java.nio.file package.

MAKE IT STICK



Roses are first, violets are next.

Readers** and **Writers** are only for **text.

BULLET POINTS

- To write a text file, start with a FileWriter connection stream.
- Chain the FileWriter to a BufferedWriter for efficiency.
- A File object represents a file at a particular path, but does not represent the actual contents of the file.
- With a File object you can create, traverse, and delete directories.
- Most streams that can use a String filename can use a File object as well, and a File object can be safer to use.
- To read a text file, start with a FileReader connection stream.
- Chain the FileReader to a BufferedReader for efficiency.
- To parse a text file, you need to be sure the file is written with some way to recognize the different elements. A common approach is to use some kind of character to separate the individual pieces.
- Use the String split() method to split a String up into individual tokens. A String with one separator will have two tokens, one on each side of the separator. *The separator doesn't count as a token*.

NIO.2 and the java.nio.file package

Java NIO.2 is usually taken to mean two packages added in Java 7:

```
java.nio.file
java.nio.file.attribute
```

The `java.nio.file.attribute` package lets you manipulate the *metadata* associated with a computer's files and directories. For example, you would use the classes in this package if you wanted to read or change a file's permissions settings. We WON'T be discussing this package further. (phew)

The `java.nio.file` package is all you need to do common text file reading and writing, and it also provides you with the ability to manipulate a computer's directories and directory structure. Most of the time you'll use three types in java.nio.file:

- The Path interface: You'll always need a Path object to locate the directories or files you want to work with.
- The Paths class: You'll use the Paths.get() method to make the Path object you'll need when you use methods in the Files class.
- The Files class: This is the class whose (static) methods do all the work you'll want to do: making new Readers and Writers, and creating, modifying, and searching through directories and files on file systems.

NOTE

A Path object represents the location (name and path) of a file or directory on disk, for example:

/Users/Kathy/Data/Game.txt

But it does NOT represent, or give you access to, the data *in* the file!

> **NOTE**
>
> An advanced but useful capability in the Files class allows you to "walk thru" (search) directory trees.

A mini-tutorial, creating a BufferedWriter with NIO.2

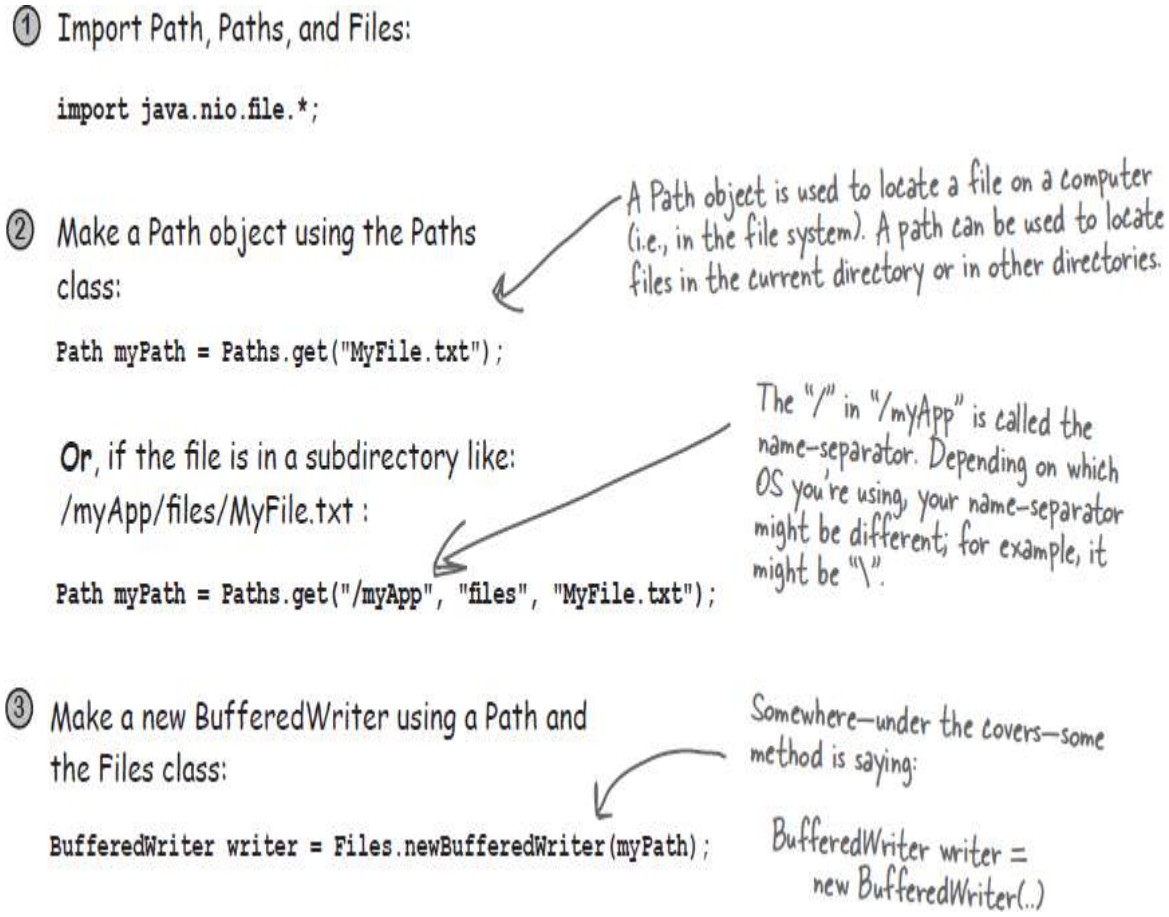

Path, Paths, and Files (messing with directories)

In Appendix B, we'll be discussing how to split your Java app into packages. This includes creating the proper directory structure for all of your app's files. In most cases you'll make and move directories and files by hand, using

the command line or utilities like the Finder or Windows Explorer. But you can also do it from within your Java code.

Warning! Goofing around with directories in a Java program is a real "can of worms" topic. To do it correctly you need to learn about paths, absolute paths, relative paths, OS permissions, file attributes, and on and on. Below is a greatly simplified example of messing around with directories, just to give you a feel for what's possible.

Suppose you wanted to make an installer program to install your killer app. You start with the directory and files on the left, and want to end up with the directory structure and files on the right.

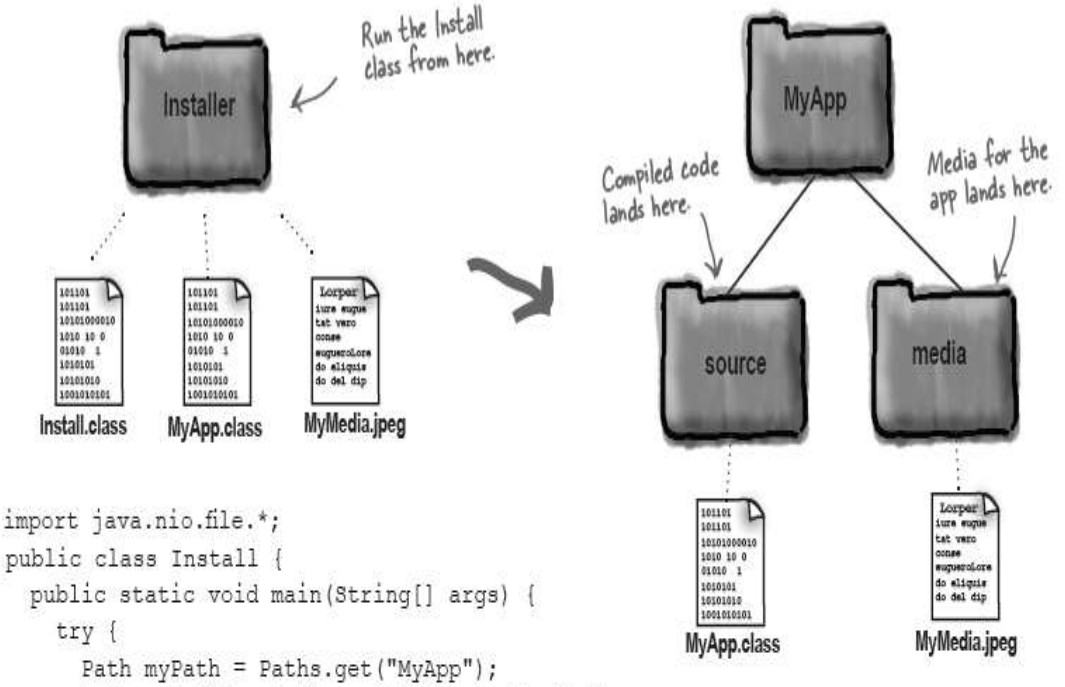


```
import java.nio.file.*;
public class Install {
  public static void main(String[] args) {
    try {
      Path myPath = Paths.get("MyApp");
      Path myPath2 = Paths.get("MyApp", "media");
      Path myPath3 = Paths.get("MyApp", "source");
      Path mySource = Paths.get("MyApp.class");
      Path myMedia = Paths.get("MyMedia.jpeg");

      Files.createDirectory(myPath);
      Files.createDirectory(myPath2);
      Files.createDirectory(myPath3);
      Files.move(mySource, myPath3.resolve(mySource.getFileName()));
      Files.move(myMedia, myPath2.resolve(myMedia.getFileName()));
    } catch (Exception e) {
      System.out.println("Got an NIO Exception" + e.getMessage());
    }
  }
}
```

Create all the Path locations.

Create the three new directories

Move the two files into their new directories.

Finally, a closer look at `finally`

Several chapters ago we looked at how try-catch-finally worked. Kind of. All we said about finally was that it was a good place to put your "cleanup code." That's true, but let's get more specific. Most of the time, when we talk about "cleanup code," we mean closing resources we borrowed from the operating system. When we open a file or a socket, the OS is giving us some

of its resources. When we're done with them, we need to give them back. Below is a snippet of code from the QuizCardBuilder class. We highlighted a call to a constructor and three separate method calls...

That's FOUR places an exception can be thrown!

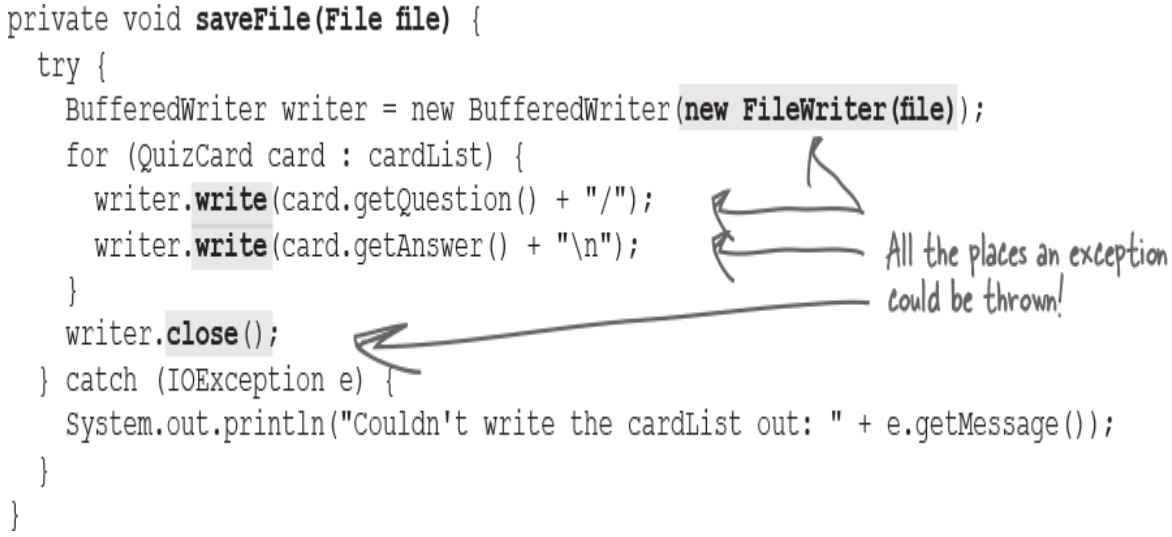

If the call to make a new FileWriter fails, if ANY of the many write() invocations fail, or the close() itself fails, an exception will be thrown, the JVM will jump to the catch block, and the writer will never be closed. Yikes!

Remember, `finally` ALWAYS runs!!

Since we REALLY want to make sure we close the writer file, let's put the close() invocation in a finally block.

CODING THE NEW FINALLY BLOCK

What changes will we have to make to the code above to move the close() to a finally block? There might be more than you first imagine.

→ **Yours to solve.**

Finally, a closer look at `finally`, cont.

The amount of code required to put the close() in the finally block might surprise you; let's take a look.

```
private void saveFile(File file) {
  BufferedWriter writer = null;
  try {
    writer = new BufferedWriter(new FileWriter(file));
    for (QuizCard card : cardList) {
      writer.write(card.getQuestion() + "/");
      writer.write(card.getAnswer() + "\n");
    }
    writer.close();
  } catch (IOException e) {
    System.out.println("Couldn't write the cardList out: " + e.getMessage());
  } finally {
    try {
      writer.close();
    } catch (Exception e) {
      System.out.println("Couldn't close writer: " + e.getMessage());
    }
  }
```

We had to declare the writer reference outside of the try block so that it's visible in the finally block.

Yup, we had to put the close() in yet another try-catch block!

There IS a better way!

In the early days of Java, this is how you had to make sure you were really closing a file. You are very likely to encounter finally blocks that look like this when you're looking at existing code. But for new code, there is a better way:

Try-With-Resources

We'll look at that next.

The try-with-resources (TWR), statement

If you're using Java 7 or later (and we sure hope you are!), you can use the try-with-resources version of try statements to make doing I/O easier. Let's compare the try code we've been looking at with try-with-resources code that does the same thing:

NOTE

Old style, try-catch-finally code

```
private void saveFile(File file) {
  BufferedWriter writer = null;
  try {
    writer = new BufferedWriter(new FileWriter(file));

    for (QuizCard card : cardList) {
      writer.write(card.getQuestion() + "/");
      writer.write(card.getAnswer() + "\n");
    }

  } catch (IOException e) {
    System.out.println("Couldn't write the cardList out: " + e.getMessage());
  } finally {
    try {
      writer.close();
    } catch (Exception e) {
      System.out.println("Couldn't close writer: " + e.getMessage());
    }
  }
}
```

```
private void saveFile(File file) {
  try (BufferedWriter writer =
       new BufferedWriter(new FileWriter(file))) {

    for (QuizCard card : cardList) {
      writer.write(card.getQuestion() + "/");
      writer.write(card.getAnswer() + "\n");
    }

  } catch (IOException e) {
    System.out.println("Couldn't write the cardList out: " + e.getMessage());
```

```
  }
}
```

NOTE

Modern, try-with-resources code

THERE ARE NO DUMB QUESTIONS

Q: Wait, what? You told us that a try statement needs a catch and/or a finally?

A: Nice catch! It turns out that when you use try-with-resources, the compiler makes a finally block for you. You can't see it, but it's there.

Autocloseable, the very small catch

On the last page we saw a different kind of try statement, the try-with-resources statement (TWR). Let's take a look at how to write and use TWR statements by first, deconstructing the following:

```
try (BufferedWriter writer =
     new BufferedWriter(new FileWriter(file))) {
```

NOTE

ONLY classes that implement Autocloseable can be used in TWR statements!

Writing a try-with-resources statement

① Add a set of parentheses between "try" and "{":

```
try ( ... ) {
```

② Inside the parentheses, declare an object whose type implements Autocloseable:

```
try (BufferedWriter writer =
       new BufferedWriter(new FileWriter(file))) {
```

Like all of the I/O classes we've been using this chapter, BufferedWriter implements Autocloseable.

③ Use the object you declared inside the try block (just like you always did):

```
writer.write(card.getQuestion() + "/");
writer.write(card.getAnswer() + "\n");
```

Autocloseable, it's everywhere you do I/O

Autocloseable is an interface that was added to java.lang in Java 7. Almost all of the I/O you're ever going to do uses classes that implement Autocloseable. You mostly won't have to think about it.

There are a few more things worth knowing about TWR statements:

- You can declare and use more than one I/O resource in a single TWR block:

```
try (BufferedWriter writer =
       new BufferedWriter(new FileWriter(file));
     BufferedReader reader =
       new BufferedReader(new FileReader(file))) {
```

Separate the resources using semicolons, ";".

- If you declare more than one resource, they will be closed in the order OPPOSITE to which they were declared; i.e., first declared is last closed.
- If you add catch or finally blocks, the system will handle multiple close() invocations gracefully.

Code Kitchen

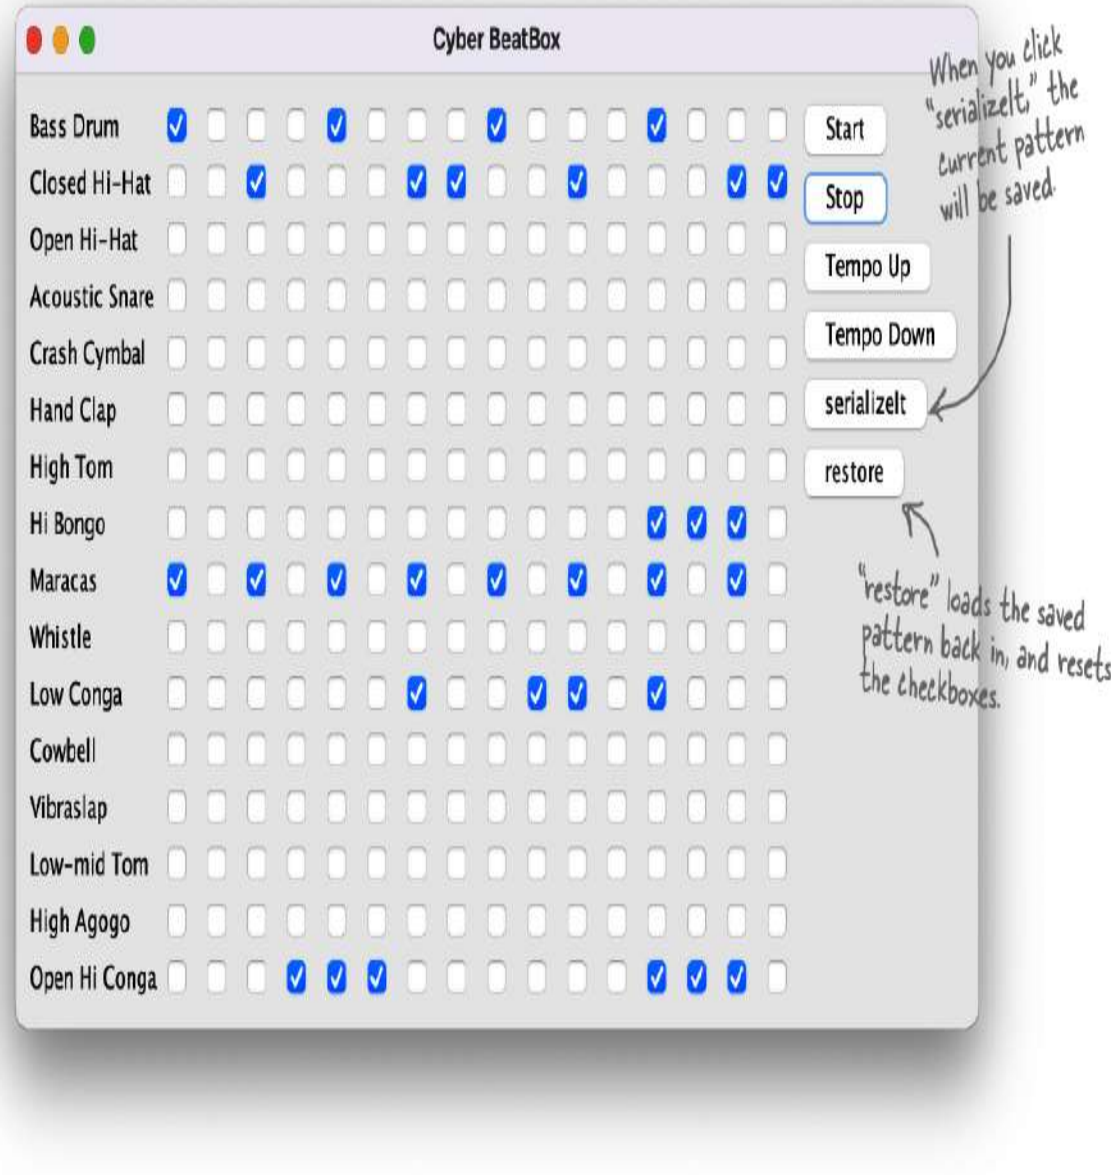

Let's make the BeatBox save and restore our favorite pattern.

Saving a BeatBox pattern

Remember, in the BeatBox, a drum pattern is nothing more than a bunch of checkboxes. When it's time to play the sequence, the code walks through the

checkboxes to figure out which drums sounds are playing at each of the 16 beats. So to save a pattern, all we need to do is save the state of the checkboxes.

We can make a simple boolean array, holding the state of each of the 256 checkboxes. An array object is serializable as long as the things *in* the array are serializable, so we'll have no trouble saving an array of booleans.

To load a pattern back in, we read the single boolean array object (deserialize it) and restore the checkboxes. Most of the code you've already seen, in the Code Kitchen where we built the BeatBox GUI, so in this chapter, we look at only the save and restore code.

This CodeKitchen gets us ready for the next chapter, where instead of writing the pattern to a *file*, we send it over the *network* to the server. And instead of loading a pattern *in* from a file, we get patterns from the *server*, each time a participant sends one to the server.

Serializing a pattern

```
private void writeFile() {

  boolean[] checkboxState = new boolean[256];

  for (int i = 0; i < 256; i++) {
    JCheckBox check = checkboxList.get(i);
    if (check.isSelected()) {
      checkboxState[i] = true;
    }
  }

  try (ObjectOutputStream os =
        new ObjectOutputStream(new FileOutputStream("Checkbox.ser"))) {
    os.writeObject(checkboxState);
  } catch (IOException e) {
    e.printStackTrace();
  }
}
```

This is a method in the BeatBox code. We can call this from a lambda expression when we add an ActionListener to the serializeIt button, or create an ActionListener inner class that calls this.

Make a boolean array to hold the state of each checkbox.

Walk through the checkboxList (ArrayList of checkboxes), get the state of each one, and add it to the boolean array.

Try-with-resources

This part's a piece of cake. Just write/serialize the one boolean array!

Restoring a BeatBox pattern

This is pretty much the save in reverse...read the boolean array and use it to restore the state of the GUI checkboxes. It all happens when the user hits the "restore" button.

Restoring a pattern

This is another method in the BeatBox class.

```
private void readFile() {
  boolean[] checkboxState = null;
  try (ObjectInputStream is =
        new ObjectInputStream(new FileInputStream("Checkbox.ser"))) {
    checkboxState = (boolean[]) is.readObject();
  } catch (Exception e) {
    e.printStackTrace();
  }

  for (int i = 0; i < 256; i++) {
    JCheckBox check = checkboxList.get(i);
    check.setSelected(checkboxState[i]);
  }

  sequencer.stop();
  buildTrackAndStart();
}
```

Try-with-resources

Read the single object in the file (the boolean array) and cast it back to a boolean array (remember, readObject() returns a reference of type Object).

Now restore the state of each of the checkboxes in the ArrayList of actual JCheckBox objects (checkboxList).

Now stop whatever is currently playing, and rebuild the sequence using the new state of the checkboxes in the ArrayList.

→ Yours to solve.

SHARPEN YOUR PENCIL

This version has a huge limitation! When you hit the "serializeIt" button, it serializes automatically, to a file named "Checkbox.ser" (which gets created if it doesn't exist). But each time you save, you overwrite the previously saved file.

Improve the save and restore feature by incorporating a JFileChooser so that you can name and save as many different patterns as you like, and load/restore from *any* of your previously saved pattern files.

Can they be saved?

→ Yours to solve.

Which of these do you think are, or should be, serializable? If not, why not? Not meaningful? Security risk? Only works for the current execution of the JVM? Make your best guess, without looking it up in the API.

Object type	Serializable?	If not, why not?
Object	Yes / No	_____
String	Yes / No	_____
File	Yes / No	_____
Date	Yes / No	_____
OutputStream	Yes / No	_____
JFrame	Yes / No	_____
Integer	Yes / No	_____
System	Yes / No	_____

What's Legal?

Circle the code fragments that would compile (assuming they're within a legal class).

→ Yours to solve.

```
FileReader fileReader = new FileReader();
BufferedReader reader = new BufferedReader(fileReader);
```

```
FileOutputStream f = new FileOutputStream("Foo.ser");
ObjectOutputStream os = new ObjectOutputStream(f);
```

```
BufferedReader reader = new BufferedReader(new FileReader(file));
String line;
```

```
while ((line = reader.readLine()) != null) {
  makeCard(line);
}
```

```
FileOutputStream f = new FileOutputStream("Game.ser");
ObjectInputStream is = new ObjectInputStream(f);
GameCharacter oneAgain = (GameCharacter) is.readObject();
```

Exercise

This chapter explored the wonderful world of Java I/O. Your job is to decide whether each of the following I/O-related statements is true or false.

True or False

1. Serialization is appropriate when saving data for non-Java programs to use.
2. Object state can be saved only by using serialization.
3. ObjectOutputStream is a class used to save serializable objects.
4. Chain streams can be used on their own or with connection streams.
5. A single call to writeObject() can cause many objects to be saved.

6. All classes are serializable by default.
7. The java.nio.file.Path class can be used to locate files.
8. If a superclass is not serializable, then the subclass can't be serializable.
9. Only classes that implement AutoCloseable can be used in try-with-resources statements.
10. When an object is deserialized, its constructor does not run.
11. Both serialization and saving to a text file can throw exceptions.
12. BufferedWriters can be chained to FileWriters.
13. File objects represent files, but not directories.
14. You can't force a buffer to send its data before it's full.
15. Both file readers and file writers can optionally be buffered.
16. The methods on the Files class let you operate on files and directories.
17. Try-with-resources statements cannot include explicit finally blocks.

→ **Answers in "True or False".**

Code Magnets

This one’s tricky, so we promoted it from an Exercise to full Puzzle status. Reconstruct the code snippets to make a working Java program that produces the output listed below. (You might not need all of the magnets, and you may reuse a magnet more than once.)

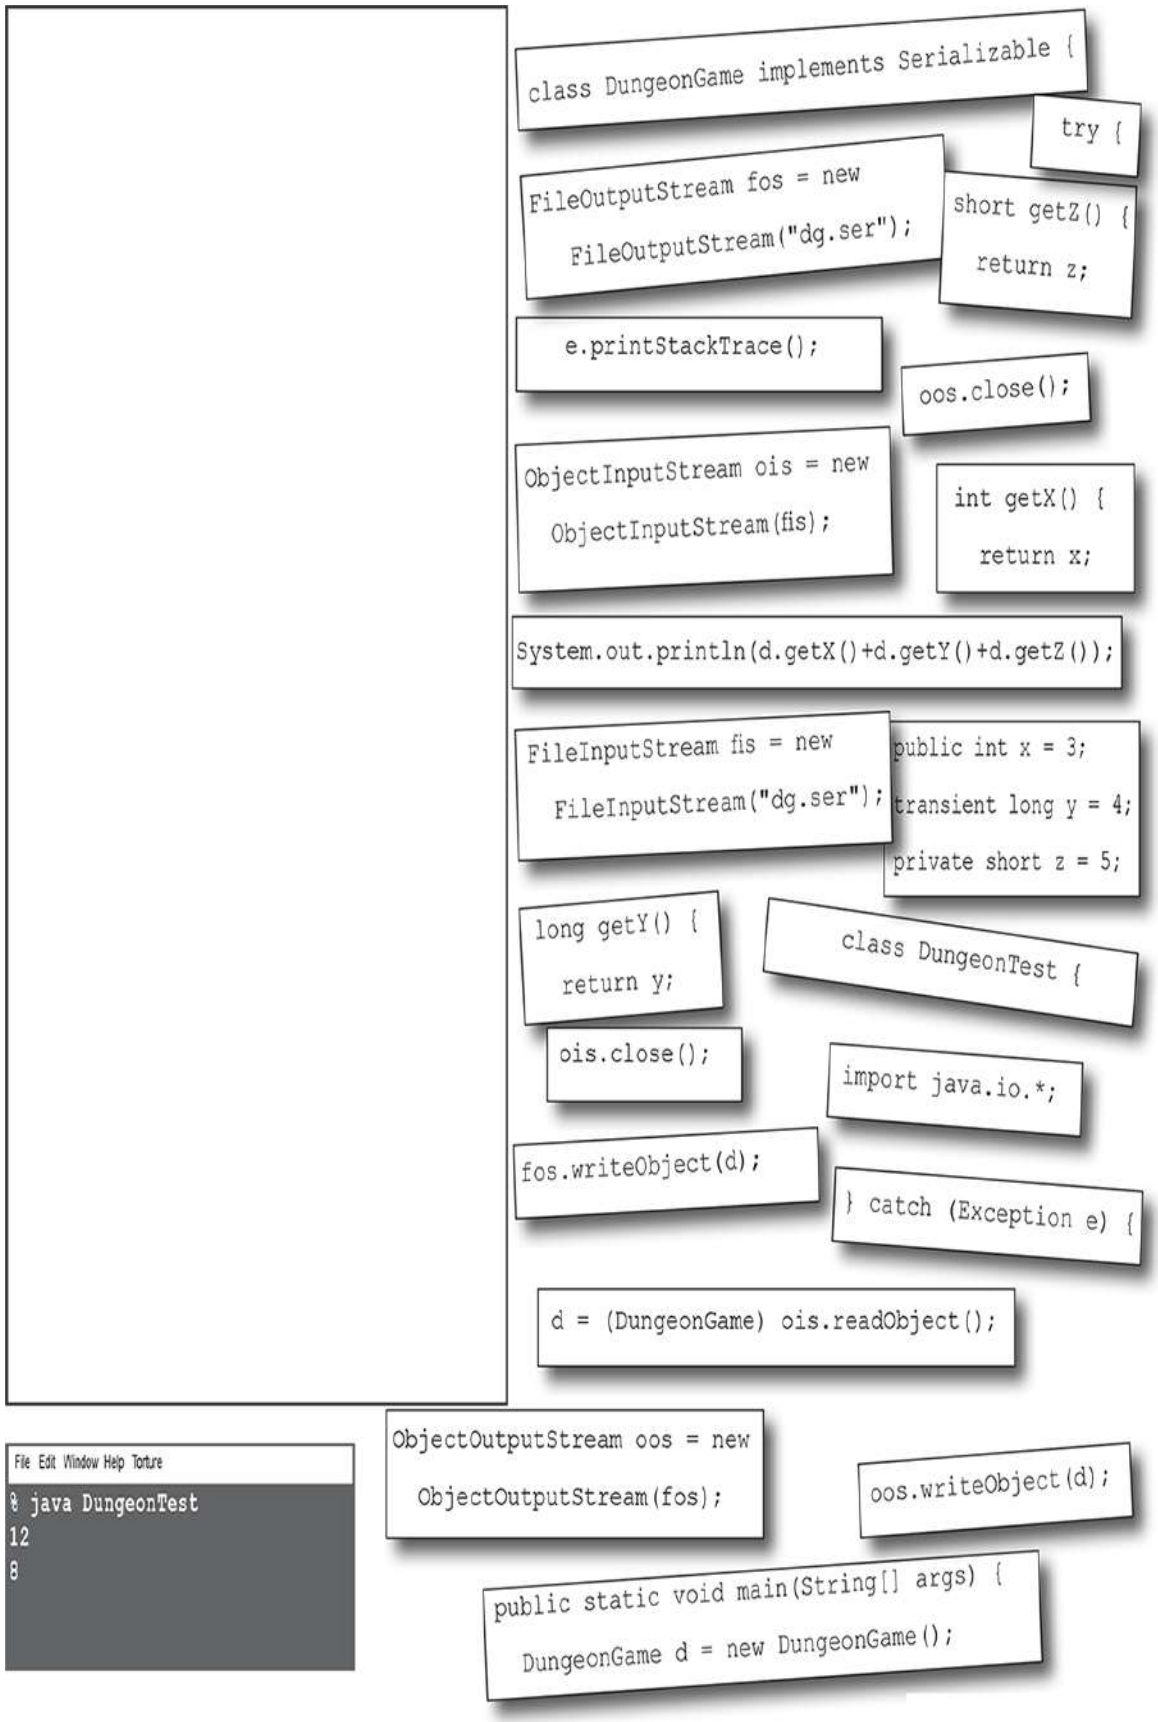
class DungeonGame implements Serializable {
try {
FileOutputStream fos = new
FileOutputStream("dg.ser");
short getZ() {
return z;
e.printStackTrace();
oos.close();
ObjectInputStream ois = new
ObjectInputStream(fis);
int getX() {
return x;
System.out.println(d.getX()+d.getY()+d.getZ());
FileInputStream fis = new
FileInputStream("dg.ser");
public int x = 3;
transient long y = 4;
private short z = 5;
long getY() {
return y;
class DungeonTest {
ois.close();
import java.io.*;
fos.writeObject(d);
} catch (Exception e) {
d = (DungeonGame) ois.readObject();
File Edit Window Help Torture
% java DungeonTest
12
8
ObjectOutputStream oos = new
ObjectOutputStream(fos);
oos.writeObject(d);
public static void main(String[] args) {
DungeonGame d = new DungeonGame();

→ **Answers in "True or False".**

Exercise Solutions

True or False

(from "True or False")

1. Serialization is appropriate when saving data for non-Java programs to use.	**False**
2. Object state can be saved only by using serialization.	**False**
3. ObjectOutputStream is a class used to save serializable objects.	**True**
4. Chain streams can be used on their own or with connection streams.	**False**
5. A single call to writeObject() can cause many objects to be saved.	**True**
6. All classes are serializable by default.	**False**
7. The java.nio.file.Path class can be used to locate files.	**False**
8. If a superclass is not serializable, then the subclass can't be serializable.	**False**
9. Only classes that implement AutoCloseable can be used in try-with-resources statements.	**True**
10. When an object is deserialized, its constructor does not run.	**True**
11. Both serialization and saving to a text file can throw exceptions.	**True**
12. BufferedWriters can be chained to FileWriters.	**True**
13. File objects represent files, but not directories.	**False**
14. You can't force a buffer to send its data before it's full.	**False**
15. Both file readers and file writers can optionally be buffered.	**True**
16. The methods on the Files class let you operate on files and directories.	**True**
17. Try-with-resources statements cannot include explicit finally blocks.	**False**

Code Magnets

(from "True or False")

```
import java.io.*;

class DungeonGame implements Serializable {
  public int x = 3;
  transient long y = 4;
  private short z = 5;

  int getX() {
    return x;
  }
  long getY() {
    return y;
  }
  short getZ() {
    return z;
```

```
  }
}

class DungeonTest {
  public static void main(String[] args) {
    DungeonGame d = new DungeonGame();
    System.out.println(d.getX() + d.getY() + d.getZ());
    try {
      FileOutputStream fos = new FileOutputStream("dg.ser");
      ObjectOutputStream oos = new ObjectOutputStream(fos);
      oos.writeObject(d);
      oos.close();

      FileInputStream fis = new FileInputStream("dg.ser");
      ObjectInputStream ois = new ObjectInputStream(fis);
      d = (DungeonGame) ois.readObject();
      ois.close();
    } catch (Exception e) {
      e.printStackTrace();
    }
    System.out.println(d.getX() + d.getY() + d.getZ());
  }
}
```

Chapter 17. Make a Connection: Networking and Threads

Connect with the outside world. Your Java program can talk to a program on another machine. It's easy. All the low-level networking details are taken care of by the built-in Java libraries. One of Java's big benefits is that sending and receiving data over a network can be just I/O with a slightly

different connection at the end of the I/O chain. In this chapter we'll connect to the outside world with *channels*. We'll make *client* channels. We'll make *server* channels. We'll make *clients* and *servers*, and we'll make them talk to each other. And we'll also have to learn how to do more than one thing at once. Before the chapter's done, you'll have a fully functional, multithreaded chat client. Did we just say *multithreaded*? Yes, now you *will* learn the secret of how to talk to Bob while simultaneously listening to Suzy.

Real-time BeatBox chat

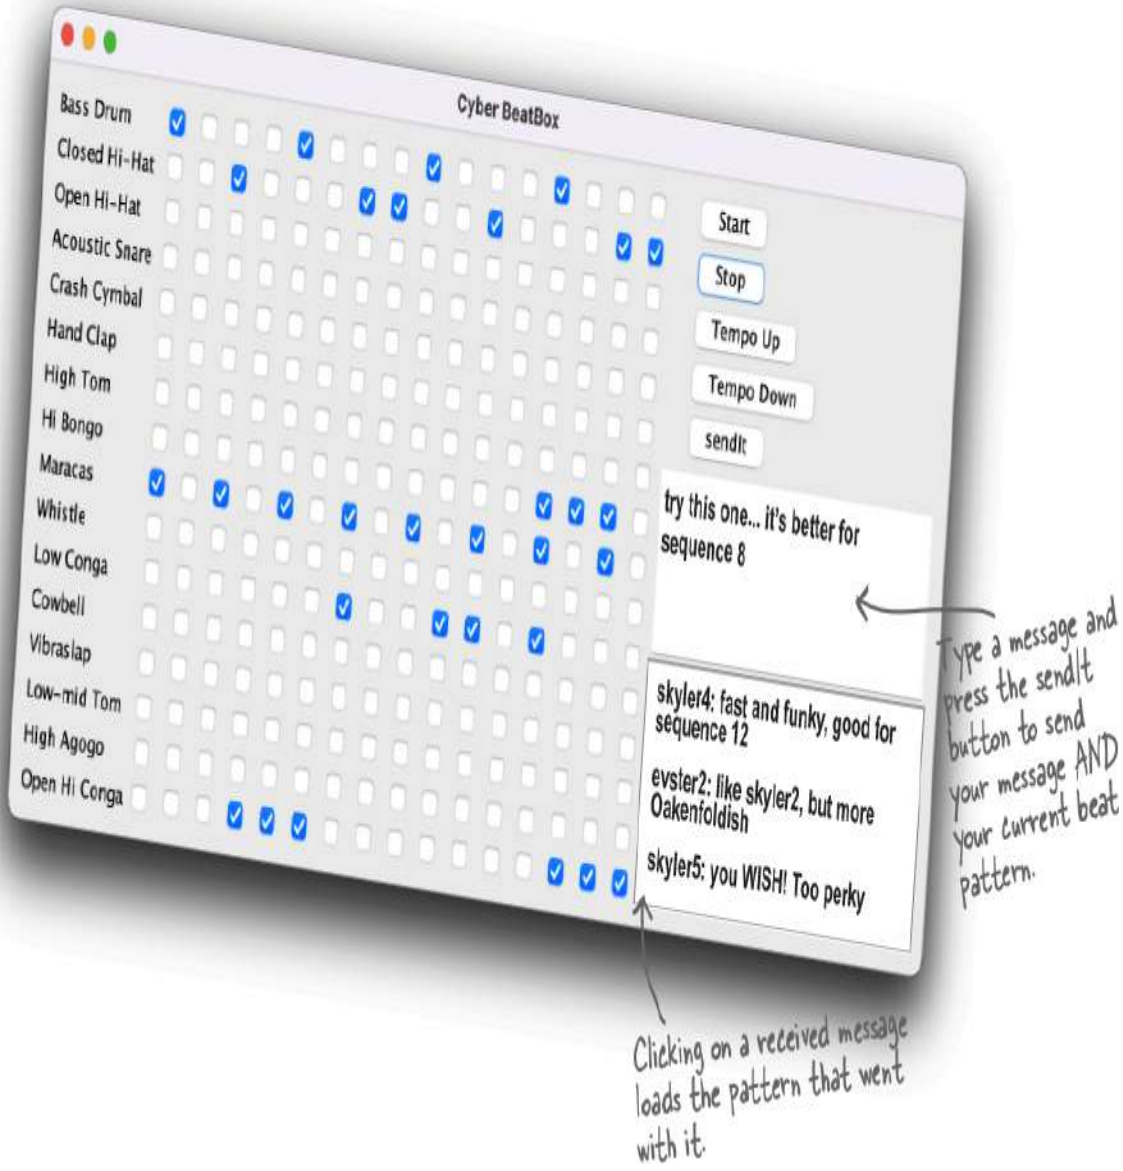
Cyber BeatBox
Bass Drum
Closed Hi-Hat
Open Hi-Hat
Acoustic Snare
Crash Cymbal
Hand Clap
High Tom
Hi Bongo
Maracas
Whistle
Low Conga
Cowbell
Vibraslap
Low-mid Tom
High Agogo
Open Hi Conga
Start
Stop
Tempo Up
Tempo Down
sendIt
try this one... it's better for sequence 8
skyler4: fast and funky, good for sequence 12
evster2: like skyler2, but more Oakenfoldish
skyler5: you WISH! Too perky
Type a message and press the sendIt button to send your message AND your current beat pattern.
Clicking on a received message loads the pattern that went with it.

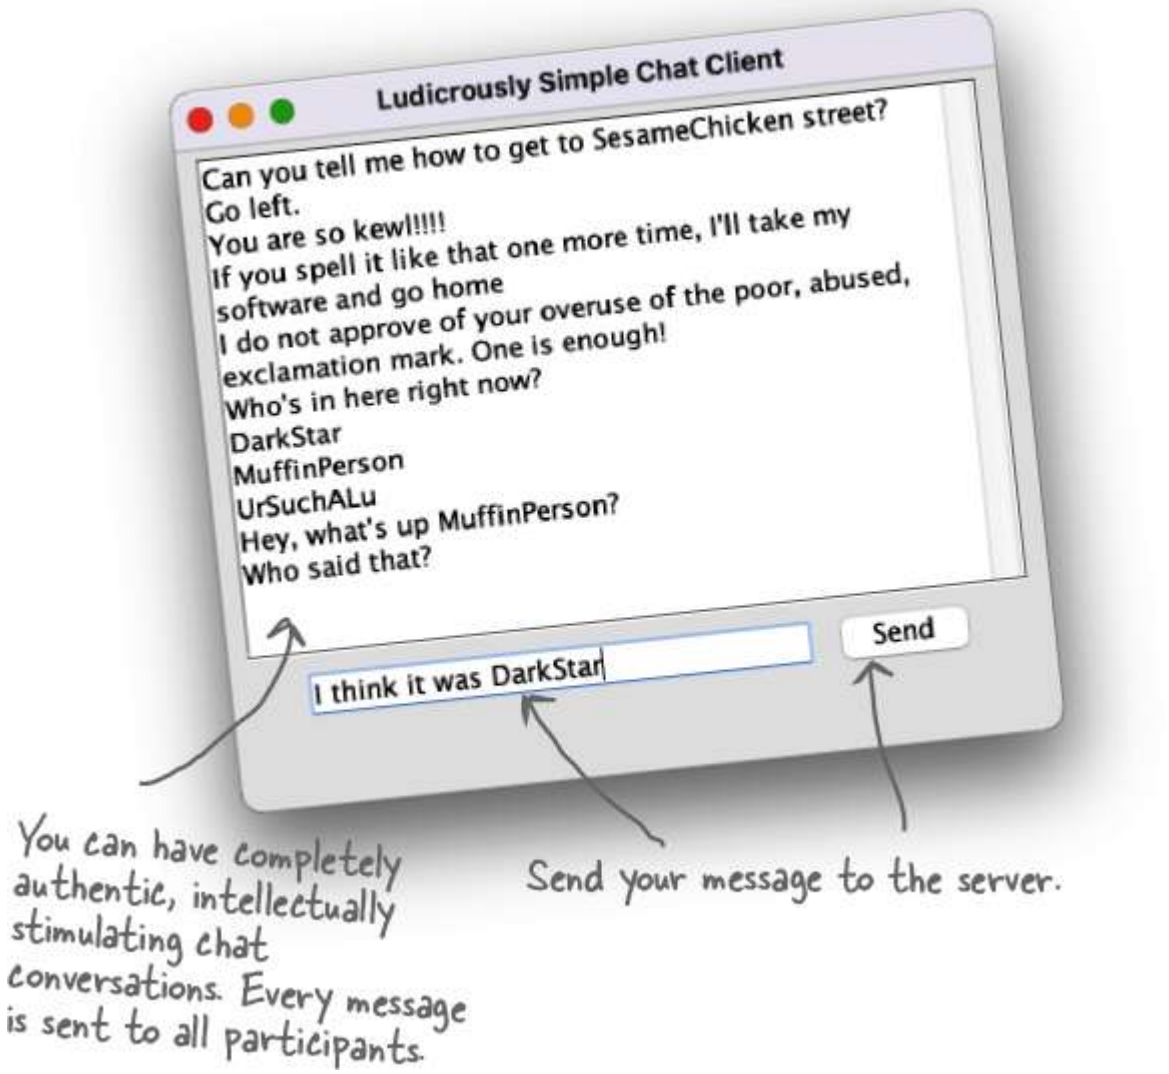

You're working on a computer game. You and your team are doing the sound design for each part of the game. Using a "chat" version of the BeatBox, your team can collaborate—you can send a beat pattern along with your chat message, and everybody in the BeatBox Chat gets it. So you don't just get to *read* the other participants' messages; you get to load and *play* a beat pattern simply by clicking the message in the incoming messages area.

In this chapter we're going to learn what it takes to make a chat client like this. We're even going to learn a little about making a chat *server*. We'll save the full BeatBox Chat for the Code Kitchen, but in this chapter you *will* write

a Ludicrously Simple Chat Client and Very Simple Chat Server that send and receive text messages.

Chat program overview

> **NOTE**
>
> Each Client has to know about the Server.
>
> The Server has to know about ALL the Clients.

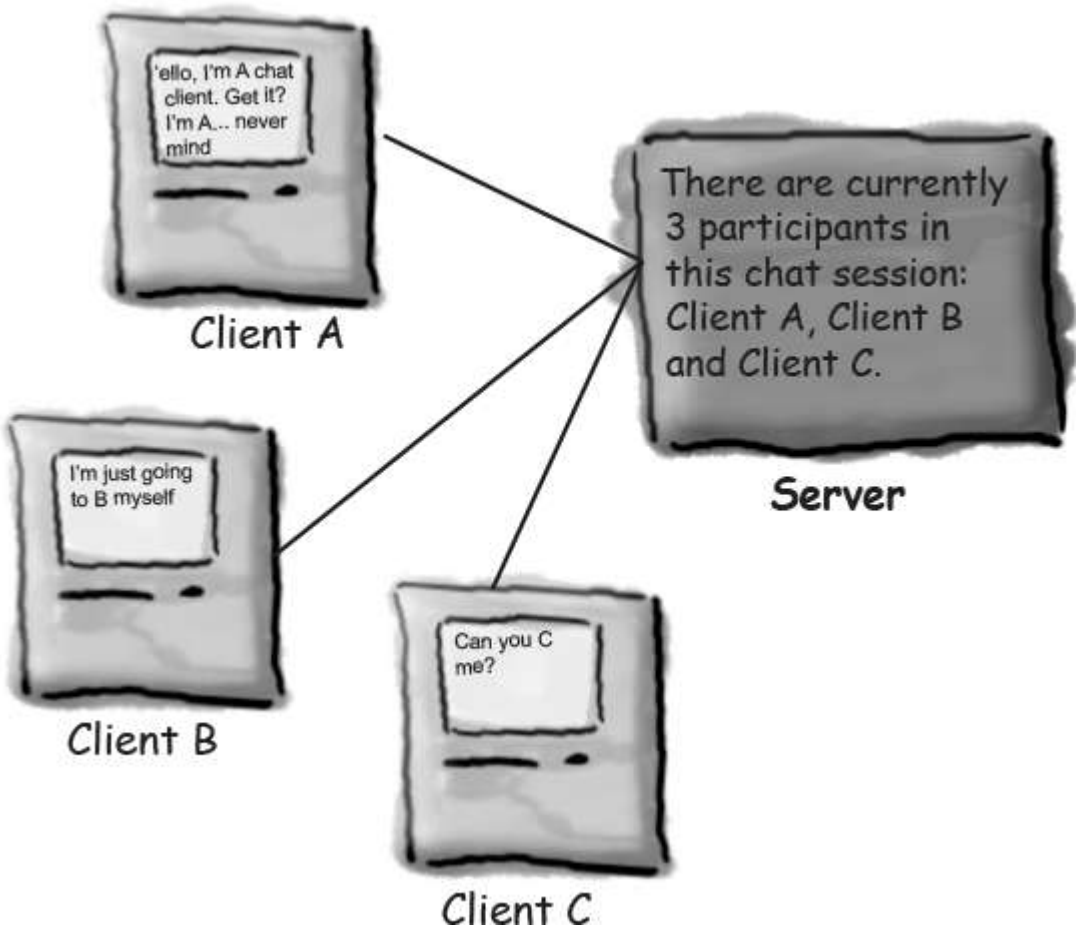

How it works:

- ❶ Client connects to the server

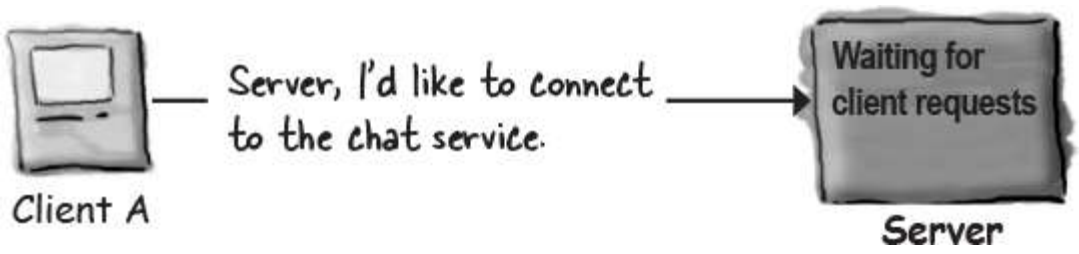

- ❷ The server makes a connection and adds the client to the list of participants

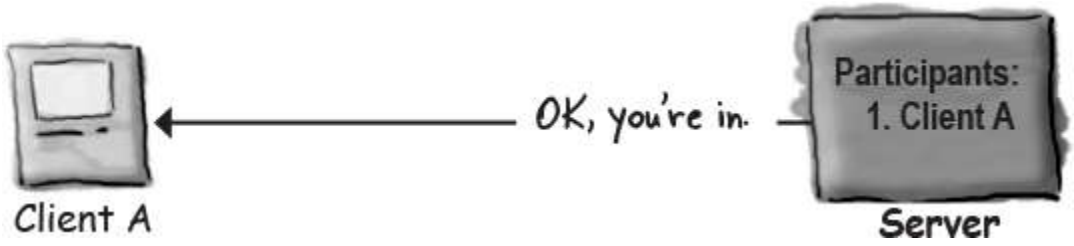

- ❸ Another client connects

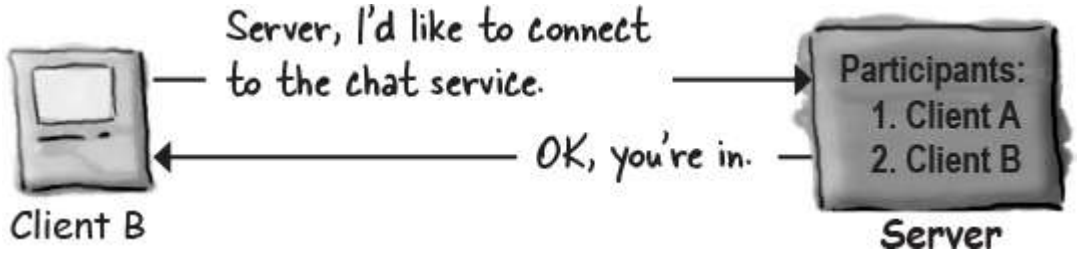

- ❹ Client A sends a message to the chat service

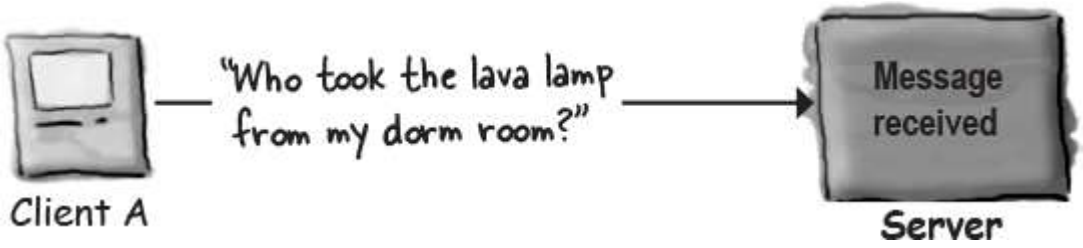

- ❺ The server distributes the message to ALL participants (including the original sender)

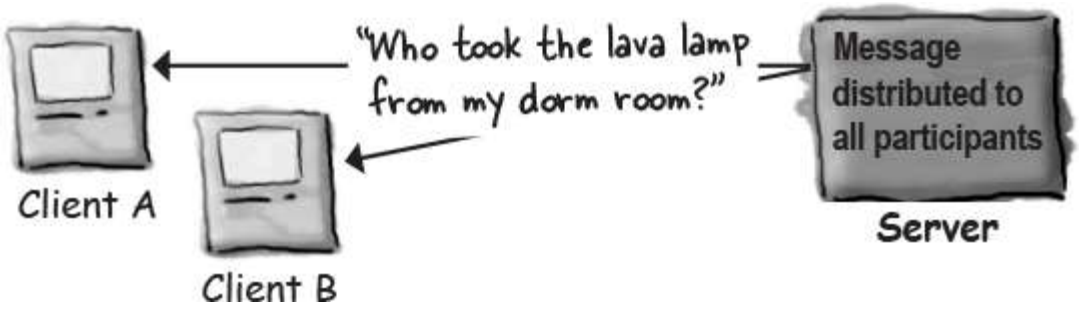

Connecting, sending, and receiving

The three things we have to learn to get the client working are:

1. How to establish the initial **connection** between the client and server
2. How to **receive** messages *from* the server
3. How to **send** messages *to* the server

There's a lot of low-level stuff that has to happen for these things to work. But we're lucky, because the Java APIs make it a piece of cake for programmers. You'll see a lot more GUI code than networking and I/O code in this chapter.

And that's not all.

Lurking within the simple chat client is a problem we haven't faced so far in this book: doing two things at the same time. Establishing a connection is a one-time operation (that either works or fails). But after that, a chat participant wants to *send outgoing messages* and **simultaneously** *receive incoming messages* from the other participants (via the server). Hmm...that one's going to take a little thought, but we'll get there in just a few pages.

- ❶ **Connect**

  Client **connects** to the server

- ❷ **Receive**

  Client **reads** a message from the server

- ❸ **Send**

  Client **writes** a message to the server

1. Connect

To talk to another machine, we need an object that represents a network connection between two machines. We can open a java.nio.channels.SocketChannel to give us this connection object.

What's a connection? A *relationship* between two machines, where **two pieces of software know about each other**. Most importantly, those two pieces of software know how to *communicate* with each other. In other words, how to send *bits* to each other.

We don’t care about the low-level details, thankfully, because they’re handled at a much lower place in the “networking stack.” If you don’t know what the “networking stack” is, don’t worry about it. It’s just a way of looking at the layers that information (bits) must travel through to get from a Java program running in a JVM on some OS, to physical hardware (Ethernet cables, for example), and back again on some other machine.

The part that you have to worry about is high-level. You just have to create an object for the server’s address and then open a channel to that server. Ready?

NOTE

To make a connection, you need to know two things about the server: where it is and which port it’s running on.

In other words,

NOTE

IP address and TCP port number.

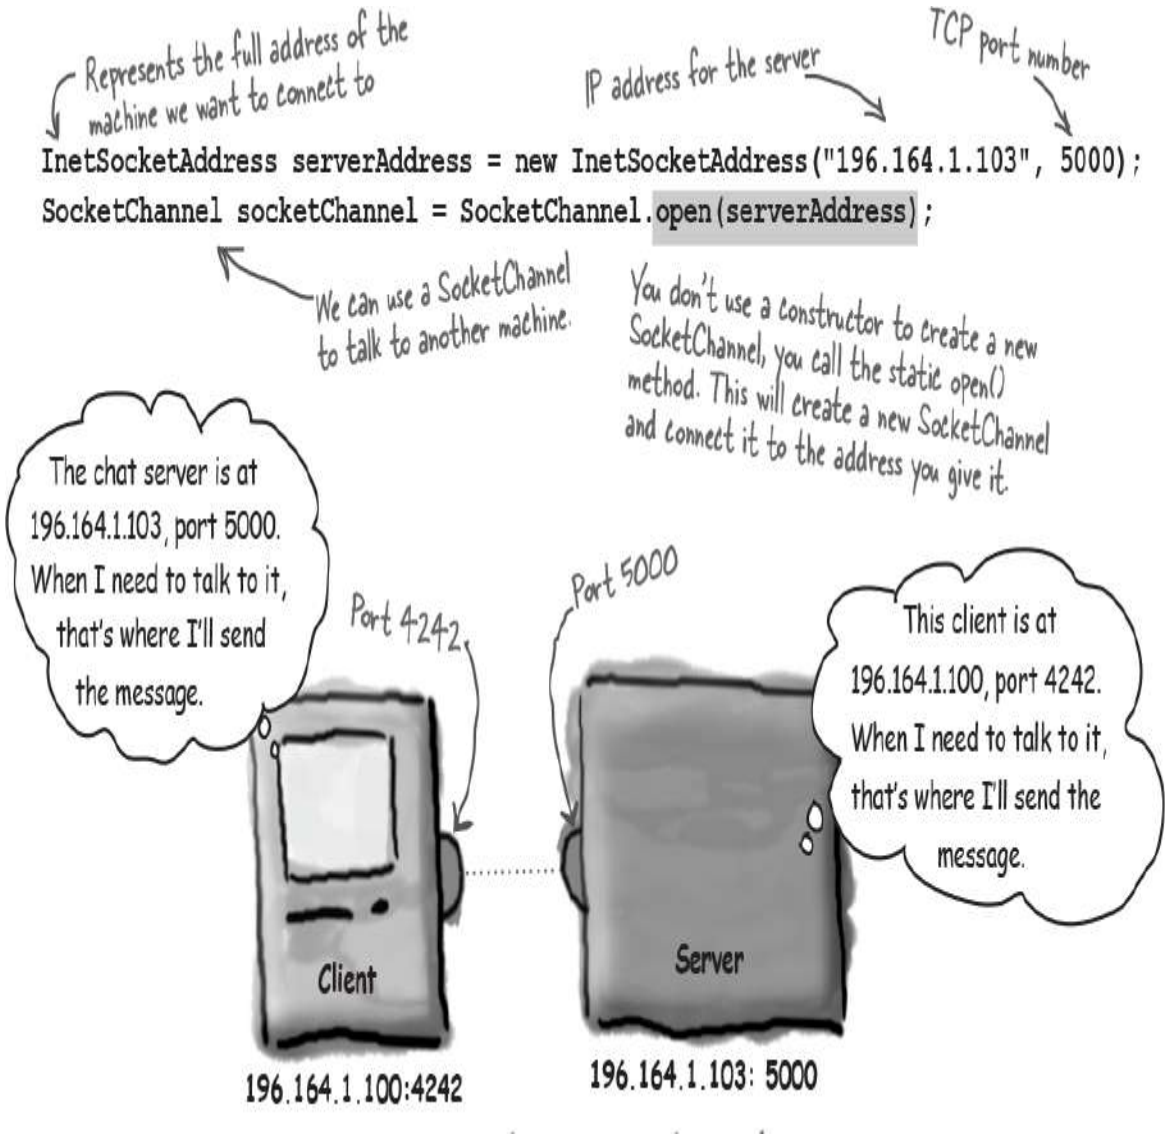

NOTE

A connection means the two machines have information about each other, including network location (IP address) and TCP port.

A TCP port is just a number... a 16-bit number that identifies a specific program on the server

Your internet web (HTTP) server runs on port 80. That's a standard. If you've got a Telnet server, its running on port 23. FTP? 20. POP3 mail

server? 110. SMTP? 25. The Time server sits at 37. Think of port numbers as unique identifiers. They represent a logical connection to a particular piece of software running on the server. That's it. You can't spin your hardware box around and find a TCP port. For one thing, you have 65,536 of them on a server (0–65535). So they obviously don't represent a place to plug in physical devices. They're just a number representing an application.

Well-known TCP port numbers for common server applications:

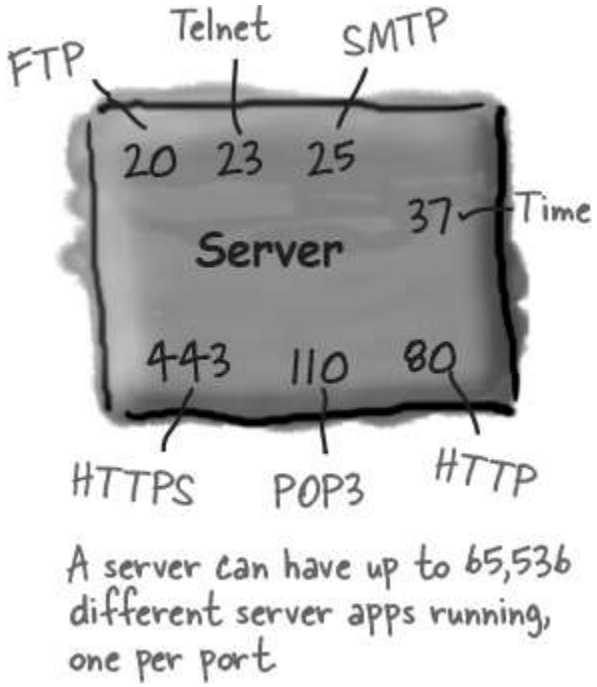

Without port numbers, the server would have no way of knowing which application a client wanted to connect to. And since each application might have its own unique protocol, think of the trouble you'd have without these identifiers. What if your web browser, for example, landed at the POP3 mail server instead of the HTTP server? The mail server won't know how to parse an HTTP request! And even if it did, the POP3 server doesn't know anything about servicing the HTTP request.

When you write a server program, you'll include code that tells the program which port number you want it to run on (you'll see how to do this in Java a little later in this chapter). In the Chat program we're writing in this chapter, we picked 5000. Just because we wanted to. And because it met the criteria

that it be a number between 1024 and 65535. Why 1024? Because 0 through 1023 are reserved for the well-known services like the ones we just talked about.

And if you're writing services (server programs) to run on a company network, you should check with the sysadmins to find out which ports are already taken. Your sysadmins might tell you, for example, that you can't use any port number below, say, 3000. In any case, if you value your limbs, you won't assign port numbers with abandon. Unless it's your *home* network. In which case you just have to check with your *kids*.

> **NOTE**
>
> The TCP port numbers from 0 to 1023 are reserved for well-known services. Don't use them for your own server programs!*
>
> The chat server we're writing uses port 5000. We just picked a number between 1024 and 65535.

*Well, you *might* be able to use one of these, but the sysadmin where you work will write you a strongly worded message and CC your boss.

THERE ARE NO DUMB QUESTIONS

Q: How do you know the port number of the server program you want to talk to?

A: That depends on whether the program is one of the well-known services. If you're trying to connect to a well-known service, like the ones on the opposite page (HTTP, SMTP, FTP, etc.), you can look these up on the internet (Google "Well-Known TCP Port"). Or ask your friendly neighborhood sysadmin.

But if the program isn't one of the well-known services, you need to find out from whoever is deploying the service. Ask them. Typically, if someone writes a network service and wants others to write clients for it, they'll publish the IP address, port number, and protocol for the service. For example, if you want to write a client for a GO game server, you can visit one of the GO server sites and find information about how to write a client for that particular server.

Q: Can there ever be more than one program running on a single port? In other words, can two applications on the same server have the same port number?

A: No! If you try to bind a program to a port that is already in use, you'll get a BindException. To *bind* a program to a port just means starting up a server application and telling it to run on a particular port. Again, you'll learn more about this when we get to the server part of this chapter.

IP address is the mall

IP address is like specifying a particular shopping mall, say, "Flatirons Marketplace"

Port number is the specific store in the mall

Port number is like naming a specific store, say, "Bob's CD Shop"

BRAIN BARBELL

OK, you got a connection. The client and the server know the IP address and TCP port number for each other. Now what? How do you communicate over that connection? In other words, how do you move bits from one to the other? Imagine the kinds of messages your chat client needs to send and receive.

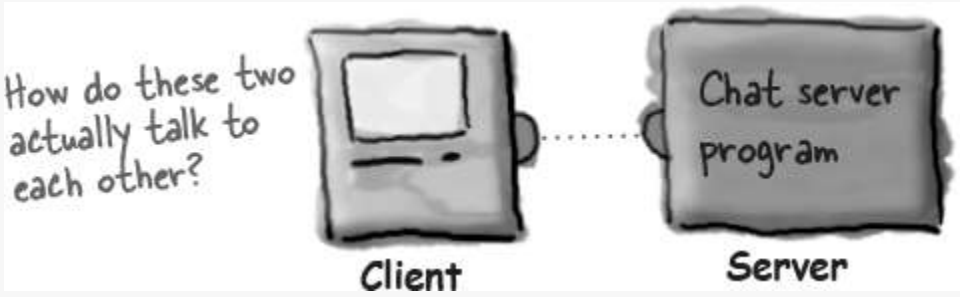

2. Receive

To communicate over a remote connection, you can use regular old I/O streams, just like we used in the previous chapter. One of the coolest features in Java is that most of your I/O work won't care what your high-level chain stream is actually connected to. In other words, you can use a **BufferedReader** just like you did when you were reading from a file; the difference is that the underlying connection stream is connected to a *Channel* rather than a *File*!

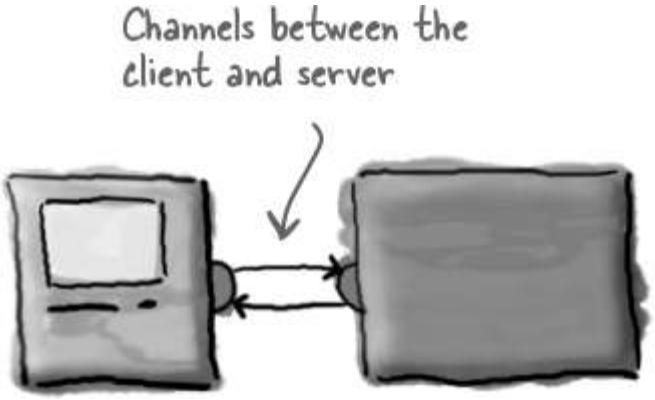

Reading from the network with BufferedReader

1 Make a connection to the server

127.0.0.1 is the IP address for "localhost," in other words, the one this code is running on. You can use this when you're testing your client and server on a single, stand-alone machine. You could also use "localhost" here instead.

```
SocketAddress serverAddr = new InetSocketAddress("127.0.0.1", 5000);

SocketChannel socketChannel = SocketChannel.open(serverAddr);
```

The port number, which you know because we TOLD you that 5000 is the port number for our chat server.

You need to open a SocketChannel that connects to this address.

2 Create or get a Reader from the connection

```
Reader reader = Channels.newReader(socketChannel, StandardCharsets.UTF_8);
```

This Reader is a "bridge" between a low-level byte stream (like the one coming from the Channel) and a high-level character stream (like the BufferedReader we're after as our top of the chain stream).

You can use the static helper methods on the Channels class to create a Reader from your SocketChannel.

You need to say which Charset to use for reading the values from the network. UTF 8 is a common one to use.

3 Make a BufferedReader and read!

Chain the BufferedReader to the Reader (which is from our SocketChannel).

```
BufferedReader bufferedReader = new BufferedReader(reader);
String message = bufferedReader.readLine();
```

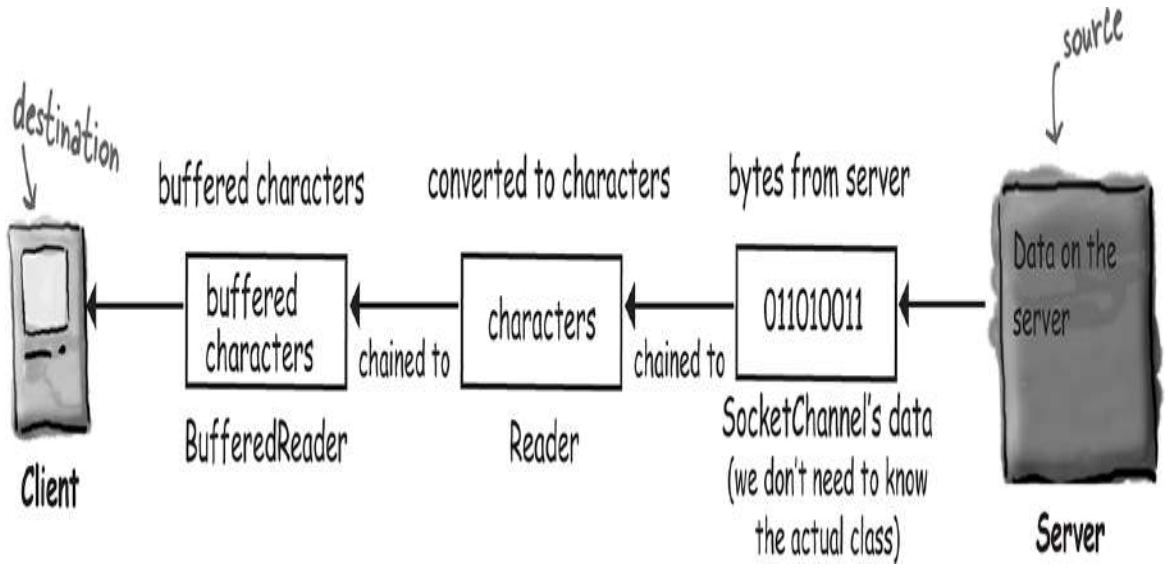

3. Send

In the previous chapter, we used BufferedWriter. We have a choice here, but when you're writing one String at a time, **PrintWriter** is a standard choice. And you'll recognize the two key methods in PrintWriter, print() and println()! Just like good ol' System.out.

Writing to the network with PrintWriter

1 Make a connection to the server

This part's the same as it was on the last page—to write to the server, we still have to connect to it.

```
SocketAddress serverAddr = new InetSocketAddress("127.0.0.1", 5000);

SocketChannel socketChannel = SocketChannel.open(serverAddr);
```

2 Create or get a Writer from the connection

You need to say which Charset to use to write Strings. You should use the same one for reading as for writing!

```
Writer writer = Channels.newWriter(socketChannel, StandardCharsets.UTF_8);
```

Writer acts as a bridge between character data and the bytes to be written to the Channel.

The Channels class contains utility methods to create a Writer.

3 Make a PrintWriter and write (print) something

By chaining a PrintWriter to the Channel's Writer, we can write Strings to the Channel, which will be sent over the connection.

```
PrintWriter printWriter = new PrintWriter(writer);
writer.println("message to send");
writer.print("another message");
```

println() adds a new line at the end of what it sends.

print() doesn't add the new line.

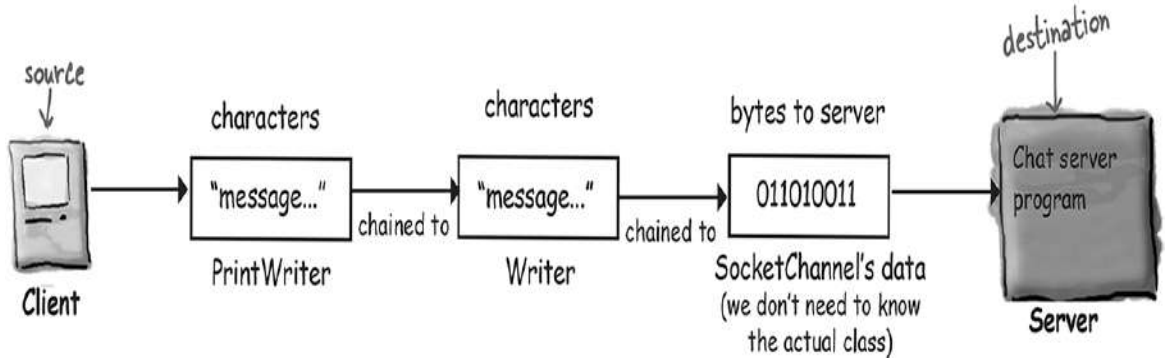

There's more than one way to make a connection

If you look at real life code that talks to a remote machine, you'll probably see a number of different ways to make connections and to read from and write to a remote computer.

Which approach you use depends on a number of things, including (but not limited to) the version of Java you're using and the needs of the application (for example, how many clients connect at once, the size of messages sent, frequency or message, etc). One of the simplest approaches is to use a **java.net.Socket** instead of a Channel.

Using a Socket

You can get an *InputStream* or *OutputStream* from a Socket, and read and write from it in a very similar way to what we've already seen.

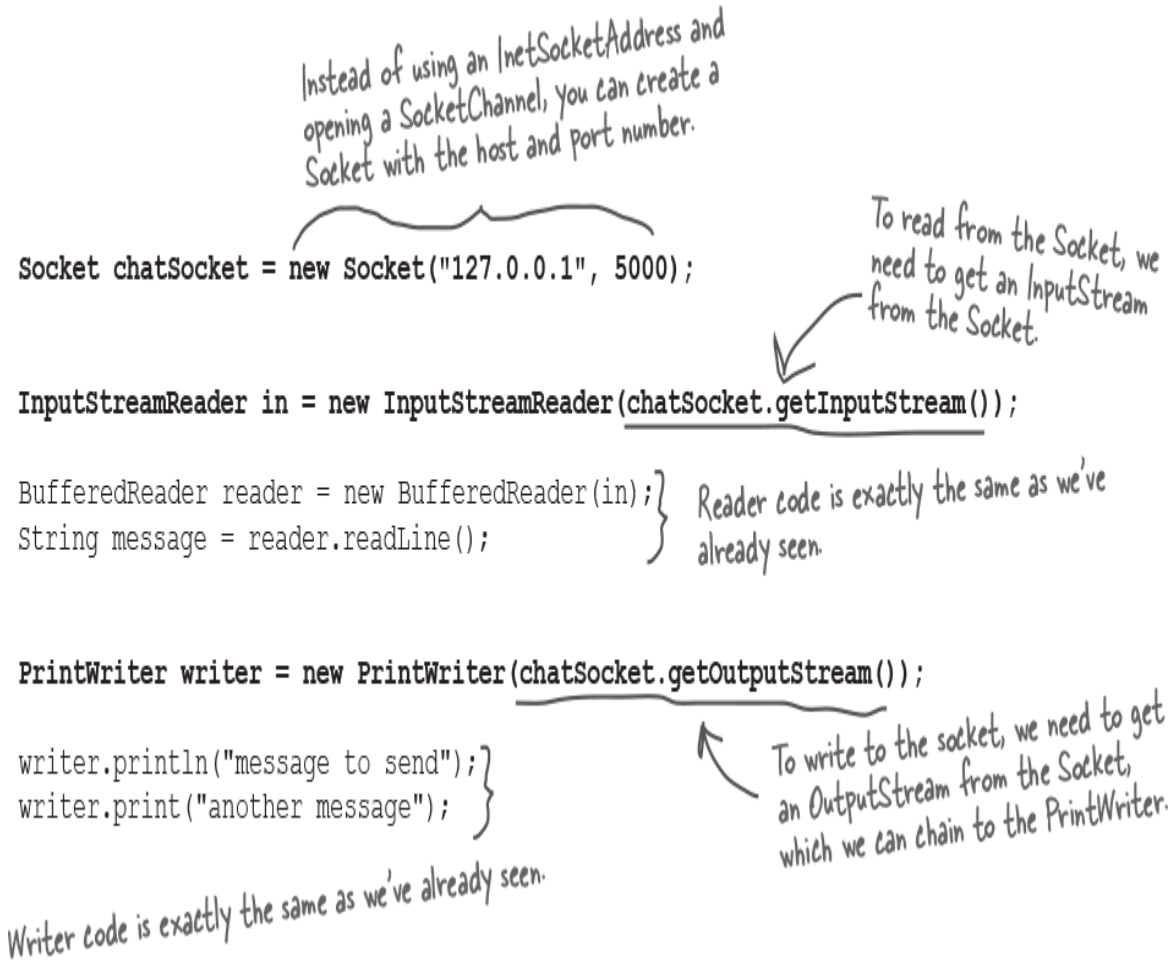

NOTE

The java.net.Socket class is available in all versions of Java.

It supports simple network I/O via the I/O streams we've already used for file I/O.

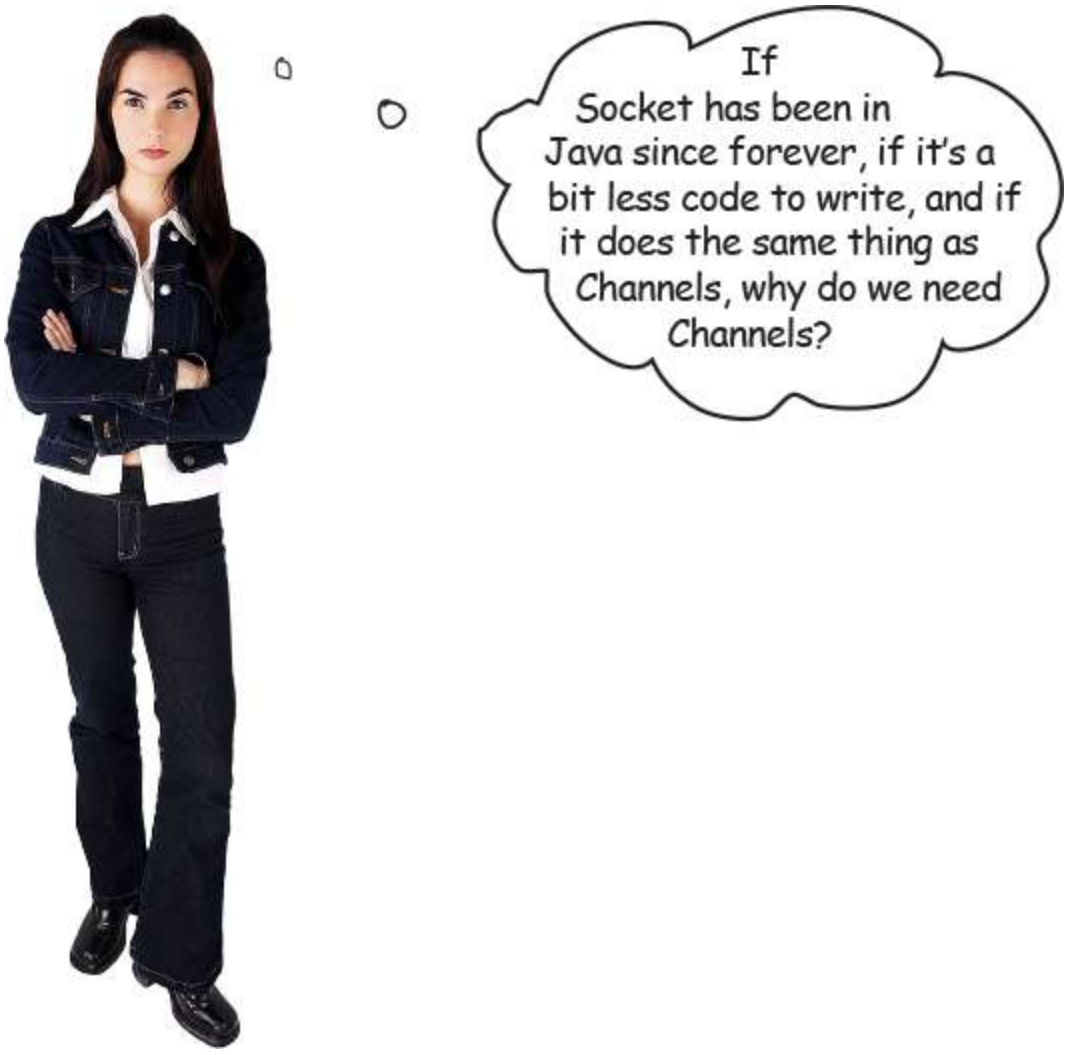

As we've become an increasingly connected world, Java has evolved to offer more ways to work with remote machines.

Remember that Channels are in the java.**nio**.channels package? The java.nio package (NIO) was introduced in Java 1.4, and there were more changes and additions made (sometimes called NIO.2) in Java 7.

There are ways to use Channels and NIO to get better performance when you're working with lots of network connections, or lots of data coming over those connections.

In this chapter, we're using Channels to provide the same very basic connection functionality we could get from Sockets. However, if our application needed to work well with a very busy network connection (or

lots of them!), we could configure our Channels differently and use them to their full potential, and our program would cope better with a high network I/O load.

We've chosen to teach you the **simplest way to get started** with network I/O using *Channels* so that if you need to "level up" to working with more advanced features, it shouldn't be such a big step.

If you do want to learn more about NIO, read *Java NIO* by Ron Hitchens and *Java I/O, NIO and NIO.2* by Jeff Friesen.

RELAX

Channels support advanced networking features that you don't need for these exercises.

Channels can support nonblocking I/O, reading and writing via ByteBuffers, and asynchronous I/O. We're not going to show you any of this! But at least now you have some keywords to put into your search engine when you want to know more.

The DailyAdviceClient

Before we start building the Chat app, let's start with something a little smaller. The Advice Guy is a server program that offers up practical, inspirational tips to get you through those long days of coding.

We're building a client for The Advice Guy program, which pulls a message from the server each time it connects.

What are you waiting for? Who *knows* what opportunities you've missed without this app.

Figure 17-1. The Advice Guy

- ❶ **Connect**

  Client connects to the server

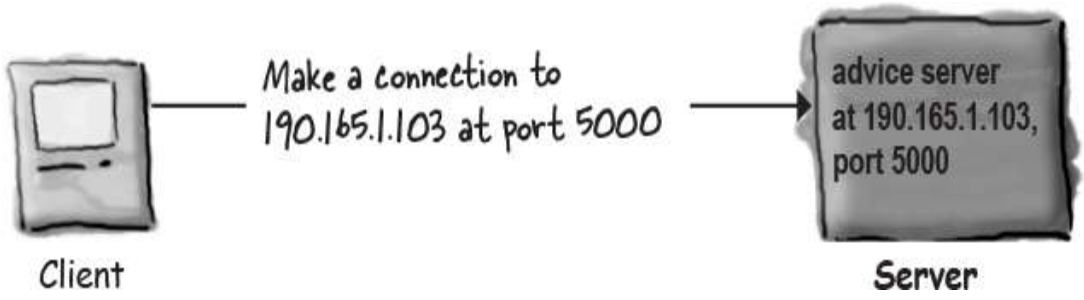

- **2 Read**

  Client gets a Reader for the Channel, and reads a message from the server

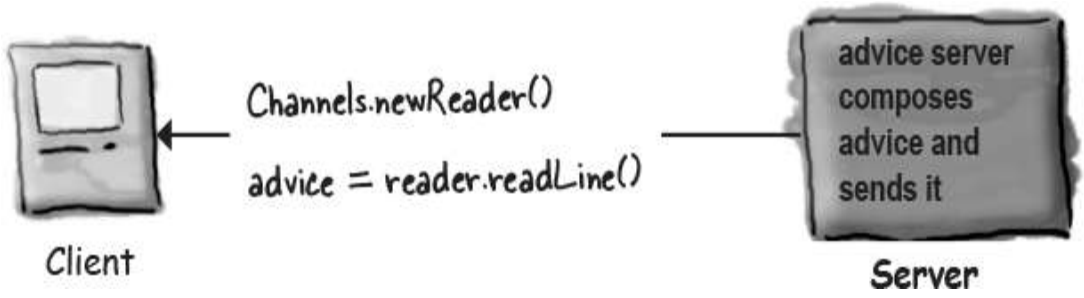

DailyAdviceClient code

This program makes a SocketChannel, makes a BufferedReader (with the help of the channel's Reader), and reads a single line from the server application (whatever is running at port 5000).

```
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.Channels;
import java.nio.channels.SocketChannel;
import java.nio.charset.StandardCharsets;

public class DailyAdviceClient {

  public void go() {

    InetSocketAddress serverAddress = new InetSocketAddress("127.0.0.1", 5000);

    try (SocketChannel socketChannel = SocketChannel.open(serverAddress)) {

      Reader channelReader = Channels.newReader(socketChannel, StandardCharsets.UTF_8);

      BufferedReader reader = new BufferedReader(channelReader);

      String advice = reader.readLine();

      System.out.println("Today you should: " + advice);

      reader.close();

    } catch (IOException e) {

      e.printStackTrace();

    }

  }

  public static void main(String[] args) {

    new DailyAdviceClient().go();

  }

}
```

Define the server address as being port 5000, on the same host this code is running on (the "localhost").

This uses try-with-resources to automatically close the SocketChannel when the code is complete.

Create a SocketChannel by opening one for the server's address.

Create a Reader that reads from the SocketChannel.

Chain a BufferedReader to the Reader from the SocketChannel.

This readLine() is EXACTLY the same as if you were using a BufferedReader chained to a FILE.. In other words, by the time you call a BufferedReader method, the reader doesn't know or care where the characters came from.

This closes the channelReader and this BufferedReader.

SHARPEN YOUR PENCIL

Yours to solve.

Test your memory of the classes for reading and writing from a SocketChannel. Try not to look at the opposite page!

To ***read*** text from a SocketChannel:

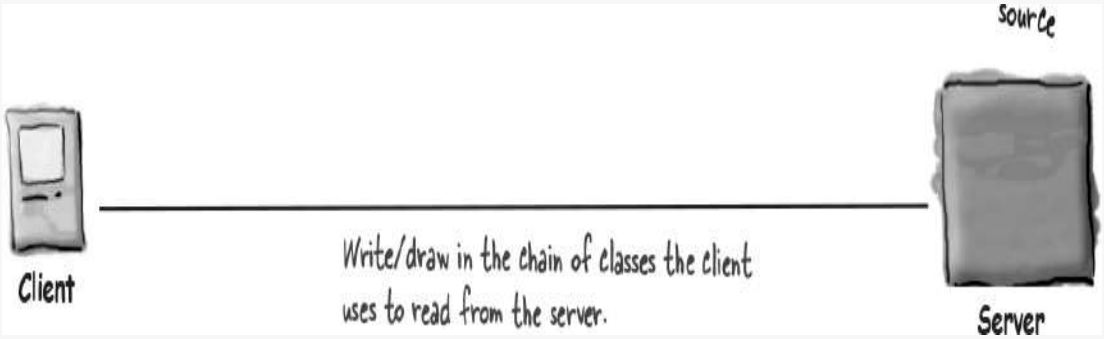

To ***send*** text to a SocketChannel:

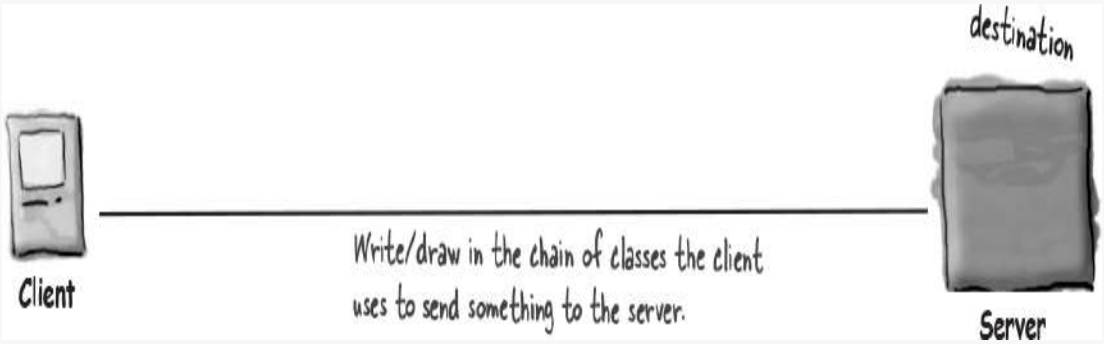

SHARPEN YOUR PENCIL

Yours to solve.

Fill in the blanks:

What two pieces of information does the client need in order to make a connection with a server?

_____

_____

Which TCP port numbers are reserved for "well-known services" like HTTP and FTP? _____

TRUE or FALSE: The range of valid TCP port numbers can be represented by a short primitive. _____

Writing a simple server application

So what's it take to write a server application? Just a couple of Channels. Yes, a couple as in two. A ServerSocketChannel, which waits for client requests (when a client connects) and a SocketChannel to use for communication with the client. If there's more than one client, we'll need more than one channel, but we'll get to that later.

How it works:

- ❶ Server application makes a ServerSocketChannel and binds it to a specific port

```
ServerSocketChannel serverChannel =
ServerSocketChannel.open();
serverChannel.bind(new InetSocketAddress(5000));
```

This starts the server application listening for client requests coming in for port 5000.

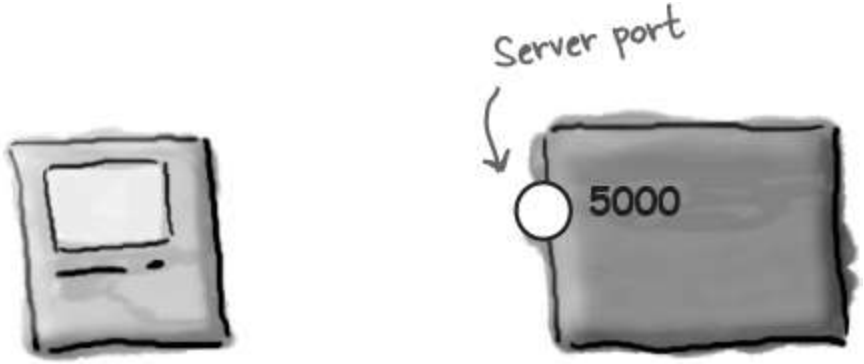

- ❷ Client makes a SocketChannel connected to the server application

  ```
  SocketChannel svr = SocketChannel.open(new
  InetSocketAddress("190.165.1.103", 5000));
  ```

  Client knows the IP address and port number (published or given to them by whomever configures the server app to be on that port).

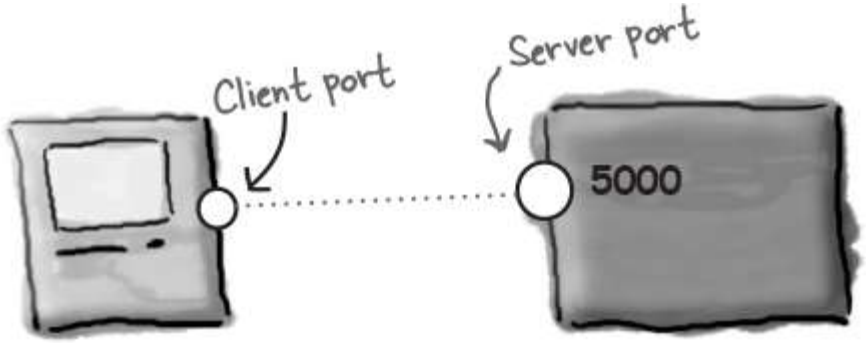

- ❸ Server makes a new SocketChannel to communicate with this client

  ```
  SocketChannel clientChannel =
  serverChannel.accept();
  ```

The accept() method blocks (just sits there) while it's waiting for a client connection. When a client finally connects, the method returns a SocketChannel that knows how to communicate with this client.

The ServerSocketChannel can go back to waiting for other clients. The server has just one ServerSocketChannel, and a SocketChannel per client.

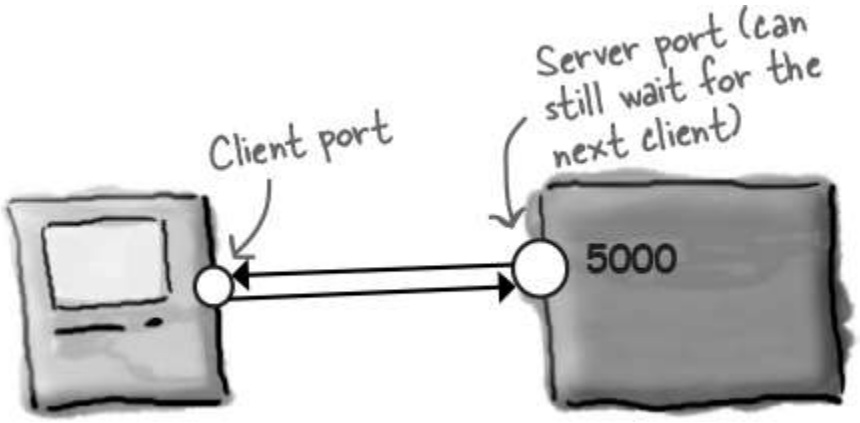

DailyAdviceServer code

This program makes a ServerSocketChannel and waits for client requests. When it gets a client request (i.e., client created a new SocketChannel to this server), the server makes a new SocketChannel to that client. The server makes a PrintWriter (using a Writer created from the SocketChannel) and sends a message to the client.

```
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.*;
import java.util.Random;

public class DailyAdviceServer {
  final private String[] adviceList = {
          "Take smaller bites",
          "Go for the tight jeans. No they do NOT make you look fat.",
          "One word: inappropriate",
          "Just for today, be honest. Tell your boss what you *really* think",
          "You might want to rethink that haircut."};
  private final Random random = new Random();

  public void go() {

    try (ServerSocketChannel serverChannel = ServerSocketChannel.open()) {
      serverChannel.bind(new InetSocketAddress(5000));

      while (serverChannel.isOpen()) {
        SocketChannel clientChannel = serverChannel.accept();
        PrintWriter writer = new PrintWriter(Channels.newOutputStream(clientChannel));

        String advice = getAdvice();
        writer.println(advice);
        writer.close();
        System.out.println(advice);
      }
    } catch (IOException ex) {
      ex.printStackTrace();
    }
  }

  private String getAdvice() {
    int nextAdvice = random.nextInt(adviceList.length);
    return adviceList[nextAdvice];
  }

  public static void main(String[] args) {
    new DailyAdviceServer().go();
  }
}
```

Remember the imports.

Daily advice comes from this array.

ServerSocketChannel makes this server application "listen" for client requests on the port it's bound to.

You have to bind the ServerSocketChannel to the port you want to run the application on.

The server goes into a permanent loop, waiting for (and servicing) client requests.

The accept method blocks (just sits there) until a request comes in, and then the method returns a SocketChannel for communicating with the client.

Create an output stream for the client's channel, and wrap it in a PrintWriter. You can use newOutputStream or newWriter here.

Send the client a String advice message.

Close the writer, which will also close the client SocketChannel.

Print in the server console, so we can see what's happening.

BRAIN BARBELL

How does the server know how to communicate with the client?

Think about how/when/where the server gets knowledge about the client.

Yes, that's right, **the server can't accept a request from a client until it has finished with the current client.** At which point, it starts the next iteration of the infinite loop, sitting, waiting, at the accept() call until a new request comes in, at which point it makes a SocketChannel to send data to the new client and starts the process over again.

To get this to work with multiple clients *at the same time*, we need to use separate threads.

We'd give each new client's SocketChannel to a new thread, and each thread can work independently.

We're just about to learn how to do that!

BULLET POINTS

- Client and server applications communicate using Channels.
- A Channel represents a connection between two applications that may (or may not) be running on two different physical machines.
- A client must know the IP address (or host name) and TCP port number of the server application.
- A TCP port is a 16-bit unsigned number assigned to a specific server application. TCP port numbers allow different server applications to run on the same machine; clients connect to a specific application using its port number.
- The port numbers from 0 through 1023 are reserved for "well-known services" including HTTP, FTP, SMTP, etc.
- A client connects to a server by opening a SocketChannel:

```
SocketChannel.open
 (new InetSocketAddress("127.0.0.1", 4200))
```

- Once connected, a client can create readers (to read data from the server) and writers (to send data to the server) for the channel:

```
Reader reader = Channels.newReader(sockCh,
 StandardCharsets.UTF_8);
Writer writer = Channels.newWriter(sockCh,
 StandardCharsets.UTF_8);
```

- To read text data from the server, create a BufferedReader, chained to the Reader. The Reader is a "bridge" that takes in bytes and converts them to text (character) data. It's used primarily to act as the middle chain between the high-level BufferedReader and the low-level connection.

- To write text data to the server, create a PrintWriter chained to the Writer. Call the print() or println() methods to send Strings to the server.
- Servers use a ServerSocketChannel that waits for client requests on a particular port number.
- When a ServerSocketChannel gets a request, it "accepts" the request by making a SocketChannel for the client.

Writing a Chat Client

We'll write the Chat Client application in two stages. First we'll make a send-only version that sends messages to the server but doesn't get to read any of the messages from other participants (an exciting and mysterious twist to the whole chat room concept).

Then we'll go for the full chat monty and make one that both sends *and* receives chat messages.

Version One: send-only

Code outline

Here's an outline of the main functionality the chat client needs to provide. The full code is on the next page.

```
public class SimpleChatClientA {
  private JTextField outgoing;
  private PrintWriter writer;

  public void go() {
     // call the setUpNetworking() method
     // make gui and register a listener with the send button
  }

  private void setUpNetworking() {
    // open a SocketChannel to the server
    // make a PrintWriter and assign to writer instance variable
  }

  private void sendMessage() {
    // get the text from the text field and
    // send it to the server using the writer (a PrintWriter)
  }
}
```

```
import javax.swing.*;
import java.awt.*;
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.*;
import static java.nio.charset.StandardCharsets.UTF_8;

public class SimpleChatClientA {
  private JTextField outgoing;
  private PrintWriter writer;

  public void go() {
    setUpNetworking();

    outgoing = new JTextField(20);

    JButton sendButton = new JButton("Send");
    sendButton.addActionListener(e -> sendMessage());

    JPanel mainPanel = new JPanel();
    mainPanel.add(outgoing);
    mainPanel.add(sendButton);
    JFrame frame = new JFrame("Ludicrously Simple Chat Client");
    frame.getContentPane().add(BorderLayout.CENTER, mainPanel);
    frame.setSize(400, 100);
    frame.setVisible(true);
    frame.setDefaultCloseOperation(WindowConstants.EXIT_ON_CLOSE);
  }

  private void setUpNetworking() {
    try {
      InetSocketAddress serverAddress = new InetSocketAddress("127.0.0.1", 5000);

      SocketChannel socketChannel = SocketChannel.open(serverAddress);
      writer = new PrintWriter(Channels.newWriter(socketChannel, UTF_8));
      System.out.println("Networking established.");
    } catch (IOException e) {
      e.printStackTrace();
    }
  }

  private void sendMessage() {
    writer.println(outgoing.getText());
    writer.flush();
    outgoing.setText("");
    outgoing.requestFocus();
  }

  public static void main(String[] args) {
    new SimpleChatClientA().go();
  }
}
```

Imports for writing (java.io), network connections (java.nio.channels) and the GUI stuff (awt and swing)

This is a static import; we looked at static imports in Chapter 10.

Call the method that will connect to the server.

Build the GUI, nothing new here, and nothing related to networking or I/O.

We're using localhost so you can test the client and server on one machine.

Open a SocketChannel that connects to the server.

This is where we make the PrintWriter from a writer that writes to the SocketChannel.

Now we actually do the writing. Remember, the writer is chained to the writer from the SocketChannel, so whenever we do a println(), it goes over the network to the server!

If you want to try this now, type in the Ready-bake chat server code listed on the next page.

First, start the server in one terminal. Next, use another terminal to start this client.

The really, really simple Chat Server

You can use this server code for all versions of the Chat Client. Every possible disclaimer ever disclaimed is in effect here. To keep the code stripped down to the bare essentials, we took out a lot of parts that you'd need to make this a real server. In other words, it works, but there are at least a hundred ways to break it. If you want to really sharpen your skills after you've finished this book, come back and make this server code more robust.

After you finish this chapter, you should be able to annotate this code yourself. You'll understand it much better if *you* work out what's happening than if we explained it to you. Then again, this is Ready-Bake Code, so you really don't have to understand it at all. It's here just to support the two versions of the Chat Client.

To run the Chat Client, you need two terminals. First, launch this server from one terminal, and then launch the client from another terminal.

```
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.*;
import java.util.*;
import java.util.concurrent.*;

import static java.nio.charset.StandardCharsets.UTF_8;

public class SimpleChatServer {
  private final List<PrintWriter> clientWriters = new ArrayList<>();

  public static void main(String[] args) {
    new SimpleChatServer().go();
  }

  public void go() {
    ExecutorService threadPool = Executors.newCachedThreadPool();
    try {
      ServerSocketChannel serverSocketChannel = ServerSocketChannel.open();
      serverSocketChannel.bind(new InetSocketAddress(5000));

      while (serverSocketChannel.isOpen()) {
        SocketChannel clientSocket = serverSocketChannel.accept();
        PrintWriter writer = new PrintWriter(Channels.newWriter(clientSocket,
UTF_8));
        clientWriters.add(writer);
        threadPool.submit(new ClientHandler(clientSocket));
        System.out.println("got a connection");
      }
    } catch (IOException ex) {
      ex.printStackTrace();
    }
  }

  private void tellEveryone(String message) {
    for (PrintWriter writer : clientWriters) {
      writer.println(message);
      writer.flush();
    }
  }

  public class ClientHandler implements Runnable {
    BufferedReader reader;
    SocketChannel socket;

    public ClientHandler(SocketChannel clientSocket) {
      socket = clientSocket;
      reader = new BufferedReader(Channels.newReader(socket, UTF_8));
```

```
    }

    public void run() {
      String message;
      try {
        while ((message = reader.readLine()) != null) {
          System.out.println("read " + message);
          tellEveryone(message);
      }
    } catch (IOException ex) {
      ex.printStackTrace();
    }
  }
 }
}
```

Runs in the background

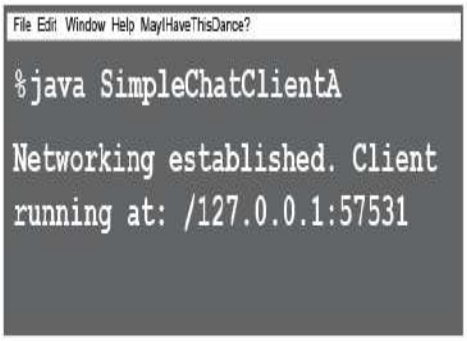

Connects to the server and launches GUI

Version Two: send and receive

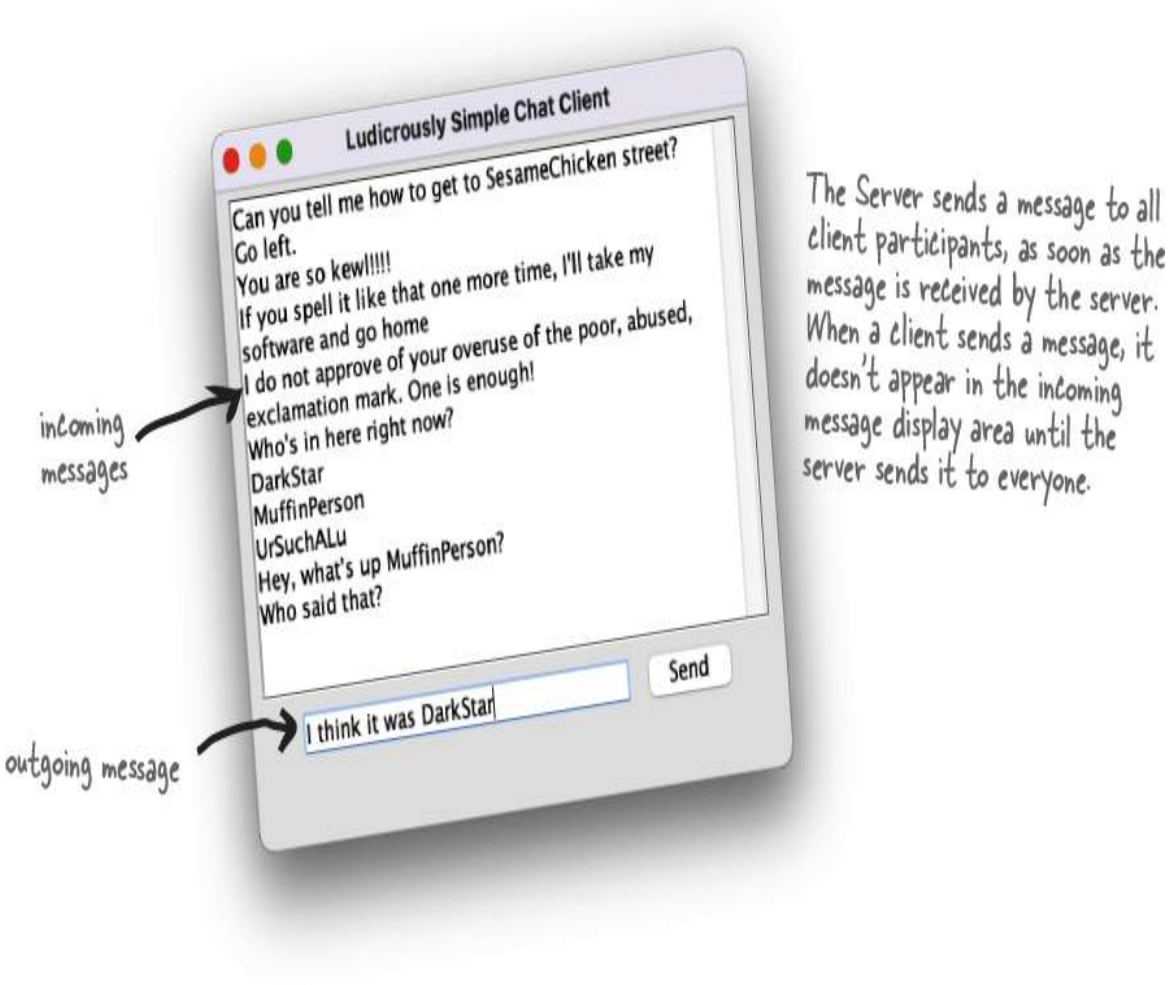

Big Question: *HOW* do you get messages from the server?

Should be easy; when you set up the networking, make a Reader as well. Then read messages using **`readLine`**.

Bigger Question: *WHEN* do you get messages from the server?

Think about that. What are the options?

- ① **Option One: Read something in from the server each time the user sends a message.**

  Pros: Doable, very easy.

  Cons: Stupid. Why choose such an arbitrary time to check for messages? What if a user is a lurker and doesn't send anything?

- ② **Option Two: Poll the server every 20 seconds.**

  Pros: It's doable, and it fixes the lurker problem.

  Cons: How does the server know what you've seen and what you haven't? The server would have to store the messages, rather than just doing a distribute-and-forget each time it gets one. And why 20 seconds? A delay like this affects usability, but as you reduce the delay, you risk hitting your server needlessly. Inefficient.

- ③ **Option Three: Read messages as soon as they're sent from the server.**

  Pros: Most efficient, best usability.

  Cons: How do you do two things at the same time? Where would you put this code? You'd need a loop somewhere that was always waiting to read from the server. But where would that go? Once you launch the GUI, nothing happens until an event is fired by a GUI component.

NOTE

In Java you really CAN walk and chew gum at the same time.

You know by now that we're going with option three

We want something to run continuously, checking for messages from the server, but *without interrupting the user's ability to interact with the GUI!* So while the user is happily typing new messages or scrolling through the incoming messages, we want something *behind the scenes* to keep reading in new input from the server.

That means we finally need a new thread. A new, separate stack.

We want everything we did in the Send-Only version (version one) to work the same way, while a new *process* runs alongside that reads information from the server and displays it in the incoming text area.

Well, not quite. Each new Java thread is not actually a separate process running on the OS. But it almost *feels* as though it is.

We're going to take a break from the chat application for a bit while we explore how this works. Then we'll come back and add it to our chat client at the end of the chapter.

Multithreading in Java

Java has support for multiple threads built right into the fabric of the language. And it's a snap to make a new thread of execution:

```
Thread t = new Thread();
t.start();
```

That's it. By creating a new Thread *object*, you've launched a separate *thread of execution*, with its very own call stack.

Except for one problem.

That thread doesn't actually *do* anything, so the thread "dies" virtually the instant it's born. When a thread dies, its new stack disappears again. End of story.

So we're missing one key component—the thread's *job*. In other words, we need the code that you want to have run by a separate thread.

Multiple threading in Java means we have to look at both the *thread* and the *job* that's *run* by the thread. In fact, **there's more than one way to run multiple jobs in Java**, not just with the Thread *class* in the java.lang package. (Remember, java.lang is the package you get imported for free, implicitly, and it's where the classes most fundamental to the language live, including String and System.)

Java has multiple threads but only one Thread class

We can talk about *thread* with a lowercase "t" and **Thread** with a capital "T." When you see *thread*, we're talking about a separate thread of execution. In other words, a separate call stack. When you see **Thread**, think of the Java naming convention. What, in Java, starts with a capital letter? Classes and interfaces. In this case, **Thread** is a class in the java.lang package. A **Thread** object represents a *thread of execution*. In older versions of Java, you always had to create an instance of class **Thread** each time you wanted to start up a new *thread* of execution. Java has evolved over time, and now using the **Thread** class directly is not the only way. We'll see this in more detail as we go through the rest of the chapter.

NOTE

A thread is a separate "thread of execution," a separate call stack.

A Thread is a Java class that represents a thread.

Using the Thread class is not the only way to do multithreading in Java.

thread	Thread
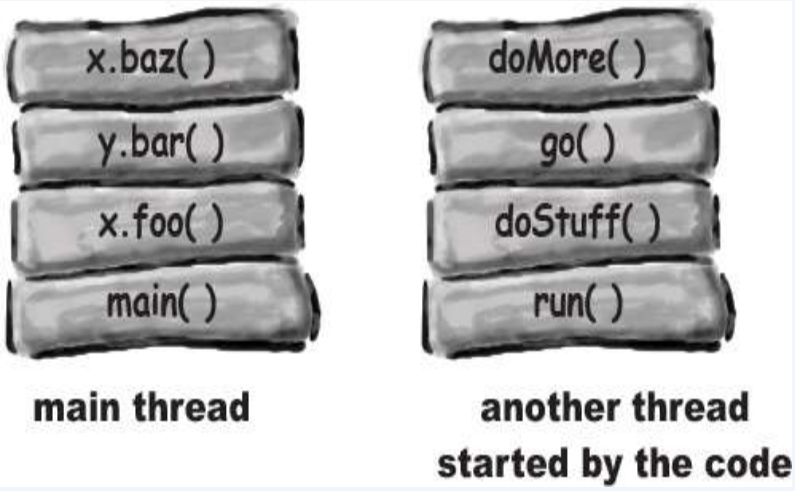	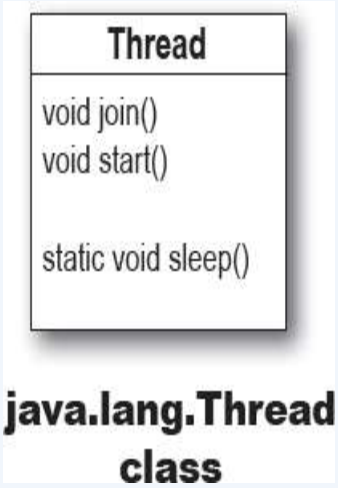
A *thread* (lowercase "t") is a separate thread of execution. That means a separate call stack. Every Java application starts up a main thread—the thread that puts the main() method on the bottom of the stack. The JVM is responsible for starting the main thread (and other threads, as it chooses, including the garbage collection thread). As a programmer, you can write code to start other threads of your own.	**`Thread`** (capital "T") is a class that represents a thread of execution. It has methods for starting a thread, joining one thread with another, putting a thread to sleep, and more.

What does it mean to have more than one call stack?

With more than one call stack, you can have multiple things happen at the same time. If you're running on a multiprocessor system (like most modern computers and phones), you can actually do more than one thing at a time. With Java threads, even if you're not running on a multiprocessor system or if you're running more processes than available cores, it can *appear* that you're doing all these things simultaneously. In other words, execution can move back and forth between stacks so rapidly that you feel as though all stacks are executing at the same time. Remember, Java is just a process running on your underlying OS. So first, Java *itself* has to be "the currently executing process" on the OS. But once Java gets its turn to execute, exactly *what* does the JVM *run*? Which bytecodes execute? Whatever is on the top of the

currently running stack! And in 100 milliseconds, the currently executing code might switch to a *different* method on a *different* stack.

One of the things a thread must do is keep track of which statement (of which method) is currently executing on the thread's stack.

It might look something like this:

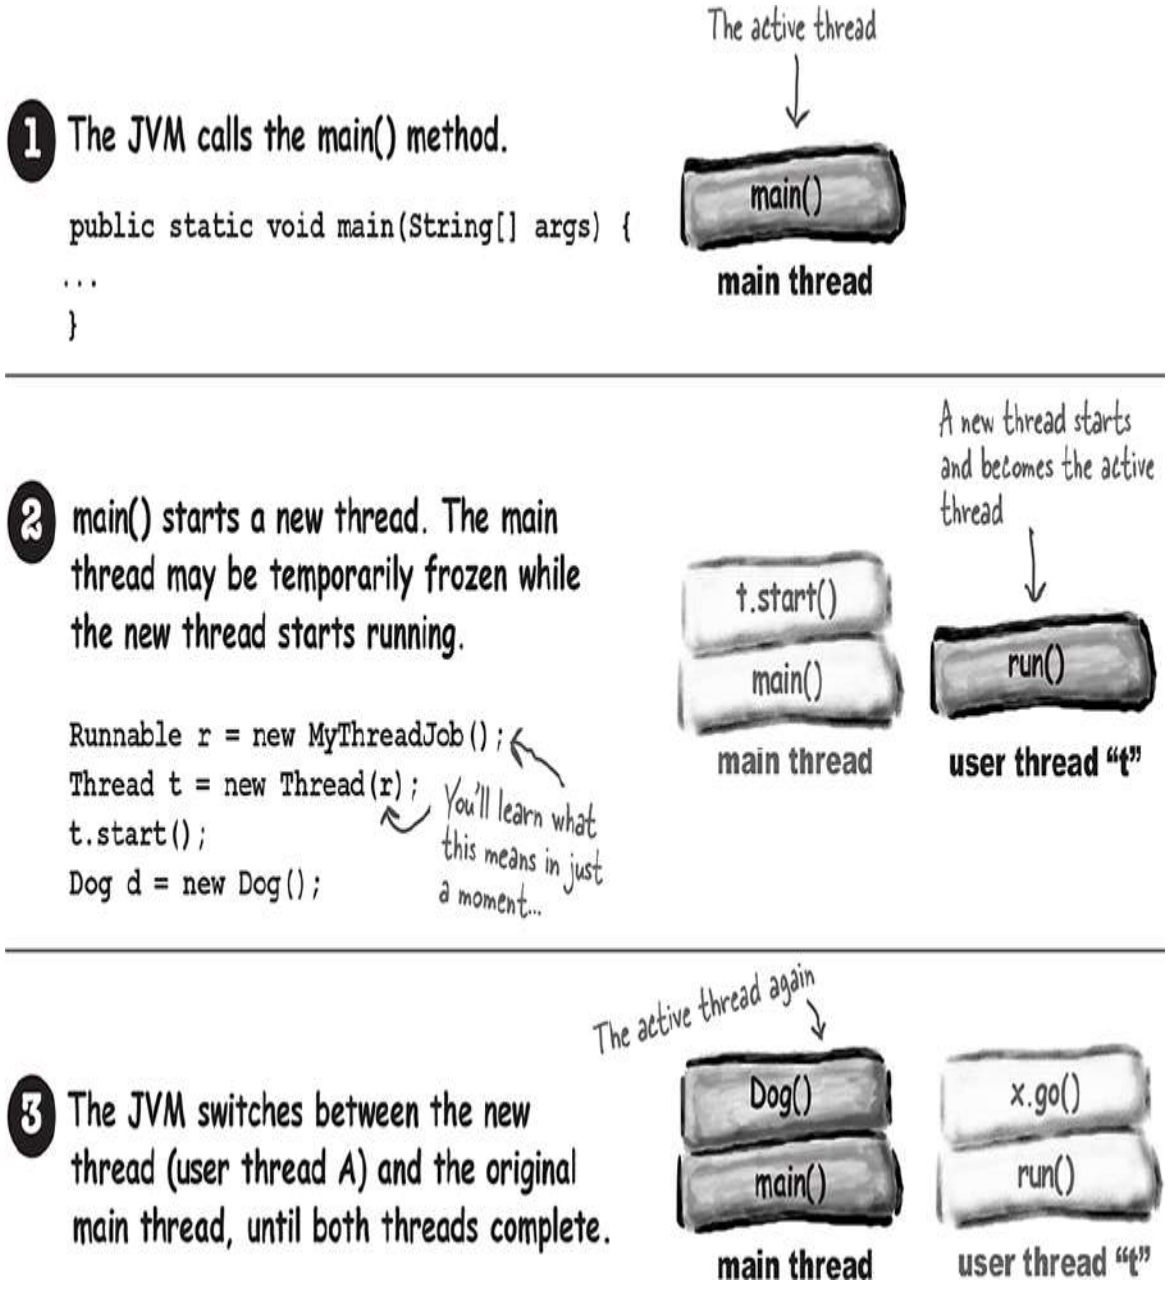

To create a new call stack you need a job to run

NOTE

Runnable is to a thread what a job is to a worker. A Runnable is the job a thread is supposed to run.

A Runna ble holds t he method t hat goes on the bottom of the new call stack: run().

To start a new call stack the thread needs a job—a job the thread will run when it's started. That job is actually the first method that goes on the new thread's stack, and it must always be a method that looks like this:

```
public void run() {
  // code that will be run by the new thread
}
```

How does the thread know which method to put at the bottom of the stack? Because Runnable defines a contract. Because Runnable is an interface. A thread's job can be defined in any class that implements the Runnable interface, or a lambda expression that is the right shape for the run method.

Once you have a Runnable class or lambda expression, you can tell the JVM to run this code in a separate thread; you're giving the thread its job.

> **NOTE**
>
> The Runnable interface defines only one method, public void run(). Since it has only a single method, it's a SAM type, a Functional Interface, and you can use a lambda instead of creating a whole class that implements Runnable if you want.

To make a job for your thread, implement the Runnable interface

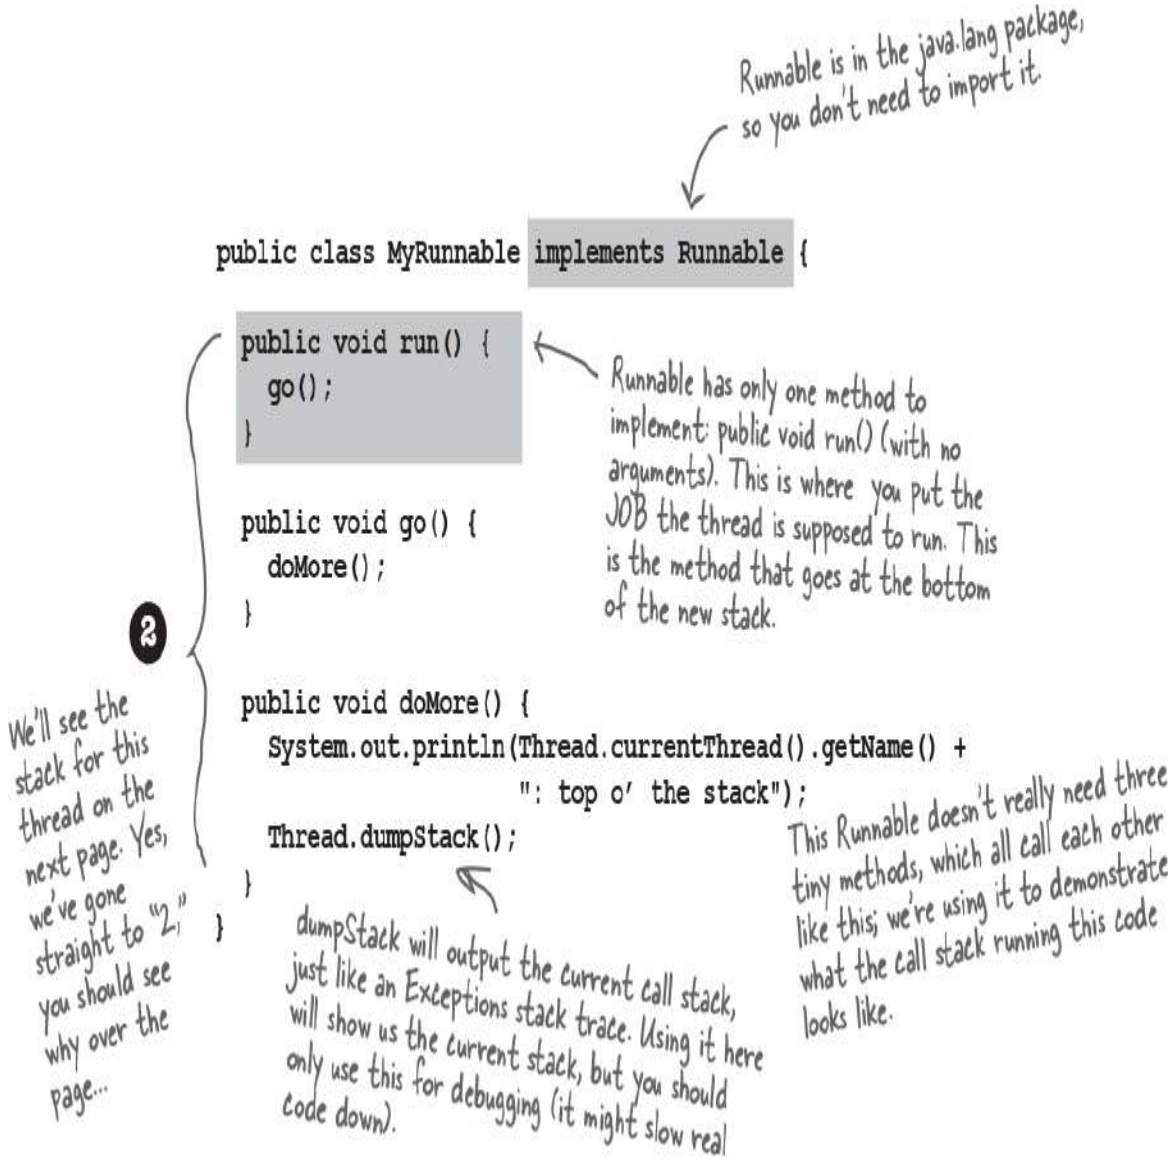

How NOT to run the Runnable

It may be tempting to create a new instance of the Runnable and call the run method, but that's **not enough to create a new call stack**.

```
class RunTester {
  public static void main(String[] args) {
    MyRunnable runnable = new MyRunnable();
    runnable.run();
    System.out.println(Thread.currentThread().getName() +
                       ": back in main");
```

```
    Thread.dumpStack();
  }
}
```

> **NOTE**
>
> This will NOT do what we want!

The run() method was called directly from inside the main() method, so it's part of the call stack of the main thread.

How we used to launch a new thread

The simplest way to launch a new thread is with the Thread class that we mentioned earlier. This method has been around in Java since the very beginning, but **it is no longer the recommended approach to use**. We're showing it here because a) it's simple, and b) you'll see it in the Real World. We will talk later about why it might not be the best approach.

```
class ThreadTester {

  public static void main(String[] args) {

    Runnable threadJob = new MyRunnable();
    Thread myThread = new Thread(threadJob);

    myThread.start();

    System.out.println(
      Thread.currentThread().getName() +
        ": back in main");
    Thread.dumpStack();
  }
}
```

Pass the new Runnable instance into the new Thread constructor. This tells the thread what job to run. In other words, the Runnable's run() method will be the first method that the new thread will run.

You won't get a new thread of execution until you call start() on the Thread instance. A thread is not really a thread until you start it. Before that, it's just a Thread instance, like any other object, but it won't have any real "threadness."

This thread's stack is below.

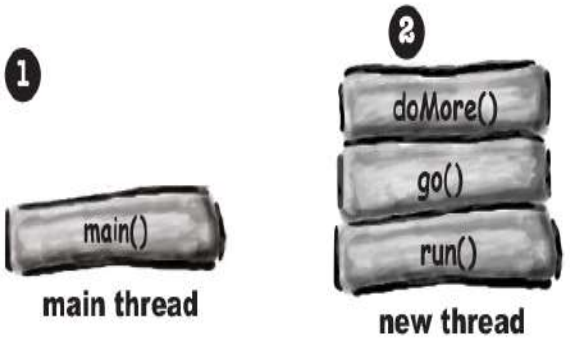

Now we have two independent call stacks.

Call stack for the "main" thread of the application (started by the "public static void main" method).

Call stack for the new thread we started with the MyRunnable job.

```
File Edit Window Help Duo
%java ThreadTester

main: back in main
Thread-0: top o' the stack
java.lang.Exception: Stack trace
        at java.base/java.lang.Thread.dumpStack(Thread.java:1383)
        at ThreadTester.main(MyRunnable.java:38)
java.lang.Exception: Stack trace
        at java.base/java.lang.Thread.dumpStack(Thread.java:1383)
        at MyRunnable.doMore(MyRunnable.java:15)
        at MyRunnable.go(MyRunnable.java:10)
        at MyRunnable.run(MyRunnable.java:6)
        at java.base/java.lang.Thread.run(Thread.java:829)
```

dumpStack() called from doMore() in MyRunnable

dumpStack() called from main() method

Note the main method is NOT the bottom of the call stack of the Runnable.

A better alternative: don't manage the Threads at all

Creating and starting a new Thread gives you a lot of control over that Thread, but the downside is you *have* to control it. You have to keep track of all the Threads and make sure they're shut down at the end. Wouldn't it be better to have something else that starts, stops, and even reuses the Threads so you don't have to?

Allow us to introduce an interface in java.util.concurrent, **`ExecutorService`**. Implementations of this interface will *execute* jobs (Runnables). Behind the scenes the ExecutorService will create, reuse, and kill threads in order to run these jobs.

> **NOTE**
>
> Static factory methods can be used instead of constructors.
>
> Factory methods return exactly the implementation of an interface that we need. We don't need to know the concrete classes or how to create them.

The **`java.util.concurrent.Executors`** class has *factory methods* to create the ExecutorService instances we'll need.

Executors have been around since Java 5 and so should be available to you even if you're working with quite an old version of Java. There's no real need to use Thread directly at all these days.

Running one job

For the simple cases we're going to get started with, we'll want to run only one job in addition to our main class. There's a *single thread executor* that we can use to do this.

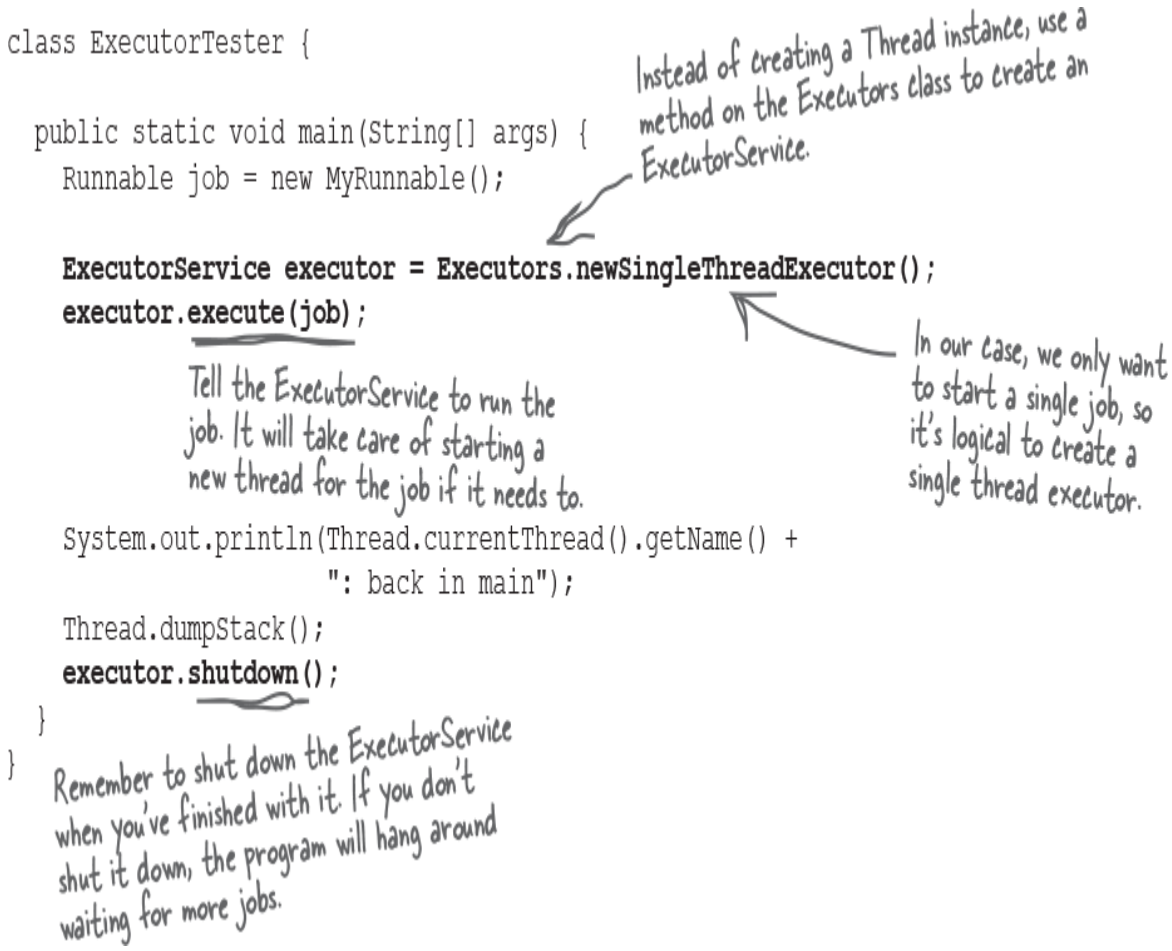

We'll come back to the Executors factory methods later, and we'll see why it might be better to use ExecutorServices rather than managing the Thread itself.

The three states of a new thread

Whether you create a new Thread and pass it the Runnable, or use an Executor to execute the Runnable, the job will still be running on a Thread. A Thread will move through a number of different states during its life, and understanding these states, and the transitions between them, helps us to better understand multithreaded programming.

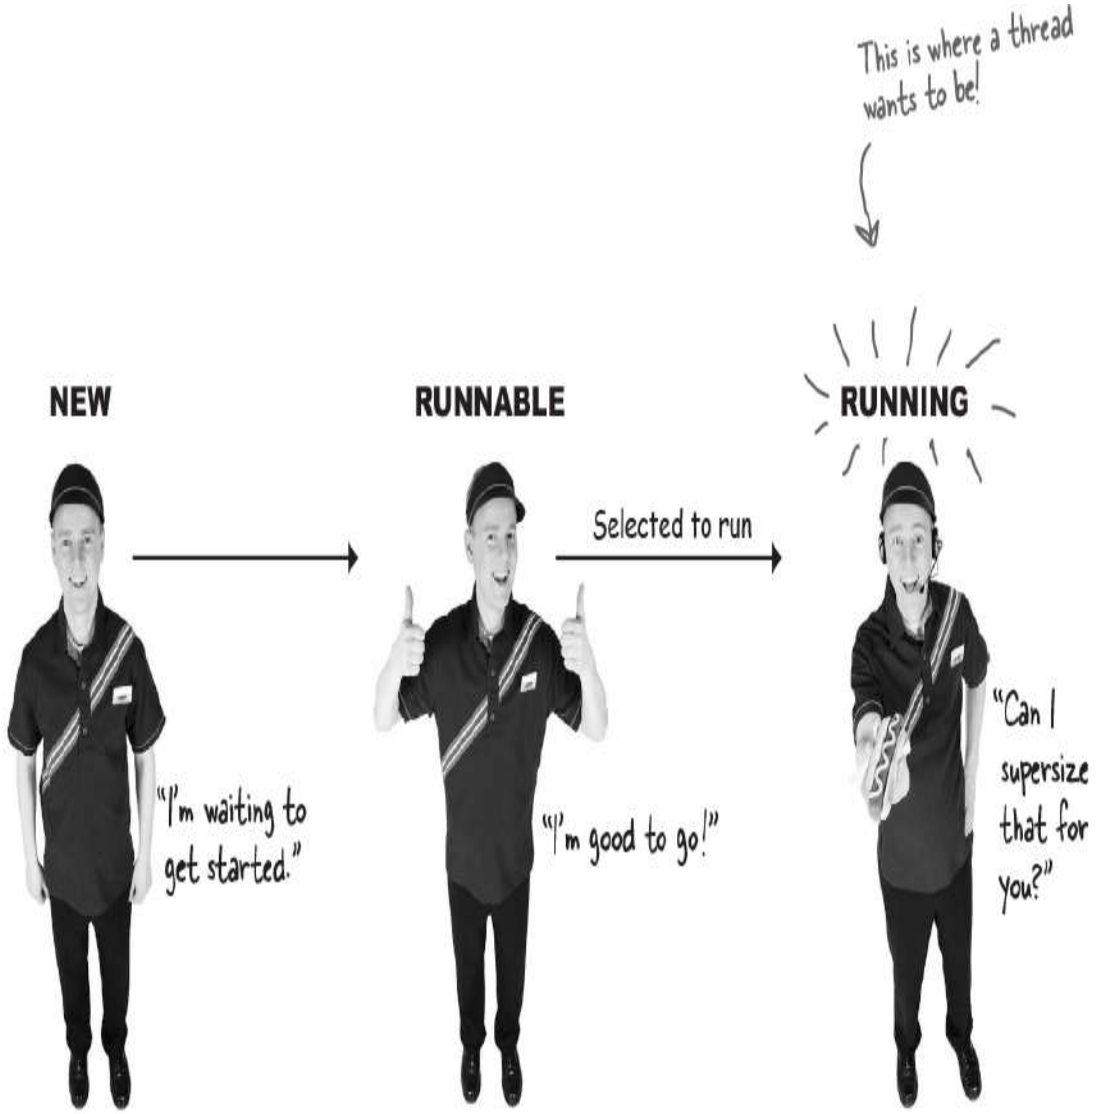

A Thread instance has been created but not started. In other words, there is a Thread *object*, but no *thread of execution*.

When you start the thread, it moves into the runnable state. This means the thread is ready to run and just waiting for its Big Chance to be selected for execution. At this point, there is a new call stack for this thread.

This is the state all threads lust after! To be Up And Running. Only the JVM thread scheduler can make that decision. You can sometimes *influence* that decision, but you cannot force a thread to move from runnable to running. In the running state, a thread (and ONLY this thread) has an active call stack, and the method on the top of the stack is executing.

But there's more. Once the thread becomes runnable, it can move back and forth between runnable, running, and an additional state: *temporarily not runnable*.

Typical runnable/running loop

Typically, a thread moves back and forth between runnable and running, as the JVM thread scheduler selects a thread to run and then kicks it back out so another thread gets a chance.

A thread can be made temporarily not-runnable

The thread scheduler can move a running thread into a blocked state, for a variety of reasons. For example, the thread might be executing code to read from an input stream, but there isn't any data to read. The scheduler will move the thread out of the running state until something becomes available. Or the executing code might have told the thread to put itself to sleep (sleep()). Or the thread might be waiting because it tried to call a method on

an object, and that object was “locked.” In that case, the thread can’t continue until the object’s lock is freed by the thread that has it.

All of those conditions (and more) cause a thread to become temporarily not-runnable.

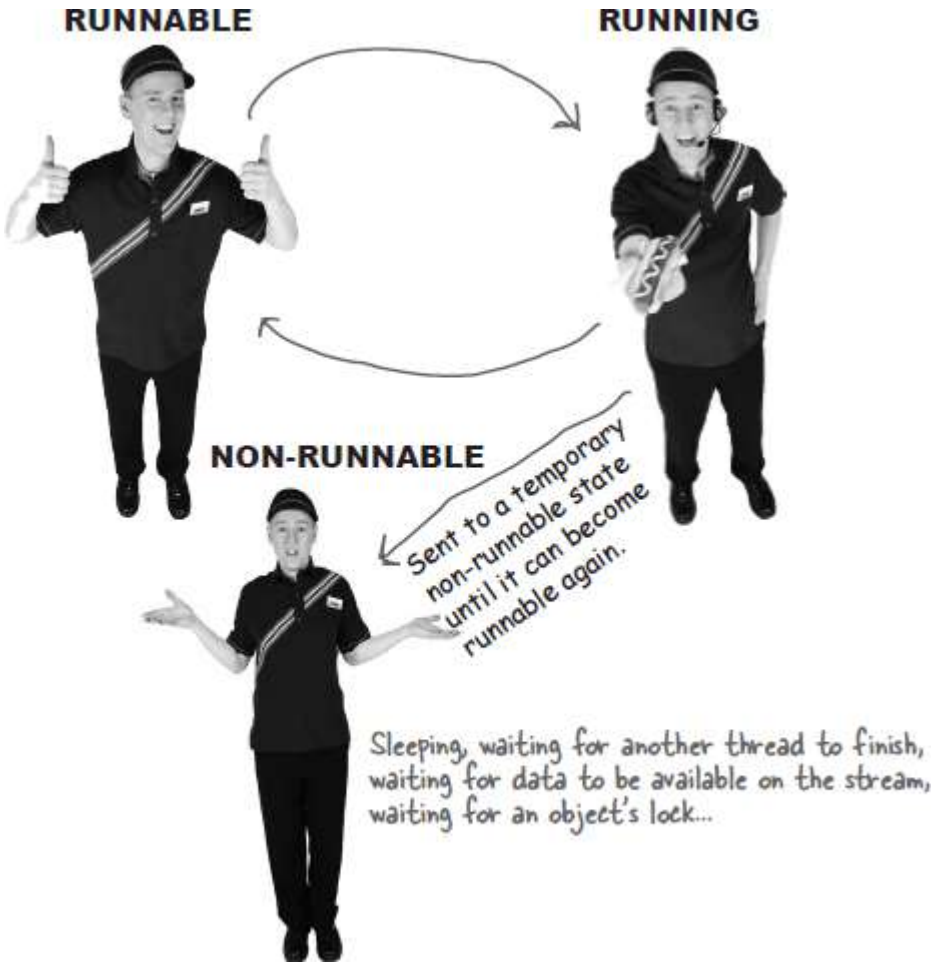

The thread scheduler

The thread scheduler makes all the decisions about who moves from runnable to running, and about when (and under what circumstances) a thread leaves the running state. The scheduler decides who runs, for how long, and where the threads go when it decides to kick them out of the currently running state.

Number four, you've had enough time. Back to runnable. Number two, looks like you're up!
Oh, now it looks like you're gonna have to sleep. Number five, come take his place. Number two, you're still sleeping...

You can't control the scheduler. There is no API for calling methods on the scheduler. Most importantly, there are no guarantees about scheduling! (There are a few *almost*-guarantees, but even those are a little fuzzy.)

The bottom line is this: ***do not base your program's correctness on the scheduler working in a particular way!*** The scheduler implementations are different for different JVMs, and even running the same program on the same machine can give you different results. One of the worst mistakes new Java programmers make is to test their multithreaded program on a single machine, and assume the thread scheduler will always work that way, regardless of where the program runs.

So what does this mean for write-once-run-anywhere? It means that to write platform-independent Java code, your multithreaded program must work no matter *how* the thread scheduler behaves. That means you can't be dependent on, for example, the scheduler making sure all the threads take nice, perfectly fair, and equal turns at the running state. Although highly unlikely today, your program might end up running on a JVM with a scheduler that says, "OK, thread five, you're up, and as far as I'm concerned, you can stay here until you're done, when your run() method completes."

NOTE

The thread scheduler makes all the decisions about who runs and who doesn't. It usually makes the threads take turns, nicely. But there's no guarantee about that. It might let one thread run to its heart's content while the other threads "starve."

An example of how unpredictable the scheduler can be...

Running this code on one machine:

```
class ExecutorTestDrive {
  public static void main (String[] args) {
    ExecutorService executor =
      Executors.newSingleThreadExecutor();

    executor.execute(() ->
      System.out.println("top o' the stack"));

    System.out.println("back in main");
    executor.shutdown();
  }
}
```

Runnable is a Functional Interface and can be represented as a lambda expression. Our job is just a single line of code, so a lambda expression makes sense here.

Produced this output:

```
File Edit Window Help PickMe
% java ExecutorTestDrive
back in main
top o' the stack
% java ExecutorTestDrive
top o' the stack
back in main
% java ExecutorTestDrive
top o' the stack
back in main
% java ExecutorTestDrive
back in main
top o' the stack
% java ExecutorTestDrive
top o' the stack
back in main
% java ExecutorTestDrive
top o' the stack
back in main
% java ExecutorTestDrive
back in main
top o' the stack
```

Notice how the order changes randomly. Sometimes the new thread finishes first, and sometimes the main thread finishes first.

It doesn't matter if you run this using an ExecutorService, like the code above, or with Threads directly, like the code below; both show the same symptoms.

```
class ThreadTestDrive {
  public static void main (String[] args) {
    Thread myThread = new Thread(() ->
      System.out.println("top o' the stack"));
    myThread.start();
    System.out.println("back in main");
  }
}
```

How did we end up with different results?

Multithreaded programs are *not deterministic*; they don't run the same way every time. The thread scheduler can schedule each thread differently each time the program runs.

Sometimes it runs like this:

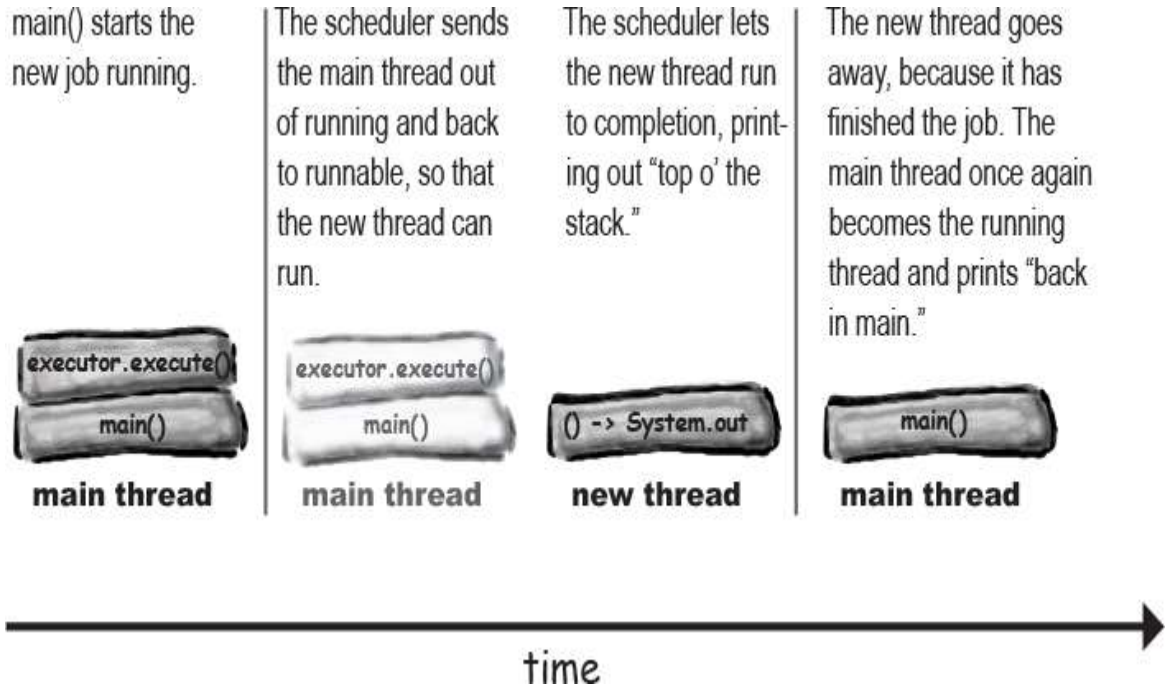

And sometimes it runs like this:

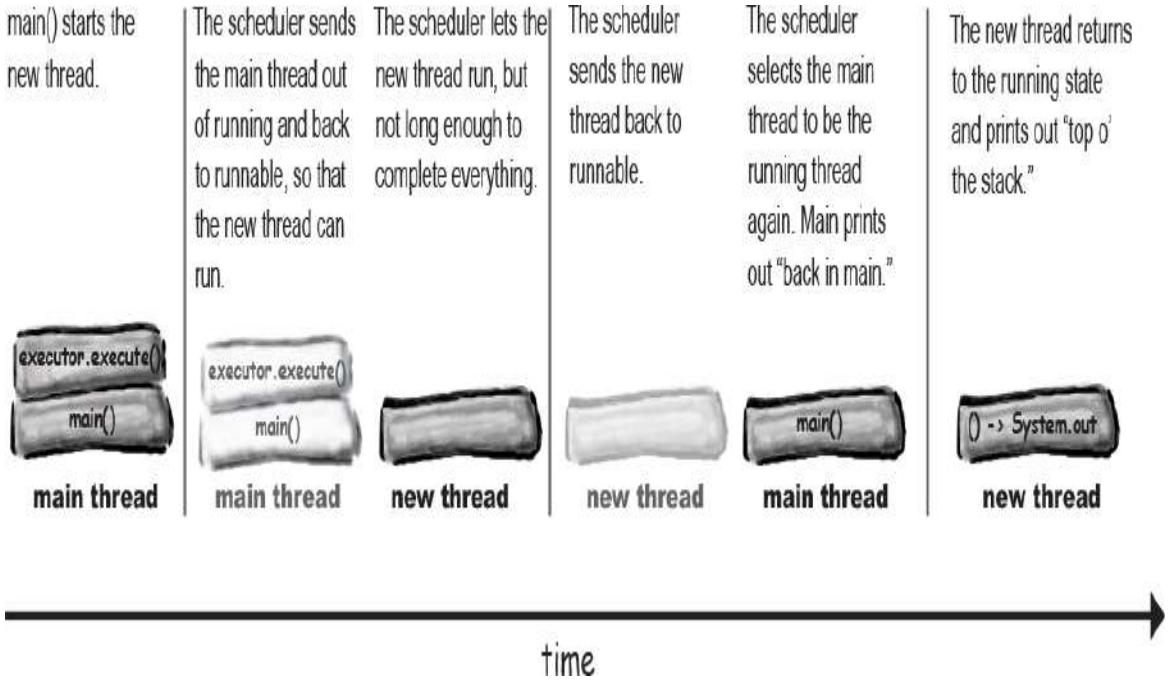

NOTE

Even if the new thread is tiny, if it has only one line of code to run like our lambda expression, it can still be interrupted by the thread scheduler.

THERE ARE NO DUMB QUESTIONS

Q: Should I use a lambda expression for my Runnable or create a new class that implements Runnable?

A: It depends upon how complicated your job is, and also on whether you think it's easier to understand as a lambda expression or a class. Lambda expressions are great for when the job is really tiny, like our single-line "print" example. Lambda expressions (or method references) may also work if you have a few lines of code in another method that you want to turn into a job:

```
executor.execute(() -> printMsg());
```

You'll most likely want to use a full Runnable class if your job needs to store things in fields and/or if your job is made up of a number of methods. This is more likely when your jobs are more complex.

Q: What's the advantage of using an ExecutorService? So far, it works the same as creating a Thread and starting it.

A: It's true that for these simple examples, where we're starting just one thread, letting it run, and then stopping our application, the two approaches seem similar. ExecutorServices become really helpful when we're starting lots of independent jobs. We don't necessarily want to create a new Thread for each of these jobs, and we don't want to keep track of all these Threads. There are different ExecutorService implementations depending upon how many threads we'll want to start (or especially if we don't know how many Threads we'll need), including ExecutorServices that create Thread pools. Thread pools let us reuse Thread instances, so we don't have to pay the cost of starting up new Threads for every job. We'll explore this in more detail later.

BULLET POINTS

- A thread with a lowercase “t” is a separate thread of execution in Java.
- Every thread in Java has its own call stack.
- A Thread with a capital “T” is the java.lang.Thread class. A Thread object represents a thread of execution.
- A thread needs a job to do. The job can be an instance of something that implements the Runnable interface.
- The Runnable interface has just a single method, run(). This is the method that goes on the bottom of the new call stack. In other words, it is the first method to run in the new thread.
- Because the Runnable interface has just a single method, you can use lambda expressions where a Runnable is expected.
- Using the Thread class to run separate jobs is no longer the preferred way to create multithreaded applications in Java. Instead, use an Executor or an ExecutorService.
- The Executors class has helper methods that can create standard ExecutorServices to use to start new jobs.
- A thread is in the NEW state when it has not yet started.
- When a thread has been started, a new stack is created, with the Runnable’s run() method on the bottom of the stack. The thread is now in the RUNNABLE state, waiting to be chosen to run.
- A thread is said to be RUNNING when the JVM’s thread scheduler has selected it to be the currently running thread. On a single-processor machine, there can be only one currently running thread.
- Sometimes a thread can be moved from the RUNNING state to a temporarily NON-RUNNABLE state. A thread might be blocked

because it's waiting for data from a stream, because it has gone to sleep, or because it is waiting for an object's lock. We'll see locks in the next chapter.

- Thread scheduling is not guaranteed to work in any particular way, so you cannot be certain that threads will take turns nicely.

Putting a thread to sleep

One way to help your threads take turns is to put them to sleep periodically. All you need to do is call the static sleep() method, passing it the amount of time you want the thread to sleep for, in milliseconds.

For example:

```
Thread.sleep(2000);
```

will knock a thread out of the running state and keep it out of the runnable state for two seconds. The thread *can't* become the running thread again until after at least two seconds have passed.

A bit unfortunately, the sleep method throws an InterruptedException, a checked exception, so all calls to sleep must be wrapped in a try/catch (or declared). So a sleep call really looks like this:

```
try {
  Thread.sleep(2000);
} catch(InterruptedException ex) {
   ex.printStackTrace();
}
```

Now you know that your thread won't wake up *before* the specified duration, but is it possible that it will wake up some time *after* the "timer" has expired? Effectively, yes. The thread won't automatically wake up at the designated time and become the currently running thread. When a thread wakes up, the thread is once again at the mercy of the thread scheduler; therefore, there are no guarantees about how long the thread will be out of action.

NOTE

Putting a thread to sleep gives the other threads a chance to run.

When the thread wakes up, it always goes back to the runnable state and waits for the thread scheduler to choose it to run again.

It can be hard to understand how much time a number of milliseconds represents. There's a convenience method on java.util.concurrent.TimeUnit that we can use to make a more readable sleep time:

```
TimeUnit.MINUTES.sleep(2);
```

which may be easier to understand than:

```
Thread.sleep(120000);
```

(You still need to wrap both in a try-catch, though.)

Using sleep to make our program more predictable

Remember our earlier example that kept giving us different results each time we ran it? Look back and study the code and the sample output. Sometimes main had to wait until the new thread finished (and printed "top o' the stack"), while other times the new thread would be sent back to runnable before it was finished, allowing the main thread to come back in and print out "back in main." How can we fix that? Stop for a moment and answer this question: "Where can you put a sleep() call, to make sure that "back in main" always prints before "top o' the stack"?

This is what we want—a consistent order of print statements:

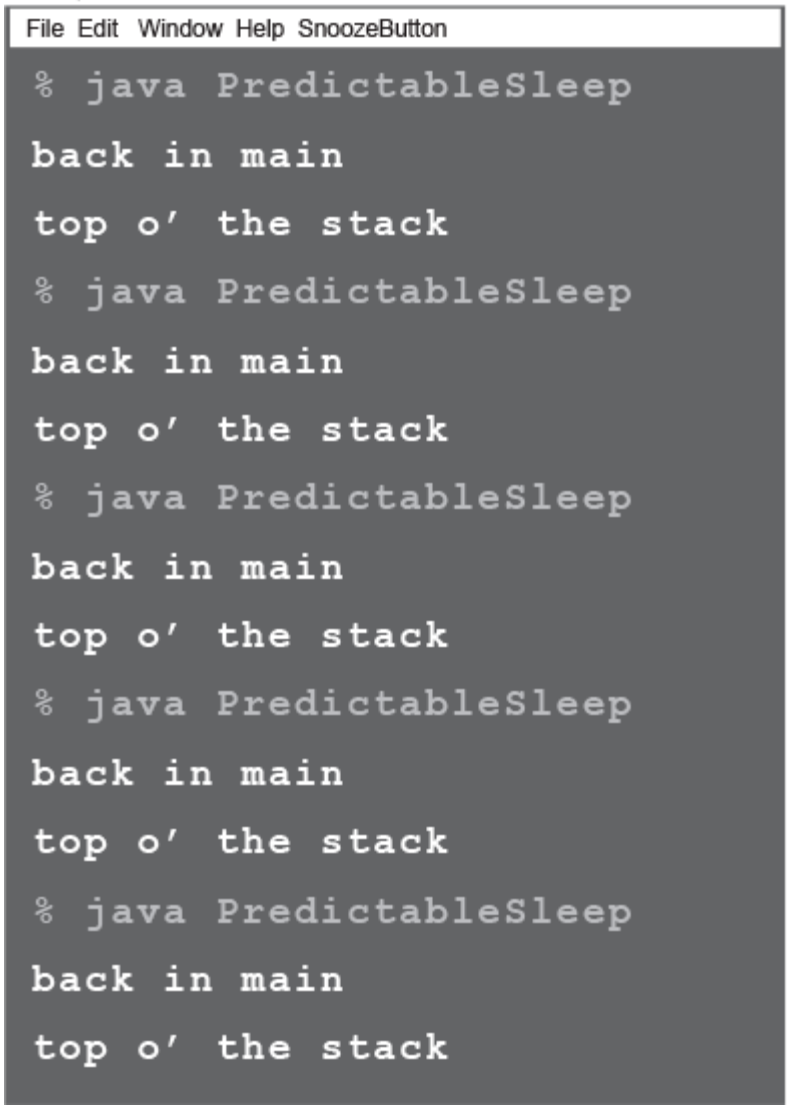

```
class PredictableSleep {
  public static void main (String[] args) {
    ExecutorService executor =
      Executors.newSingleThreadExecutor();
    executor.execute(() -> sleepThenPrint());
    System.out.println("back in main");
    executor.shutdown();
  }

  private static void sleepThenPrint() {
    try {
      TimeUnit.SECONDS.sleep(2);
    } catch (InterruptedException e) {
      e.printStackTrace();
    }
    System.out.println("top o' the stack");
  }
}
```

Instead of putting a lambda with an ugly try-catch inside, we've put the job code inside a method. We're calling the method from this lambda expression.

Calling sleep here will force the new thread to leave the currently running state. The main thread will get a chance to print out "back in main."

Thread.sleep() throws a checked Exception that we need to catch or declare. Because catching the Exception makes the job's code a bit longer, we've put it into its own method.

There will be a pause (for about two seconds) before we get to this line, which prints out "top o' the stack."

BRAIN BARBELL

Can you think of any problems with forcing your threads to sleep for a set amount of time? How long will it take to run this code 10 times?

There are downsides to forcing the thread to sleep

- ① **The program has to wait for at least that amount of time.**

  If we put the thread to sleep for two seconds, the thread will be non-runnable for that time. When it wakes up, it won't automatically become the currently running thread. When a thread wakes up, the thread is once again at the mercy of the thread scheduler. Our application is going to be hanging around for at least those two seconds, probably more. This might not sound like a big deal, but imagine a bigger program full of these pauses *intentionally* slowing down the application.

- ② **How do you know the other job will finish in that time?**

  We put the new thread to sleep for two seconds, assuming that the main thread would be the running thread, and complete its work in that time. But what if the main thread took longer to finish than that? What if another thread, running a longer job, was scheduled instead? One of the ways people deal with this is to set sleep times that are much longer than they'd expect a job to take, but then our first problem becomes even more of a problem.

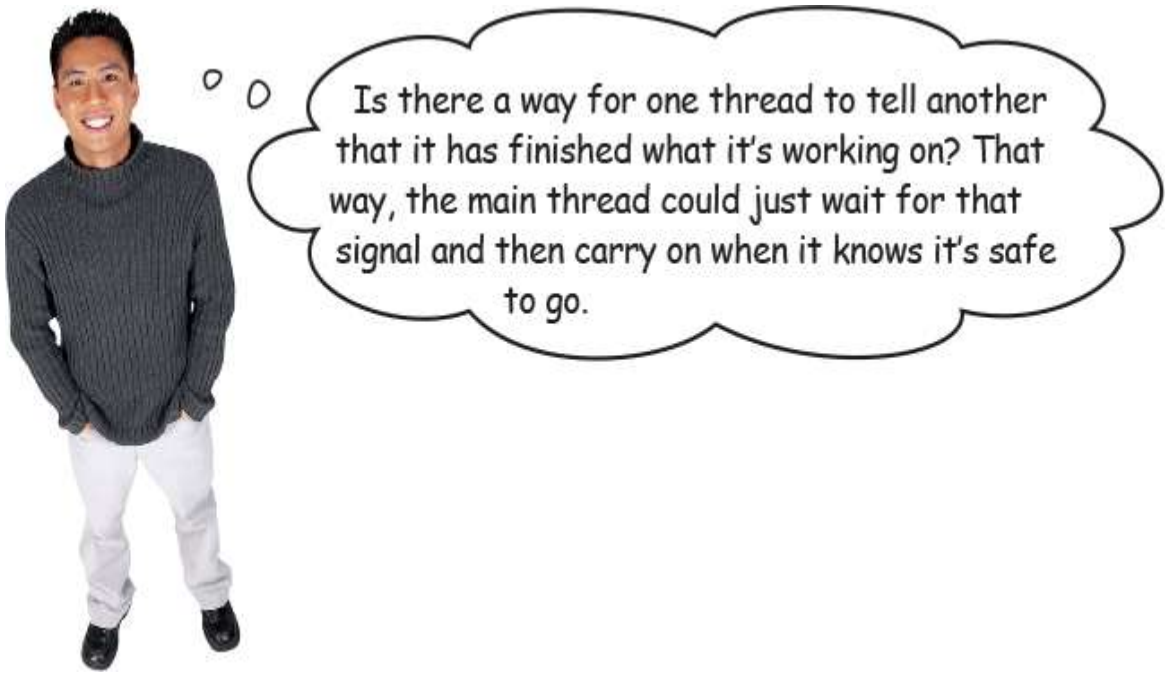

A better alternative: wait for the perfect time.

What we really wanted in our example was to wait until a specific thing had happened in our main thread before carrying on with our new thread. Java supports a number of different mechanisms to do this, like Future, CyclicBarrier, Semaphore, and CountDownLatch.

> **NOTE**
>
> **To coordinate events happening on multiple threads, one thread may need to wait for a specific signal from another thread before it can continue.**

Counting down until ready

You can make threads *count down* when significant events have happened. A thread (or threads) can wait for all these events to complete before continuing. You might be counting down until a minimum number of clients have connected, or a number of services have been started.

This is what **`java.util.concurrent.CountDownLatch`** is for. You set a number to count down from. Then any thread can tell the latch to count down when a relevant event has happened.

In our example, we have only one thing we want to count—our new thread should wait until the main thread has printed "back in main" before it can continue.

> **NOTE**
>
> **CountDownLatch is a barrier synchronizer. Barriers are mechanisms to allow threads to coordinate with each other.**
>
> **Other examples are CyclicBarrier and Phaser.**

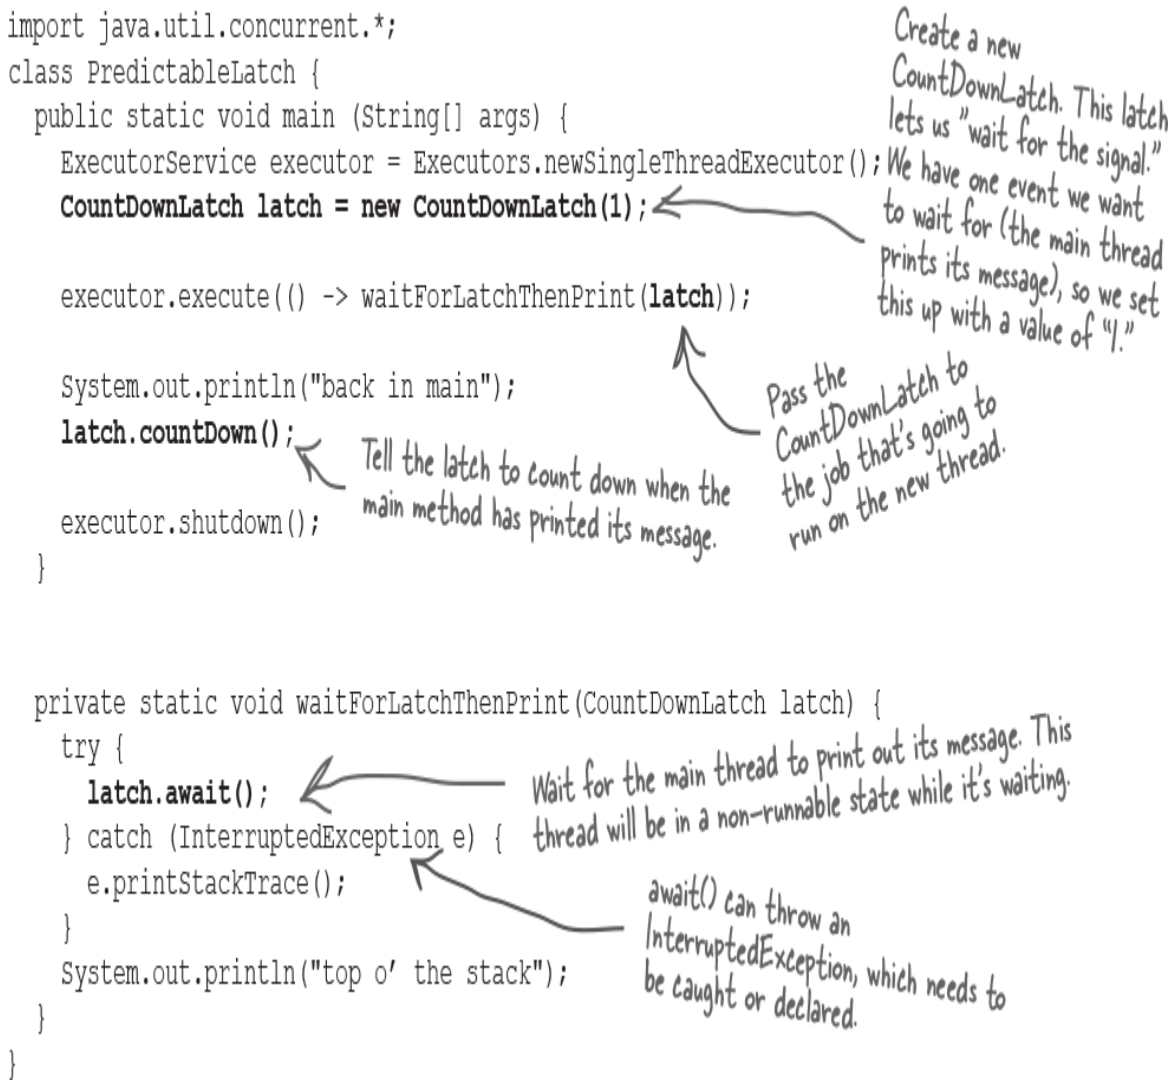

The code is really similar to the code that performs a sleep; the main difference is the latch.countDown in the main method. The performance difference is significant, though. Instead of having to wait *at least* two seconds to make sure main has printed its message, the new thread waits only until the main method has printed its "back in main" message.

To get an idea of the performance difference this might make on a real system, when this latch code was run on a MacBook 100 times, it took around 50 milliseconds to finish *all* one hundred runs, and the output was in the correct order *every time*. If running the sleep() version just one time takes over 2 seconds (2000 milliseconds), imagine how long it took to run 100 times*....

Making and starting two threads (or more!)

What happens if we want to start more than one job in addition to our main thread? Clearly, we can't use Executors.newSingleThreadExecutor() if we want to run more than one thread. What else is available?

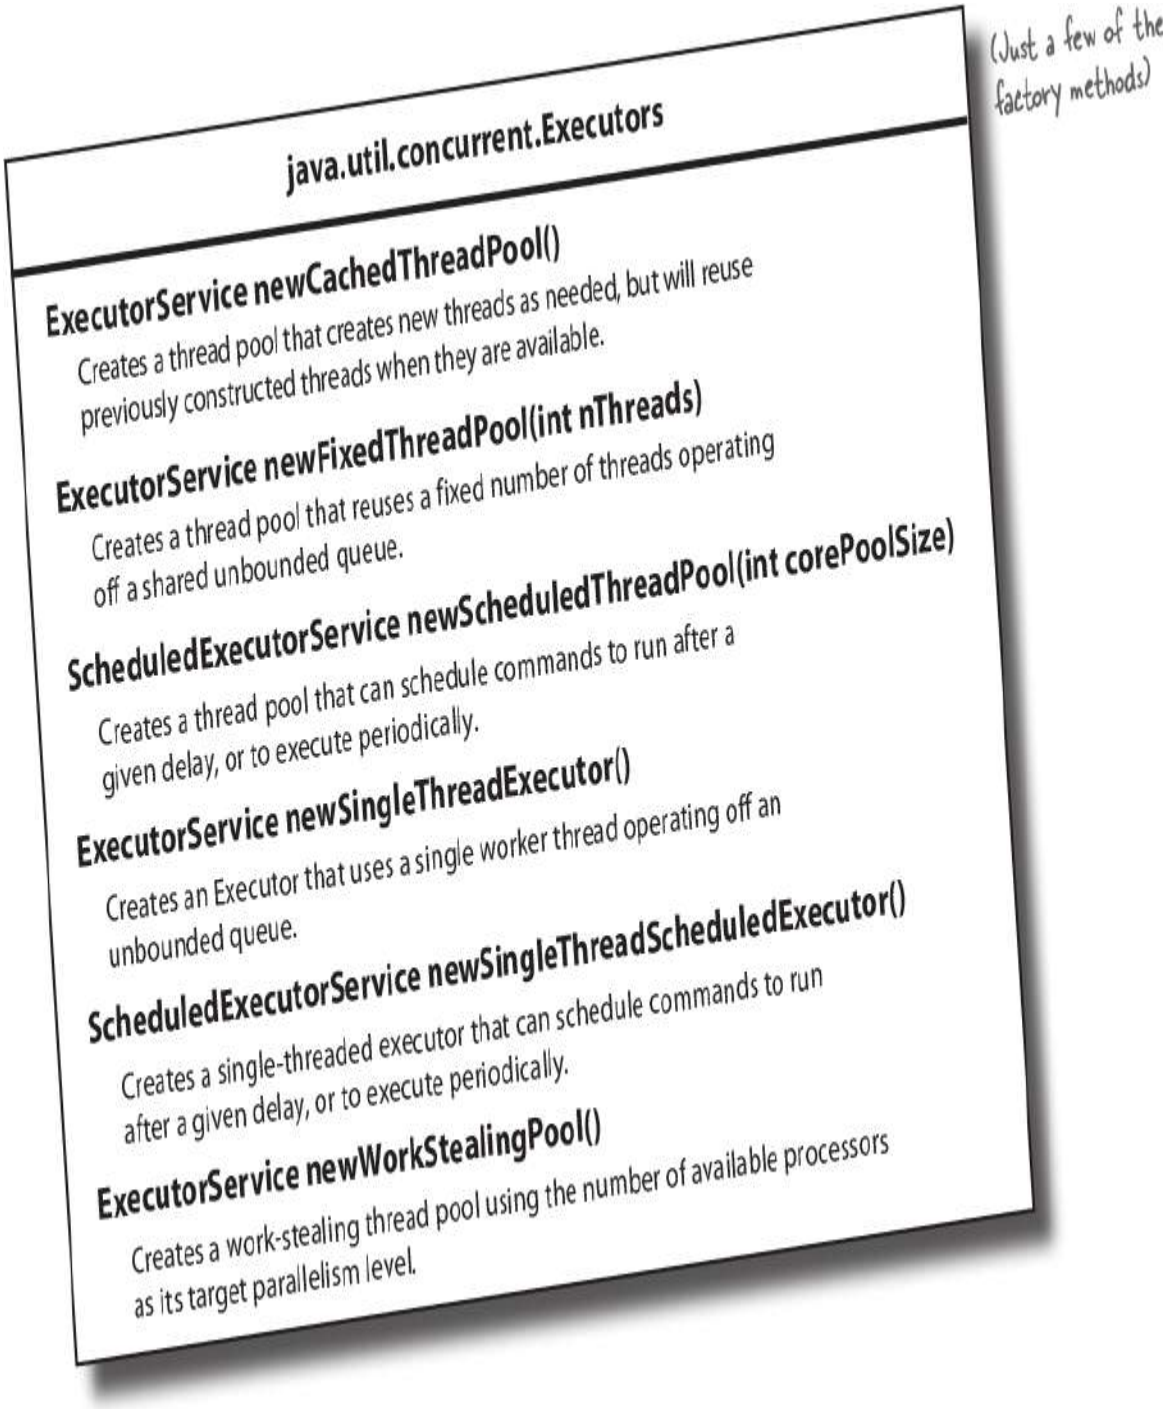

NOTE

These ExecutorServices use some form of Thread Pool. This is a collection of Thread instances that can be used (and reused) to perform jobs.

How many threads are in the pool, and what to do if there are more jobs to run than threads available, depends on the ExecutorService implementation.

Pooling Threads

Using a pool of resources, especially ones that are expensive to create like Threads or database connections, is a common pattern in application code.

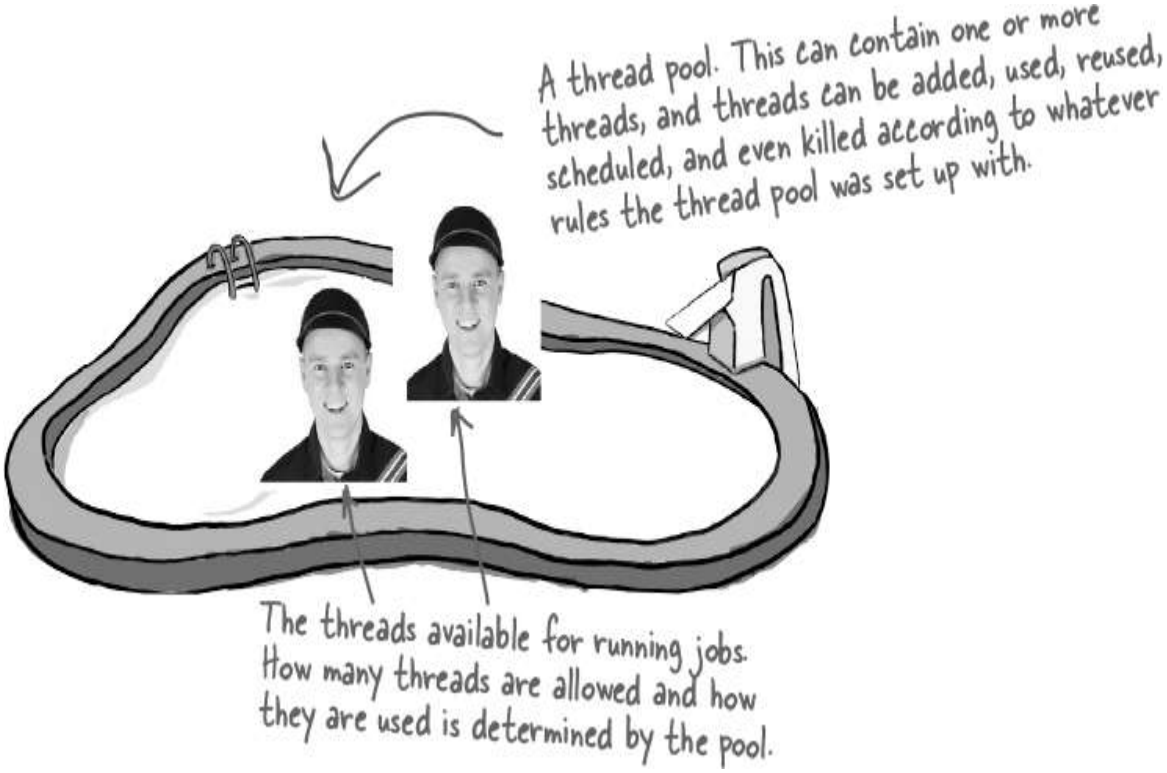

When you create a new ExecutorService, its pool may be started with some threads to begin with, or the pool may be empty.

You can create an ExecutorService with a thread pool using one of the helper methods from the Executors class.

```
ExecutorService threadPool =
    Executors.newCachedThreadPool();
```

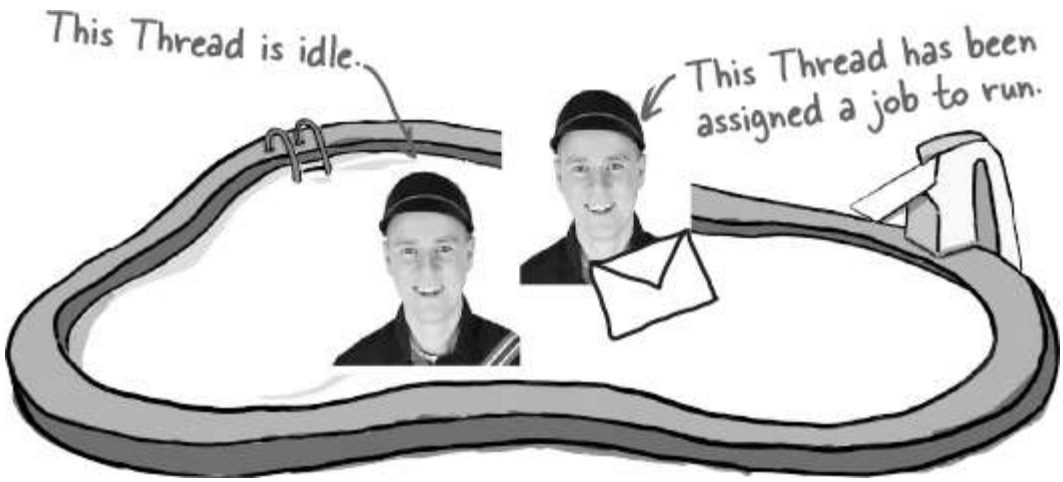

You can use the pool's threads to run your job by giving the job to the ExecutorService. The ExecutorService can then figure out if there's a free Thread to run the job.

```
threadPool.execute(() -> run("Job 1"));
```

This means an ExecutorService can **reuse** threads; it doesn't just create and destroy them.

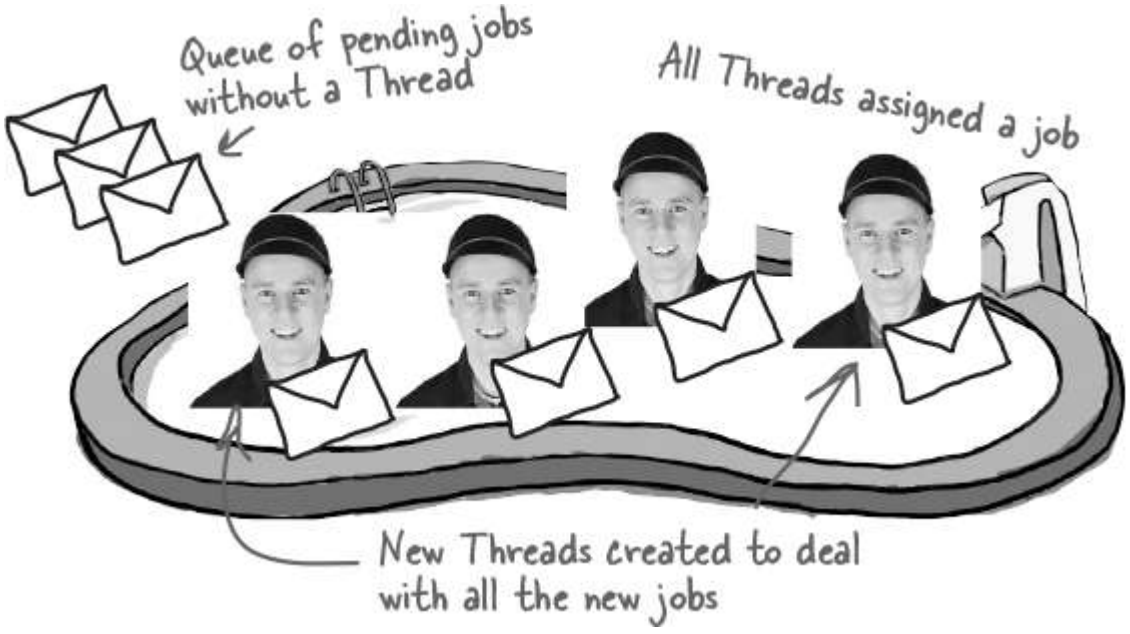

As you give the ExecutorService more jobs to run, it *may* create and start new Threads to handle the jobs. It *may* store the jobs in a queue if there are more jobs than Threads.

How an ExecutorService deals with additional jobs depends on how it is set up.

```
threadPool.execute(() -> run("Job 324"));
```

The ExecutorService may also **terminate** Threads that have been idle for some period of time. This can help to minimize the amount of hardware resources (CPU, memory) your application needs.

Running multiple threads

The following example runs two jobs, and uses a fixed-sized thread pool to create two threads to run the jobs. Each thread has the same job: run in a loop, printing the currently running thread's name with each iteration.

```
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class RunThreads {

  public static void main(String[] args) {
    ExecutorService threadPool = Executors.newFixedThreadPool(2);
    threadPool.execute(() -> runJob("Job 1"));
    threadPool.execute(() -> runJob("Job 2"));
    threadPool.shutdown();
  }

  public static void runJob(String jobName) {
    for (int i = 0; i < 25; i++) {
      String threadName = Thread.currentThread().getName();
      System.out.println(jobName + " is running on " + threadName);
    }
  }
}
```

Create an ExecutorService with a fixed-sized thread pool (we know we're going to run only two jobs).

A lambda expression that represents our Runnable job. If you don't want to use lambdas, here you'd pass in a new instance of your Runnable class, like we did when we created MyRunnable earlier in the chapter.

The job is to run through this loop, printing the thread's name each time.

What will happen?

Will the threads take turns? Will you see the thread names alternating? How often will they switch? With each iteration? After five iterations?

Part of the output when the loop iterates 25 times.

You already know the answer: *we don't know!* It's up to the scheduler. And on your OS, with your particular JVM, on your CPU, you might get very different results.

Running this on a modern multicore system, the two jobs will likely run in parallel, but there's no guarantee that this means they will complete in the same amount of time or output values at the same rate.

Closing time at the thread pool

You may have noticed that our examples have a **`threadPool.shutdown()`** at the end of the main methods. Although the

thread pools will take care of our individual Threads, we do need to be responsible adults and close the pool when we're finished with it. That way, the pool can empty its job queue and shut down all of its threads to free up system resources.

ExecutorService has two shutdown methods. You can use either, but to be safe we'd use both:

- ① **ExecutorService.shutdown()**

  Calling shutdown() asks the ExecutorService nicely if it wouldn't mind awfully wrapping things up so everyone can go home.

  All of the Threads that are currently running jobs are allowed to finish those jobs, and any jobs waiting in the queue will also be finished off. The ExecutorService will reject any new jobs too.

  If you need your code to wait until all of those things are finished, you can use **`awaitTermination`** to sit and wait until it's finished. You give awaitTermination a maximum amount of time to wait for everything to end, so awaitTermination will hang around until either the ExecutorService has finished everything or the timeout has been reached, whichever is earlier.

- ② **ExecutorService.shutdownNow()**

  Everybody out! When this is called, the ExecutorService will try to stop any Threads that are running, will not run any waiting jobs, and definitely won't let anyone else into the pool.

  Use this if you need to put a stop to everything. This is sometimes used after first calling shutdown() to give the jobs a chance to finish before pulling the plug entirely.

```
public class ClosingTime {
  public static void main(String[] args) {
    ExecutorService threadPool = Executors.newFixedThreadPool(2);

    threadPool.execute(new LongJob("Long Job"));
    threadPool.execute(new ShortJob("Short Job"));

    threadPool.shutdown();

    try {
      boolean finished = threadPool.awaitTermination(5, TimeUnit.SECONDS);
      System.out.println("Finished? " + finished);
    } catch (InterruptedException e) {
      e.printStackTrace();
    }
    threadPool.shutdownNow();
  }
}
```

Create a thread pool with just two threads.

Start two jobs, a short one that just prints the name and a "long" one that uses a sleep so it can pretend to be a long-running job (LongJob and ShortJob are classes that implement Runnable).

Ask the ExecutorService to shut down. If you call execute() with a job after this, you will get a RejectedExecutionException. The ExecutorService will continue to run all the jobs that are running, and run any waiting jobs too.

Wait up to 5 seconds for the ExecutorService to finish everything. If this method hits the timeout before everything has finished, it returns "false."

At this point, we tell the ExecutorService to stop everything right now. If everything was already shut down, that's fine; this won't do anything.

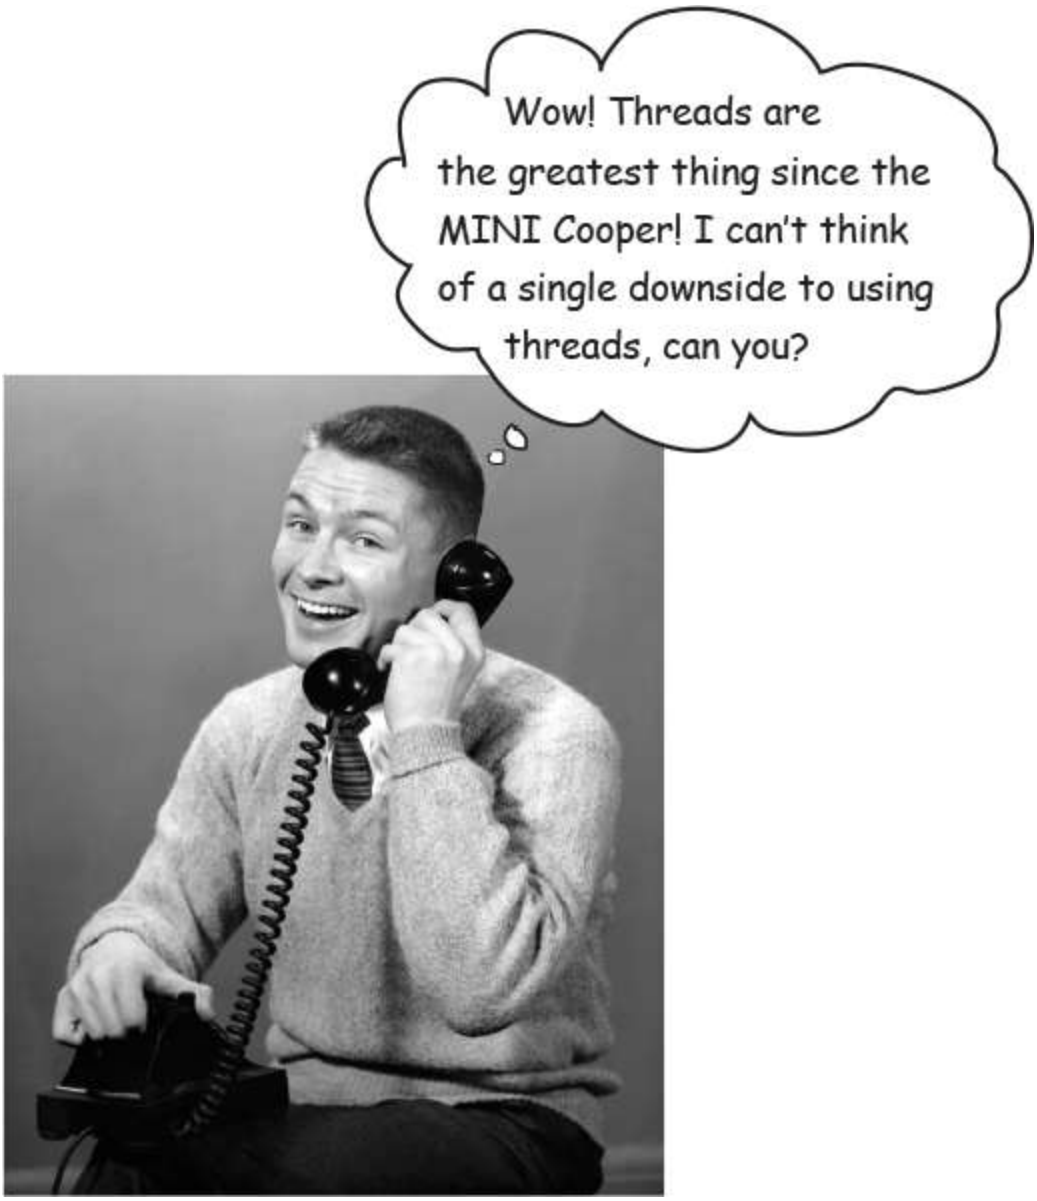

Um, yes. There IS a dark side. Multithreading can lead to concurrency "issues."

Concurrency issues lead to race conditions. Race conditions lead to data corruption. Data corruption leads to fear...you know the rest.

It all comes down to one potentially deadly scenario: two or more threads have access to a single object's *data*. In other words, methods executing on

two different stacks are both calling, say, getters or setters on a single object on the heap.

It's a whole "left-hand-doesn't-know-what-the-right-hand-is-doing" thing. Two threads, without a care in the world, humming along executing their methods, each thread thinking that he is the One True Thread. The only one that matters. After all, when a thread is not running, and in runnable (or blocked) it's essentially knocked unconscious. When it becomes the currently running thread again, it doesn't know that it ever stopped.

BULLET POINTS

- The static Thread.sleep() method forces a thread to leave the running state for *at least* the duration passed to the sleep method. Thread.sleep(200) puts a thread to sleep for 200 milliseconds.
- You can also use the sleep method on java.util.concurrent.TimeUnit, for example TimeUnit.SECONDS.sleep(2).
- The sleep() method throws a checked exception (InterruptedException), so all calls to sleep() must be wrapped in a try/catch, or declared.
- There are different mechanisms to give threads a chance to wait for each other. You can use sleep(), but you can also use CountDownLatch to wait for the right number of events to have happened before continuing.
- Managing threads directly can be a lot of work. Use the factory methods in Executors to create an ExecutorService, and use this service to run Runnable jobs.
- Thread pools can manage creation, reuse, and destruction of threads so you don’t have to.
- ExecutorServices should be shut down correctly so the jobs are finished and threads terminated. Use shutdown() for graceful shutdown, and shutdownNow() to kill everything.

IT'S A CLIFF-HANGER!

A dark side? Race conditions?? Data corruption?! But what can we DO about those things? Don't leave us hanging!

Stay tuned for the next chapter, where we address these issues and more...

Exercise

Who Am I?

(from "Exercise")

A bunch of Java and network terms, in full costume, are playing a party game, “Who am I?” They’ll give you a clue—you try to guess who they are based on what they say. Assume they always tell the truth about themselves. If they happen to say something that could be true for more than one attendee, then write down all for whom that sentence applies. Fill in the blanks next to the sentence with the names of one or more attendees.

Tonight’s attendees:

InetSocketAddress, SocketChannel, IP address, host name, port, Socket, ServerSocketChannel, Thread, thread pool, Executors, ExecutorService, CountDownLatch, Runnable, InterruptedException, Thread.sleep()

I need to be shut down or I might live forever	_____
I let you talk to a remote machine	_____
I might be thrown by sleep() and await()	_____
If you want to reuse Threads, you should use me	_____
You need to know me if you want to connect to another machine	_____
I'm like a separate process running on the machine	_____
I can give you the ExecutorService you need	_____
You need one of me if you want clients to connect to me	_____
I can help you make your multithreaded code more predictable	_____
I represent a job to run	_____
I store the IP address and port of the server	_____

Answers in "Who Am I?".

New and improved SimpleChatClient

Way back near the beginning of the chapter, we built the SimpleChatClient that could *send* outgoing messages to the server but couldn't receive anything. Remember? That's how we got onto this whole thread topic in the first place, because we needed a way to do two things at once: send messages *to* the server (interacting with the GUI) while simultaneously reading incoming messages *from* the server, displaying them in the scrolling text area.

This is the New Improved chat client that can both send and receive messages, thanks to the power of multithreading! Remember, you need to run the chat server first to run this code.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.*;
import java.util.concurrent.*;

import static java.nio.charset.StandardCharsets.UTF_8;

public class SimpleChatClient {
  private JTextArea incoming;
  private JTextField outgoing;
  private BufferedReader reader;
  private PrintWriter writer;

  public void go() {
    setUpNetworking();

    JScrollPane scroller = createScrollableTextArea();

    outgoing = new JTextField(20);

    JButton sendButton = new JButton("Send");
    sendButton.addActionListener(e -> sendMessage());

    JPanel mainPanel = new JPanel();
    mainPanel.add(scroller);
    mainPanel.add(outgoing);
    mainPanel.add(sendButton);

    ExecutorService executor = Executors.newSingleThreadExecutor();
    executor.execute(new IncomingReader());

    JFrame frame = new JFrame("Ludicrously Simple Chat Client");
    frame.getContentPane().add(BorderLayout.CENTER, mainPanel);
    frame.setSize(400, 350);
    frame.setVisible(true);
    frame.setDefaultCloseOperation(WindowConstants.EXIT_ON_CLOSE);
  }
```

Yes, there really IS an end to this chapter. But not yet.

This is mostly GUI code you've seen before. Nothing special except the highlighted part where we start the new "reader" thread.

We've got a new job, an inner class, which is a Runnable. The job is to read from the server's socket stream, displaying any incoming messages in the scrolling text area. We start this job using a single thread executor since we know we want to run only this one job.

```
  private JScrollPane createScrollableTextArea() {
    incoming = new JTextArea(15, 30);
    incoming.setLineWrap(true);
    incoming.setWrapStyleWord(true);
    incoming.setEditable(false);
    JScrollPane scroller = new JScrollPane(incoming);
    scroller.setVerticalScrollBarPolicy(ScrollPaneConstants.VERTICAL_SCROLLBAR_ALWAYS);
    scroller.setHorizontalScrollBarPolicy(ScrollPaneConstants.HORIZONTAL_SCROLLBAR_NEVER);
    return scroller;
  }

  private void setUpNetworking() {
    try {
      InetSocketAddress serverAddress = new InetSocketAddress("127.0.0.1", 5000);
      SocketChannel socketChannel = SocketChannel.open(serverAddress);

      reader = new BufferedReader(Channels.newReader(socketChannel, UTF_8));
      writer = new PrintWriter(Channels.newWriter(socketChannel, UTF_8));

      System.out.println("Networking established.");
    } catch (IOException ex) {
      ex.printStackTrace();
    }
  }

  private void sendMessage() {
    writer.println(outgoing.getText());
    writer.flush();
    outgoing.setText("");
    outgoing.requestFocus();
  }
```

A helper method, like we saw back in Chapter 16, to create a scrolling text area.

We're using Channels to create a new reader and writer for the SocketChannel that's connected to the server. The writer sends messages to the server, and now we're using a reader so that the reader job can get messages from the server.

Nothing new here. When the user clicks the send button, this method sends the contents of the text field to the server.

```
  public class IncomingReader implements Runnable {
    public void run() {
      String message;
      try {
        while ((message = reader.readLine()) != null) {
          System.out.println("read " + message);
          incoming.append(message + "\n");
        }
      } catch (IOException ex) {
        ex.printStackTrace();
      }
    }
  }

  public static void main(String[] args) {
    new SimpleChatClient().go();
  }
}
```

This is what the thread does!!

In the run() method, it stays in a loop (as long as what it gets from the server is not null), reading a line at a time and adding each line to the scrolling text area (along with a new line character).

Remember, the Chat Server code was the Ready-Bake Code from "The really, really simple Chat Server".

Exercise

Code Magnets

A working Java program is scrambled up on the fridge (see the next page). Can you reconstruct the code snippets on the next page to make a working Java program that produces the output listed below?

To get it to work, you will need to be running the **`SimpleChatServer`** from "The really, really simple Chat Server".



```
File  Edit  Window  Help  StillThere
% java PingingClient
Networking established
09:27:06 Sent ping 0
09:27:07 Sent ping 1
09:27:08 Sent ping 2
09:27:09 Sent ping 3
09:27:10 Sent ping 4
09:27:11 Sent ping 5
09:27:12 Sent ping 6
09:27:13 Sent ping 7
09:27:14 Sent ping 8
09:27:15 Sent ping 9
```

→ **Answers in "Code Magnets".**

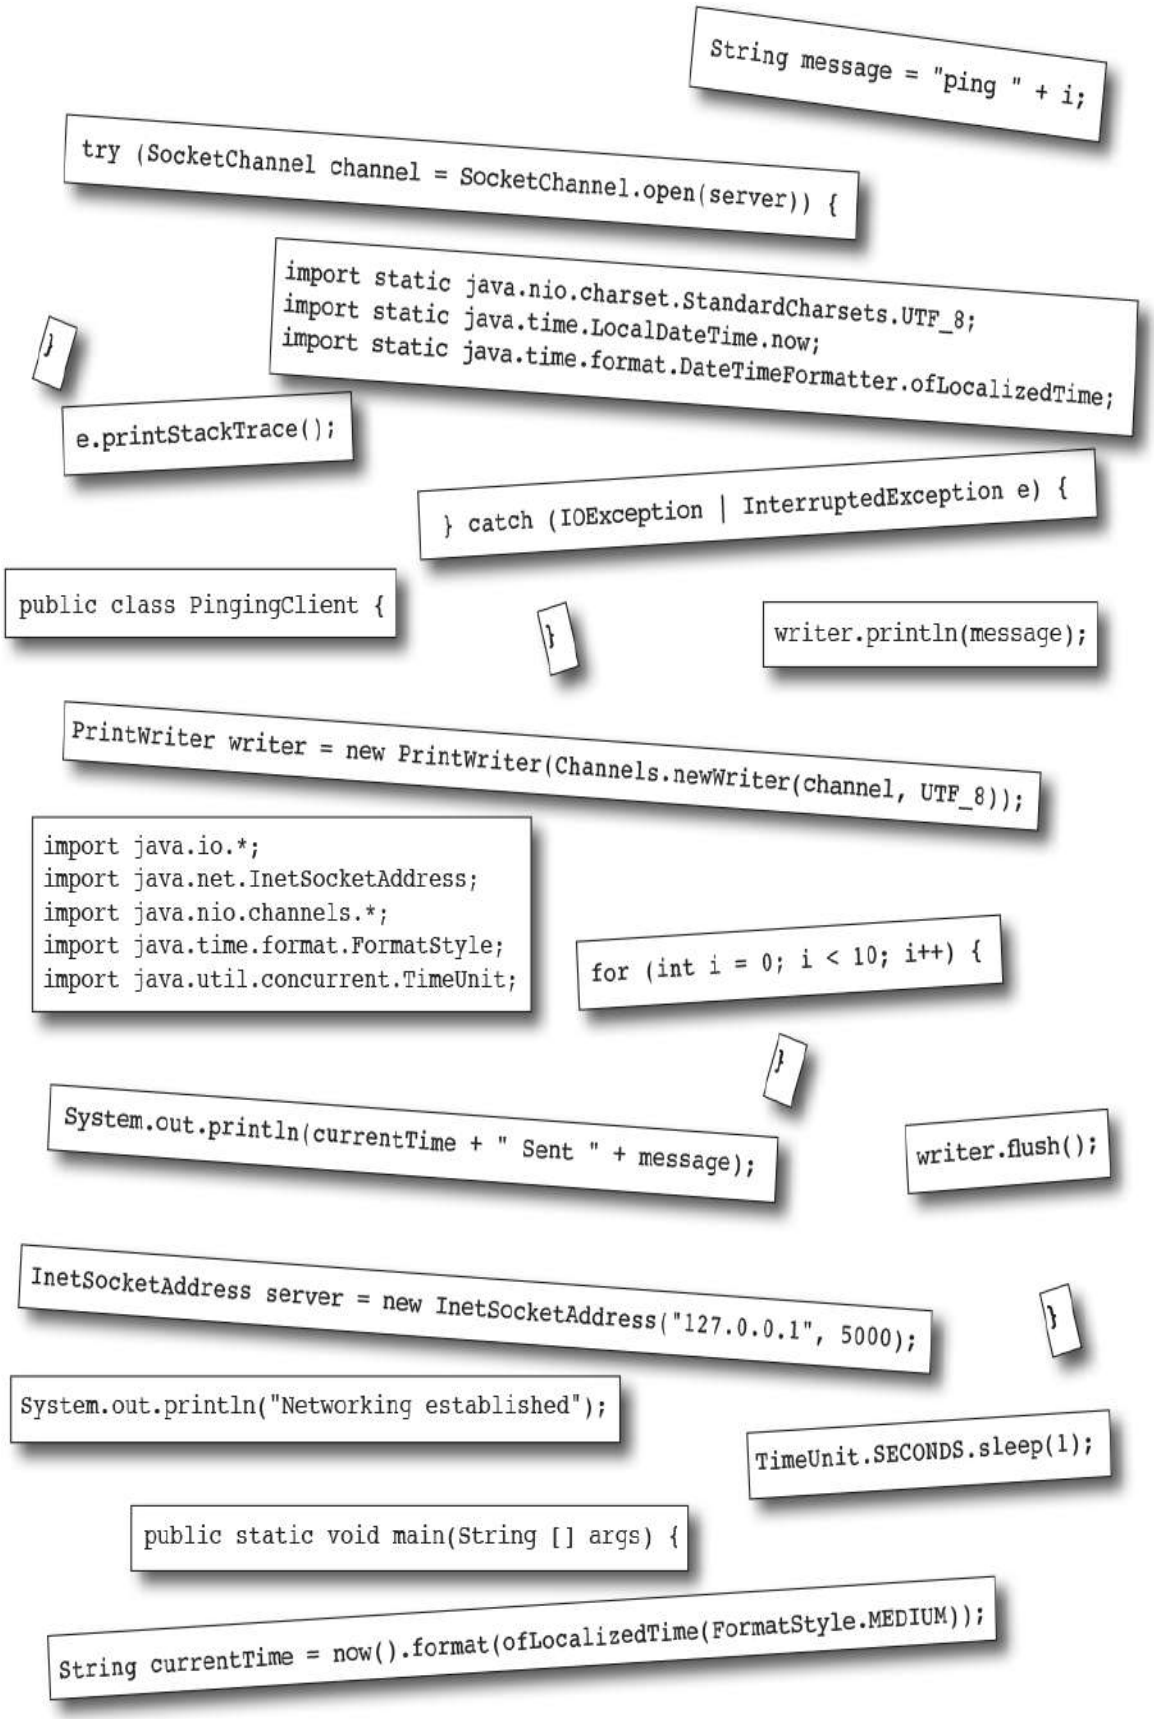
String message = "ping " + i;
try (SocketChannel channel = SocketChannel.open(server)) {
import static java.nio.charset.StandardCharsets.UTF_8;
import static java.time.LocalDateTime.now;
import static java.time.format.DateTimeFormatter.ofLocalizedTime;
}
e.printStackTrace();
} catch (IOException | InterruptedException e) {
public class PingingClient {
}
writer.println(message);
PrintWriter writer = new PrintWriter(Channels.newWriter(channel, UTF_8));
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.*;
import java.time.format.FormatStyle;
import java.util.concurrent.TimeUnit;
for (int i = 0; i < 10; i++) {
}
System.out.println(currentTime + " Sent " + message);
writer.flush();
InetSocketAddress server = new InetSocketAddress("127.0.0.1", 5000);
}
System.out.println("Networking established");
TimeUnit.SECONDS.sleep(1);
public static void main(String [] args) {
String currentTime = now().format(ofLocalizedTime(FormatStyle.MEDIUM));

Exercise Solutions

Who Am I?

I need to be shut down or I might live forever	*ExecutorService*
I let you talk to a remote machine	*SocketChannel, Socket*
I might be thrown by sleep() and await()	*InterruptedException*
If you want to reuse Threads, you should use me	*Thread pool, ExecutorService*
You need to know me if you want to connect to another machine	*IP Address, Host name, port*
I'm like a separate process running on the machine	*Thread*
I can give you the ExecutorService you need	*Executors*
You need one of me if you want clients to connect to me	*ServerSocketChannel*
I can help you make your multithreaded code more predictable	*Thread.sleep(), CountDownLatch*
I represent a job to run	*Runnable*
I store the IP address and port of the server	*InetSocketAddress*

Code Magnets

(from "Code Magnets")

```
import java.io.*;
import java.net.InetSocketAddress;
import java.nio.channels.*;
import java.time.format.FormatStyle;
import java.util.concurrent.TimeUnit;

import static java.nio.charset.StandardCharsets.UTF_8;
import static java.time.LocalDateTime.now;
import static java.time.format.DateTimeFormatter.ofLocalizedTime;

public class PingingClient {

  public static void main(String[] args) {
    InetSocketAddress server = new InetSocketAddress("127.0.0.1", 5000);
    try (SocketChannel channel = SocketChannel.open(server)) {
      PrintWriter writer = new PrintWriter(Channels.newWriter(channel, UTF_8));
      System.out.println("Networking established");

      for (int i = 0; i < 10; i++) {
        String message = "ping " + i;
        writer.println(message);
        writer.flush();
        String currentTime = now().format(ofLocalizedTime(FormatStyle.MEDIUM));
        System.out.println(currentTime + " Sent " + message);
        TimeUnit.SECONDS.sleep(1);
      }
    } catch (IOException | InterruptedException e) {
      e.printStackTrace();
    }
  }
}
```

You should get the same output even if you move the sleep() to somewhere else inside this for loop.

This is one way of getting the current time and turning it into a String in the format of Hours:Minutes:Seconds.

You can catch the InterruptedException thrown by sleep() inside the for loop, or you can catch all the Exceptions at the end of the method.

Catching all Exceptions at the end because we do the same thing with them all.

Code Kitchen

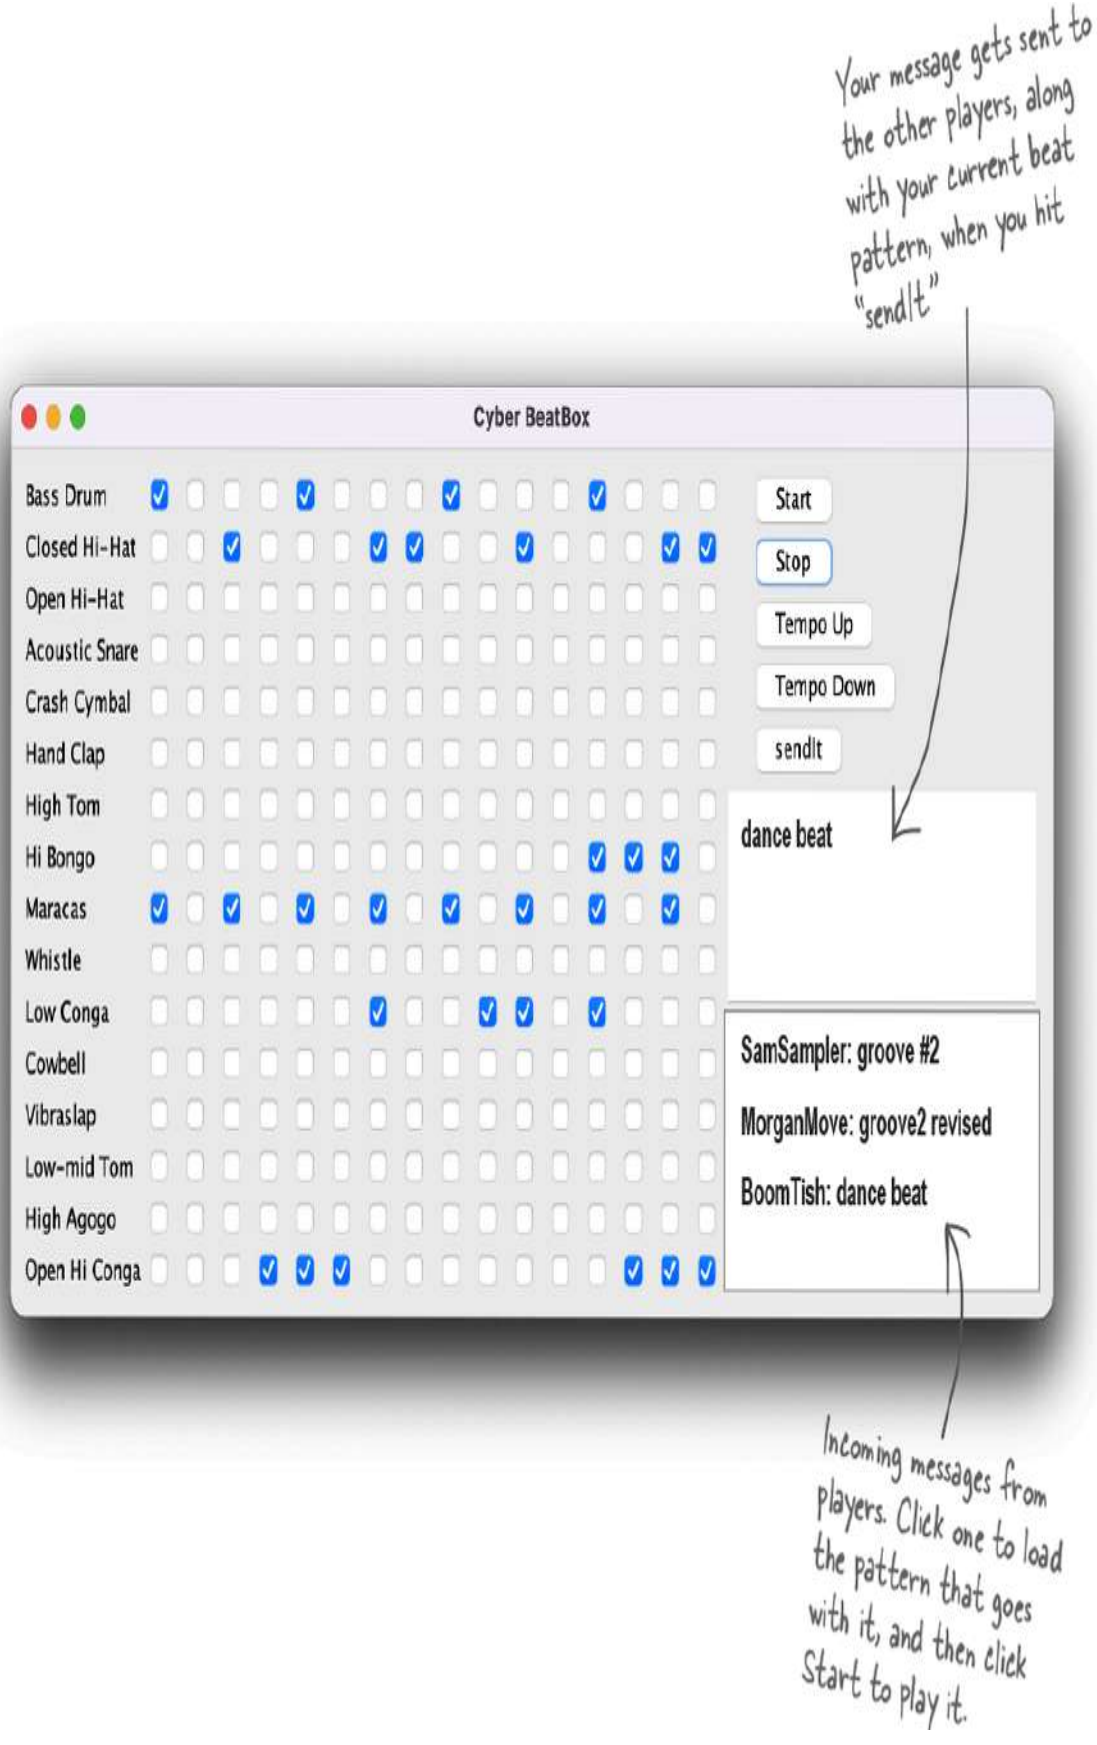
Your message gets sent to the other players, along with your current beat pattern, when you hit "sendIt"
Cyber BeatBox
Bass Drum
Closed Hi-Hat
Open Hi-Hat
Acoustic Snare
Crash Cymbal
Hand Clap
High Tom
Hi Bongo
Maracas
Whistle
Low Conga
Cowbell
Vibraslap
Low-mid Tom
High Agogo
Open Hi Conga
Start
Stop
Tempo Up
Tempo Down
sendIt
dance beat
SamSampler: groove #2
MorganMove: groove2 revised
BoomTish: dance beat
Incoming messages from players. Click one to load the pattern that goes with it, and then click Start to play it.

Now you've seen how to build a chat client, we have the last version of the BeatBox!

It connects to a simple MusicServer so that you can send and receive beat patterns with other clients.

The code is really long, so the complete listing is actually in Appendix A.

Chapter 18. Dealing with Concurrency Issues: Race Conditions and Immutable Data

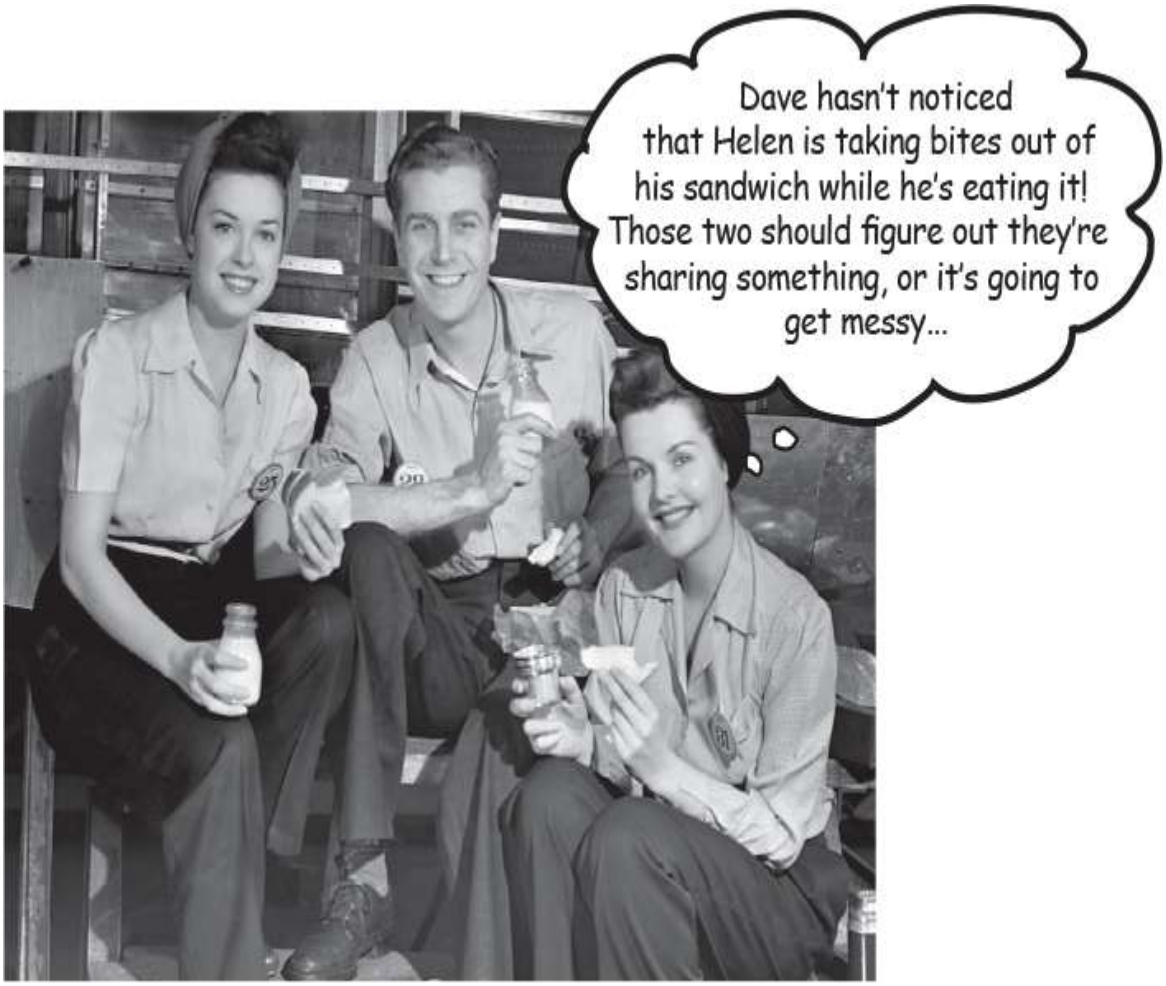

Doing two or more things at once is hard. Writing multithreaded code is easy. Writing multithreaded code that works the way you expect can be much harder. In this final chapter, we're going to show you some of the things that can go wrong when two or more threads are working at the same time. You'll learn about some of the tools in java.util.concurrent that can help you to write

multithreaded code that works correctly. You'll learn how to create immutable objects (objects that don't change) that are safe for multiple threads to use. By the end of the chapter, you'll have a lot of different tools in your toolkit for working with concurrency.

What could possibly go wrong?

At the end of the last chapter we hinted that things may not all be rainbows and sunshine when you're working with multithreaded code. Well, actually, we did more than hint! We outright said:

> **NOTE**
>
> "It all comes down to one potentially deadly scenario: two or more threads have access to a single object's data."

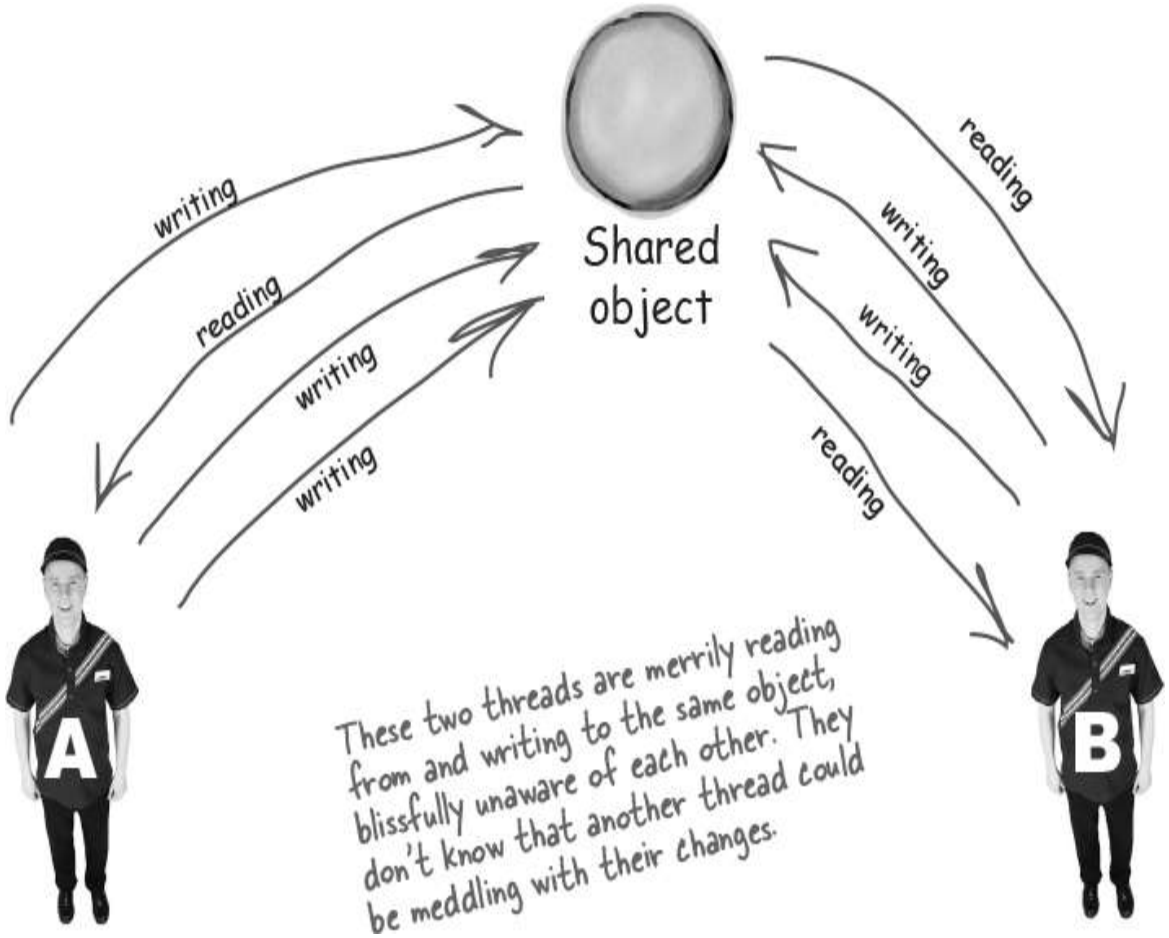

BRAIN BARBELL

Why is it a problem if two threads are both reading and writing?

If a thread reads the object's data before changing it, why is it a problem that another thread might also be writing at the same time?

Marriage in Trouble.

Can this couple be saved?

Next, on a very special Dr. Steve Show

[Transcript from episode #42]

Welcome to the Dr. Steve show.

We've got a story today that's centered around one of the top reasons why couples split up—finances.

Today's troubled pair, Ryan and Monica, share a bank account. But not for long if we can't find a solution. The problem? The classic "two people—one bank account" thing.

Here's how Monica described it to me:

"Ryan and I agreed that neither of us will overdraw the checking account. So the procedure is, whoever wants to spend money *must* check the balance in the account *before* withdrawing cash or spending on a card. It all seemed so simple. But suddenly we're getting hit with overdraft fees!

I thought it wasn't possible; I thought our procedure was safe. But then *this* happened:

Ryan had a full online shopping cart totalling $50. He checked the balance in the account and saw that it was $100. No problem. So he started the checkout procedure.

Ryan and Monica: victims of the "two people, one account" problem.

And that's where *I* come in; while Ryan was filling in the shipping details, *I* wanted to spend $100. I checked the balance, and it's $100 (because Ryan hasn't clicked the "Pay" button yet), so I think, no problem. So I spend the money, and again no problem. But then Ryan finally pays, and we're suddenly overdrawn! He didn't know that I was spending money at the same time, so he just went ahead and completed his transaction without checking the balance again. You've got to help us, Dr. Steve!"

Is there a solution? Are they doomed? We can't help them with their online shopping addiction, but can we make sure one of them can't start spending while the other one is shopping?

Take a moment and think about that while we go to a commercial break.

The Ryan and Monica problem, in code

The following example shows what can happen when *two* threads (Ryan and Monica) share a *single* object (the bank account).

The code has two classes, BankAccount and RyanAndMonicaJob. There's also a RyanAndMonicaTest with a main method to run everything. The RyanAndMonicaJob class implements Runnable, and represents the behavior that Ryan and Monica both have—checking the balance and spending money.

The RyanAndMonicaJob class has instance variables for the shared BankAccount, the person's name, and the amount they want to spend. The code works like this:

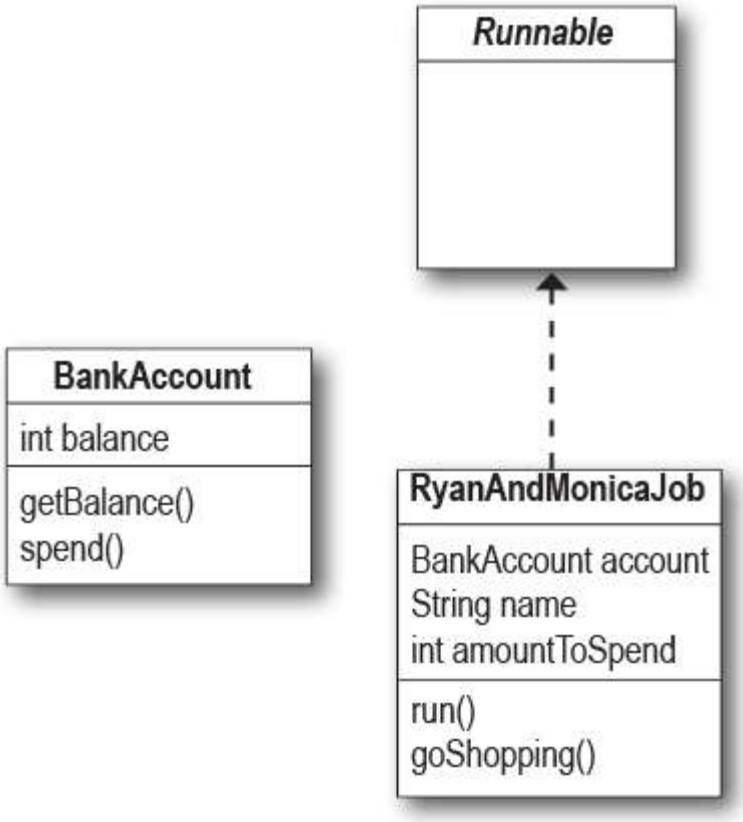

- ① **Make an instance of the shared bank account**

  Creating a new one will set up all the defaults correctly.

```
BankAccount account = new BankAccount();
```

- ② **Make one instance of RyanAndMonicaJob for each person**

We need one job for each person. We also need to give them access to the BankAccount and tell them how much to spend.

```
RyanAndMonicaJob ryan = new RyanAndMonicaJob("Ryan", account,
50);
RyanAndMonicaJob monica = new RyanAndMonicaJob("Monica",
account, 100);
```

- ③ **Create an ExecutorService and give it the two jobs**

  Since we know we have two jobs, one for Ryan and one for Monica, we can create a fixed-sized thread pool with two threads.

```
ExecutorService executor = Executors.newFixedThreadPool(2);
executor.execute(ryan);
executor.execute(monica);
```

- ④ **Watch both jobs run**

  One thread represents Ryan, the other represents Monica. Both threads check the balance before spending money. Remember that when more than one thread is running at a time, you can't assume that your thread is the only one making changes to a shared object (e.g., the BankAccount). Even if there's only two lines of code related to the shared object, and they're right next to each other.

```
if (account.getBalance() >= amount) {
 account.spend(amount);
} else {
 System.out.println("Sorry, not enough money");
}
```

In the goShopping() method, do exactly what Ryan and Monica would do —check the balance and, if there's enough money, spend.

This should protect against overdrawing the account.

Except...if Ryan and Monica are spending money at the same time, the money in the bank account might be gone before the other one can spend it!

The Ryan and Monica example

```
import java.util.concurrent.*;

public class RyanAndMonicaTest {
  public static void main(String[] args) {
    BankAccount account = new BankAccount();
    RyanAndMonicaJob ryan = new RyanAndMonicaJob("Ryan", account, 50);
    RyanAndMonicaJob monica = new RyanAndMonicaJob("Monica", account, 100);
    ExecutorService executor = Executors.newFixedThreadPool(2);
    executor.execute(ryan);
    executor.execute(monica);
    executor.shutdown();
  }
}

class RyanAndMonicaJob implements Runnable {
  private final String name;
  private final BankAccount account;
  private final int amountToSpend;
  RyanAndMonicaJob(String name, BankAccount account, int amountToSpend) {
    this.name = name;
    this.account = account;
    this.amountToSpend = amountToSpend;
  }

  public void run() {
    goShopping(amountToSpend);
  }

  private void goShopping(int amount) {
    if (account.getBalance() >= amount) {
      System.out.println(name + " is about to spend");
      account.spend(amount);
      System.out.println(name + " finishes spending");
    } else {
      System.out.println("Sorry, not enough for " + name);
    }
  }
}

class BankAccount {
  private int balance = 100;
  public int getBalance() {
    return balance;
  }
  public void spend(int amount) {
    balance = balance - amount;
    if (balance < 0) {
      System.out.println("Overdrawn!");
    }
  }
}
```

There will be only ONE instance of the BankAccount. That means both threads will access this one account.

Make two jobs that will do the withdrawal from the shared bank account, one for Monica and one for Ryan, passing in the amount they're going to spend.

Start both jobs running.

Don't forget to shut the pool down.

Create a new thread pool with two threads for our two jobs.

The run() method just calls goShopping() with the amount they need to spend.

Check the account balance, and if there's enough money, we go ahead and spend the money, just like Ryan and Monica did.

We put in a bunch of print statements so we can see what's happening as it runs.

The account starts with a balance of $100.

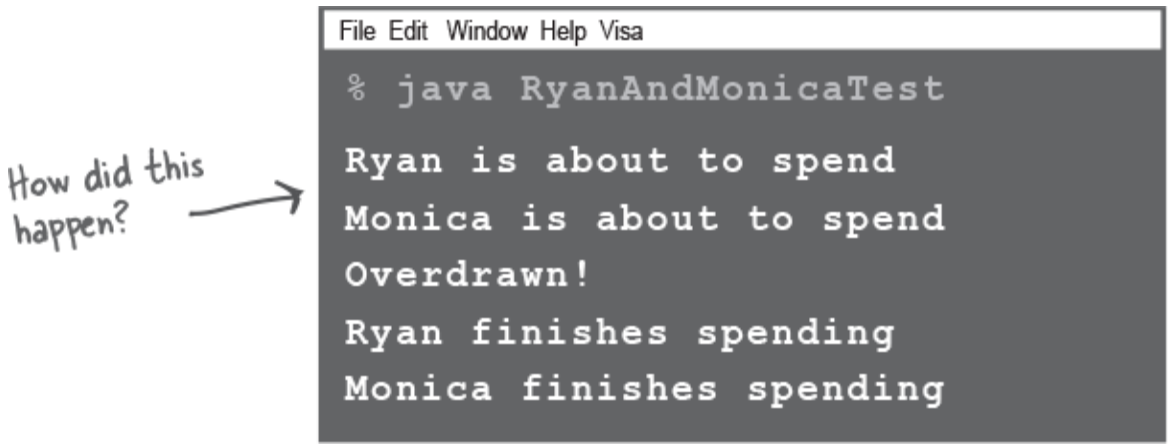

NOTE

This code is not deterministic; it doesn't always produce the same result every time. You may need to run it a few times before you see the problem.

This is common with multithreaded code, since it depends upon which threads start first and when each thread gets its time on a CPU core.

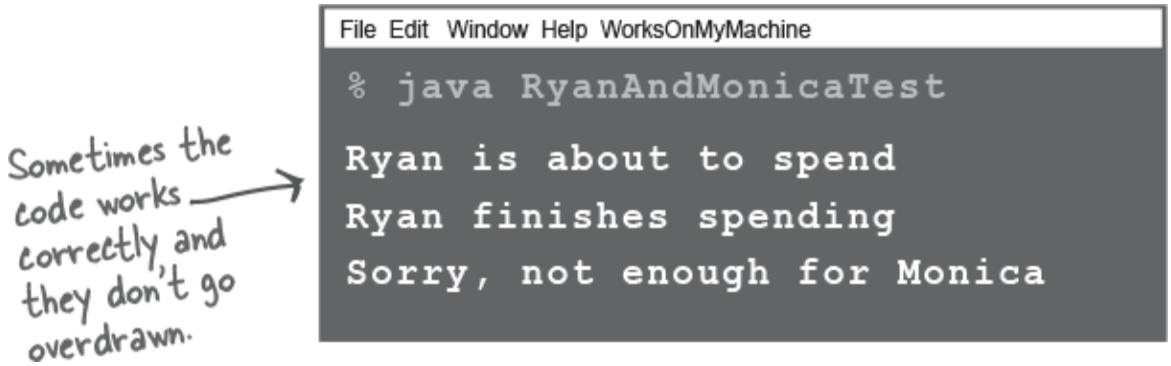

The goShopping() method always checks the balance before making a withdrawal, but still we went overdrawn.

Here's one scenario:

Ryan checks the balance, sees that there's enough money, and goes to check out.

Meanwhile, Monica checks the balance. She, too, sees that there's enough money. She has no idea that Ryan is about to pay for something.

Ryan completes his purchase.

Monica completes her purchase. Big Problem! In between the time when she checked the balance and spent the money, Ryan had already spent money!

Monica's check of the account was not valid, because Ryan had already checked and was still in the middle of making a purchase.

Monica must be stopped from getting into the account until Ryan has finished, and vice versa.

They need a lock for account access!

The lock works like this:

- ① There's a lock associated with the bank account transaction (checking the balance and withdrawing money). There's only one key, and it stays with the lock until somebody wants to access the account.

  The bank account transaction is unlocked when nobody is using the account.

- ② When Ryan wants to access the bank account (to check the balance and withdraw money), he locks the lock and puts the key in his pocket. Now nobody else can access the account, since the key is gone.

When Ryan wants to access the account, he secures the lock and takes the key.

- ③ **Ryan keeps the key in his pocket until he finishes the transaction.** He has the only key, so Monica can't access the account until Ryan unlocks the account and returns the key.

  Now, even if Ryan gets distracted after he checks the balance, he has a guarantee that the balance will be the same when he spends the money, because he kept the key while he was doing something else!

When Ryan is finished, he unlocks the lock and returns the key. Now the key is available for Monica (or Ryan again) to access the account.

We need to check the balance and spend the money as one atomic thing

We need to make sure that once a thread starts a shopping transaction, *it must be allowed to finish* before any other thread changes the bank account.

In other words, we need to make sure that once a thread has checked the account balance, that thread has a guarantee that it can spend the money *before any other thread can check the account balance!*

Use the **`synchronized`** keyword on a method, or with an object, to lock an object so only one thread can use it at a time.

That's how you protect the bank account! We can put a lock on the bank account inside the method that does the banking transaction. That way, one thread gets to complete the whole transaction, start to finish, even if that thread is taken out of the "running" state by the thread scheduler or another thread is trying to make changes at exactly the same time.

On the next couple of pages we'll look at the different things that we can lock. With the Ryan and Monica example, it's quite simple—we want to wrap our shopping transaction in a block that locks the bank account:

The `synchronized` keyword means that a thread needs a key in order to access the synchronized code.

To protect your data (like the bank account), synchronize the code that acts on that data.

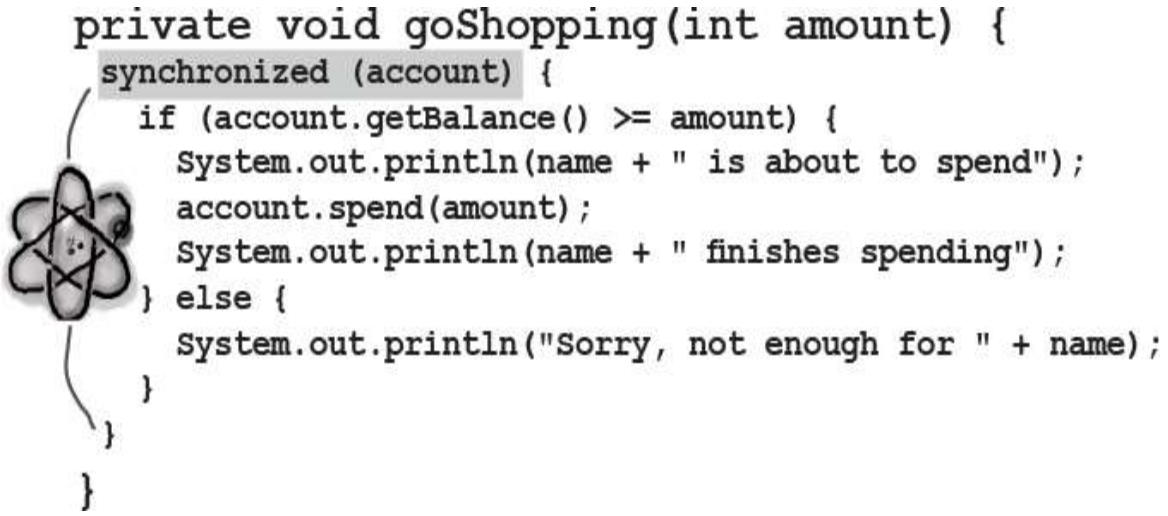

```
private void goShopping(int amount) {
  synchronized (account) {
    if (account.getBalance() >= amount) {
      System.out.println(name + " is about to spend");
      account.spend(amount);
      System.out.println(name + " finishes spending");
    } else {
      System.out.println("Sorry, not enough for " + name);
    }
  }
}
```

NOTE

(Note for you physics-savvy readers: yes, the convention of using the word " atomic " here does not reflect the whole subatomic particle thing. Think Newton, not Einstein, when you hear the word " atomic " in the context of threads or transactions. Hey, it's not OUR convention. If WE were in charge, we'd apply Heisenberg's Uncertainty Principle to pretty much everything related to threads.)

THERE ARE NO DUMB QUESTIONS

Q: Why don't you just synchronize all the getters and setters from the class with the data you're trying to protect?

A: Synchronizing the getters and setters isn't enough. Remember, the point of synchronization is to make a specific section of code work ATOMICALLY. In other words, it's not just the individual methods we care about; it's methods that require ***more than one step to complete!***

Think about it. We added a synchronized block inside the goShopping() method. If getBalance() and spend() were both synchronized instead, it wouldn't help—Ryan (or Monica) would have checked the balance returned the key! The whole point is to keep the key until ***both*** operations are completed.

Using an object's lock

Every object has a lock. Most of the time, the lock is unlocked, and you can imagine a virtual key sitting with it. Object locks come into play only when there is a **synchronized block**for an object (like in the last page) or a class has **synchronized methods**. A method is synchronized if it has the synchronized keyword in the method declaration.

When an object has one or more synchronized methods, ***a thread can enter a synchronized method only if the thread can get the key to the object's lock!***

The locks are not per *method*, they are per *object*. If an object has two synchronized methods, it doesn't *only* mean two threads can't enter the same

method. It means you can't have two threads entering *any* of the synchronized methods. If you have two synchronized methods on the same object, method1() and method2(), if one thread is in method1(), a second thread can't enter method1(), obviously, but it *also can't enter method2()*, or any other synchronized method on that object.

Think about it. If you have multiple methods that can potentially act on an object's instance variables, all those methods need to be protected with synchronized.

The goal of synchronization is to protect critical data. But remember, you don't lock the data itself; you synchronize the methods that *access* that data.

So what happens when a thread is cranking through its call stack (starting with the run() method) and it suddenly hits a synchronized method? The thread recognizes that it needs a key for that object before it can enter the method. It looks for the key (this is all handled by the JVM; there's no API in Java for accessing object locks), and if the key is available, the thread grabs the key and enters the method.

From that point forward, the thread hangs on to that key like the thread's life depends on it. The thread won't give up the key until it completes the synchronized method or block. So while that thread is holding the key, no other threads can enter *any* of that object's synchronized methods, because the one key for that object won't be available.

NOTE

Every Java object has a lock. A lock has only one key.

Most of the time, the lock is unlocked and nobody cares.

But if an object has synchronized methods, a thread can enter one of the synchronized methods ONLY if the key for the object's lock is available. In other words, only if another thread hasn't already grabbed the one key.

Using synchronized methods

Can we synchronize the goShopping() method to fix Ryan and Monica's problem?

```
private synchronized void goShopping(int amount) {
  if (account.getBalance() >= amount) {
    System.out.println(name + " is about to spend");
    account.spend(amount);
    System.out.println(name + " finishes spending");
  } else {
    System.out.println("Sorry, not enough for " + name);
  }
}
```

It does NOT work!

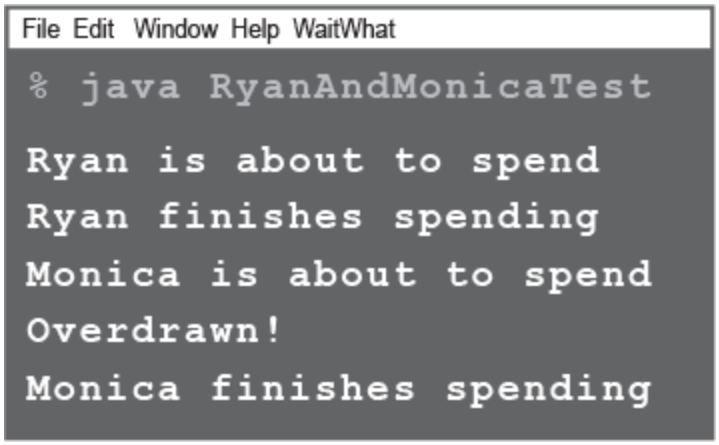

The synchronized keyword locks an object. The goShopping() method is in RyanAndMonicaJob. Synchronizing an instance method means "lock *this* RyanAndMonicaJob instance." However, there are *two* instances of RyanAndMonicaJob; one is "ryan," and the other is "monica." If "ryan" is locked, "monica" can still make changes to the bank account; she doesn't care that the "ryan" job is locked.

The object that needs locking, the object these two threads are fighting over, is the BankAccount. Putting synchronized on a method in RyanAndMonicaJob (and locking a RyanAndMonicaJob instance) isn't going to solve anything.

It's important to lock the correct object

Since it's the BankAccount object that's shared, you could argue it should be the BankAccount that's in charge of making sure it is safe for multiple threads to use. The spend() method on BankAccount could make sure there's enough money *and* debit the account in a single transaction.

```
class RyanAndMonicaJob implements Runnable {
  // ...rest of the RyanAndMonicaJob class
  // the same as before...

  private void goShopping(int amount) {
    System.out.println(name + " is about to spend");
    account.spend(name, amount);
    System.out.println(name + " finishes spending");
  }
}
```

This would no longer need to check the balance before spending if we know the BankAccount spend() method checks for us.

```
class BankAccount {
  // other methods in BankAccount...

  public synchronized void spend(String name, int amount) {
    if (balance >= amount) {
      balance = balance - amount;
      if (balance < 0) {
        System.out.println("Overdrawn!");
      }
    } else {
      System.out.println("Sorry, not enough for " + name);
    }
  }
}
```

Locks the BankAccount instance the two threads are using.

Ryan and Monica SHOULDN'T go overdrawn now; this should never be the case.

Do the balance check and balance decrease in the BankAccount itself. If this method is synchronized, it becomes an atomic transaction that can be done in full by only one thread at a time.

THERE ARE NO DUMB QUESTIONS

Q: What about protecting static variable state? If you have static methods that change the static variable state, can you still use synchronization?

A: Yes! Remember that static methods run against the class and not against an individual instance of the class. So you might wonder whose object's lock would be used on a static method? After all, there might not even *be* any instances of that class. Fortunately, just as each *object* has its own lock, each loaded *class* has a lock. That means if you have three Dog objects on your heap, you have a total of four Dog-related locks; three belonging to the three Dog instances, and one belonging to the Dog class itself. When you synchronize a static method, Java uses the lock of the class itself. So if you synchronize two static methods in a single class, a thread will need the class lock to enter *either* of the methods.

The dreaded "Lost Update" problem

Here's another classic concurrency problem. Sometimes you'll hear them called "race conditions," where two or more threads are changing the same data at the same time. It's closely related to the Ryan and Monica story, so we'll use this example to illustrate a few more points.

The lost update revolves around one process:

Step 1: Get the balance in the account

```
int i = balance;
```

Step 2: Add 1 to that balance

```
balance = i + 1;
```

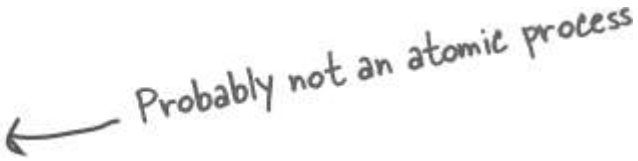

Even if we used the more common syntax of **`balance++`**, there is no guarantee that the compiled bytecode will be an "atomic process." In fact, it probably won't—it's actually multiple operations: a read of the current value and then adding one to that value and setting it back into the original variable.

In the "Lost Update" problem, we have many threads trying to increment the balance. Take a look at the code, and then we'll look at the real problem:

```
public class LostUpdate {
  public static void main(String[] args) throws InterruptedException {
    ExecutorService pool = Executors.newFixedThreadPool(6);

    Balance balance = new Balance();
    for (int i = 0; i < 1000; i++) {
      pool.execute(() -> balance.increment());
    }
    pool.shutdown();
    if (pool.awaitTermination(1, TimeUnit.MINUTES)) {
      System.out.println("balance = " + balance.balance);
    }
  }
}

class Balance {
  int balance = 0;

  public void increment() {
    balance++;
  }
}
```

Create a thread pool to run all the jobs. If you add more threads here, you may see even more missing updates.

Run 1,000 attempts to update the balance, on different threads.

Make sure the pool has finished running all the updates before printing the final balance. In theory, this should be 1,000. If it's any less than that, we've lost an update!

Here's the crucial part! We increment the balance by adding 1 to whatever the value of balance was AT THE TIME WE READ IT (rather than adding 1 to whatever the CURRENT value is). You might think that "++" is an atomic operation, but it is not.

Let’s run this code...

① Thread A runs for a while

Reads balance: 0
Set the value of balance to 0 + 1.
Now balance is 1

Reads balance: 1
Set the value of balance to 1 + 1.
Now balance is 2

② Thread B runs for a while

Reads balance: 2
Set the value of balance to 2 + 1.
Now balance is 3

Reads balance: 3

[now thread B is sent back to runnable,
***before** it sets the value of balance to 4]*

③ Thread A runs again, picking up where it left off

Reads balance: 3
Set the value of balance to 3 + 1.
Now balance is 4

Reads balance: 4
Set the value of balance to 4 + 1.
Now balance is 5

④ Thread B runs again, and picks up exactly where it left off!

Set the value of balance to 3 + 1.
Now balance is 4

Yikes!!

Thread A updated it to 5, but now B came back and stepped on top of the update A made, as if A's update never happened.

We lost the last updates that Thread A made! Thread B had previously done a "read" of the value of balance, and when B woke up, it just kept going as if it never missed a beat.

Make the increment() method atomic. Synchronize it!



Synchronizing the increment() method solves the "Lost Update" problem, because it keeps the steps in the method (read of balance and increment of balance) as one unbreakable unit.

```
public synchronized void increment() {
  balance++;
}
```

Classic concurrency gotcha: this looks like a single operation, but it's actually more than one—it's a read of the balance, an increment, and an update to the balance.

Once a thread enters the method, we have to make sure that all the steps in the method complete (as one atomic process) before any other thread can enter the method.

THERE ARE NO DUMB QUESTIONS

Q: Sounds like it's a good idea to synchronize everything, just to be thread-safe.

A: Nope, it's not a good idea. Synchronization doesn't come for free. First, a synchronized method has a certain amount of overhead. In other words, when code hits a synchronized method, there's going to be a performance hit (although typically, you'd never notice it) while the matter of "is the key available?" is resolved.

Second, a synchronized method can slow your program down because synchronization restricts concurrency. In other words, a synchronized method forces other threads to get in line and wait their turn. This might not be a problem in your code, but you have to consider it.

Third, and most frightening, synchronized methods can lead to deadlock! (We'll see this in a couple of pages.)

A good rule of thumb is to synchronize only the bare minimum that should be synchronized. And in fact, you can synchronize at a granularity that's even smaller than a method. Remember, you can use the synchronized keyword to synchronize at the more fine-grained level of one or more statements, rather than at the whole-method level (we used this in our first solution to Ryan and Monica's problem).

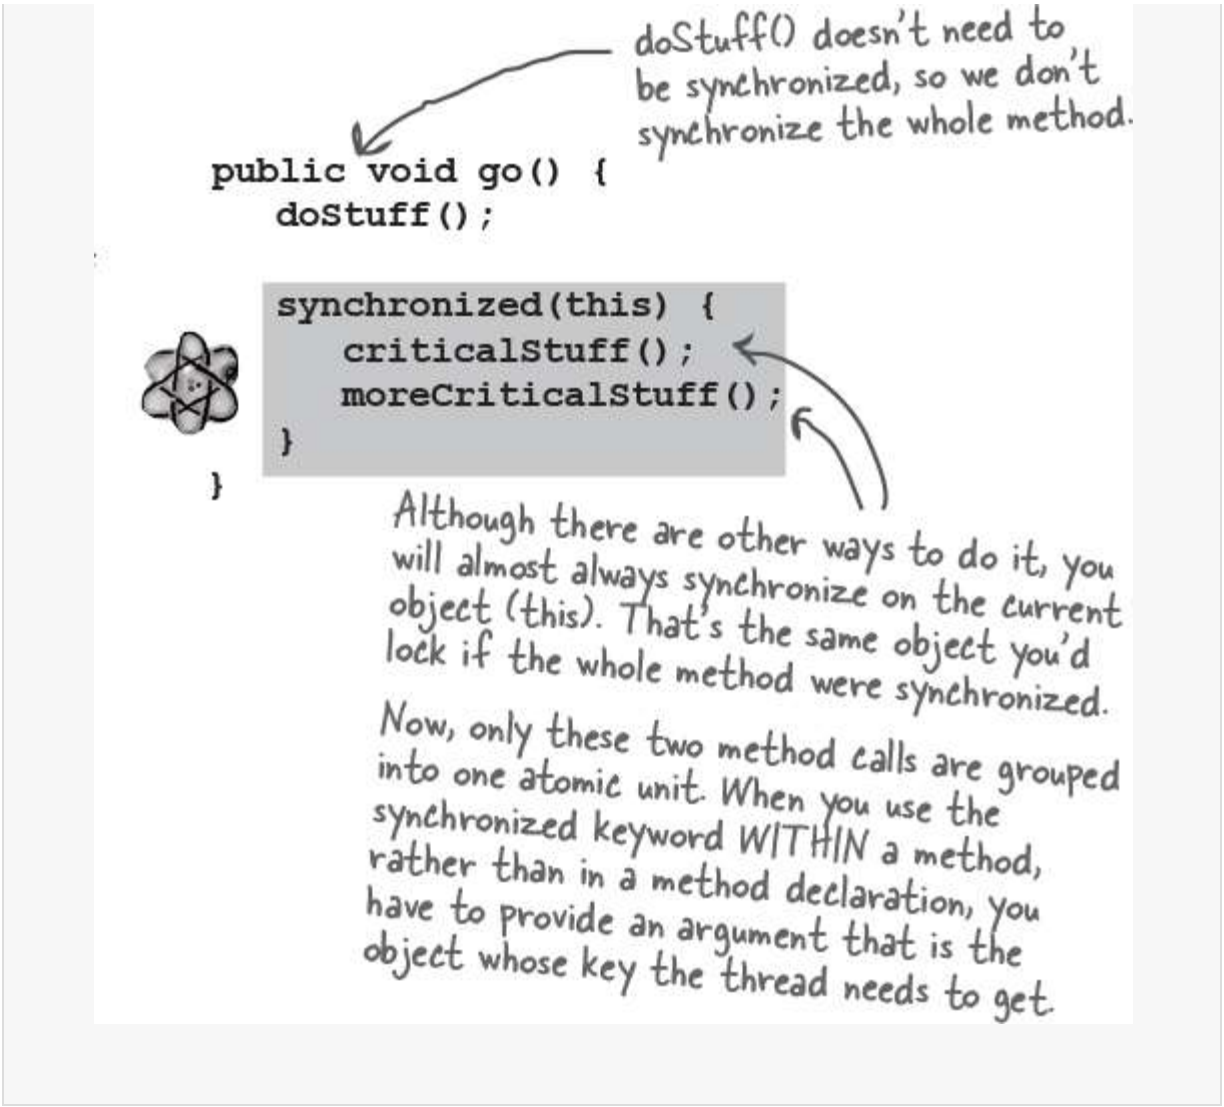

- ① Thread A runs for a while
  - Attempt to enter the increment() method.
  - The method is synchronized, so **get the key** for this object
  - Reads balance: 0
  - Set the value of balance to 0 + 1.
  - Now balance is 1
  - **Return the key** (it completed the increment() method).

- Re-enter the increment() method and **get the key**.
- Reads balance: 1

  [now thread A is sent back to runnable, but since it has not completed the synchronized method, Thread A keeps the key]

- ② Thread B is selected to run
  - Attempt to enter the increment() method. The method is synchronized, so we need to get the key.

    The key is not available.

    [now thread B is sent into an "object lock not available" lounge]

- ③ Thread A runs again, picking up where it left off (remember, it still has the key)
  - Set the value of balance 1 + 1.
  - Now balance is 2

Return the key.

[now thread A is sent back to runnable, but since it has completed the increment() method, the thread does NOT hold on to the key]

- ④ Thread B is selected to run

  - Attempt to enter the increment() method. The method is synchronized, so we need to get the key.

    This time, the key IS available; get the key.

    Reads balance: 2

    [continues to run...]

Deadlock, a deadly side of synchronization

Synchronization saved Ryan and Monica from using their bank account at the same time, and has saved us from losing updates. But we also mentioned that

we shouldn't synchronize everything, one reason being that synchronization can slow your program down.

There's another important consideration: we need to be careful using synchronized code, because nothing will bring your program to its knees like thread deadlock. Thread deadlock happens when you have two threads, both of which are holding a key the other thread wants. There's no way out of this scenario, so the two threads will simply sit and wait. And wait. And wait.

If you're familiar with databases or other application servers, you might recognize the problem; databases often have a locking mechanism somewhat like synchronization. But a real transaction management system can sometimes deal with deadlock. It might assume, for example, that deadlock might have occurred when two transactions are taking too long to complete. But unlike Java, the application server can do a "transaction rollback" that returns the state of the rolled-back transaction to where it was before the transaction (the atomic part) began.

Java has no mechanism to handle deadlock. It won't even *know* deadlock occurred. So it's up to you to design carefully. We're not going to go into more detail about deadlock than you see on this page, so if you find yourself writing multithreaded code, you might want to study *Java Concurrency in Practice* by Brian Goetz, et al. It goes into a lot of detail about the sorts of problems you can face with concurrency (like deadlock), and approaches to address these problems.

All it takes for deadlock are two objects and two threads.

A simple deadlock scenario:

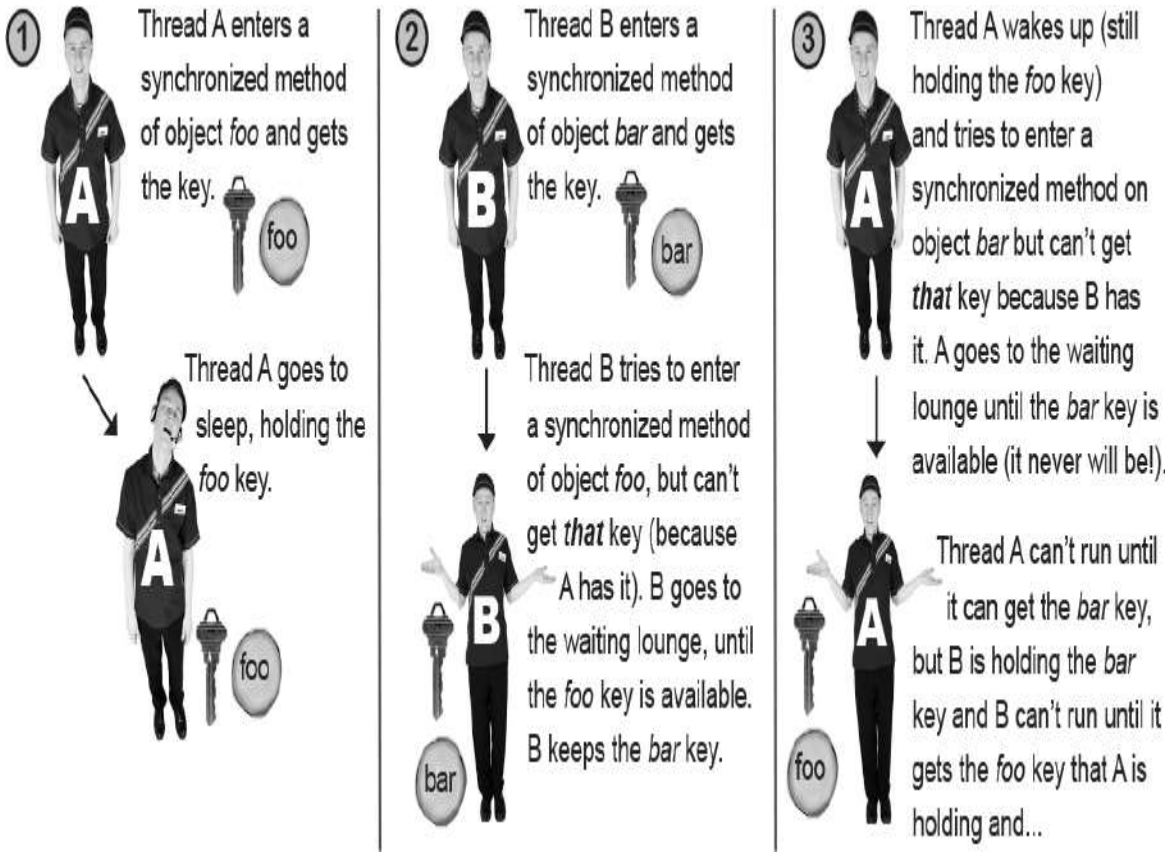

You don't always have to use synchronized

Since synchronization can come with some costs (like performance and potential deadlocks), you should know about other ways to manage data that's shared between threads. The java.util.concurrent package has lots of classes and utilities for working with multithreaded code.

Atomic variables

If the shared data is an int, long, or boolean, we might be able to replace it with an *atomic variable*. These classes provide methods that are atomic, i.e., can safely be used by a thread without worrying about another thread changing the object's values at the same time.

There are few types of atomic variable, e.g., **AtomicInteger**, **AtomicLong**, **AtomicBoolean**, and **AtomicReference**.

We can fix our Lost Update problem with an AtomicInteger, instead of synchronizing the increment method.

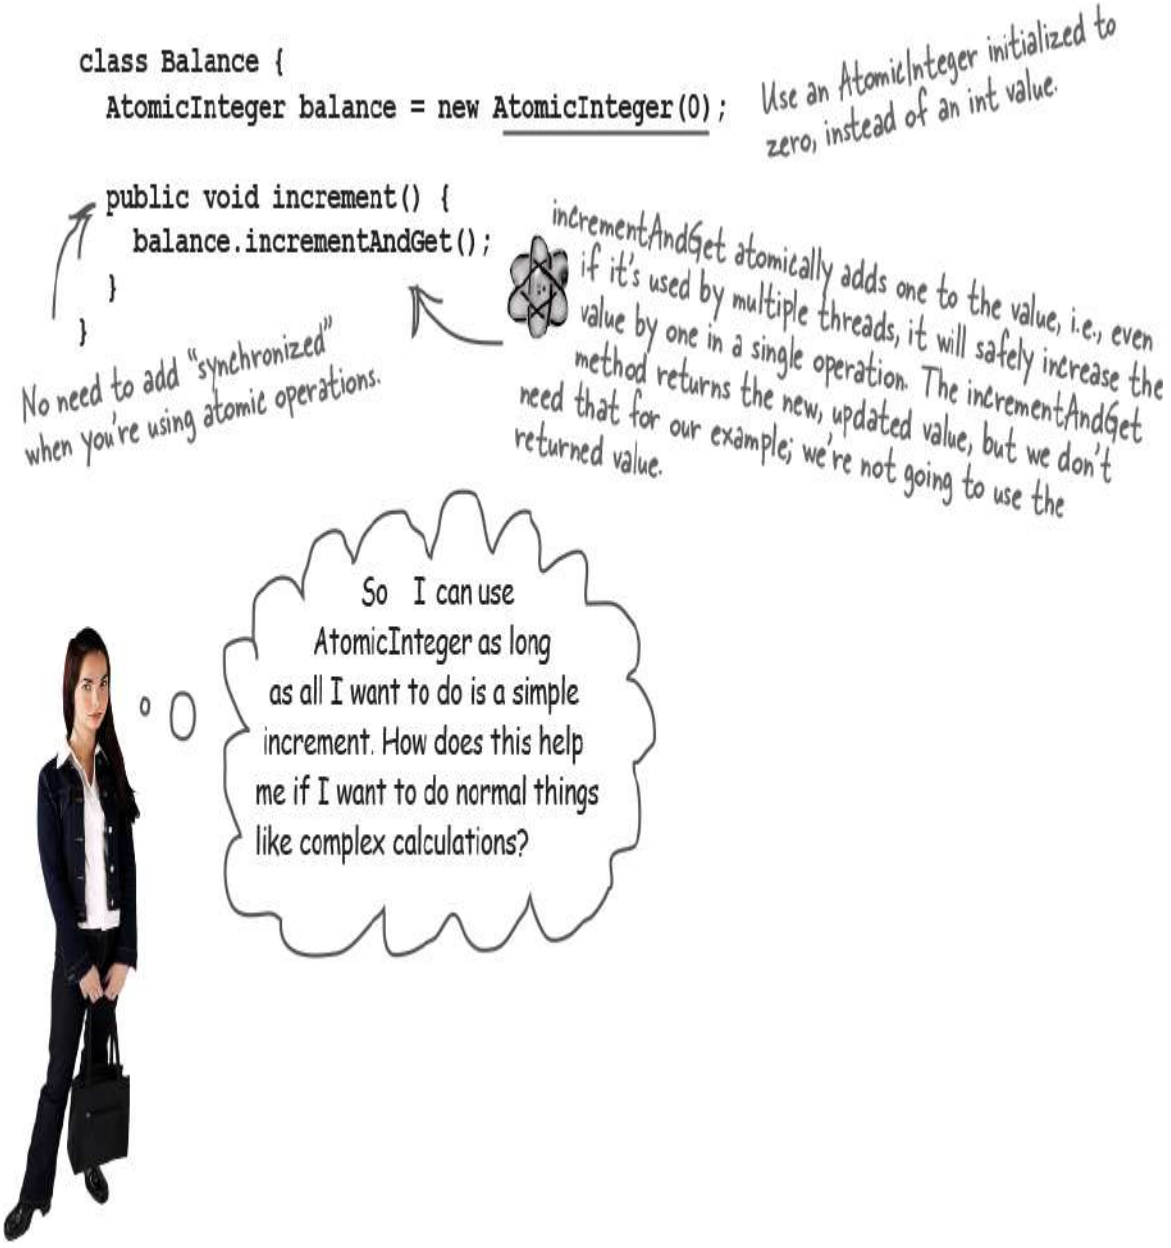

Atomic variables get more interesting when you use their *compare-and-swap* (CAS) operations. CAS is yet another way to make an atomic change to a value. You can use CAS on atomic variables by using the **`compareAndSet`** method. Yes, it's a slightly different name! Gotta love programming, where naming is always the hardest problem to solve.

The compareAndSet method takes a value, which is what you *expect* the atomic variable to be, compares it to the *current* value, and if that matches, *then* the operation will complete.

In fact, we can use this to fix our Ryan and Monica problem, instead of locking the whole bank account with **`synchronized`**.

Compare-and-swap with atomic variables

How could we make use of atomic variables, and CAS (via **`compareAndSet`**), to solve Ryan and Monica's problem?

Since Ryan and Monica were both trying to access an int value, the account balance, we could use an AtomicInteger to store that balance. We could then use **`compareAndSet`** to update the balance when someone wants to spend money.

```
private AtomicInteger balance = new AtomicInteger(100);

...

boolean success = balance.compareAndSet(expectedValue, newValue)
```

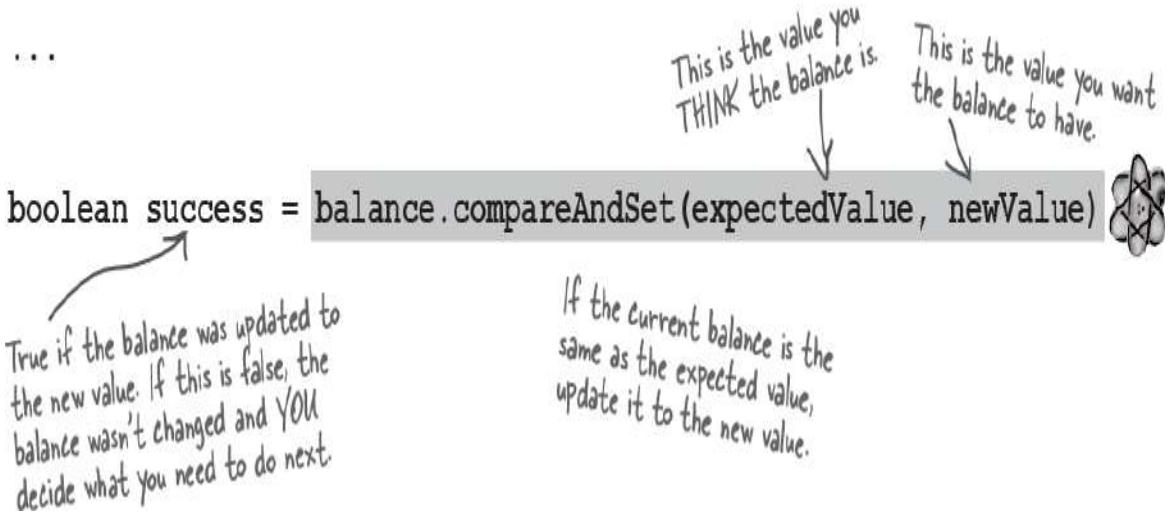

In plain English:

> ***"Set the balance to this new value only if the current balance is the same as this expected value, and tell me if the balance was actually changed."***

Compare-and-swap uses *optimistic locking*. Optimistic locking means you don't stop all threads from getting to the object; you *try* to make the change, but you embrace the fact that the change ***might not happen***. If it doesn't succeed, you decide what to do. You might decide to try again, or to send a message letting the user know it didn't work.

This may be more work than simply locking all other threads out from the object, but it can be faster than locking everything. For example, when the chances of multiple writes happening at the same time are very low or if you have a lot of threads reading and not so many writing, then you may not want to pay the price of a lock on every write.

> *When you're using CAS operations, you have to deal with the times when the operation does NOT succeed.*

Ryan and Monica, going atomic

Let's see the whole thing in action in Ryan and Monica's bank account. We'll put the balance in an AtomicInteger and use compareAndSet to make an *atomic* change to the balance.

```
import java.util.concurrent.atomic.AtomicInteger;

class BankAccount {
  private final AtomicInteger balance = new AtomicInteger(100);

  public int getBalance() {
    return balance.get();
  }

  public void spend(String name, int amount) {

    int initialBalance = balance.get();
    if (initialBalance >= amount) {

      boolean success = balance.compareAndSet(initialBalance, initialBalance - amount);

      if (!success) {
        System.out.println("Sorry " + name + ", you haven't spent the money.");
      }
    } else {
      System.out.println("Sorry, not enough for " + name);
    }
  }
}
```

Store the balance in an AtomicInteger, with the same initial value ($100) as before.

Use the get() method to get the int value of the AtomicInteger.

Not synchronized

Like before, check if there's enough money. This time, keep a record of the balance.

The balance will NOT be changed if the initial balance does not match the actual balance right now.

Pass in the balance from when we checked if there was enough money.

This is the "spend," subtracting the amount spent from the account balance.

If success was false, the money was NOT spent. Tell Ryan or Monica it didn't work and they can decide what to do.

```
File Edit Window Help SorryMonica
% java RyanAndMonicaTest
Ryan is about to spend
Monica is about to spend
Ryan finishes spending
Sorry Monica, you can't buy this
Monica finishes spending
```

Monica was able to start her shopping, but by the time she came to pay, the bank said no. At least they didn't go overdrawn!

NOTE

java.util.concurrent has lots of useful classes and utilities for working with multithreaded code. Take a look at what's there!

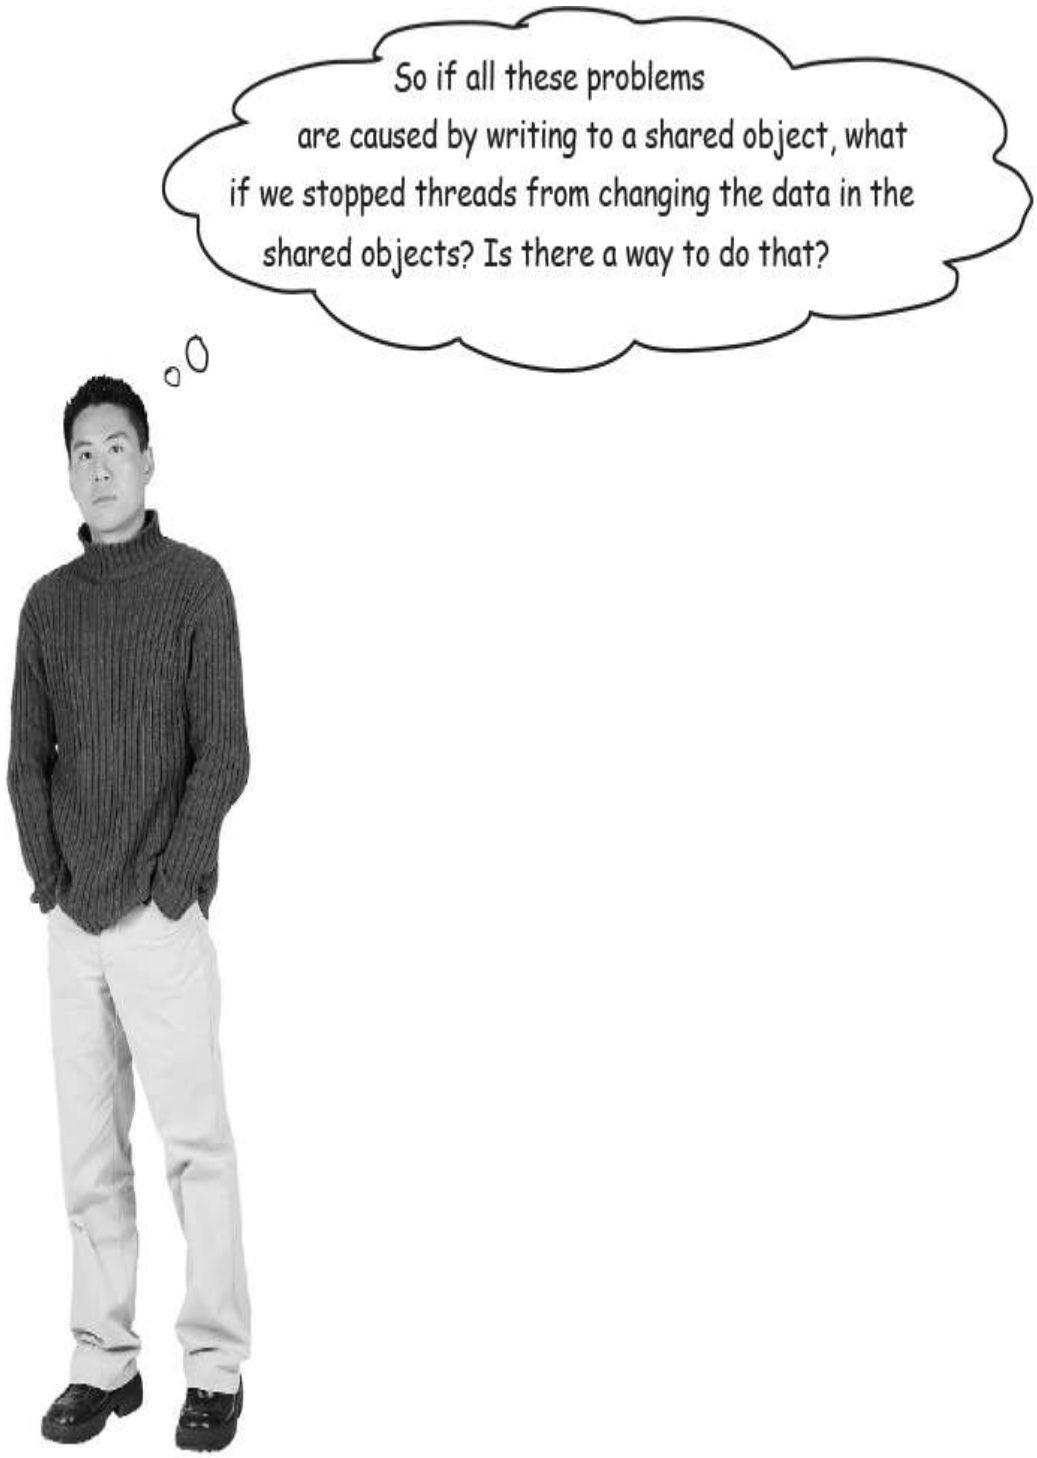

Make an object <u>immutable</u> if you're going to share it between threads and you don't want the threads to change its data.

The very best way to know *for sure* that another thread isn't changing your data is to make it impossible to change the data in the object. When an object's data cannot be changed, we call it an **immutable object**.

Writing a class for immutable data

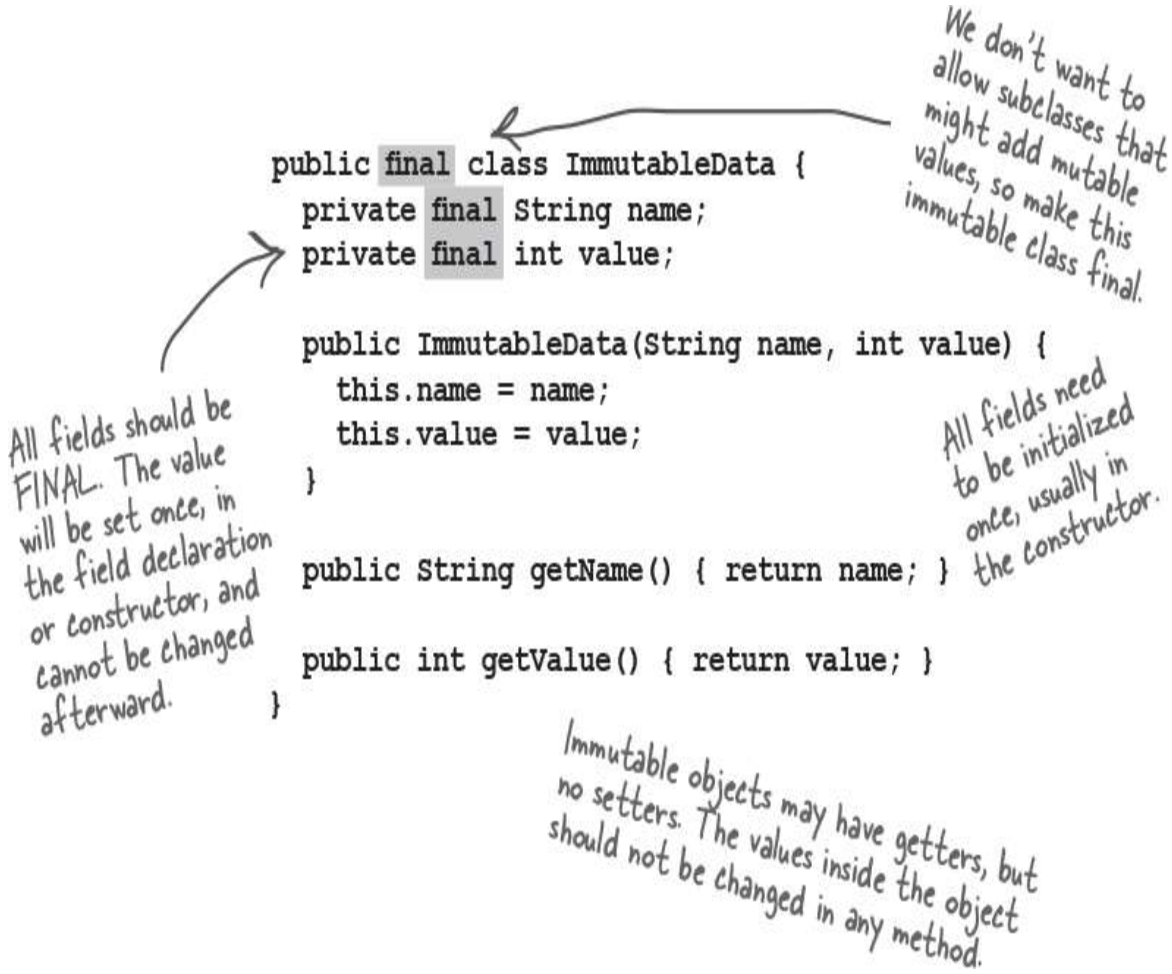

BRAIN BARBELL

There are times when adding the final keyword isn't enough to prevent changes. When do you think that might be the case? We'll give you a clue....

Using immutable objects

It is terribly convenient to be able to change data on a shared object and assume that all the other threads will be able to see these changes.

However, we've also seen that while it's *convenient*, it's not very *safe*.

On the other hand, when a thread is working with an object that cannot be changed, it can make assumptions about the data in that object; e.g., once the thread has read a value from the object, it knows that data can't change.

We don't need to use synchronization or other mechanisms to control who changes the data because it can't change.

Working with immutable objects means thinking in a different way.

Instead of making changes to the *same* object, we *replace* the old object with a new one. The new object has the updated values, and any threads that need the new values need to use the new object.

What happens to the old object? Well, if it's still being used by something (and it might be—it's perfectly valid sometimes to work with older data), it will hang around on the heap. If it's not being used, it'll be garbage collected, and we don't have to worry about it anymore.

Changing immutable data

Imagine a system that has customers, and that each Customer object has an Address that represents the street address of a customer. If the customer's

Address is an immutable object (all its fields are final and the data cannot be changed), how do you change the customer's address when they move?

- ❶ **The Customer has a reference to the original Address object containing the customer's street address data.**

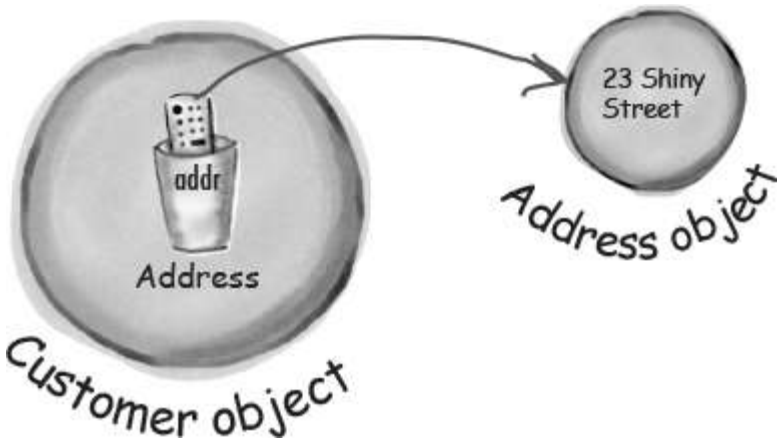

- ❷ **When the customer moves, a brand new Address object is created with the new street address for the customer.**

- ❸ **The Customer object's reference to their address is changed to point to the new Address object.**

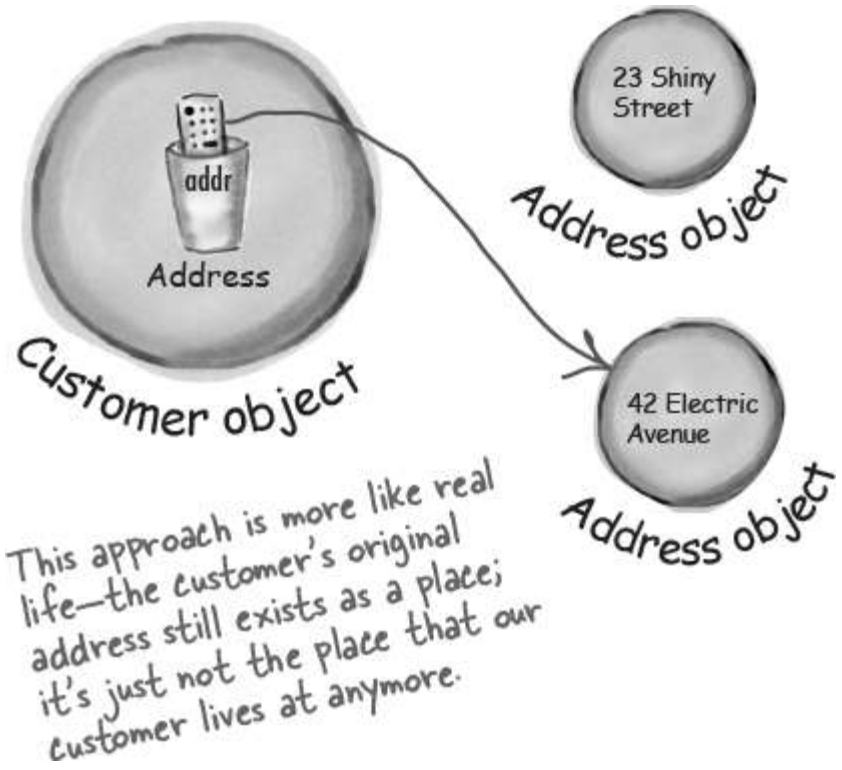

THERE ARE NO DUMB QUESTIONS

Q: What happens if other parts of the program have a reference to the old Address?

A: Actually sometimes we want this. Imagine the customer placed an order to be delivered to their original address. We still want the details of that order to have the original address; we don't want it changed to contain the details of the new address.

Once the customer changes their address (and the Customer contains a reference to the new address object), *then* we want new orders to use the new Address object.

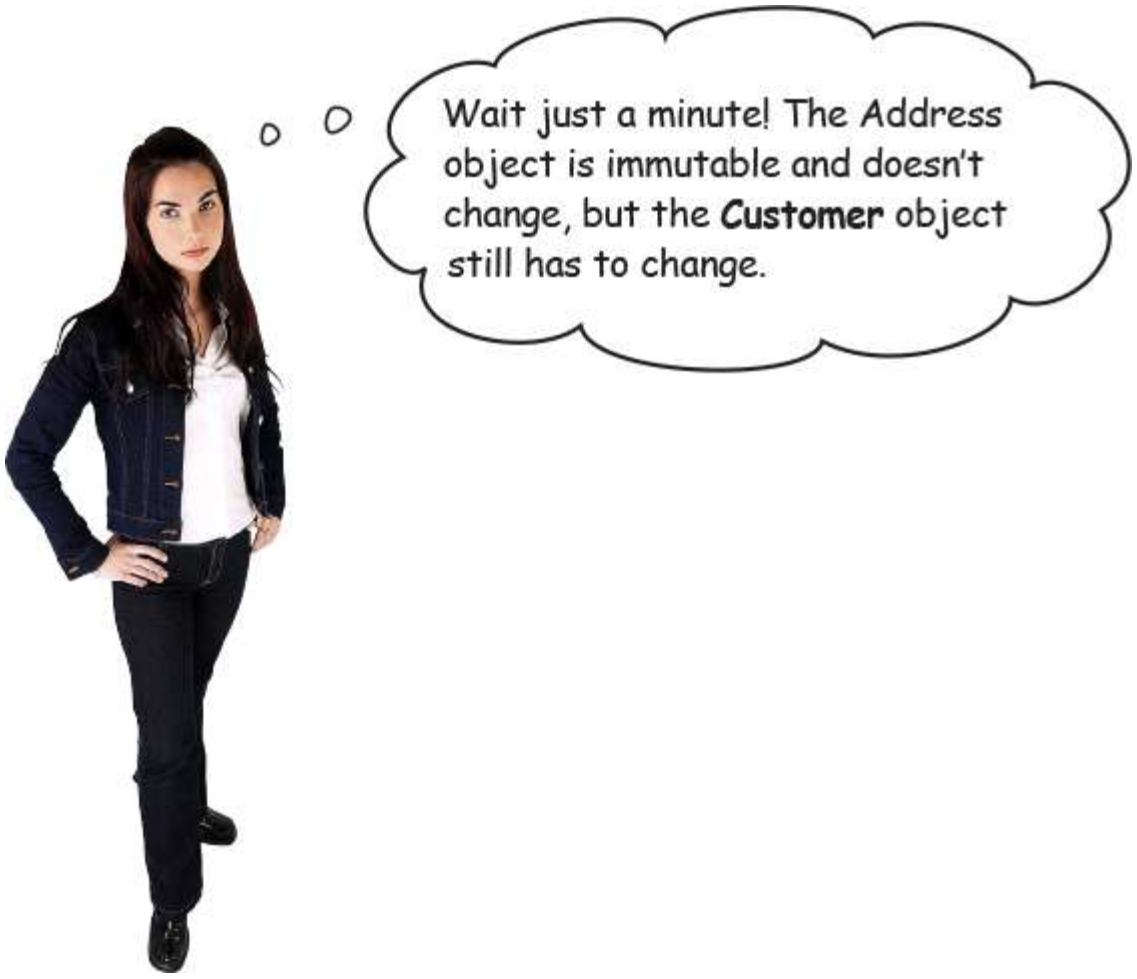

Absolutely right. If your system has data that changes, those changes do have to happen somewhere. The key idea to take away from this discussion is that not all of the classes in your application have to have data that changes. In fact, we'd argue for minimizing the places where things change. Then, there are far fewer places where you have to think about what happens if multiple threads are making changes at the same time.

There are a number of techniques for working effectively with immutable data classes; we've just scratched the surface here. It is interesting to note that Java 16 introduced *records*, which are immutable data classes provided directly by the language.

NOTE

Use immutable data classes where you can.

Limit the number of places where data can be changed by multiple threads.

More problems with shared data

We're nearly there, we promise! Just one last thing to look at.

So far we've seen all sorts of problems that can come from many threads writing to the same data. This applies to data in Collections too.

We can even have problems when we have lots of threads *reading* the same data, even if only one thread is making changes to it.

This code has just one thread writing to a collection, but two threads reading it.

```
public class ConcurrentReaders {
  public static void main(String[] args) {
    List<Chat> chatHistory = new ArrayList<>();
    ExecutorService executor = Executors.newFixedThreadPool(3);
    for (int i = 0; i < 5; i++) {
      executor.execute(() -> chatHistory.add(new Chat("Hi there!")));
      executor.execute(() -> System.out.println(chatHistory));
      executor.execute(() -> System.out.println(chatHistory));
    }
    executor.shutdown();
  }
}
```

Stores the Chat objects in an ArrayList, which is NOT thread safe

Create a writing thread that adds to the List, and two threads that read from the list. Loop a few times to try to provoke the problem.

```
final class Chat {
  private final String message;
  private final LocalDateTime timestamp;

  public Chat(String message) {
    this.message = message;
    timestamp = LocalDateTime.now();
  }

  public String toString() {
    String time = timestamp.format(ofLocalizedTime(MEDIUM));
    return time + " " + message;
  }
}
```

Making an Object field "final" doesn't guarantee the data inside that object won't change, just that the reference won't change. String and LocalDateTime are immutable, so this is safe.

Instances of Chat are immutable.

Reading from a changing data structure causes an Exception

Running the code on the last page causes an Exception to be thrown, sometimes. By now you know these sorts of issues depend a lot on the whims of the hardware, the operating system, and the JVM.

```
File Edit Window Help PoorBrunonono
% java ConcurrentReaders
[]
[]
[18:43:59 Hi there!, 18:43:59 Hi there!]
[18:43:59 Hi there!, 18:43:59 Hi there!]
[18:43:59 Hi there!, 18:43:59 Hi there!, 18:43:59 Hi there!]
[18:43:59 Hi there!, 18:43:59 Hi there!, 18:43:59 Hi there!]
Exception in thread "pool-1-thread-2" Exception in thread "pool-1-thread-1" java.util.
ConcurrentModificationException
        at java.base/java.util.ArrayList$Itr.checkForComodification(ArrayList.java:1043)
        at java.base/java.util.ArrayList$Itr.next(ArrayList.java:997)
        at java.base/java.util.AbstractCollection.toString(AbstractCollection.java:472)
        at java.base/java.lang.String.valueOf(String.java:2951)
        at java.base/java.io.PrintStream.println(PrintStream.java:897)
        at ConcurrentReaders.lambda$main$2(ConcurrentReaders.java:17)
```

A ConcurrentModificationException is thrown by the reading thread when the List it is reading is changed WHILE this thread is reading it.

> **NOTE**
>
> If a collection is changed by one thread while another thread is reading that collection, you can get a ConcurrentModificationException.

Use a thread-safe data structure

Clearly good ol' ArrayList just isn't going to cut it if you have threads reading data that's being changed at the same time. Luckily for us, there are other options. We want a thread-safe data structure, one that can be written to, and read from, by multiple threads at the same time.

The java.util.concurrent package has a number of thread-safe data structures, and we're going to look at **`CopyOnWriteArrayList`** to solve this specific problem.

CopyOnWriteArrayList is a reasonable choice when you have a List that is being **read a lot, but not changed very often**. We'll see why later.

CopyOnWriteArrayList implements the List interface, so we can use it as a drop-in replacement for any List.

```
public class ConcurrentReaders {
  public static void main(String[] args) {
    List<Chat> chatHistory = new CopyOnWriteArrayList<>();
    ExecutorService executor = Executors.newFixedThreadPool(3);
    for (int i = 0; i < 5; i++) {
      executor.execute(() -> chatHistory.add(new Chat("Hi there!")));
      executor.execute(() -> System.out.println(chatHistory));
      executor.execute(() -> System.out.println(chatHistory));
    }
    executor.shutdown();
  }
}
```

The rest of the code is exactly the same as before.

```
File Edit Window Help AyMariposa
% java ConcurrentReaders
[]
[]
[]
[]
[10:26:22 Hi there!, 10:26:22 Hi there!]
[10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!]
[10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!]
[10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!]
[10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!
[10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!, 10:26:22 Hi there!

Process finished with exit code 0
```

No Exception!

CopyOnWriteArrayList

CopyOnWriteArrayList uses immutability to provide safe access for reading threads while other threads are writing.

How does it work? Well, it does what it says on the tin: when a thread is writing to the list, it's actually writing to a *copy* of the list. When the changes have been made, then the new copy replaces the original. In the meantime, any threads that were reading the list before the change are happily (and safely!) reading the original.

- ❶ **An instance of CopyOnWriteArrayList contains an ordered set of data, like an array.**

- ❷ When Thread A reads the CopyOnWriteArrayList, it gets an Iterator that allows it to read a **snapshot** of the list data at that point in time.

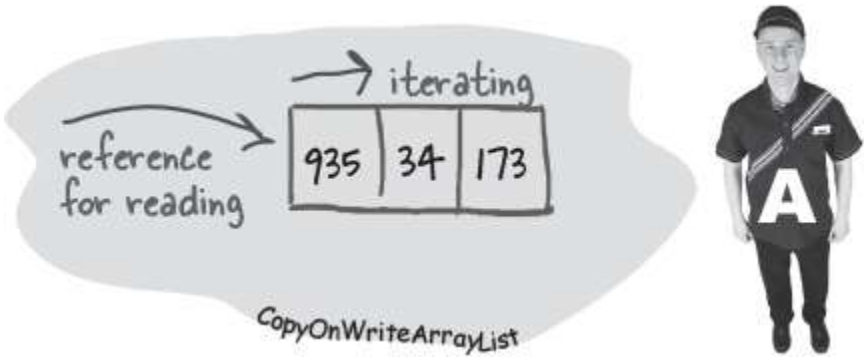

- ❸ Thread B writes data to the CopyOnWriteArrayList by adding a new element, and the CopyOnWriteArray creates a **copy** of the list data before any changes are made. This is invisible to any of the reading or writing threads.

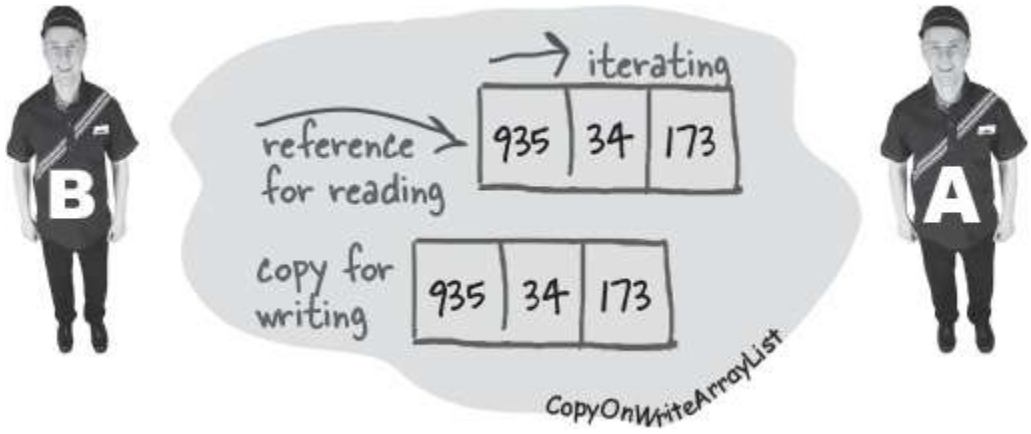

- ❹ When Thread B makes changes to "the list," it's actually making changes to this copy. It's happy knowing the changes are being made. The reading threads like Thread A are not affected at all; they're iterating over the snapshot of the original data.

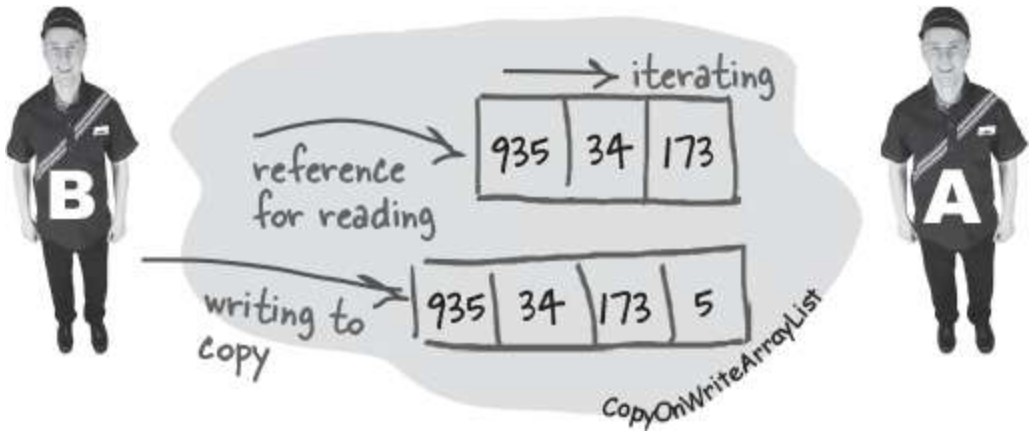

- ❺ Once Thread B has finished its updates, then the original data is replaced with the new data.

  If Thread A is still reading, it's safely reading the old data. If any other threads start reading after the change, they get the new data.

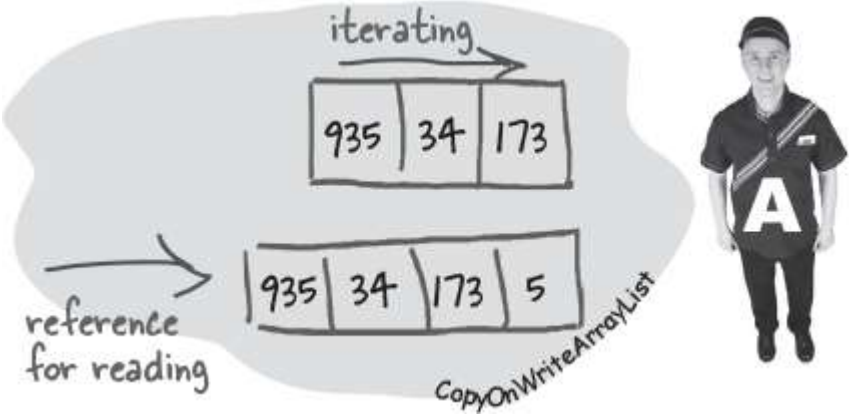

THERE ARE NO DUMB QUESTIONS

Q: Doesn't using CopyOnWriteArrayList mean that some reading threads will be reading old data?

A: Yes, the reading threads will always be working off data that is a snapshot of the data from when they first started reading. This means that potentially the data might be out of date at some point, but at least it's not going to throw a ConcurrentModificationException.

Q: Isn't it bad to be using out of date data?

A: Not necessarily. In many systems this is "good enough." Think, for example, about a website that shows live news. Yes, you want it to be pretty up to date, but it doesn't have to be up to date to the latest millisecond; it's probably fine if some news is a few seconds old.

Q: But I don't want my bank statement to be even slightly out of date! How can I make sure that critical shared data is always correct?

A: CopyOnWriteArrayList is probably not the right choice if all threads need to be working off exactly the same data. Other data structures, like Vector, provide thread-safety by using locks to ensure only one thread at a time has access to the data. This is safe, but can be slow—you're not getting any benefits of multi-threading if your threads need to wait their turn to get to their data.

Q: So CopyOnWriteArrayList is a fast thread-safe data structure?

A: Well.. it depends! It's fast (compared to a locking Collection) if you have lots of reading threads and not many writes. But if there's a lot of writing going on, it might not be the best data structure. The cost of creating a new copy of the data every time a single write is made might be too high for some applications.

Q: Why isn't there an easy answer to the best way to do this concurrency stuff?

A: Concurrent programming is all about trade-offs. You need a good understanding of what your application is doing, how it should work, and the hardware and environment that's running it.

If you find yourself wondering which approach is better for your application, it's probably a good time to learn about performance testing so you can measure exactly how each approach impacts the performance in your system.

Q: You never told us about the case where adding final to a field declaration is not enough to make sure that value is never changed. What's the deal?

A: Good catch! The "deal" is that if your field is a reference to another object, like a Collection or one of your own objects, using final does not prevent another thread from changing the values inside that object. The only way to make sure that doesn't happen is to make sure all your fields that are references refer only to immutable objects themselves. Otherwise, your immutable object can have data that changes.

See the LocalDateTime case in "More problems with shared data".

NOTE

Thread-safe collections in early versions of Java were made safe via locking. For example, java.util.Vector.

Java 5 introduced concurrent data structures in java.util.concurrent. These do NOT use locking.

BULLET POINTS

- You can have serious problems with threads if two or more threads are trying to change the same data.
- Two or more threads accessing the same object can lead to data corruption if one thread, for example, leaves the running state while still in the middle of manipulating an object's critical state.
- To make your objects thread-safe, decide which statements should be treated as one atomic process. In other words, decide which methods must run to completion before another thread enters the same method on the same object.
- Use the keyword **`synchronized`** to modify a method declaration when you want to prevent two threads from entering that method.
- Every object has a single lock, with a single key for that lock. Most of the time we don't care about that lock; locks come into play only when an object has synchronized methods or use the synchronized keyword with a specified object.
- When a thread attempts to enter a synchronized method, the thread must get the key for the object (the object whose method the thread is trying to run). If the key is not available (because another thread already has it), the thread goes into a kind of waiting lounge until the key becomes available.
- Even if an object has more than one synchronized method, there is still only one key. Once any thread has entered a synchronized method on that object, no thread can enter any other synchronized method on the same object. This restriction lets you protect your data by synchronizing any method that manipulates the data.
- The synchronized keyword isn't the only way to safeguard your data from multithreaded changes. Atomic variables, with CAS

operations, may be suitable if it's just one value that is being changed by multiple threads.

- It's *writing* data from multiple threads that causes the most problems, not *reading*, so consider if your data needs to be changed at all or if it can be immutable.
- Make a class immutable by making the class final, making all the fields final, setting the values just once in the constructor or field declaration, and having no setters or other methods that can change the data.
- Having immutable objects in your application doesn't mean nothing ever changes; it means that you limit the parts of your application where you have to worry about multiple threads changing the data.
- There are thread-safe data structures that let you have multiple threads reading the data while one (or more) threads change the data. Some of these are in java.util.concurrent.
- Concurrent programming is difficult! But there are plenty of tools to help you.

Exercise

BE the JVM

The Java file on this page represents a complete source file. Your job is to play JVM and determine what the output would be when the program runs.

How might you fix it, making sure the output is correct every time?

Answers in "BE the JVM".

```
import java.util.*;
import java.util.concurrent.*;

public class TwoThreadsWriting {
  public static void main(String[] args) {
    ExecutorService threadPool = Executors.newFixedThreadPool(2);
    Data data = new Data();
    threadPool.execute(() -> addLetterToData('a', data));
    threadPool.execute(() -> addLetterToData('A', data));
    threadPool.shutdown();
  }

  private static void addLetterToData(char letter, Data data) {
    for (int i = 0; i < 26; i++) {
```

```
      data.addLetter(letter++);
      try {
        Thread.sleep(50);
      } catch (InterruptedException ignored) {}
    }
    System.out.println(Thread.currentThread().getName() +
data.getLetters());
    System.out.println(Thread.currentThread().getName()
                          + " size = " + data.getLetters().size());
  }
}

final class Data {
  private final List<String> letters = new ArrayList<>();

  public List<String> getLetters() {return letters;}

  public void addLetter(char letter) {
    letters.add(String.valueOf(letter));
  }
}
```

Near-miss at the airlock

As Sarah joined the onboard development team's design review meeting, she gazed out the portal at sunrise over the Indian Ocean. Even though the ship's conference room was incredibly claustrophobic, the sight of the growing blue and white crescent overtaking night on the planet below filled Sarah with awe and appreciation.

Five-Minute Mystery

This morning's meeting was focused on the control systems for the orbiter's airlocks. As the final construction phases were nearing their end, the number of spacewalks was scheduled to increase dramatically, and traffic was high both in and out of the ship's airlocks. "Good morning, Sarah," said Tom, "Your timing is perfect; we're just starting the detailed design review."

"As you all know," said Tom, "Each airlock is outfitted with space-hardened GUI terminals, both inside and out. Whenever spacewalkers are entering or exiting the orbiter they will use these terminals to initiate the airlock sequences." Sarah nodded and asked, "Tom, can you tell us what the method sequences are for entry and exit?" Tom rose and floated to the whiteboard, "First, here's the exit sequence method's pseudocode." Tom quickly wrote on the board.

```
orbiterAirlockExitSequence()

  verifyPortalStatus();

  pressurizeAirlock();

  openInnerHatch();

  confirmAirlockOccupied();

  closeInnerHatch();

  decompressAirlock();

  openOuterHatch();

  confirmAirlockVacated();

  closeOuterHatch();
```

“To ensure that the sequence is not interrupted, we have synchronized all of the methods called by the orbiterAirlockExitSequence() method,” Tom explained. “We’d hate to see a returning spacewalker inadvertently catch a buddy with his space pants down!”

Everyone chuckled as Tom erased the whiteboard, but something didn’t feel right to Sarah, and it finally clicked as Tom began to write the entry sequence pseudocode on the whiteboard. “Wait a minute, Tom!” cried Sarah, “I think we’ve got a big flaw in the exit sequence design.

Let’s go back and revisit it; it could be critical!”

Why did Sarah stop the meeting? What did she suspect?

→ **Answers in “Five-Minute Mystery”.**

Exercise Solution

BE the JVM

(from “BE the JVM”)

The answer is the output won’t be the same every time. In theory, one might expect the size to always be 52 (2 × 26 letters in the alphabet), but in fact this is one of those lost-update problems.

```
File Edit Window Help ZeCount
% java TwoThreadsWriting
pool-1-thread-2[a, A, b, B, c, C, d, D, E, F, g, G, h, H, i, j, K, k,
pool-1-thread-1[a, A, b, B, c, C, d, D, E, F, g, G, h, H, i, j, K, k,
pool-1-thread-1 size = 40
pool-1-thread-2 size = 40
```

Example output. Your output probably won't look exactly the same as this, but if you predicted that the size would be less than 52, you win a cookie.

It can be solved in two different ways; both are valid.

Synchronize the write method

```
public synchronized void addLetter(char letter) {
  letters.add(String.valueOf(letter));
}
```

If this method is synchronized, only one thread at a time can write to the data, and therefore no updates will be lost. This will not work if there's a DIFFERENT thread reading at the same time as one of these threads are writing.

Use a thread-safe collection

```
private final List<String> letters = new CopyOnWriteArrayList<>();
```

Using CopyOnWriteArrayList will allow the threads to both safely write to the letters List.

> **NOTE**
>
> Use either solution, you do NOT have to do both!!
>
> With a thread-safe collection, you don't have to synchronize the writing method.

Five-Minute Mystery

(from "BE the JVM")

What did Sarah know?

Sarah realized that in order to ensure that the entire exit sequence would run without interruption the `orbiterAirlockExitSequence( )` method needed to be synchronized. As the design stood, it would be possible for a returning spacewalker to interrupt the Exit Sequence! The Exit Sequence thread couldn't be interrupted in the middle of any of the lower-level method calls, but it could be interrupted in *between* those calls. Sarah knew that the entire sequence should be run as one atomic unit, and if the `orbiterAirlockExitSequence()` method was synchronized, it could not be interrupted at any point.

Appendix A. Final Code Kitchen

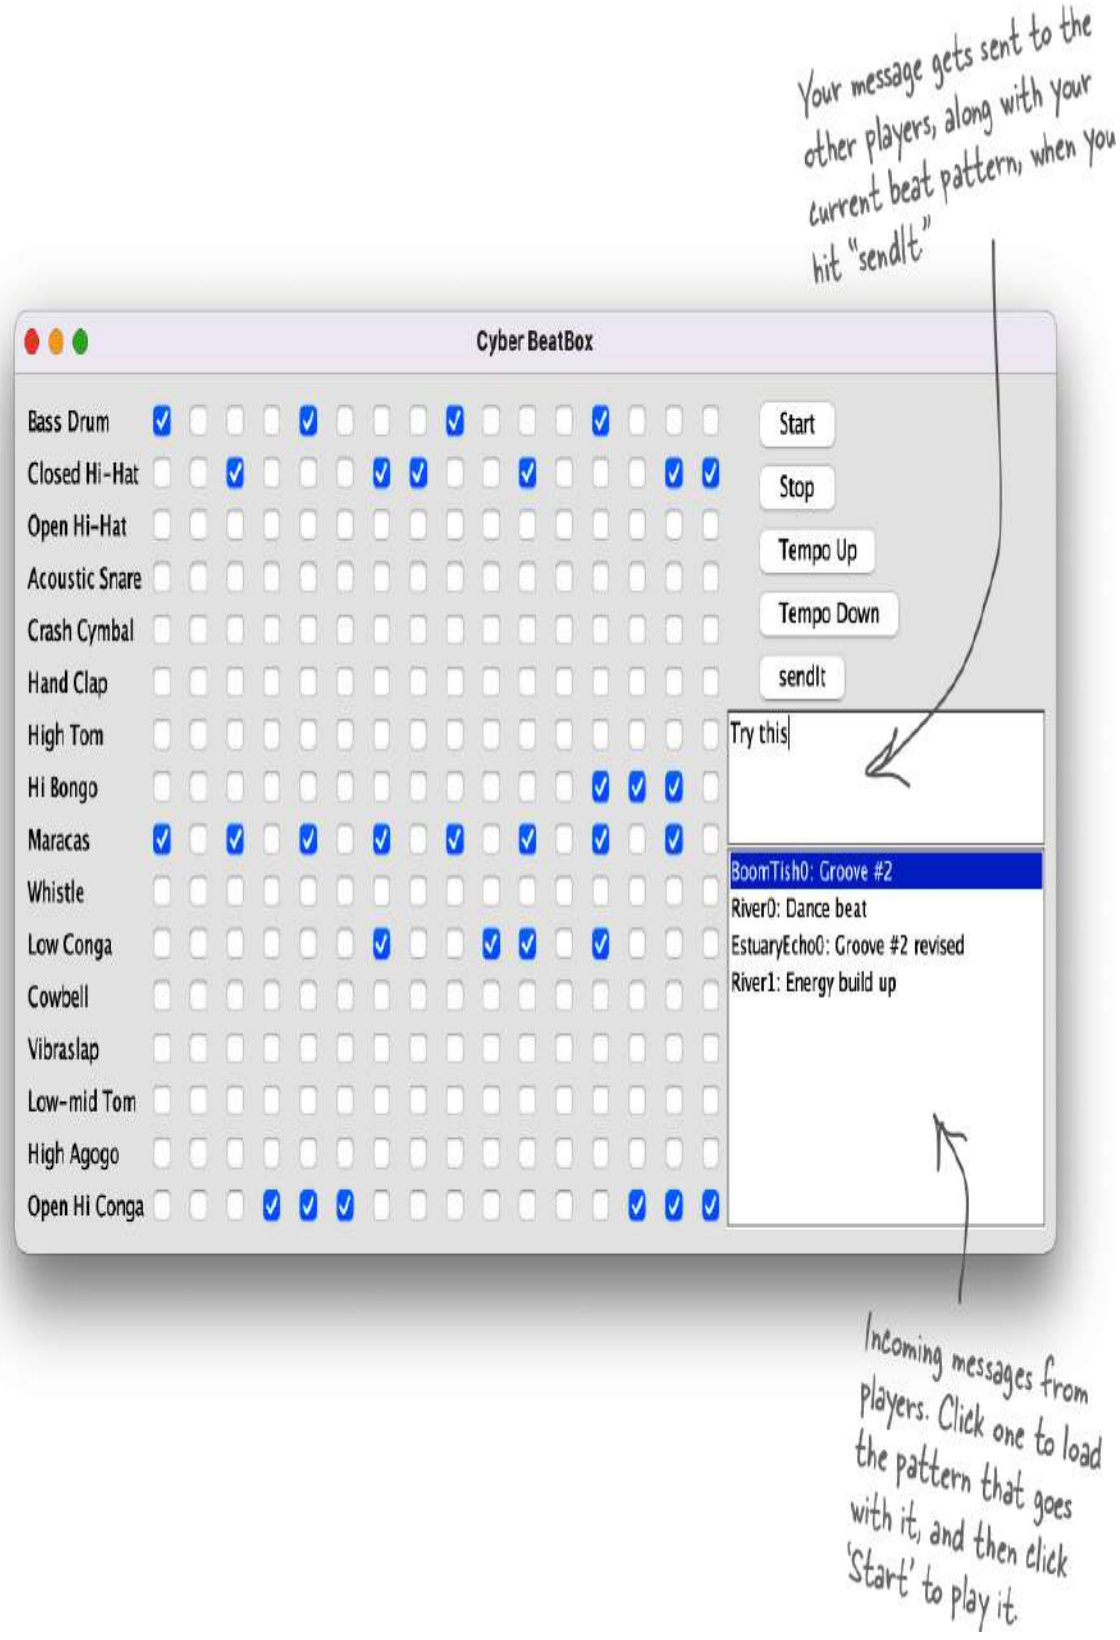
Your message gets sent to the other players, along with your current beat pattern, when you hit "sendIt"
Cyber BeatBox
Bass Drum
Closed Hi-Hat
Open Hi-Hat
Acoustic Snare
Crash Cymbal
Hand Clap
High Tom
Hi Bongo
Maracas
Whistle
Low Conga
Cowbell
Vibraslap
Low-mid Tom
High Agogo
Open Hi Conga
Start
Stop
Tempo Up
Tempo Down
sendIt
Try this
BoomTish0: Groove #2
River0: Dance beat
EstuaryEcho0: Groove #2 revised
River1: Energy build up
Incoming messages from players. Click one to load the pattern that goes with it, and then click 'Start' to play it.

NOTE

Finally, the complete version of the BeatBox!

It connects to a simple MusicServer so that you can send and receive beat patterns with other clients.

Final BeatBox client program

Most of this code is the same as the code from the Code Kitchens in the previous chapters, so we don't annotate the whole thing again. The new parts include:

GUI: Two new components are added for the text area that displays incoming messages (actually a scrolling list) and the text field.

NETWORKING: Just like the SimpleChatClient in this chapter, the BeatBox now connects to the server and gets an input and output stream.

MULTITHREADED: Again, just like the SimpleChatClient, we start a "reader" job that keeps looking for incoming messages from the server. But instead of just text, the messages coming in include TWO objects: the String message and the serialized array (the thing that holds the state of all the checkboxes).

All the code is available at *https://oreil.ly/hfJava_3e_examples*.

```
import javax.sound.midi.*;
import javax.swing.*;
import javax.swing.event.*;
import java.awt.*;
import java.io.*;
import java.net.Socket;
import java.util.*;
import java.util.concurrent.*;

import static javax.sound.midi.ShortMessage.*;

public class BeatBoxFinal {
  private JList<String> incomingList;
  private JTextArea userMessage;
  private ArrayList<JCheckBox> checkboxList;

  private Vector<String> listVector = new Vector<>();
  private HashMap<String, boolean[]> otherSeqsMap = new HashMap<>();

  private String userName;
  private int nextNum;

  private ObjectOutputStream out;
  private ObjectInputStream in;

  private Sequencer sequencer;
  private Sequence sequence;
  private Track track;

  String[] instrumentNames = {"Bass Drum", "Closed Hi-Hat",
          "Open Hi-Hat", "Acoustic Snare", "Crash Cymbal", "Hand Clap",
          "High Tom", "Hi Bongo", "Maracas", "Whistle", "Low Conga",
          "Cowbell", "Vibraslap", "Low-mid Tom", "High Agogo",
          "Open Hi Conga"};
  int[] instruments = {35, 42, 46, 38, 49, 39, 50, 60, 70, 72, 64, 56, 58, 47, 67, 63};
```

These are the names of the instruments, as a String array, for building the GUI labels (on each row).

These represent the actual drum "keys." The drum channel is like a piano, except each "key" on the piano is a different drum. So the number '35' is the key for the Bass drum, 42 is Closed Hi-Hat, etc.

```
public static void main(String[] args) {
  new BeatBoxFinal().startUp(args[0]);
}
```

Add a command-line argument for your screen name.

Example: % java BeatBoxFinal theFlash

```
public void startUp(String name) {
  userName = name;
  // open connection to the server
  try {
    Socket socket = new Socket("127.0.0.1", 4242);
    out = new ObjectOutputStream(socket.getOutputStream());
    in = new ObjectInputStream(socket.getInputStream());
    ExecutorService executor = Executors.newSingleThreadExecutor();
    executor.submit(new RemoteReader());
  } catch (Exception ex) {
    System.out.println("Couldn't connect-you'll have to play alone.");
  }
  setUpMidi();
  buildGUI();
}
```

Set up the networking, I/O, and make (and start) the reader thread. We're using Sockets here instead of Channels because they work better with Object Input/Output streams.

You've seen this GUI code before, in Chapter 15.

```
public void buildGUI() {
  JFrame frame = new JFrame("Cyber BeatBox");
  frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
  BorderLayout layout = new BorderLayout();
  JPanel background = new JPanel(layout);
  background.setBorder(BorderFactory.createEmptyBorder(10, 10, 10, 10));

  Box buttonBox = new Box(BoxLayout.Y_AXIS);
  JButton start = new JButton("Start");
  start.addActionListener(e -> buildTrackAndStart());
  buttonBox.add(start);

  JButton stop = new JButton("Stop");
  stop.addActionListener(e -> sequencer.stop());
  buttonBox.add(stop);

  JButton upTempo = new JButton("Tempo Up");
  upTempo.addActionListener(e -> changeTempo(1.03f));
  buttonBox.add(upTempo);

  JButton downTempo = new JButton("Tempo Down");
  downTempo.addActionListener(e -> changeTempo(0.97f));
  buttonBox.add(downTempo);
```

An "empty border" gives us a margin between the edges of the panel and where the components are placed. (Purely aesthetic.)

Lambda expressions call a specific method on this class when the button is pressed.

The default tempo is 1.0, so we're adjusting +/- 3% per click.

```
  JButton sendIt = new JButton("sendIt");
  sendIt.addActionListener(e -> sendMessageAndTracks());
  buttonBox.add(sendIt);
```

This is new; send the message and the current beat sequence to the music server.

```
  userMessage = new JTextArea();
  userMessage.setLineWrap(true);
  userMessage.setWrapStyleWord(true);
  JScrollPane messageScroller = new JScrollPane(userMessage);
  buttonBox.add(messageScroller);
```

Create a text area for the user to type their message.

We saw JList briefly in Chapter 15. This is where the incoming messages are displayed. Only instead of a normal chat where you just LOOK at the messages, in this app you can SELECT a message from the list to load and play the attached beat pattern.

```
incomingList = new JList<>();
incomingList.addListSelectionListener(new MyListSelectionListener());
incomingList.setSelectionMode(ListSelectionModel.SINGLE_SELECTION);
JScrollPane theList = new JScrollPane(incomingList);
buttonBox.add(theList);
incomingList.setListData(listVector);
```

This border on each instrument name helps them line up with the checkboxes.

```
  Box nameBox = new Box(BoxLayout.Y_AXIS);
  for (String instrumentName : instrumentNames) {
    JLabel instrumentLabel = new JLabel(instrumentName);
    instrumentLabel.setBorder(BorderFactory.createEmptyBorder(4, 1, 4, 1));
    nameBox.add(instrumentLabel);
  }

  background.add(BorderLayout.EAST, buttonBox);
  background.add(BorderLayout.WEST, nameBox);

  frame.getContentPane().add(background);
  GridLayout grid = new GridLayout(16, 16);
  grid.setVgap(1);
  grid.setHgap(2);

  JPanel mainPanel = new JPanel(grid);
  background.add(BorderLayout.CENTER, mainPanel);

  checkboxList = new ArrayList<>();
  for (int i = 0; i < 256; i++) {
    JCheckBox c = new JCheckBox();
    c.setSelected(false);
    checkboxList.add(c);
    mainPanel.add(c);
  }

  frame.setBounds(50, 50, 300, 300);
  frame.pack();
  frame.setVisible(true);
}

private void setUpMidi() {
  try {
    sequencer = MidiSystem.getSequencer();
    sequencer.open();
    sequence = new Sequence(Sequence.PPQ, 4);
    track = sequence.createTrack();
    sequencer.setTempoInBPM(120);
  } catch (Exception e) {
    e.printStackTrace();
  }
}
```

This layout manager one lets you put the components in a grid with rows and columns.

Make the check boxes, set them to "false" (so they aren't checked), and add them to the ArrayList AND to the GUI panel.

Get the Sequencer, make a Sequence, and make a Track.

```
private void buildTrackAndStart() {
  ArrayList<Integer> trackList; // this will hold the instruments for each
  sequence.deleteTrack(track);
  track = sequence.createTrack();
  for (int i = 0; i < 16; i++) {
    trackList = new ArrayList<>();
    int key = instruments[i];
    for (int j = 0; j < 16; j++) {
      JCheckBox jc = checkboxList.get(j + (16 * i));
      if (jc.isSelected()) {
        trackList.add(key);
      } else {
        trackList.add(null);  // because this slot should be empty in the track
      }
    }
    makeTracks(trackList);
    track.add(makeEvent(CONTROL_CHANGE, 1, 127, 0, 16));
  }
  track.add(makeEvent(PROGRAM_CHANGE, 9, 1, 0, 15)); // - so we always go to 16 beats
  try {
    sequencer.setSequence(sequence);
    sequencer.setLoopCount(sequencer.LOOP_CONTINUOUSLY);
    sequencer.setTempoInBPM(120);
    sequencer.start();
  } catch (Exception e) {
    e.printStackTrace();
  }
}
```

Build a track by walking through the checkboxes to get their state and mapping that to an instrument (and making the MidiEvent for it). This is pretty complex, but it is EXACTLY as it was in the previous chapters, so refer to the Code Kitchen in Chapter 15 to get the full explanation again.

```
private void changeTempo(float tempoMultiplier) {
  float tempoFactor = sequencer.getTempoFactor();
  sequencer.setTempoFactor(tempoFactor * tempoMultiplier);
}
```

The Tempo Factor scales the sequencer's tempo by the factor provided, slowing the beat down or speeding it up.

```
private void sendMessageAndTracks() {
  boolean[] checkboxState = new boolean[256];
  for (int i = 0; i < 256; i++) {
    JCheckBox check = checkboxList.get(i);
    if (check.isSelected()) {
      checkboxState[i] = true;
    }
  }
  try {
    out.writeObject(userName + nextNum++ + ": " + userMessage.getText());
    out.writeObject(checkboxState);
  } catch (IOException e) {
    System.out.println("Terribly sorry. Could not send it to the server.");
    e.printStackTrace();
  }
  userMessage.setText("");
}
```

This is new...it's a lot like the SimpleChatClient, except instead of sending a String message, we serialize two objects (the String message and the beat pattern) and write those two objects to the socket output stream (to the server).

```
public class MyListSelectionListener implements ListSelectionListener {
  public void valueChanged(ListSelectionEvent lse) {
    if (!lse.getValueIsAdjusting()) {
      String selected = incomingList.getSelectedValue();
      if (selected != null) {
        // now go to the map, and change the sequence
        boolean[] selectedState = otherSeqsMap.get(selected);
        changeSequence(selectedState);
        sequencer.stop();
        buildTrackAndStart();
      }
    }
  }
}
```

This is also new—a ListSelectionListener that tells us when the user made a selection on the list of messages. When the user selects a message, we IMMEDIATELY load the associated beat pattern (it's in the HashMap called otherSeqsMap) and start playing it. There's some if tests because of little quirky things about getting ListSelectionEvents.

```
private void changeSequence(boolean[] checkboxState) {
  for (int i = 0; i < 256; i++) {
    JCheckBox check = checkboxList.get(i);
    check.setSelected(checkboxState[i]);
  }
}
```

This method is called when the user selects something from the list. We IMMEDIATELY change the pattern to the one they selected.

```
public void makeTracks(ArrayList<Integer> list) {
  for (int i = 0; i < list.size(); i++) {
    Integer instrumentKey = list.get(i);
    if (instrumentKey != null) {
      track.add(makeEvent(NOTE_ON, 9, instrumentKey, 100, i));
      track.add(makeEvent(NOTE_OFF, 9, instrumentKey, 100, i + 1));
    }
  }
}
```

All the MIDI stuff is exactly the same as it was in the previous versions.

```
public static MidiEvent makeEvent(int cmd, int chnl, int one, int two, int tick) {
  MidiEvent event = null;
  try {
    ShortMessage msg = new ShortMessage();
    msg.setMessage(cmd, chnl, one, two);
    event = new MidiEvent(msg, tick);
  } catch (Exception e) {
    e.printStackTrace();
  }
  return event;
}
```

```
public class RemoteReader implements Runnable {
  public void run() {
    try {
      Object obj;
      while ((obj = in.readObject()) != null) {
        System.out.println("got an object from server");
        System.out.println(obj.getClass());

        String nameToShow = (String) obj;
        boolean[] checkboxState = (boolean[]) in.readObject();
        otherSeqsMap.put(nameToShow, checkboxState);

        listVector.add(nameToShow);
        incomingList.setListData(listVector);
      }
    } catch (IOException | ClassNotFoundException e) {
      e.printStackTrace();
    }
  }
}
```

This is the thread job—it reads in data from the server. In this code, "data" will always be two serialized objects: the String message and the beat pattern (a boolean array of checkbox state values).

When a message comes in, we read (deserialize) the two objects (the message and the array of boolean checkbox state values), which we want to add to the JList component.

Adding to a JList is a two-step thing: you keep a Vector of the lists data (Vector is an old-fashioned ArrayList), and then tell the JList to use that Vector as it's source for what to display in the list.

Multi-catch: if you want to catch two different Exceptions but do the same thing with them (like here, we just want to print them out), you can separate the two Exception classes with a pipe.

SHARPEN YOUR PENCIL

Yours to solve.

What are some of the ways you can improve this program?

Here are a few ideas to get you started:

1. Once you select a pattern, whatever current pattern was playing is blown away. If that was a new pattern you were working on (or a modification of another one), you're out of luck. You might want to pop up a dialog box that asks the user if he'd like to save the current pattern.

2. If you fail to type in a command-line argument, you just get an exception when you run it! Put something in the main method that checks to see if you've passed in a command-line argument. If the user doesn't supply one, either pick a default or print out a message that says they need to run it again, but this time with an argument for their screen name.

3. It might be nice to have a feature where you can click a button and it will generate a random pattern for you. You might hit on one you really like. Better yet, have another feature that lets you load in existing "foundation" patterns, like one for jazz, rock, reggae, etc., that the user can add to.

You don't have to type all the code in! You can clone it from the repository at All the code is available at *https://oreil.ly/hfJava_3e_examples*.

There's also an alternative BeatBox solution, which uses Maps and Lists instead of the arrays used in this solution. There's more than one way to

solve any problem!

Final BeatBox server program

Most of this code is identical to the SimpleChatServer we made in Chapter 17, *Make a Connection*. The only difference, in fact, is that this server receives, and then re-sends, two serialized objects instead of a plain String (although one of the serialized objects happens to *be* a String).

```
import java.io.*;
import java.net.*;
import java.util.*;
import java.util.concurrent.*;

public class MusicServer {
  final List<ObjectOutputStream> clientOutputStreams = new ArrayList<>();

  public static void main(String[] args) {
    new MusicServer().go();
  }

  public void go() {
    try {
      ServerSocket serverSock = new ServerSocket(4242);
      ExecutorService threadPool = Executors.newCachedThreadPool();

      while (!serverSock.isClosed()) {
        Socket clientSocket = serverSock.accept();
        ObjectOutputStream out = new ObjectOutputStream(clientSocket.getOutputStream());
        clientOutputStreams.add(out);

        ClientHandler clientHandler = new ClientHandler(clientSocket);
        threadPool.execute(clientHandler);
        System.out.println("Got a connection");
      }

    } catch (IOException e) {
      e.printStackTrace();
    }
  }

  public void tellEveryone(Object one, Object two) {
    for (ObjectOutputStream clientOutputStream : clientOutputStreams) {
      try {
        clientOutputStream.writeObject(one);
        clientOutputStream.writeObject(two);
      } catch (IOException e) {
        e.printStackTrace();
      }
    }
  }
```

List of all the client output streams to send messages to when a message is received.

Open a server socket at port 4242.

Keep listening for client connections; create a new Socket and new ClientHandler for each connected client.

Send the message and the beat pattern to all the clients.

```
  public class ClientHandler implements Runnable {
    private ObjectInputStream in;

    public ClientHandler(Socket socket) {
      try {
        in = new ObjectInputStream(socket.getInputStream());
      } catch (IOException e) {
        e.printStackTrace();
      }
    }

    public void run() {
      Object userName;
      Object beatSequence;
      try {
        while ((userName = in.readObject()) != null) {
          beatSequence = in.readObject();

          System.out.println("read two objects");
          tellEveryone(userName, beatSequence);
        }
      } catch (IOException | ClassNotFoundException e) {
        e.printStackTrace();
      }
    }
  }

}
```

Create an ObjectInputStream for reading messages from this client.

When the client sends a message, it's made of two parts: a String that contains the username and their message; and a Object that represents the beat sequence (this is actually a boolean array, but the server doesn't care about that).

Once we've got the message and beat sequence, send these to all the clients (including this one).

Appendix B. The top ten-ish topics that didn’t make it into the rest of the book...

We covered a lot of ground, and you're almost finished with this book. We'll miss you, but before we let you go, we wouldn't feel right about sending you out into JavaLand without a little more preparation. We can't possibly fit everything you'll need to know into this relatively small appendix. Actually, we *did* originally include everything you need to know about Java (not already covered by the other chapters), by reducing the type point size to

.00003. It all fit, but nobody could read it. So, we threw most of it away, but kept the best bits for this Top Ten-ish appendix. Yep, there's more than ten Really Useful Things that you still need to know.

This really *is* the end of the book. Except for the index (a must-read!).

#11 JShell (Java REPL)

Java 9+

Why do you care?

A REPL (Read Eval Print Loop) lets you run snippets of code without needing a full application or framework. It's a great way to try out new features, experiment with new ideas, and get immediate feedback. We've put this right at the start of this appendix in case you want to use JShell to try out some of the features we'll be talking about in the following pages.

Starting the REPL

JShell is a command-line tool that comes part of the JDK. If JAVA_HOME/bin is on your system's path, you can just type "jshell" from the command line (full details on getting started are in Oracle's Introduction to JShell (*https://oreil.ly/Ei3Df*).

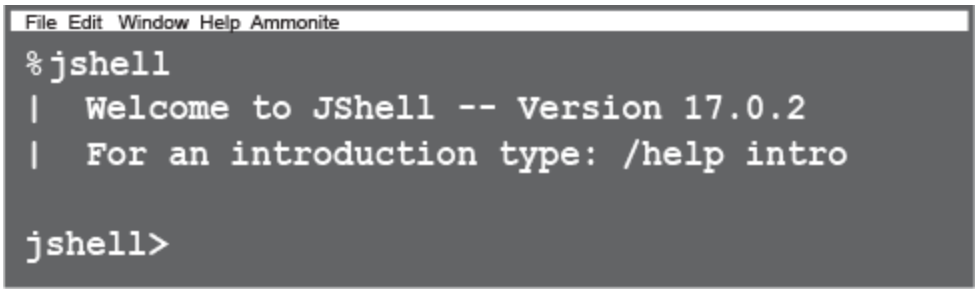

JShell is available only in **JDK 9 and higher**, but the good news is that even if you're running code and applications on an older version of Java, you can still use JShell from a more recent version, since it's completely independent

of your “JAVA_HOME” or IDE’s version of Java. Just run it directly from the *bin* directory of whichever version of Java you want to use.

Run Java code without a class

Try out some Java from the prompt:

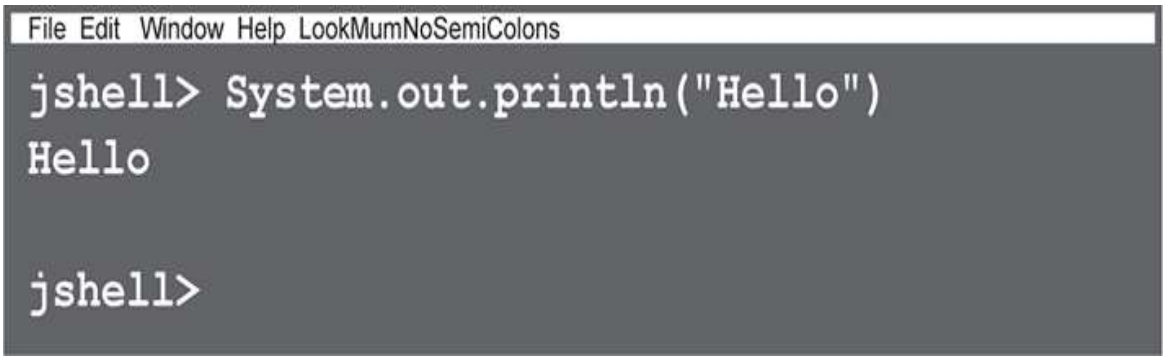

Note:

- No need for a class
- No need for a *public static main* method
- No need for a semicolon on the end of the line

Just start typing Java!

More than just lines of code

You can define variables and methods:

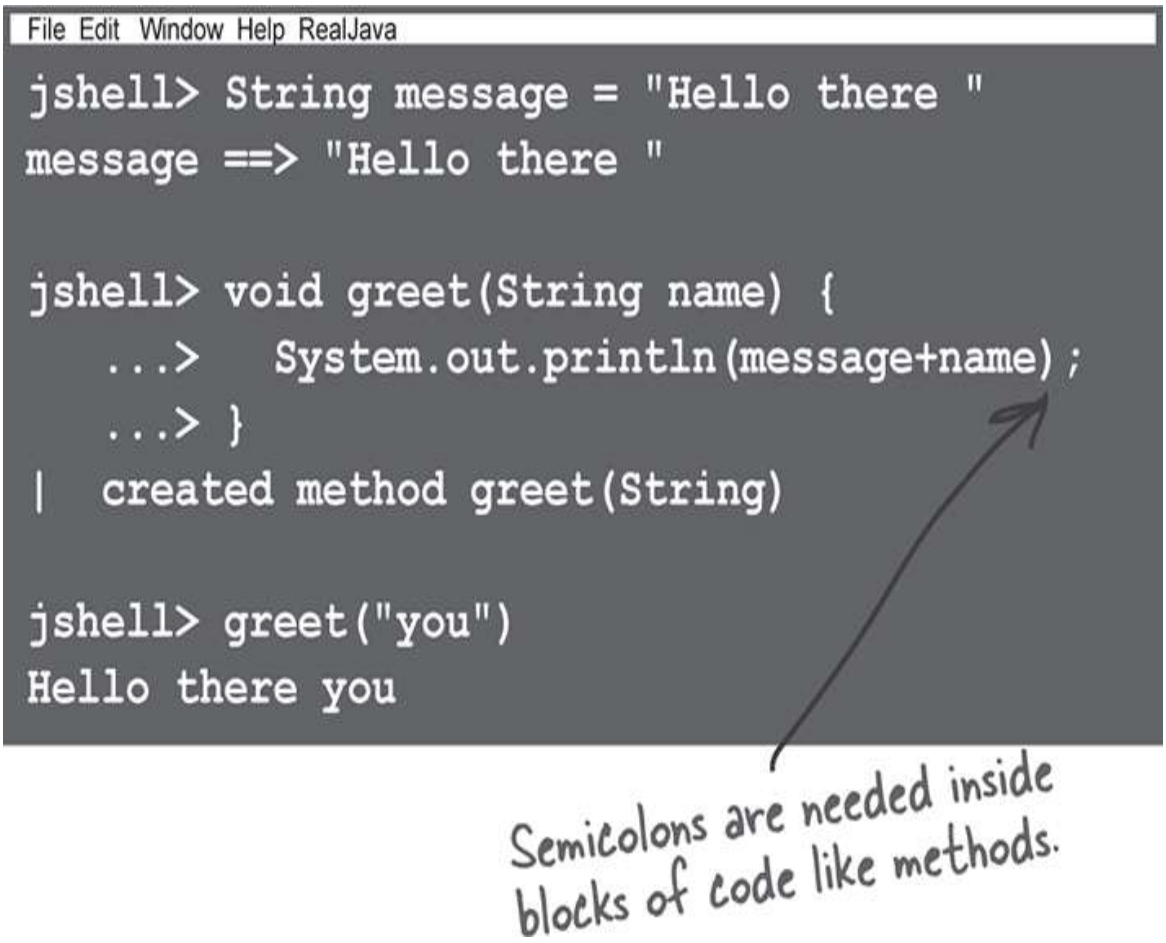

It supports *forward references*, so you can sketch out the shape of your code without having to define everything immediately.

```
File Edit Window Help ForwardLooking
jshell> void doSomething() {
   ...>   doSomethingElse();
   ...> }
|  created method doSomething(), however, it
cannot be invoked until method doSomethin-
gElse() is declared
```

Code suggestions

If you press Tab halfway through typing, you'll get code suggestions. You can also use the up and down arrows to cycle through the lines you've typed so far.

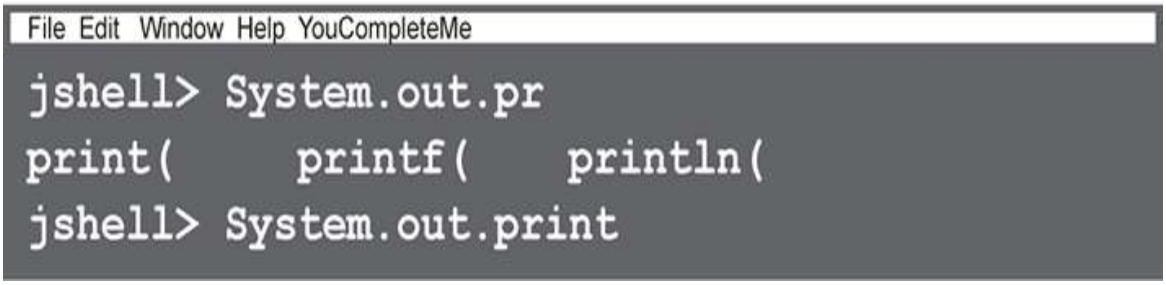

Commands

There are lots of helpful commands that are part of JShell and not part of Java. For example, type **`/vars`** to see all the variables you've declared. Type **`/exit`** to, er, exit. Use **`/help`** to see a list of commands and to get more information.

Oracle has a very useful JShell User Guide (*https://oreil.ly/Ei3Df*), which also shows how to create and run scripts with JShell.

#10 Packages

Packages prevent class name conflicts

Although packages aren't just for preventing name collisions, that's a key feature. If part of the point of OO is to write reusable components, developers need to be able to piece together components from a variety of sources and build something new out of them. Your components have to be able to "play well with others," including those you didn't write or even know about.

Remember way back in Chapter 6, *Using the Java Library*, when we discussed how a package name is like the full name of a class, technically known as the *fully qualified name*. Class List is really **`java.util.List`**,

a GUI List is really **`java.awt.List`**, and Socket is really **`java.net.Socket`**. Hey presto, an example of how package names can help prevent name conflicts—there's a List that's a data structure and a List that's a GUI element, and we can use the package names to tell them apart.

Notice that these classes have *java* as their "first name." In other words, the first part of their fully qualified names is "java"; think of a hierarchy when you think of package structures, and organize your classes accordingly.

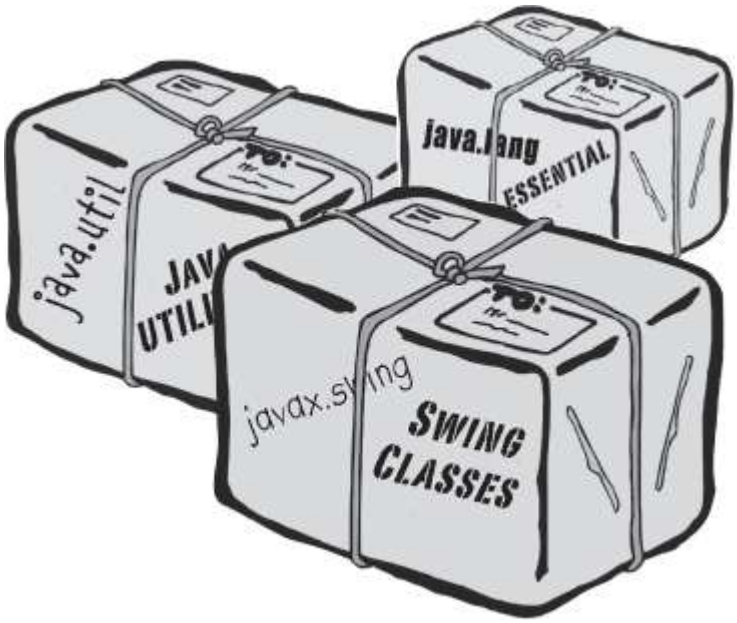

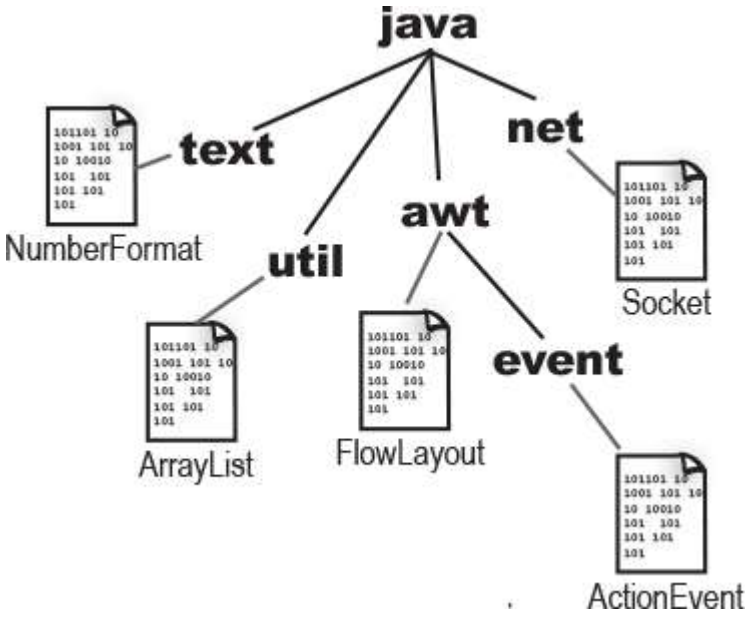

What does this picture look like to you? Doesn't it look a whole lot like a directory hierarchy?

Preventing package name conflicts

The standard package naming convention is to prepend every class with your reverse domain name. Remember, domain names are guaranteed to be unique. Two different guys can be named Bartholomew Simpson, but two different domains cannot be named *doh.com*.

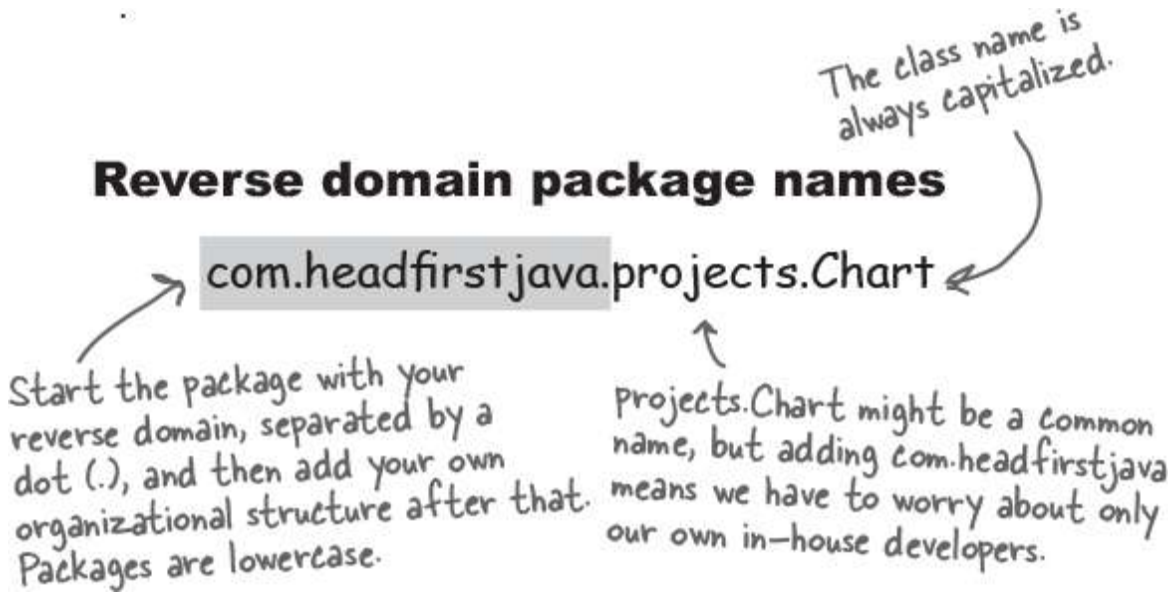

When you look at the code samples at *https://oreil.ly/hfJava_3e_examples*, you'll see we've put the classes into packages named after each chapter to clearly separate the examples.

> **NOTE**
>
> **Packages can prevent name conflicts, but only if you choose a package name that's guaranteed to be unique. The best way to do that is to preface your packages with your reverse domain name.**

To put your class in a package:

- ① **Choose a package name**

  We're using **`com.headfirstjava`** as our example. The class name is PackageExercise, so the fully qualified name of the class is now **`com.headfirstjava.PackageExercise`**.

- ② **Put a package statement in your class**

  It must be the first statement in the source code file, above any import statements. There can be only one package statement per source code file, so **`all classes in a source file must be in the same package`**. That includes inner classes, of course.

```
package com.headfirstjava;

import javax.swing.*;

public class PackageExercise {
  // life-altering code here
}
```

- ③ **Set up a matching directory structure**

  It's not enough to ***say*** your class is in a package by merely putting a package statement in the code. Your class isn't *truly* in a package until you put the class in a matching directory structure. So, if the fully qualified class name is com.headfirstjava.PackageExercise, you *must* put the PackageExercise source code in a directory named **`headfirstjava`**, which ***must*** be in a directory named **`com`**.

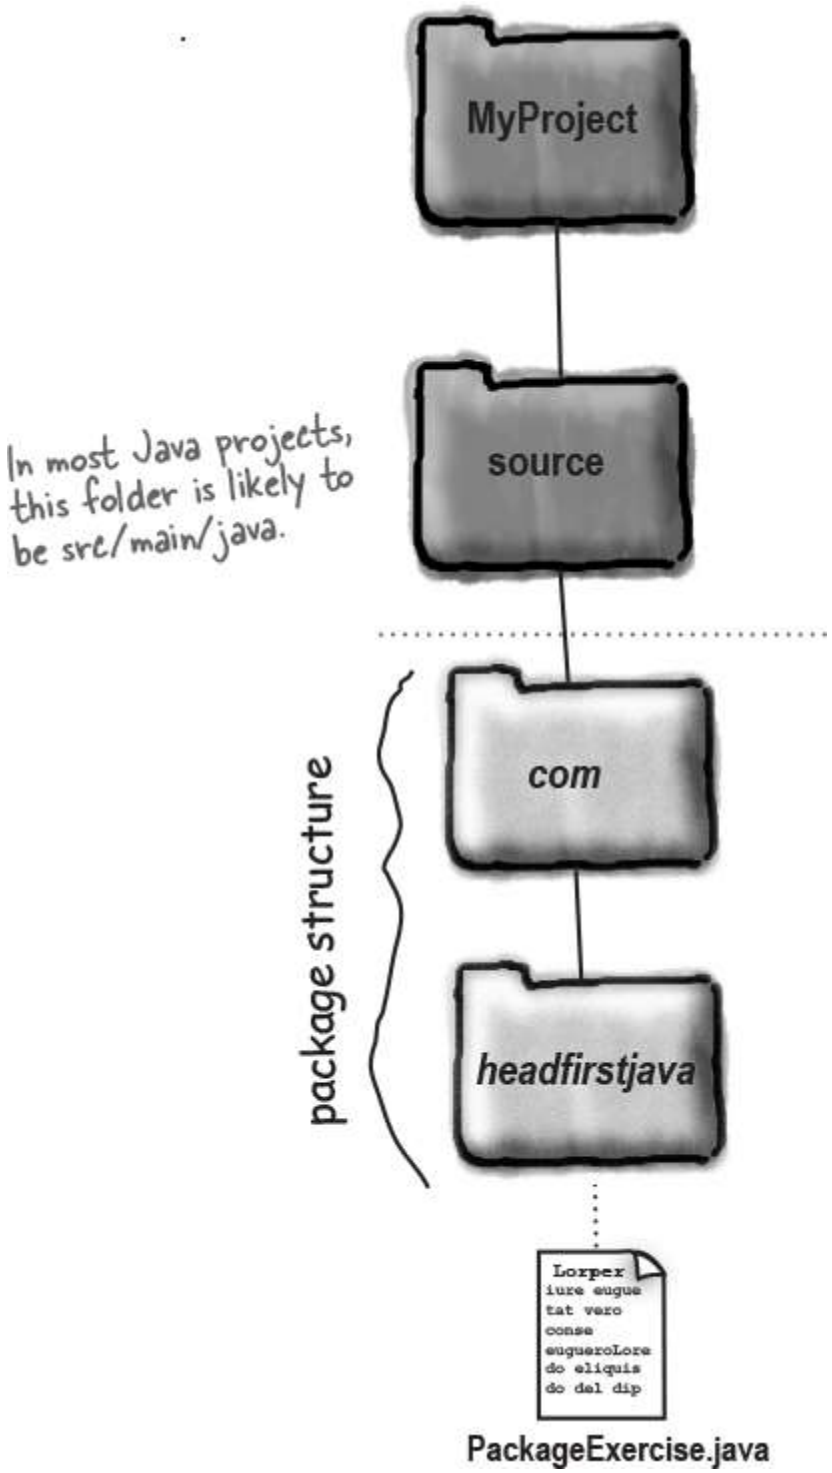

A note on directories

In the Real World, source files and class files are usually kept in separate directories—you don't want to copy the source code to wherever it's running

(a customer's computer or the cloud), only the class files.

The most common structure for Java projects is based off Maven's* convention:

`MyProject/src/main/java` Application sources

`MyProject/src/test/java` Test sources

The class files are placed elsewhere. Real enterprise systems usually use a build tool like Maven or Gradle to compile and build the application (our sample code uses Gradle). Each build tool puts the classes into different folders:

	Maven	Gradle
Application classes	MyProject/target/classes	MyProject/out/production/classes
Test classes	MyProject/target/test-classes	MyProject/out/test/classes

*Maven and Gradle are the most common build tools for Java projects.

Compiling and running with packages

We don't need to use a build tool to separate our classes and source files. By using the **`-d`** flag, *you* get to decide which **`directory`** the compiled code lands in, rather than accepting the default of class files landing in the same directory as the source code.

Compiling with the **`-d`** flag not only lets you send your compiled class files into a directory other than the one where the source file is, but it also knows to put the class into the correct directory structure for the package the class is in. Not only that, compiling with -d tells the compiler to *build* the directories if they don't exist.

> ***The `-d` flag tells the compiler, "Put the class into its package directory structure, using the class specified after the `-d` as the root directory. But...if the directories aren't there, create them first and then put the class in the right place!"***

Compiling with the -d (directory) flag

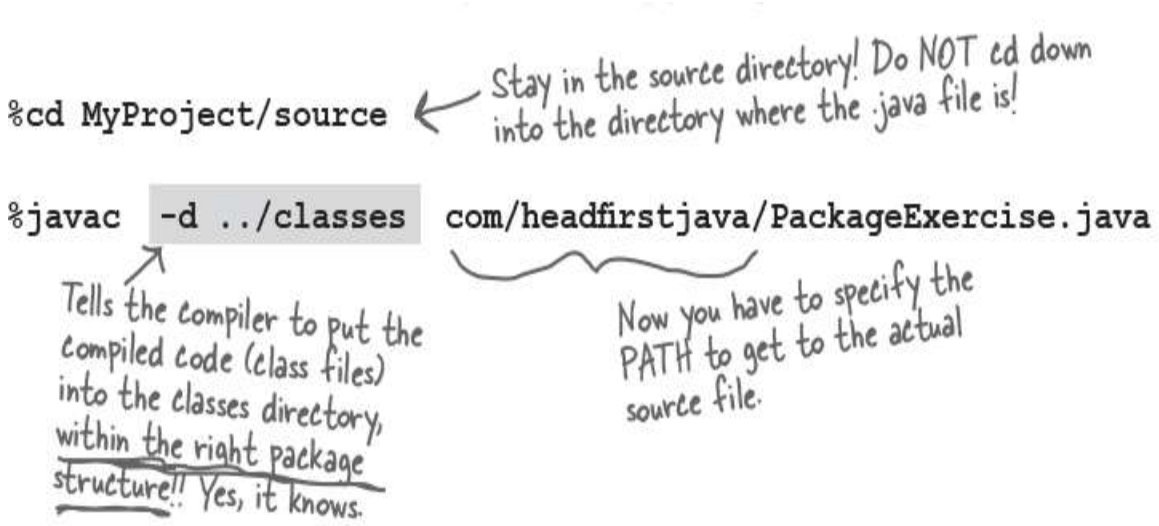

To compile all the .java files in the com.headfirstjava package, use:

```
%javac  -d ../classes  com/headfirstjava/*.java
```

Compiles every source (.java) file in this directory

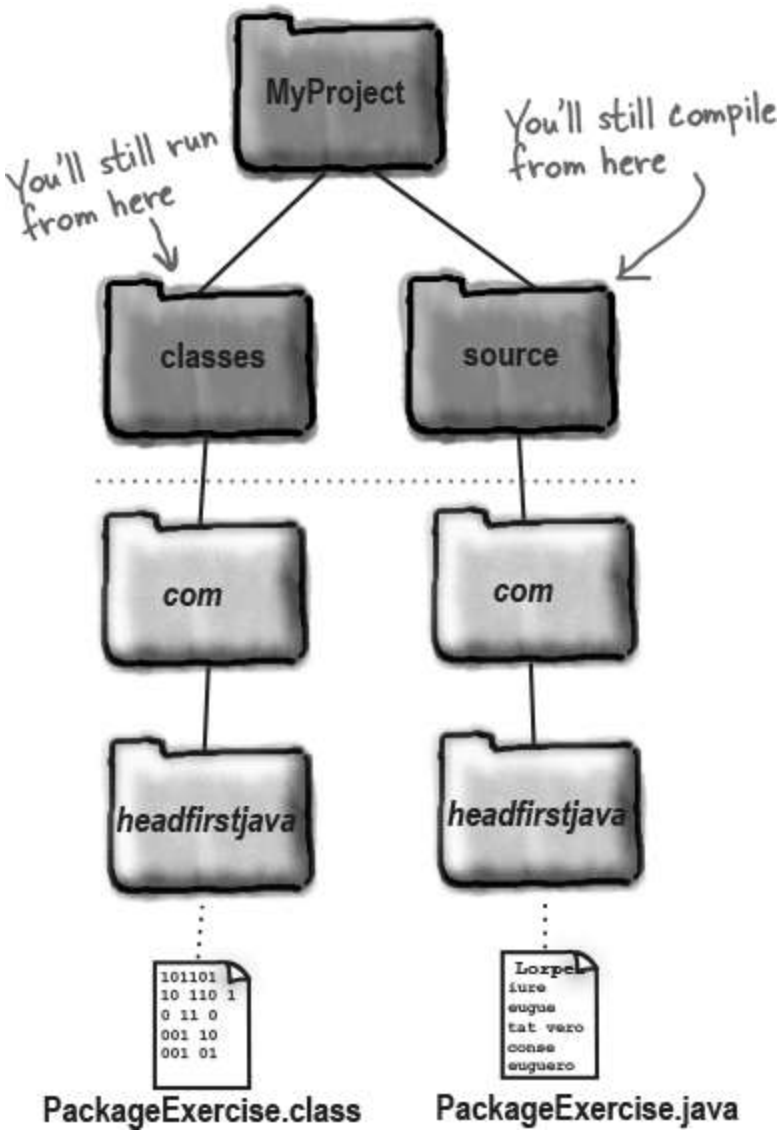

Running your code

```
%cd MyProject/classes
```

Run your program from the "classes" directory.

```
%java com.headfirstjava.PackageExercise
```

You MUST give the fully qualified class name! The JVM will see that and immediately look inside its current directory (classes) and expect to find a directory named com, where it expects to find a directory named headfirstjava, and in there it expects to find the class. If the class is in the "com" directory, or even in "classes," it won't work!

#9 Immutability in Strings and Wrappers

We talked about immutability in Chapter 18, and we'll mention immutability in the last item of this appendix. This section is specifically about immutability in two important Java types: Strings and Wrappers.

Why do you care that Strings are immutable?

For security purposes and for the sake of conserving memory (whether you're running on phones, IoT devices, or the cloud, memory matters), Strings in Java are immutable. What this means is that when you say:

```
String s = "0";
for (int i = 1; i < 10; i++) {
  s = s + i;
}
```

what's actually happening is that you're creating ten String objects (with values "0," "01," "012," through "0123456789"). In the end, *s* is referring to the String with the value "0123456789," but at this point there are *ten different* Strings in existence!

Similarly, if you use methods on String to "change" a String object, it doesn't change that object at all; it creates a new one:

```
String str = "the text";
String upperStr = str.toUpperCase();
```

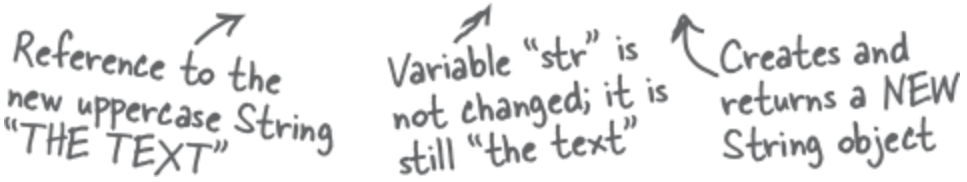

How does this save memory?

Whenever you make a new String, the JVM puts it into a special part of memory called the "String Pool" (sounds refreshing, doesn't it?). If there is already a String in the pool with the same value, the JVM *doesn't create a duplicate*; it refers your reference variable to the *existing* entry. So you won't have 500 objects of the word "customer" (for example), but 500 references to the single "customer" String object.

```
String str1 = "customer";
String str2 = "customer";
System.out.println(str1 == str2);
```



Immutability makes reuse possible

The JVM can get away with this because Strings are **`immutable`**; one reference variable can't change a String's value out from under another reference variable referring to the same String.

What happens to unused Strings?

Our first example created a lot of intermediate Strings that weren't used ("01," "012," etc). These were placed in the String Pool, which is on the heap and therefore eligible for Garbage Collection (see Chapter 9). Strings that aren't used will eventually be garbage-collected.

However, if you have to do a lot of String manipulations (like concatenations, etc.), you can avoid the creation of unnecessary strings by using a *StringBuilder*:

```
StringBuilder s = new StringBuilder("0");
for (int i = 1; i < 10; i++) {
  s.append(i);
}
String finalString = s.toString();
```

This way, the single *mutable* StringBuilder is updated every time to represent the intermediate states, instead of ten *immutable* String instances being created and the nine intermediate Strings being thrown away.

Why do you care that Wrappers are immutable?

In Chapter 10, we talked about the two main uses of the wrapper classes:

- Wrapping a primitive so it can act like an object.
- Using the static utility methods (e.g., Integer.parseInt()).

It's important to remember that when you create a wrapper object like:

```
Integer iWrap = new Integer(42);
```

that's it for that wrapper object. Its value will *always* be 42. ***There is no setter method for a wrapper object.*** You can, of course, refer *iWrap* to a *different* wrapper object, but then you'll have *two* objects. Once you create a wrapper object, there's no way to change the *value* of that object!

#8 Access levels and access modifiers (who sees what)

Java has four access levels and three access modifiers. There are only three modifiers because the default (what you get when you don't use any access

modifier) is one of the four access levels.

Access levels (in order of how restrictive they are, from least to most restrictive)

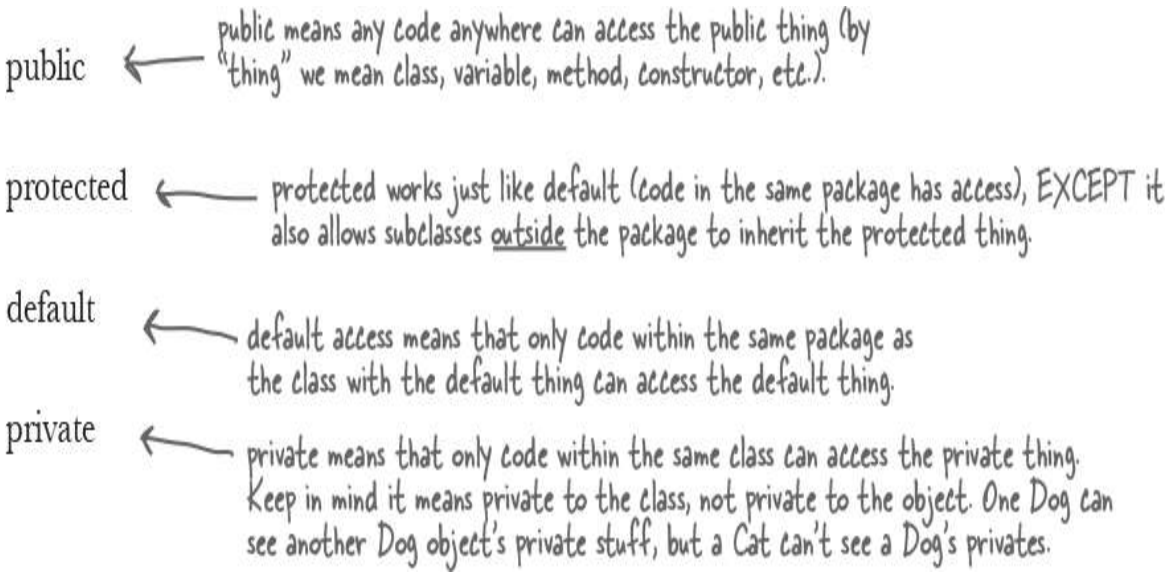

Access modifiers

```
public
protected
private
```

Most of the time you'll use only public and private access levels.

public

Use public for classes, constants (static final variables), and methods that you're exposing to other code (for example getters and setters) and most constructors.

private

Use private for virtually all instance variables, and for methods that you don't want outside code to call (in other words, methods used by the public methods of your class).

Although you might not use the other two (protected and default) much, you still need to know what they do because you'll see them in other code.

default and protected

default

Both protected and default access levels are tied to packages. Default access is simple—it means that only code *within the same package* can access code with default access. So a default class, for example (which means a class that isn't explicitly declared as *public*) can be accessed by only classes within the same package as the default class.

But what does it really mean to *access* a class? Code that does not have access to a class is not allowed to even *think* about the class. And by think, we mean *use* the class in code. For example, if you don't have access to a class, because of access restriction, you aren't allowed to instantiate the class or even declare it as a type for a variable, argument, or return value. You simply can't type it into your code at all! If you do, the compiler will complain.

Think about the implications—a default class with public methods means the public methods aren't really public at all. You can't access a method if you can't *see* the class.

Why would anyone want to restrict access to code within the same package? Typically, packages are designed as a group of classes that work together as a related set. So it might make sense that classes within the same package need to access one another's code, while as a package, only a small number of classes and methods are exposed to the outside world (i.e., code outside that package).

OK, that's default. It's simple—if something has default access (which, remember, means no explicit access modifier!), only code within the same package as the default *thing* (class, variable, method, inner class) can access that *thing*.

Then what's *protected* for?

protected

Protected access is almost identical to default access, with one exception: it allows subclasses to *inherit* the protected thing, *even if those subclasses are outside the package of the superclass they extend*. That's it. That's *all* protected buys you—the ability to let your subclasses be outside your superclass package, yet still *inherit* pieces of the class, including methods and constructors.

Many developers find very little reason to use protected, but it is used in some designs, and some day you might find it to be exactly what you need. One of the interesting things about protected is that—unlike the other access levels—protected access applies only to *inheritance*. If a subclass-outside-the-package has a *reference* to an instance of the superclass (the superclass that has, say, a protected method), the subclass can't access the protected method using that superclass reference! The only way the subclass can access that method is by *inheriting* it. In other words, the subclass-outside-the-package doesn't have *access* to the protected method; it just *has* the method, through inheritance.

> **NOTE**
>
> Experienced developers writing libraries for other developers to use will find both default and protected access levels very helpful.
>
> These access levels can separate the internals of a library from the API that other developers will call from their code.

#7 Varargs

We saw varargs briefly in Chapter 10, *Numbers Matter,* when we looked at the String.format() method. You also saw them in Chapter 11, *Data Structures*, when we looked at *convenience factory methods for Collections*. Varargs let a method take as many arguments as they want, as long as they're of the same type.

Why do you care?

Chances are, you won't write many (or any!) methods with a vararg parameter. But you will likely use them, passing in varargs, since the Java libraries do provide helpful methods, like the ones we just mentioned, that can take as many arguments as they like.

How can I tell if a method takes varargs?

Let's look at the API documentation for String.format():

```
static String format(String format, Object... args)
```

The triple dot (...) says this is method takes an arbitrary number of Objects after the String argument, **`including zero`**. For example:

```
String msg = String.format("Message");
String msgName = String.format("Message for %s", name);
String msgNumName = String.format("%d, messages for %s", number, name);
```

Pointless for the format() method, but valid

One varargs argument, "name"

Two varargs arguments, "number" and "name"

Methods that take varargs generally don't care how many arguments there are; it doesn't matter much. Consider List.of(), for example. It doesn't care how many items you want in the List; it will just use add all the arguments into the new list.

Creating a method that takes varargs

You will generally be calling a method that takes varargs, not creating it, but let's take a look anyway. If you wanted to define your own method that, for example, printed out everything passed into it, you could do it like this:

```
void printAllObjects(Object... elements) {
  for (Object element : elements) {
    System.out.println(element);
  }
}
```

The parameter *elements* is nothing magic; it's actually just an array of Objects. So you can iterate over it the same way as if you'd created the method signature as:

```
void printAllObjects(Object[] elements) {
```

It's the calling code that looks different. Instead of having to create an array of objects to pass in, you get the convenience of passing in an arbitrary number of parameters.

Rules

- A method can have only one varargs parameter.
- The varargs parameter must be the last parameter.

#6 Annotations

Why do you care?

We very briefly mentioned annotations back in Chapter 12, *Lambdas and Streams: What, Not How*, when we said that interfaces that can be implemented as a lambda expression may be marked with a "@FunctionalInterface" annotation.

Adding an annotation to your code can add extra behavior, or an annotation can be a kind of compiler-friendly documentation; i.e., you're simply tagging the code with some additional information that could optionally be used by the compiler.

You will definitely see annotations used in the Real World, and very likely use them.

Where will you see annotations?

You will see annotations in code that uses libraries and frameworks like Java EE/Jakarta EE, Spring/Spring Boot, Hibernate and Jackson, all of which are

very commonly used in the Java world for building large and small applications.



Where you will definitely see annotations is in test code. Back in Chapter 5, *Extra-Strength Methods*, we introduced the idea of testing your code, but what we haven't shown is the frameworks that make it much easier. The most common one is JUnit. If you look at the code samples at *https://oreil.ly/hfJava_3e_examples*, you'll see there are some example test classes in the "test" folder.

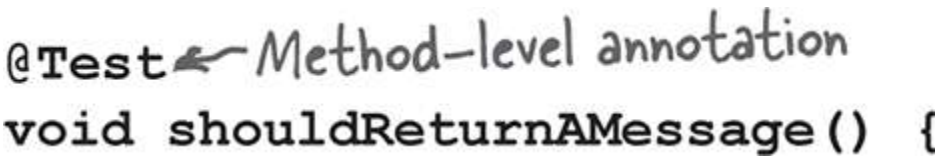

NOTE

Annotations can be applied to classes and methods, to variables (local and instance) and parameters, and even some other places in the code.

Annotations can have elements

Some annotations include elements, which are like parameters with names.

```
@Table(name="cust")
public class Customer {
```

If the annotation has only one element, you don't need to give the name.

```
@Disabled("This test isn't finished")
void thisTestIsForIgnoring() {
```

As you saw in the earlier examples, you don't need to add parentheses to an annotation that doesn't have elements.

You can add more than one annotation to the class, method, or variable that you're annotating.

What do they do?

Well, it depends! Some can be used as a sort of compiler-safe documentation. If you add @FunctionalInterface to an interface with more than one abstract method, you'll get a compiler error.

Other annotations (like @NotNull) can be used by your IDE or by analysis tools to see if your code is correct.

Many libraries provide annotations for you to use to tag parts of your code so the framework knows what to do with your code. For example, the @Test annotation tags methods that need to be run as individual tests by JUnit; @SpringBootApplication tags the class with the *main* method that's the entry point of a Spring Boot application; @Entity tags a Java class as a data object that needs to be saved to a database by Hibernate.

Some annotations provide behavior on top of your code. For example, Lombok can use annotations to generate common code: add @Data to the top of your class, and Lombok will generate constructors, getters and (if needed) setters, and hashCode, toString, and equals methods.

> Sometimes annotations seem to work like magic! The code that does the hard work is hidden away. If you use annotations that are well documented, you'll have a better understanding of what they do and how they work. This will help you fix any issues you may run into.

#5 Lambdas and Maps

Java 8+

Why do you care?

Java 8 famously added lambdas and streams to Java, but what is less well-known is that java.util.Map also got a few new methods that take lambda expressions as arguments. These methods make it much easier to do common operations on Maps, which will save you time and brainpower.

Create a new value if there isn't one for the key

Imagine you want to track what a customer does on your website, and you do this using an Actions object. You might have a Map of String username to Actions. When a customer performs some action that you want to add to their Actions object, you want to either:

- Create a new Actions object for this customer and add it to the Map
- Get the existing Actions object for this customer

It's very common to use an *if* statement and a *null* check to do this (pre-Java 8):

```
Map<String, Actions> custActs = new HashMap<>();
// probably other stuff happens here...

Actions actions = custActs.get(usr);
if (actions == null) {

  actions = new Actions(usr);
  custActs.put(usr, actions);
}
// do something with actions
```

See if there's an Actions object for the username.

The value doesn't exist..

...so create a new Actions and add it to the Map with the username as the key.

It's not a lot of code, but it is a pattern that is used again and again. If you're using Java 8 or higher, you don't need to do this at all. Use **computeIfAbsent**, and give it a lambda expression that says how to "compute" the value that should go into the Map if there isn't an entry for the given key:

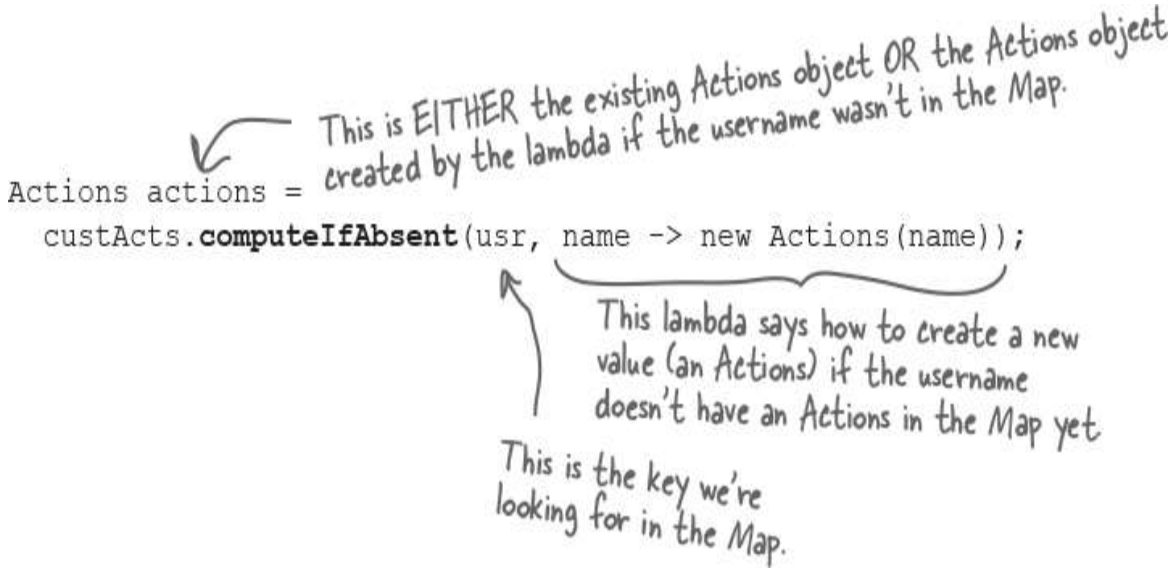

Update the value only if it already exists

There may be other scenarios when you want to update a value in the Map only if it exists. For example, you might have a Map of things that you are counting, like metrics, and you want to update only the metrics that you care about. You don't want to add any arbitrary new metric to the Map. Before Java 8, you might use a combination of *contains*, *get*, and *put* to check if the map has a value for this metric and update it if so.

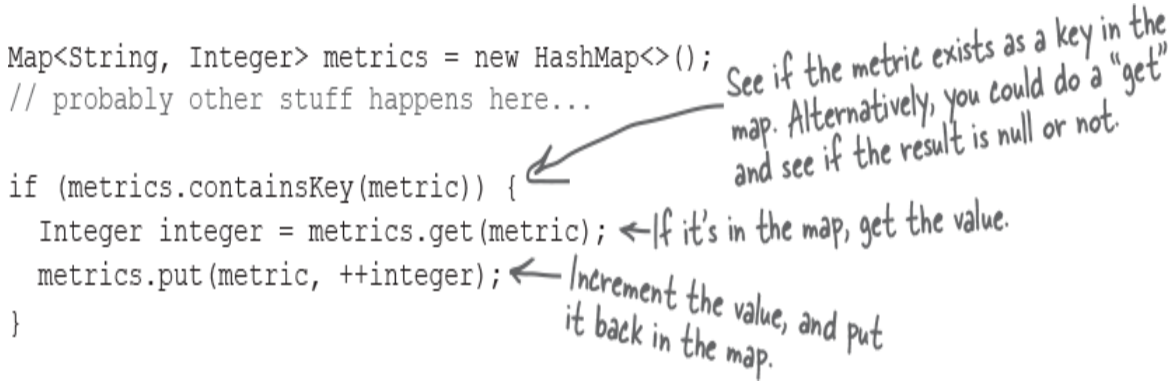

Java 8 added **computeIfPresent**, which takes the key you're looking for and a lambda expression, which you can use to describe how to calculate the updated value for the Map. Using this, the code above can be simplified to:

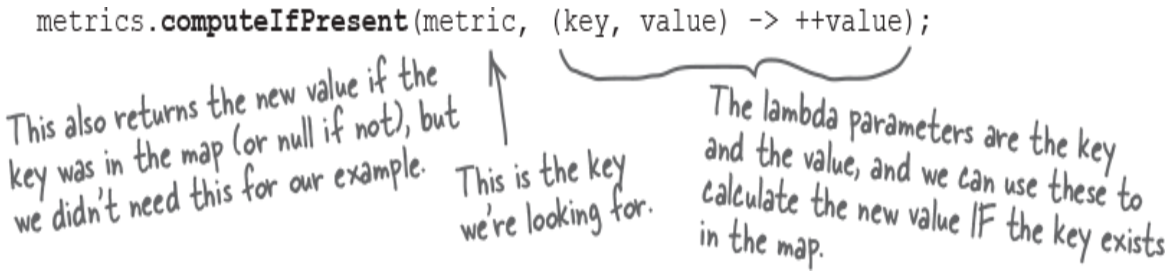

Other methods

There are other, more advanced methods on Map that can be useful when you want to "add a new value OR do something with the existing value" (or even remove a value), like *merge* and *compute*. There's also *replaceAll*, which you can give a lambda expression that calculates a new value for all the values in the map (we could use this, for example, to increment ALL the metrics in our previous example, if we needed to). And, like all the collections, it has a *forEach* that lets us iterate over all the key/value pairs in the Map.

The Java libraries continuously evolve, so even if you think you understand something you've used a lot, like List or Map, it's always worth keeping an eye out for changes that may make your life easier.

Remember, the Java API documentation (*https://oreil.ly/ln5xn*) is a great place to start if you want to see what methods are available on a class, and what they do.

#4 Parallel Streams

Java 8+

Back in Chapter 12, *Lambdas and Streams: What, Not How*, we took a long look at the Streams API. We did not look at one of the really interesting features of streams, which is that you can use them to take advantage of modern multicore, multi-CPU hardware and run your stream operations in parallel. Let's look at that now.

So far, we've used the Streams API to effectively "query" our data structures. Now, imagine those data structures can get big. We mean REALLY big. Like all the data from a database, or like a real-time stream of data from a social media API. We *could* plod over each of these items one by one, in **`serial`**, until we get the results we want. Or, we could split the work up into multiple operations and run them at the same time, in **`parallel`**, on different CPUs. After Chapter 17 and Chapter 18 you might be tempted to run off and write a multithreaded application to do that, but *you don't have to*!

Going parallel

You can simply tell the Streams API you want your stream pipeline to be run on multiple CPU cores. There are two ways to do this.

1. **Start a parallelStream**

Remember our mock song data from Chapter 12?

```
List<Song> songs = getSongs();
Stream<Song> par = songs.parallelStream();
```

2. **Add parallel() to the stream pipeline**

```
List<Song> songs = getSongs();
Stream<Song> par = songs.stream()
                        .parallel();
```

They both do the same thing, and you can choose whichever approach you prefer.

OK now what?

Now, you just write a stream pipeline just like we did in Chapter 12, adding the operations you want and finishing off with a terminator. The Java libraries will take care of figuring out:

- How to split the data to run the stream pipeline on multiple CPU cores
- How many parallel operations to run
- How to merge the results of the multiple operations

Multithreading is taken care of

Under the covers, parallel streams use the Fork-Join framework (which we did not cover in this book; see *https://oreil.ly/XJ6eH*), yet another type of thread pool (which we did talk about in Chapter 17, *Make a Connection*). With parallel streams, you'll find the number of threads is equal to the number of cores available wherever your application is running. There are ways to change this setup, but it's recommended to stick with the defaults unless you *really* know what you're doing.

Do not use parallel everywhere!

Before you going running off and making all your stream calls parallel, **wait**! Remember we said back in Chapter 18, *Dealing with Concurrency Issues*, that multithreaded programming was hard, because the solutions you choose depend a lot on your application, your data, and your environment? The same applies to using parallel streams. Going parallel and making use of multiple CPU cores is ***not*** free and does ***not*** automatically mean your application will run faster.

There is a cost to running a stream pipeline in parallel. The data needs to be split up, the operations need to be run on each bit of data on separate threads, and then at the end the results of each separate parallel operation need to be combined in some way to give a final result. All of that adds time.

If the data going into your stream pipeline is a simple collection, like the examples we looked at in Chapter 12 (indeed, in *most* places streams are used today), using serial streams is almost definitely going to be faster. Yes, you read that correctly: for most ordinary use cases, you do ***not*** want to go parallel.

Parallel streams can improve performance when:

- The input collection is BIG (think hundreds of thousands of elements at least)
- The stream pipeline is performing complicated, long-running operations
- The decomposition (splitting) of the data/operations and merging of the results are not too costly.

You should measure the performance with and without parallel before using it. If you want to learn more, Richard Warburton's *Java 8 Lambdas* book has an excellent section on data parallelism.

#3 Enumerations (also called enumerated types or enums)

We've talked about constants that are defined in the API, for instance, **`JFrame.EXIT_ON_CLOSE`**. You can also create your own constants by marking a variable **`static final`**. But sometimes you'll want to create a set of constant values to represent the ***only*** valid values for a variable. This set of valid values is commonly referred to as an enumeration. Full-fledged enumerations were introduce way back in Java 5.

Who's in the band?

Let's say that you're creating a website for your favorite band, and you want to make sure that all of the comments are directed to a particular band member.

The old way to fake an "enum":

```
public static final int KEVIN = 1;
public static final int BOB = 2;
public static final int STUART = 3;

// later in the code

if (selectedBandMember == KEVIN) {
  // do KEVIN related stuff
}
```

We're hoping that by the time we got here "selectedBandMember" has a valid value!

The good news about this technique is that it DOES make the code easier to read. The other good news is that you can't ever change the value of the fake enums you've created; `KEVIN` will always be `1`. The bad news is that there's no easy or good way to make sure that the value of `selectedBandMember` will always be `1, 2`, or `3`. If some hard-to-find piece of code sets `selectedBandMember` equal to `812`, it's pretty likely your code will break.

> **NOTE**
>
> This IS the OLD way to fake an enum, but you will still see code like this in Real Life (e.g., the older Java libraries like AWT).
>
> However, if you have any control over the code, try to use enums instead of constants like this. See the next page...

Let's see what the band members would look like with a "real" enum. While this is a very basic enumeration, most enumerations usually are this simple.

An official "enum"

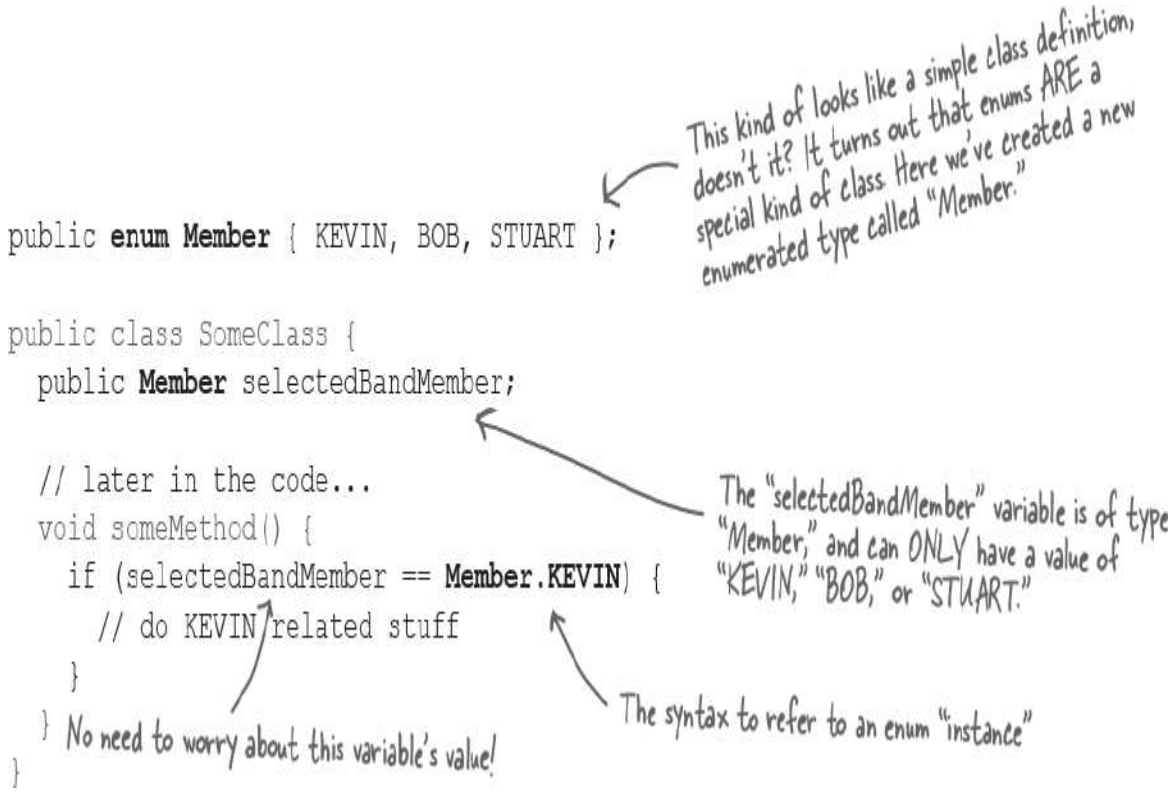

Your enum extends java.lang.Enum

When you create an enum, you're creating a new class, and ***you're implicitly extending `java.lang.Enum`***. You can declare an enum as its own standalone class, in its own source file, or as a member of another class.

Using "if" and "switch" with enums

Using the enum we just created, we can perform branches in our code using either the `if` or `switch` statement. Also notice that we can compare enum instances using either `==` or the `.equals()` method. Usually `==` is considered better style.

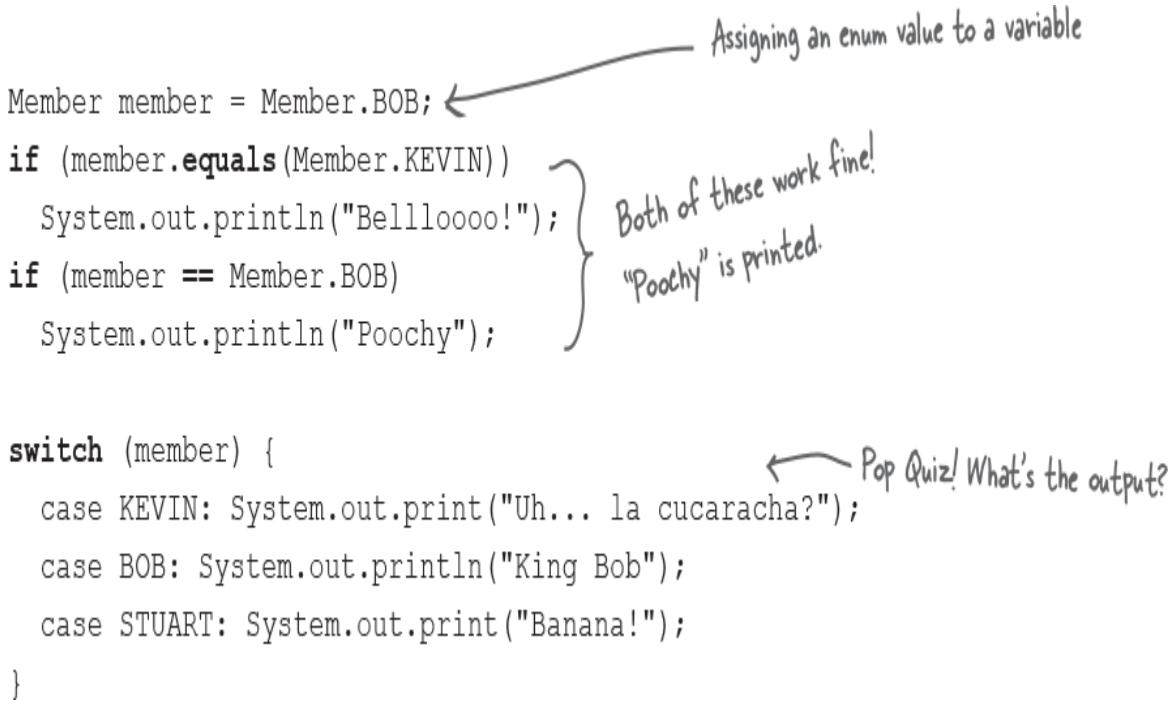

You can add a bunch of things to your enum like a constructor, methods, variables, and something called a constant-specific class body. They're not common, but you might run into them.

Answer:

King Bob

Banana!

#2 Local Variable Type Inference (var)

Java 10+

If you're using Java 10 or higher, you can use **`var`** when you're declaring your *local* variables (i.e., variables inside methods, **not** method parameters or instance variables).

This is another example of *type inference*, where the compiler can use what it already knows about the types to save you from writing more. The compiler knows *name* is a String because it was declared as a String on the right hand side of the equals sign.

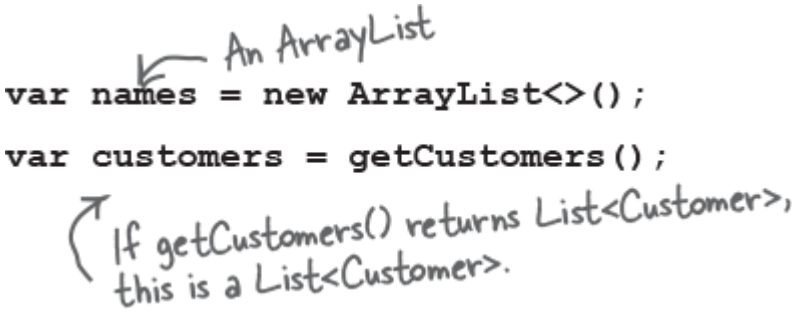

Type inference, NOT dynamic types

When you declare your variable using *var*, ***it still has a type***. It's not a way of adding dynamic or optional types to Java (it's **not** like Groovy's *def*). It's simply a way of avoiding writing that type twice.

You do have to somehow tell the compiler what the type is when you declare the variable. You can't assign it later. So, you ***can't*** do this:

because the compiler has no idea what type *name* is.

It also means that you can't change its type later:



Someone has to read your code

Using *var* does make the code shorter, and an IDE can tell you exactly what type your variable is, so you might be tempted to use var everywhere.

However, someone reading your code might not be using an IDE or have the same understanding of the code as you.

We did not use var in this book (even though it would have been easier to fit the code on the pages), because we wanted to be explicit to you, the reader, about what the code was doing.

Tip: Better with useful variable names

If you don't have the type information visible in the code, descriptive variable and method names will be extra helpful to a reader.

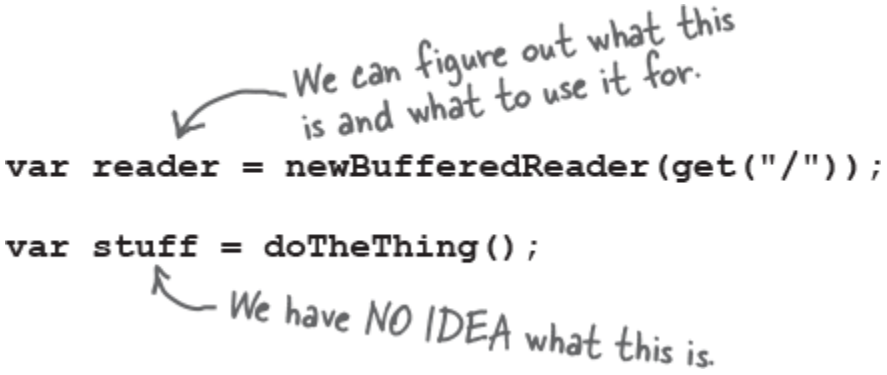

Tip: Variable will be the concrete type

In Chapter 11 we started "programming to interfaces"; i.e., we declared our variables as the interface type, not the implementation:

```
List<String> list = new ArrayList<>();
```

If you're using var, you can't do this. The type will be the type from the right-hand side:

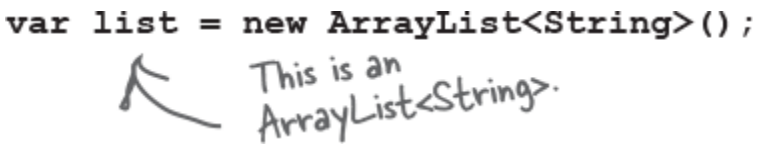

Tip: Don't use var with the diamond operator

Look at the last example. We declared list first as a List<String> and used the diamond operator (<>) on the right-hand side. The compiler knows the type

of the list element is a String from the lefthand side.

If you use var, like we did in the second example, the compiler no longer has this information. If you want the list to still be a list of Strings, you need to declare that on the righthand side; otherwise, it will contain Objects.

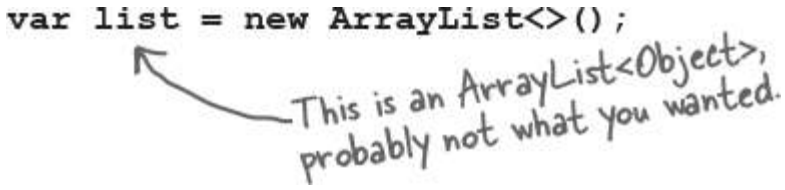

Read all the style guidelines from the OpenJDK developers (*https://oreil.ly/eVfSd*).

#1 Records

Why do you care?

A "simple" Java data object is often not simple at all. Even a data class (sometimes called a Java Bean, for historical reasons) with only a couple of fields requires quite a lot more code than you might expect.

A Java data class, before Java 16

Imagine a basic Customer class, with a name and an ID:

```
public final class Customer {
  private final int id;
  private final String name;

  public Customer(int id, String name) {
    this.id = id;
    this.name = name;
  }

  public int getId() {
    return id;
  }
```

```
  public String getName() {
    return name;
  }

  public boolean equals(Object o) { }

  public int hashCode() { }

  public String toString() { }
}
```

We've left out the details of the equals, hashCode, and toString methods, but you would probably want to implement those methods, especially if you're going to use this object in any collections. We've also left off the "setters"; this is an immutable object with final fields, but in some cases you might want setters as well.

That's a lot of code! It's a simple class with two fields, and the full code, including implementation, is 41 lines!

What if there was a special syntax for data classes?

Guess what? If you're using **Java 16** or higher, there is! Instead of creating a *class*, you create a *record*.

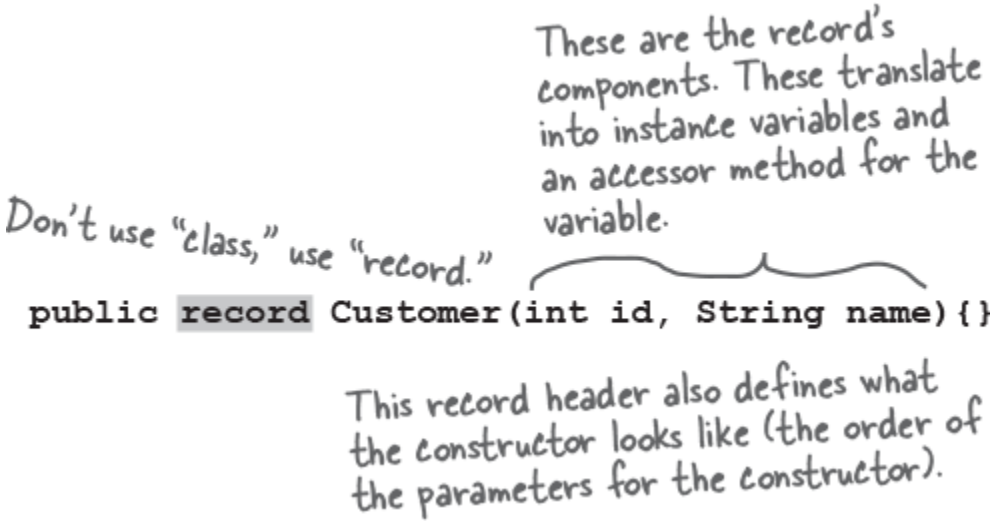

That's it. That's all you need to do to replace the 42 lines of code of the "old" Customer data class.

A record like this one has instance variables, a constructor, accessor methods, and equals, hashCode, and toString methods.

Using a record

When you're using a record that's already been defined, it looks exactly the same as it would if the record class was a standard data class:

```
Customer customer = new Customer(7, "me");
System.out.println(customer);
System.out.println(customer.name());
```

Notice this is NOT getName().

The output looks like:

```
File Edit Window Help Vinyl
%java UsingRecords

Customer[id=7, name=me]
me
```

Records have a pretty toString by default

Goodbye "get"

Did you notice something? Records don't use the classic "get" prefix for the methods that let you read the instance variables (hence we carefully called them "accessors" and not "getters"). They just use the name of the record component as the method name.

You can override constructors

The constructor, accessors, and equals, hashCode, and toString methods are all provided by default, but you can still override their behavior if you need something specific.

Most of the time, you probably won't need to. But if you want, for example, to add validation when you create the record, you can do that by overriding the constructor.

```
public record Customer(int id, String name) {
  public Customer(int id, String name) {
    if (id < 0) {
      throw new ValidationException();
    }
    this.id = id;
    this.name = name;
  }
}
```

Actually, it's even easier than that. The example above is a ***canonical constructor***, i.e., the normal kind of constructor we've been using everywhere. But records also have a ***compact constructor***. This compact constructor assumes all the normal stuff is taken care of (having the right number of parameters in the right order, and all assigned to the instance variables) and lets you define only the other stuff that matters, like validation:

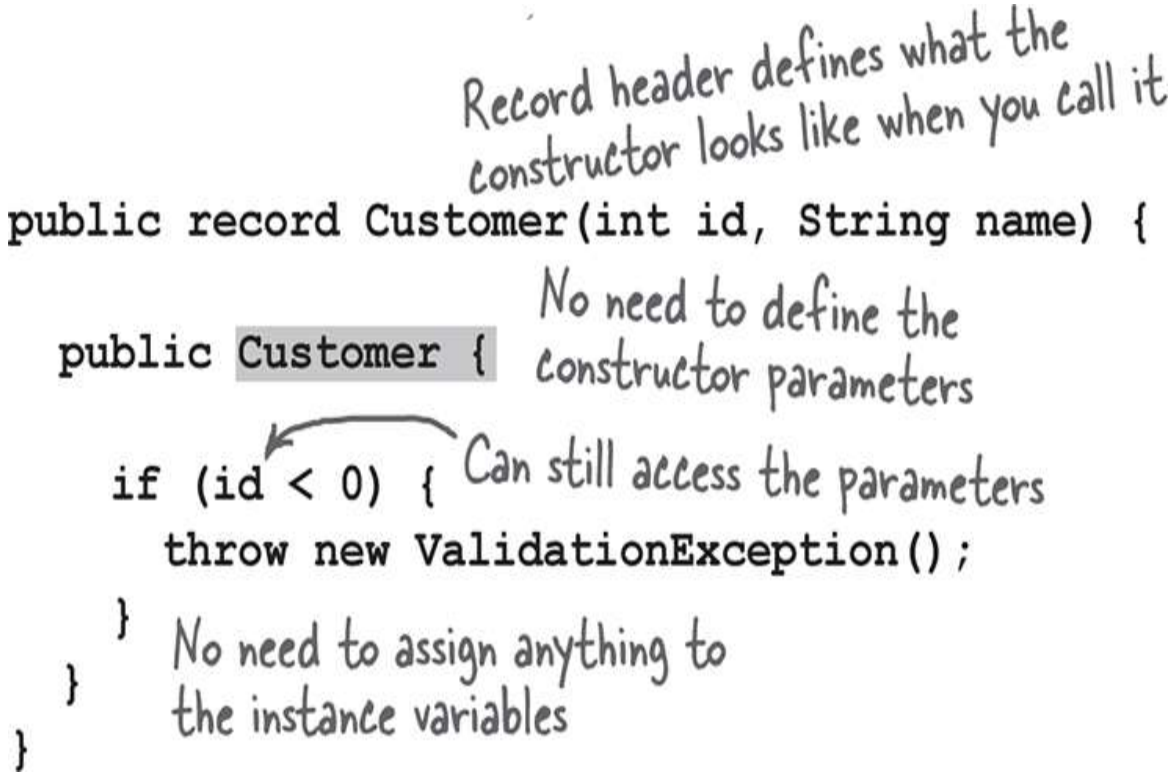

When you call the Customer's constructor, you still need to pass it an ID and a name, and they will still be assigned to the instance variables (that's all

defined by the record header). All you need to do to add validation to the constructor is use the compact form and let the compiler take care of all of the rest.

```
Customer customer = new Customer(7, "me");
```

Even with a compact constructor you must pass in arguments for all of the record components.

You can override or add methods

You can override any of the methods and add your own (public, default, or private) methods. If you are migrating existing data classes to use records, you may want to keep your old equals, hashCode, and toString methods.

```
public record Customer(int id, String name) {

  public boolean equals(Object o) {
    return id == ((Customer) o).id;
  }

  private boolean isValidName(String name) {
    // some implementation
  }
}
```

Overrides the equals method to provide custom behavior

Records can have "normal" methods too

You can create a protected method; the compiler won't stop you, but there's no point—records are always *final* classes and can't be subclassed.

Records are immutable

In Chapter 18, we talked about making data objects *immutable*. Immutable objects are safer to use in concurrent applications, because you know that it's impossible for more than one thread to change the data.

It's also easier to reason about what's happening in your application if you know the data classes can't change, so even in applications that aren't multithreaded, you may find immutable data objects being used. And in #9 in this appendix we saw how immutability in Strings can save memory.

Records are immutable. You can't change the values in a record Object after you have created it; there are no "setters" and no way to change the instance variables. You can't access them directly from outside the record, only read them via the accessor method.

If you try to change one of the record's instance variables from inside the record, the compiler will throw an exception. A record's instance variables are *final*.

Find out more about records in Oracle's Record Classes documentation (*https://oreil.ly/D7fh3*). There, you can also read about some of the other new language features available in Java 17 that we didn't get a chance to cover, like Pattern Matching, Sealed Classes, Switch Expressions, and the very useful Text Blocks.

Index

Symbols

!= and ! (not equals), Super powerful Boolean expressions

% percent sign in format String, Formatting deconstructed...

&&, || (‘and’ and ‘or’ operators), Super powerful Boolean expressions

++ -- (increment/decrement), Just the new stuff, Difference between for and while

-> (arrow operator) for lambda expressions, Hello Lambda, my (not so) old friend

-d (directory) flag, Compiling and running with packages

. (dot operator), Making your first object, Controlling your Dog object, Control your Dog (with a reference variable), Do it or risk humiliation and ridicule.

// (comment syntax), What can you say in the main method?

:: (method reference), Sometimes you don’t even need a lambda expression

< (less than operator), Looping and looping and...

<=, ==,!=, >, >= (comparison operators), Looping and looping and..., Comparing variables (primitives or references), Super powerful Boolean expressions, What makes two objects equal?

<> (diamond operator), Great question! You spotted the diamond operator, #2 Local Variable Type Inference (var)

= (assignment operator), Looping and looping and...

== (equals operator), Looping and looping and..., Comparing variables (primitives or references), What makes two objects equal?

> (greater than operator), Looping and looping and...

@FunctionalInterface annotation, Spotting Functional Interfaces

{} (curly braces) for classes and methods, What can you say in the main method?

‘and’ and ‘or’ operators (&&, ||), Super powerful Boolean expressions

A

abandoned objects (see garbage collection)

abstract class modifier, Did we forget about something when we designed this?

abstract classes, Did we forget about something when we designed this?

- and polymorphism, Serious Polymorphism: Interfaces and Abstract Classes, Polymorphism in action
- and static methods, What it means to have a class with static methods
- conditions for using, Making and implementing the Pet interface
- constructors in, The role of superclass constructors in an object’s life
- interface implementation, Interface to the rescue!

abstract methods, Abstract methods, Let’s explore some design options for reusing some of our existing classes in a PetShop program, Interface to the rescue!, Spotting Functional Interfaces

accept(), Writing a simple server application

access control, #8 Access levels and access modifiers (who sees what)

and subclasses, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

levels, #8 Access levels and access modifiers (who sees what)

modifiers, Hide the data, #8 Access levels and access modifiers (who sees what)

object locking for, The Ryan and Monica example, Using an object's lock, It's important to lock the correct object, Compare-and-swap with atomic variables

polymorphism, Keeping the contract: rules for overriding

access levels, Keeping the contract: rules for overriding, Overloading a method, #8 Access levels and access modifiers (who sees what)

access modifiers, Hide the data, Nanoreview: four things to remember about constructors, #8 Access levels and access modifiers (who sees what)

Accessors and Mutators (see Getters and Setters)

ActionEvent, Getting a user event, How do you get action events for two different buttons when each button needs to do something different?, Playing with Swing components

ActionListener, How do you get action events for two different buttons when each button needs to do something different?, How do you get action events for two different buttons when each button needs to do something different?, ActionListener is a Functional Interface

actionPerformed(), Getting a user event, How do you get action events for two different buttons when each button needs to do something different?, How do you get action events for two different buttons when each button needs to do something different?

add(anObject), ArrayList, Comparing ArrayList to a regular array

addActionListener(), Getting a user event

Advice Guy, The DailyAdviceClient

alphabetical (natural) ordering in Java, "Natural Ordering," what Java means by alphabetical

Animal simulation program, Let's design the inheritance tree for an Animal simulation program, Did we forget about something when we designed this?

animation, Using an inner class for animation

annotations, Why do you care?

argument list, Doesn't the compiler always make a no-arg constructor for you? No!, What happens if I have more than one argument?

arguments, You can send things to a method, You can send more than one thing to a method

- and no-arg constructor, Be sure you have a no-arg constructor
- autoboxing, Autoboxing works almost everywhere
- catch, An exception is an object... of type Exception
- Getters and Setters, Cool things you can do with parameters and return types
- number formatting, Formatting deconstructed..., What happens if I have more than one argument?
- passing to super(), Superclass constructors with arguments
- polymorphic, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, Keeping the contract: rules for overriding
- with generic types, Finally, back to generics

ArrayList, Wake up and smell the library, Exploring the java.util API, List and Collections

and value of generics, Generics means more type-safety, Learning generics

as generic class, Using generic CLASSES

autoboxing, Java will Autobox primitives for you

casting, Invoking the superclass version of a method

containing references of type Object, Using polymorphic references of type Object has a price...

diamond operator, Great question! You spotted the diamond operator

HashSet instead of, Using a HashSet instead of ArrayList

relationship to List in sorting project, Tracking song popularity on your jukebox

StartupBust object, Who does what in the StartupBust game (and when)

type parameters with, Using type parameters with ArrayList

arrays, How it works, An array is like a tray of cups

behavior of objects in, How do objects in an array behave?

dot operator in, Control your Dog (with a reference variable)

elements of as objects, An array is like a tray of cups

for declaring multiple return values, Java is pass-by-value. That means pass-by-copy.

polymorphic, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

SimpleStartupGame bug fix, How do we fix it?

versus ArrayList, Comparing ArrayList to a regular array

assignment, Make an array of Dogs

arrays, Make an array of Dogs

autoboxing, Autoboxing works almost everywhere

lambda expression variables, How can I tell if a method takes a lambda?

object, An object reference is just another variable value, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

primitive variables, You really don't want to spill that...

reference variables, An object reference is just another variable value

assignment operator (=), Looping and looping and...

atomic transactions, thread concurrency, We need to check the balance and spend the money as one atomic thing

atomic variables, You don't always have to use synchronized

AtomicInteger, Compare-and-swap with atomic variables

attributes, Laura delivered just moments ahead of Brad

autoboxing of primitive types, Java will Autobox primitives for you

Autocloseable, Autocloseable, the very small catch

awaitTermination, Closing time at the thread pool

B

background components (containers), GUI, Swing components, Layout Managers

BeatBox app, Let's make a Music Machine

Chat client and server, Real-time BeatBox chat

client program, Final BeatBox client program

GUI for, Code Kitchen

MIDI Music Player, We'll start with the basics

saving drum pattern, Saving a BeatBox pattern

saving objects, Capture the beat

server program, Final BeatBox server program

behavior of an object (see methods)

BindException, 1. Connect

Boolean anyMatch, Streams are like recipes: nothing's going to happen until someone actually cooks them

Boolean expressions, Looping and looping and...

autoboxing with, Autoboxing works almost everywhere

not equals (!= and !), Super powerful Boolean expressions

querying collection for values, But wait, there's more!

variables as incompatible with integers, Simple boolean tests

boolean primitive type, "I'd like a double mocha, no, make it an int.", Back away from that keyword!

BorderLayout manager, GUI layouts: putting more than one widget on a frame, Layout Managers, The Big Three layout managers: border, flow, and box, The Big Three layout managers: border, flow, and box

Bottle Song application, Coding a serious business application

BoxLayout manager, The Big Three layout managers: border, flow, and box, The Big Three layout managers: border, flow, and box

branching (if/else), What can you say in the main method?

break statements, Just the new stuff

BufferedReader, Reading from a text file, 2. Receive

BufferedWriter, The java.io.File class, NIO.2 and the java.nio.file package

buffers, The java.io.File class, Reading from a text file

buttons, GUI, Your first GUI: a button on a frame

- ActionEvent, How do you get action events for two different buttons when each button needs to do something different?
- BorderLayout, The Big Three layout managers: border, flow, and box
- FlowLayout, The Big Three layout managers: border, flow, and box
- inner class two-button code, How to make an instance of an inner class
- response and timing, But nothing happens when I click it...

byte primitive type, “I’d like a double mocha, no, make it an int.”, Back away from that keyword!

bytecode, The way Java works

C

C programming language, An object reference is just another variable value

canonical constructor (see constructors)

CAS (compare-and-swap) operations, You don’t always have to use synchronized

casting, Java is pass-by-value. That means pass-by-copy., random() and getUserInput(), Casting primitives, Casting an object reference back to its real type., Deserialization: restoring an object

catch argument, An exception is an object... of type Exception

catch blocks (see try/catch blocks)

chained streams, Stream operations are building blocks, Data moves in streams from one place to another, Parsing with String split()

Chair Wars scenario, (or How Objects Can Change Your Life), Chair Wars Revisited...

channels, client and server networking, Make a Connection: Networking and Threads

    reading/receiving with, 2. Receive

    SocketChannel, 1. Connect, 2. Receive, 3. Send, There's more than one way to make a connection

char primitive type, "I'd like a double mocha, no, make it an int.", Back away from that keyword!

character (%c) formatting type, The only required specifier is for TYPE

Chat client app, Real-time BeatBox chat, Writing a Chat Client, New and improved SimpleChatClient

Chat server app, Real-time BeatBox chat, The really, really simple Chat Server

check box (JCheckBox), Playing with Swing components

check.addItemListener(this), Playing with Swing components

checked versus runtime exceptions, If it's your code that catches the exception, then whose code throws it?

checkUserGuess(), Prep code for the real StartupBust class

checkYourself(), Writing test code for the SimpleStartup class, The checkYourself() method, Option two is a little better, but still pretty clunky

classes, Anatomy of a class, (or How Objects Can Change Your Life), Running the Guessing Game, Remember: a class describes what an object knows and what an object does

(see also inheritance)

abstract (see abstract classes)

and constructors, The miracle of object creation

and Java API packages, Using the Library (the Java API), Packages prevent class name conflicts, To put your class in a package:

and static variables, Initializing a static variable

and types, Declaring a variable

Animal simulation program, Using inheritance to avoid duplicating code in subclasses, Do all animals eat the same way?

concrete, Did we forget about something when we designed this?

conditions for making, Making and implementing the Pet interface

deserialization and versioning, Version ID: A big serialization gotcha

designing, When you design a class, think about the objects that will be created from that class type. Think about:

documentation, Using the class documentation

efficiency of not saving with object, What happens during deserialization?

elements of, Code structure in Java

Executors, A better alternative: don't manage the Threads at all

File, The java.io.File class

Files, NIO.2 and the java.nio.file package

final, final isn't just for static variables..., final isn't just for static variables...

for immutable data, Ryan and Monica, going atomic, Changing immutable data

full names in Java library, You have to know the full name* of the class you want to use in your code.

generic, Learning generics, In generics, "extends" means "extends or implements"

Graphics2D, Behind every good Graphics reference is a Graphics2D object

hierarchy design with inheritance, Looking for more inheritance opportunities

implementing multiple interfaces, Making and implementing the Pet interface

in object creation, Making your first object

inner (see inner classes)

instance variable declarations inside, The Stack and the Heap: where things live

JComponent, Swing components

lambda expressions as, Lambda expressions are objects, and you run them by calling their Single Abstract Method

Math, MATH methods: as close as you'll ever get to a global method

Object superclass, What about non-Animals? Why not make a class generic enough to take anything?

Paths, NIO.2 and the java.nio.file package

PetShop program class tree modifications, Let's explore some design options for reusing some of our existing classes in a PetShop program

Random, random() and getUserInput()

records, Why do you care?

Sequencer, First we need a Sequencer

Simple Startup Game, Developing a Class

tester class, Making your first object

Thread, The really, really simple Chat Server

versus objects, A class is not an object (but it's used to construct them)

with main(), Writing a class with a main()

without type parameters, Using generic METHODS

client application, networking, Real-time BeatBox chat, Writing a Chat Client, New and improved SimpleChatClient

client-server relationship, Real-time BeatBox chat

Code Kitchens, Final BeatBox client program

BeatBox app, Final BeatBox client program

GUI for Beatbox, Code Kitchen

music with graphics, Code Kitchen

playing sound, Code Kitchen

saving BeatBox pattern, Saving a BeatBox pattern

collect(), Streams are like recipes: nothing's going to happen until someone actually cooks them, Getting a result from a Stream, But wait, there's more!

Collection API, We need a Set instead of a List, Getting started with Streams

collections, We need a Set instead of a List

and concurrency, More problems with shared data

ArrayList (see ArrayList)

common operations, Building blocks of common operations

count operation on, But wait, there's more!

enhanced for loop, The enhanced for loop

factory methods, Creating and filling collections

generics for type-safe, Generics means more type-safety

List (see List interface)

Map, We've seen Lists and Sets, now we'll use a Map, Collecting results in different ways

parameterized types, Comparing ArrayList to a regular array

streams as queries, Correct! Stream operations don't change the original collection., Code Magnets

Collections class, Exploring the java.util API, List and Collections, Using type parameters with ArrayList

Collections.sort(), Exploring the java.util API, List and Collections

and List.sort(), Using a custom Comparator

Comparator, We can sort the list, but...

compare(), Updating the Jukebox to use a Comparator

with Objects instead of Strings, Changing the Jukebox code to use Songs instead of Strings

Collectors class, Getting a result from a Stream, Terminal operations do all the work, Code Magnets, Collecting results in different ways

Collectors.joining, Collecting results in different ways

Collectors.toList, Code Magnets, Collecting results in different ways

Collectors.toMap, Collecting results in different ways

Collectors.toSet, Collecting results in different ways

Collectors.toUnmodifiableList, Creating and filling collections, Code Magnets, Collecting results in different ways

Collectors.toUnmodifiableMap, Collecting results in different ways

Collectors.toUnmodifiableSet, Collecting results in different ways

command-line arguments, MIDIEvent, Version 2: Using command-line args to experiment with sounds

commas, formatting large numbers with, Number formatting, The percent (%) says, “insert argument here” (and format it using these instructions)

comment syntax (//), What can you say in the main method?

Comparable interface, TreeSet elements MUST be comparable

    Collections.sort(), Revisiting the sort() method

    versus Comparator, Using a custom Comparator, But wait! We’re sorting in two different ways!

Comparator interface, Functional interfaces in the wild

    and method reference, Sometimes you don’t even need a lambda expression

    and TreeSet, TreeSet elements MUST be comparable

    as SAM type, Functional interfaces in the wild

    lambda expressions with, Where did all that code go?, The shape of lambda expressions

sorting with, Exploring the java.util API, List and Collections, We can sort the list, but...

versus Comparable, Using a custom Comparator, But wait! We're sorting in two different ways!

compare and swap operations (see CAS)

compare(), Using a custom Comparator, Updating the Jukebox to use a Comparator, Where did all that code go?

compareAndSet method, You don't always have to use synchronized

compareTo(), The Song class needs to implement Comparable, Using a custom Comparator, If we want the set to stay sorted, we've got TreeSet

comparison operators, Looping and looping and..., Comparing variables (primitives or references), Super powerful Boolean expressions, What makes two objects equal?

compiler, The way Java works, Writing a class with a main(), Compiling and running with packages

compiler-safe documentation, annotations as, Why do you care?

computeIfAbsent, Why do you care?

computeIfPresent, Update the value only if it already exists

concatenated objects, How it works

concrete classes, Did we forget about something when we designed this?

concurrency, Dealing with Concurrency Issues: Race Conditions and Immutable Data

atomic variables, You don't always have to use synchronized

collections, More problems with shared data

immutable objects, Ryan and Monica, going atomic

locking, The Ryan and Monica example

lost update scenario, The dreaded “Lost Update” problem

multithreading, Closing time at the thread pool

race conditions, What could possibly go wrong?

synchronization, We need to check the balance and spend the money as one atomic thing

trade-offs in, CopyOnWriteArrayList

ConcurrentModificationException, Reading from a changing data structure causes an Exception

conditional branching, Conditional branching

conditional expressions, Looping and looping and..., Conditional branching

conditional test, for loop, More about for loops

connection streams, Data moves in streams from one place to another

connection, client-server, 1. Connect

constants, Running the Guessing Game, static final variables are constants, #3 Enumerations (also called enumerated types or enums)

constructors, The miracle of object creation

chaining, The role of superclass constructors in an object’s life

function of, Construct a Duck

in deserialization, What happens during deserialization?

initializing state of object, Initializing the state of a new Duck

overloaded, Invoking one overloaded constructor from another

private, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, Nanoreview: four things to remember about constructors, What it means to have a class with static methods, Static variable: value is the same for ALL instances of the class

review, Nanoreview: four things to remember about constructors

superclass, Wait a minute...we never DID talk about superclasses and inheritance and how that all fits in with constructors

containers (background components), GUI, Swing components, Layout Managers

contains(), Getting clever with filters

contract, What if you need to change the contract?

modifying class tree, What if you need to change the contract?

public methods as, Keeping the contract: rules for overriding, Casting an object reference back to its real type.

ControllerEvent, Listening for a non-GUI event, Version Two: registering and getting ControllerEvents

convenience methods, Convenience Factory Methods for Collections, Code Magnets

CopyOnWriteArrayList, CopyOnWriteArrayList

count operation, on collections, But wait, there's more!

CountDownLatch, Counting down until ready

curly braces ({}), for classes and methods, What can you say in the main method?

D

DailyAdviceServer, DailyAdviceServer code

data structures (see collections)

date formatting, What happens if I have more than one argument?

DDD (Deadly Diamond of Death), Let's explore some design options for reusing some of our existing classes in a PetShop program

deadlock, synchronization, Deadlock, a deadly side of synchronization

decimal (%d) formatting type, The only required specifier is for TYPE

declarations, Methods in Java use exceptions to tell the calling code, "Something Bad Happened. I failed."

    exceptions, Methods in Java use exceptions to tell the calling code, "Something Bad Happened. I failed.", When you don't want to handle an exception...

    method, Java is pass-by-value. That means pass-by-copy., Prep code for the real StartupBust class, Abstract methods, Let's explore some design options for reusing some of our existing classes in a PetShop program, The Stack and the Heap: where things live

    object, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

    variable, Declaring a variable, Controlling your Dog object, Declaring and initializing instance variables, The difference between instance and local variables, The enhanced for loop, Prep code for the real StartupBust class, The Stack and the Heap: where things live

default access level, #8 Access levels and access modifiers (who sees what), #8 Access levels and access modifiers (who sees what)

default method, Spotting Functional Interfaces

default value, Declaring and initializing instance variables

instance variable, Declaring and initializing instance variables

static variable, Initializing a static variable

deserialization, Deserialization: restoring an object

diamond operator (<>), Great question! You spotted the diamond operator, #2 Local Variable Type Inference (var)

directories, The java.io.File class

File object with, The java.io.File class

packages, Path, Paths, and Files (messing with directories), To put your class in a package:

distinct(), Stream, Introducing the Streams API, Removing duplicates

dot operator (.), Making your first object, Controlling your Dog object, Control your Dog (with a reference variable), Do it or risk humiliation and ridicule.

double primitive type, “I’d like a double mocha, no, make it an int.”, Back away from that keyword!

drawing 2D graphics, Getting back to graphics..., Make your own drawing widget, Version Three: drawing graphics in time with the music

Duck constructor, The miracle of object creation, Doesn’t the compiler always make a no-arg constructor for you? No!, Static variable: value is the same for ALL instances of the class

ducking exceptions, When you don’t want to handle an exception...

duplicate code, avoiding with inheritance, So what does all this inheritance really buy you?

duplicate results, removing, Removing duplicates

E

e-flashcards example, saving to text file, Text file example: e-Flashcards

encapsulation, Do it or risk humiliation and ridicule.

enhanced for loop, Just the new stuff, The enhanced for loop

enumerations, #3 Enumerations (also called enumerated types or enums)

equality, What makes two objects equal?, How a HashSet checks for duplicates: hashCode() and equals()

equals operator (==), Looping and looping and..., Comparing variables (primitives or references), What makes two objects equal?

equals(), Comparing variables (primitives or references), How a HashSet checks for duplicates: hashCode() and equals(), The old way to fake an "enum":

event handling, Getting a user event

- getting graphics, We can get an event. We can paint graphics. But can we paint graphics when we get an event?
- JCheckBox, Playing with Swing components
- JList, Playing with Swing components
- listener interface, Getting a user event
- MIDIEvents, Making a MidiEvent (song data), Listening for a non-GUI event
- static methods, An easier way to make messages/events

event object, Listeners, Sources, and Events

event source, Getting a user event

exception handling, Risky Behavior: Exception Handling, Methods in Java use exceptions to tell the calling code, "Something Bad Happened. I failed."

finally block, Finally: for the things you want to do no matter what, Getting back to our music code..., Finally, a closer look at finally

flow control, Flow control in try/catch blocks

multiple exceptions, Multiple catch blocks must be ordered from smallest to biggest

try-with-resources statement, The try-with-resources (TWR), statement

try/catch blocks (see try/catch blocks)

exceptions, 1. Connect

as polymorphic, Exceptions are polymorphic

BindException, 1. Connect

catching (see try/catch blocks)

checked versus runtime, If it's your code that catches the exception, then whose code throws it?

concurrency and collections, Reading from a changing data structure causes an Exception

declaring, Exceptions are polymorphic, When you don't want to handle an exception...

ducking, When you don't want to handle an exception...

methods, What happens when a method you want to call (probably in a class you didn't write) is risky?

multiple, Did we mention that a method can throw more than one exception?

NumberFormatException, But wait! There's more! Wrappers have static utility methods too!

throwing, If it's your code that catches the exception, then whose code throws it?

Executors, Making and starting two threads (or more!)

Executors class, A better alternative: don't manage the Threads at all

ExecutorService, A better alternative: don't manage the Threads at all, Making and starting two threads (or more!)

ExecutorService.shutdown(), A better alternative: don't manage the Threads at all, Closing time at the thread pool

ExecutorService.shutdownNow(), Closing time at the thread pool

exercises, BE the Compiler

Be the..., BE the Compiler, BE the Compiler, BE the Compiler, BE the Compiler, BE the JVM, BE the Compiler, BE the compiler, BE the Compiler, advanced, BE the Compiler, advanced, Who Am I?

Code Magnets, Code Magnets, Code Magnets, Code Magnets, Code Magnets, Code Magnets, Code Magnets, Code Magnets, Code Magnets

Mixed Messages, Mixed Messages, Mixed Messages, When for loops go wrong

Popular Objects, Popular Objects

Sharpen Your Pencil, Speed and memory usage, Conditional branching, Making and testing Movie objects, You really don't want to spill that..., Comparing variables (primitives or references), Final code for SimpleStartup and SimpleStartupTestDrive, Some things you can do with ArrayList, Prep code for the real StartupBust class, You MUST implement all abstract methods, Doesn't the compiler always make a no-arg constructor for you? No!, Invoking one overloaded constructor from another, final isn't just for static variables..., Autoboxing works

almost everywhere, Fill-in-the-blanks, Reverse Engineer, What you MUST know about TreeSet..., Functional interfaces in the wild, If it's your code that catches the exception, then whose code throws it?, Flow Control, You can't put bigger baskets above smaller baskets, Using an inner class for animation, Version Three: drawing graphics in time with the music, Restoring a BeatBox pattern, DailyAdviceClient code

True or False, BE the compiler, Exercise, Exercise

What's the Declaration?, Exercise

What's the Picture?, Exercise

Which Layout?, Which code goes with which layout?

Who Am I?, Who Am I?, BE the Compiler, Exercise, Who Am I?

Who Does What?, Building blocks of common operations

explicit cast, Java is pass-by-value. That means pass-by-copy.

extending classes (see inheritance)

extends keyword, In generics, "extends" means "extends or implements"

Extreme Programming, Writing the method implementations

F

factory methods, Creating and filling collections, Code Magnets, A better alternative: don't manage the Threads at all

File class, The java.io.File class

File object, The java.io.File class

FileInputStream, Deserialization: restoring an object

FileOutputStream, Writing a serialized object to a file, Data moves in streams from one place to another

FileReader, Reading from a text file

Files class, NIO.2 and the java.nio.file package

files, source file structure, Code structure in Java

FileWriter, Writing a String to a Text File, The java.io.File class

filter streams (see chained streams)

filter(), Lou's Challenge #1: Find all the "rock" songs

final keyword, Changing immutable data

- adding to field declaration, Changing immutable data, CopyOnWriteArrayList
- classes, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, final isn't just for static variables..., final isn't just for static variables...
- methods, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, final isn't just for static variables...
- variables, Numbers Matter: Numbers and Statics, static final variables are constants

finally block, Finally: for the things you want to do no matter what, Getting back to our music code..., Finally, a closer look at finally

findFirst(), Optional, Streams are like recipes: nothing's going to happen until someone actually cooks them

Fireside Chats, Fireside Chats

- for loop versus forEach method, Fireside Chats
- instance versus static variables, Fireside Chats
- JVM and compiler roles, Writing a class with a main()

variable discussion on life and death, What about reference variables?

float primitive type, “I’d like a double mocha, no, make it an int.”, Back away from that keyword!

floating point (%f) formatting type, The only required specifier is for TYPE

flow control, exceptions, Flow control in try/catch blocks

flowchart for Sink a Startup, First, a high-level design

FlowLayout manager, The Big Three layout managers: border, flow, and box, The Big Three layout managers: border, flow, and box

for loops, More about for loops

enhanced, Just the new stuff, The enhanced for loop

SimpleStartup class, Just the new stuff

versus forEach(), Tell the computer WHAT you want

forEach(), Tell the computer WHAT you want, Hello Lambda, my (not so) old friend, A lambda might not return anything, Update the value only if it already exists

Fork-Join framework, #4 Parallel Streams

format specifiers, Formatting deconstructed..., The format specifier

format(), The percent (%) says, “insert argument here” (and format it using these instructions)

Formatter class, Number formatting

formatting numbers, Number formatting

frames, GUI, It all starts with a window, Layout Managers, The Big Three layout managers: border, flow, and box

Friesen, Jeff, Using a Socket

Java I/O, NIO and NIO.2, Using a Socket

fully qualified name, Java library packages, You have to know the full name* of the class you want to use in your code.

Function, in map method, Mapping from one type to another

functional interface, lambda expression, Lambda expressions are objects, and you run them by calling their Single Abstract Method

G

GameHelper class, One last class: GameHelper, Who does what in the StartupBust game (and when), Ready-Bake Code

GameHelper object, Who does what in the StartupBust game (and when)

garbage collection, Running the Guessing Game, Life on the garbage-collectible heap, What about reference variables?

Garbage-Collectible Heap, The Stack and the Heap: where things live

generics, Generics means more type-safety

and polymorphic arguments, Finally, back to generics

classes, Learning generics

extends or implements, In generics, “extends” means “extends or implements”

methods, Using generic METHODS, Introducing the Streams API

type parameters, Using the method’s generic type parameter

getPreferredSize(), The Big Three layout managers: border, flow, and box

getSequencer(), Methods in Java use exceptions to tell the calling code, “Something Bad Happened. I failed.”

Getters and Setters, Cool things you can do with parameters and return types, We need to check the balance and spend the money as one atomic thing

getUserInput(), One last class: GameHelper

gradient blend, graphics object, Because life's too short to paint the circle a solid color when there's a gradient blend waiting for you

Gradle, To put your class in a package:

graphics, Getting back to graphics...

(see also GUI)

Graphics superclass, Behind every good Graphics reference is a Graphics2D object

greater than operator (>), Looping and looping and...

Guessing Game example, Quick! Get out of main!

GUI, A Very Graphic Story: Getting Gui

abstract classes in, Abstract vs. Concrete

BeatBox app, Code Kitchen, Final BeatBox client program

BorderLayout, GUI layouts: putting more than one widget on a frame, Layout Managers

BoxLayout, The Big Three layout managers: border, flow, and box

building graphics, Getting back to graphics...

buttons (see buttons, GUI)

components, It all starts with a window, Getting back to graphics..., Swing components, Playing with Swing components

event handling, Getting a user event

FlowLayout, The Big Three layout managers: border, flow, and box

inner classes, Inner class to the rescue!

layout managers, Layout Managers

listener interface, Getting a user event

Swing, It all starts with a window, Work on Your Swing: Using Swing

H

HAS-A test for inheritance, Using IS-A and HAS-A

hashCode(), What makes two objects equal?

heap, Running the Guessing Game, Life on the garbage-collectible heap, The Stack and the Heap: where things live

hexadecimal (%x) formatting type, The only required specifier is for TYPE

Hitchens, Ron, Using a Socket

Java NIO, Using a Socket

HTML API docs, Use the HTML API docs

I

I/O, Capture the beat, Parsing with String split()

deserialization, Deserialization: restoring an object

exception handling, Finally, a closer look at finally

networking (see networking)

saving data to text file, Writing a String to a Text File

saving objects, Saving state

serialization, Saving state, Saving and restoring the game characters

streams, Data moves in streams from one place to another

if statement, Conditional branching, The old way to fake an “enum”:

if test, Conditional branching

if/else statement, What can you say in the main method?, Conditional branching

images on GUI widget, Getting back to graphics..., Fun things to do in paintComponent()

immutability, #9 Immutability in Strings and Wrappers

immutable objects, Ryan and Monica, going atomic, CopyOnWriteArrayList

import statement, You have to know the full name* of the class you want to use in your code., You have to know the full name* of the class you want to use in your code.

imports, static, Just one more thing...static imports

increment(), synchronizing, Make the increment() method atomic. Synchronize it!

increment/decrement operators (++ and --), Just the new stuff, Difference between for and while

index position, List, We need a Set instead of a List

InetSocketAddress, 1. Connect

inheritance, So, Brad the OO guy got the chair and desk, right?, Chair Wars Revisited...

(see also polymorphism)

Animal simulation program, Let’s design the inheritance tree for an Animal simulation program

benefits of using, So what does all this inheritance really buy you?

dos and don’ts, When designing with inheritance, are you using or abusing?

implementing abstract methods, You MUST implement all abstract methods

keeping trees shallow, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

relationship to objects, Get in touch with your inner Object

subclasses (see subclasses)

superclass (see superclass)

inheritance trees, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, What if you need to change the contract?

initializing, Using the constructor to initialize important Duck state*

instance variables, Declaring and initializing instance variables

static variables, Initializing a static variable

with constructor, Using the constructor to initialize important Duck state*

inner classes, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, Just the code that matters, Inner class to the rescue!

drawing 2D graphics, Version Three: drawing graphics in time with the music

lambda expressions with, Lambdas to the rescue! (again)

relationship to outer class, Inner class to the rescue!

two-button code, How to make an instance of an inner class

InputStreamReader, There's more than one way to make a connection

instance variables, When you design a class, think about the objects that will be created from that class type. Think about:, A class is not an object (but it's used to construct them)

Animal simulation program, Using inheritance to avoid duplicating code in subclasses, Do all animals eat the same way?

declaring, Declaring and initializing instance variables, The Stack and the Heap: where things live

default values, Declaring and initializing instance variables

Getters and Setters, Cool things you can do with parameters and return types

in serialization process, What really happens to an object when it's serialized?

inability to use with static methods, Static methods can't use non-static (instance) variables!

initializing, Declaring and initializing instance variables

lack of in Math class, MATH methods: as close as you'll ever get to a global method

life and scope of, Now we know how an object is born, but how long does an object live?

matching with parameter types, You can send more than one thing to a method

on heap, If local variables live on the stack, where do instance variables live?

pass-by-value/pass-by-copy, Java is pass-by-value. That means pass-by-copy.

private access modifier for, Hide the data

setter methods for, Do it or risk humiliation and ridicule.

subclass, What about the Amoeba rotate()?

transient, If you want your class to be serializable, implement Serializable, If you want your class to be serializable, implement Serializable, What happens during deserialization?

versus local variables, The difference between instance and local variables, The Stack and the Heap: where things live

versus static variables, Fireside Chats

instances, inner and outer class, An inner class instance must be tied to an outer class instance*

int array variable, An array is like a tray of cups

int primitive type, "I'd like a double mocha, no, make it an int.", Back away from that keyword!

integers, incompatibility with boolean variables, Simple boolean tests

interactive components, GUI, Swing components

interface keyword, Interface to the rescue!

interfaces, Serious Polymorphism: Interfaces and Abstract Classes

functional interface, Lambda expressions are objects, and you run them by calling their Single Abstract Method, ActionListener is a Functional Interface

naming, Using the Library (the Java API)

polymorphism, Interface to the rescue!

intermediate operations, Getting started with Streams

as lazily evaluated, Terminal operations do all the work

chaining operations, Building blocks can be stacked and combined

creating stream pipeline, Stream operations are building blocks

IS-A test, Using IS-A and HAS-A, When designing with inheritance, are you using or abusing?, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, The role of superclass constructors in an object's life

iteration expression, for loops, More about for loops

iteration variable declaration, enhanced for loop, The enhanced for loop

J

Java, Running the Guessing Game

basic elements, Running the Guessing Game

code structure, Code structure in Java

history, A very brief history of Java

setting up, What you need for this book:

speed and memory usage, A very brief history of Java

version naming conventions, Speed and memory usage

workings of, The way Java works

Java API, Using the Java Library: Get to Know the Java API

classes and packages, Using the Library (the Java API)

(see also packages, Java API)

documentation, How to discover the API

Java Collections Framework, Data Structures: Collections and Generics

(see also collections)

Java I/O, NIO and NIO.2 (Friesen), Using a Socket

Java Module System, Use the HTML API docs

Java NIO (Hitchens), Using a Socket

Java Virtual Machine (see JVM)

Java-Enabled House, Monday morning at Bob's Java-enabled house

java.nio.channels package, Using a Socket

java.util API, Exploring the java.util API, List and Collections

JavaFX, But nothing happens when I click it...

JavaSound API, Risky Behavior: Exception Handling, We'll start with the basics

JCheckBox, Playing with Swing components

JComponent class, Swing components

JFrame, It all starts with a window, Swing components, The Big Three layout managers: border, flow, and box

JPanel, Swing components, The Big Three layout managers: border, flow, and box

JPanel.paintComponent(), Make your own drawing widget, Using an inner class for animation

JPEG on widget, Fun things to do in paintComponent()

JScrollPane, Playing with Swing components

JShell, Why do you care?

JTextArea, Playing with Swing components

JTextArea.requestFocus(), Playing with Swing components

JTextArea.selectAll(), Playing with Swing components

JTextArea.setLineWrap(true), Playing with Swing components

JTextArea.setText(), Playing with Swing components

JTextField, Playing with Swing components

JTextField.requestFocus(), Playing with Swing components

JTextField.selectAll(), Playing with Swing components

JVM (Java Virtual Machine), Writing a class with a main()

K

key-value pairs, Map, We've seen Lists and Sets, now we'll use a Map

keywords in Java, Back away from that keyword!, In generics, "extends" means "extends or implements"

L

lambda expressions, Enter lambdas! Leveraging what the compiler can infer, Hello Lambda, my (not so) old friend

- anatomy of, Anatomy of a lambda expression
- calling Single Abstract Method, Lambda expressions are objects, and you run them by calling their Single Abstract Method
- forEach method, Tell the computer WHAT you want
- implementing Predicate, Let's Rock!
- map operation, Mapping from one type to another, Sometimes you don't even need a lambda expression, Why do you care?

method reference replacement for, Sometimes you don't even need a lambda expression

parameters, A lambda might not return anything

replacing inner class with, Lambdas to the rescue! (again)

threads, To create a new call stack you need a job to run, How did we end up with different results?

void return in, A lambda might not return anything

latch.countDown, Counting down until ready

layout managers, Work on Your Swing: Using Swing, Layout Managers, Playing with Swing components

BorderLayout, GUI layouts: putting more than one widget on a frame, The Big Three layout managers: border, flow, and box

BoxLayout, The Big Three layout managers: border, flow, and box

changing frames, The Big Three layout managers: border, flow, and box

differing policies of, How does the layout manager decide?

FlowLayout, The Big Three layout managers: border, flow, and box, The Big Three layout managers: border, flow, and box

less than operator (<), Looping and looping and...

limit(), Stream, Introducing the Streams API, Customizing the building blocks

List interface, We need a Set instead of a List

collecting to, Terminal operations do all the work, Lou's Challenge #1: Find all the "rock" songs, Collecting results in different ways

Comparator with, We can sort the list, but...

sorting with, Tracking song popularity on your jukebox

unmodifiable output, Creating and filling collections, Code Magnets

using versus implementation type, Great question! You spotted the diamond operator

list.addListSelectionListener(this), Playing with Swing components

List.of(), Convenience Factory Methods for Collections

list.setSelectionMode(ListSelectionModel.SINGLE_SELECTION), Playing with Swing components

list.setVisibleRowCount(4), Playing with Swing components

List.sort(), Using a custom Comparator

listener, Getting a user event, How do you get action events for two different buttons when each button needs to do something different?

ActionListener, How do you get action events for two different buttons when each button needs to do something different?, ActionListener is a Functional Interface

check.addItemListener(this), Playing with Swing components

list.addListSelectionListener(this), Playing with Swing components

non-GUI event, Listening for a non-GUI event

listener interface, event handling, Getting a user event

literals, assigning values, You really don’t want to spill that...

local variables, The Stack and the Heap: where things live

declaring, The Stack and the Heap: where things live

in Stack, The Stack and the Heap: where things live

life and scope of, Now we know how an object is born, but how long does an object live?, What about reference variables?

parameters as, You can send things to a method

references on heap, What about local variables that are objects?

type inference, #2 Local Variable Type Inference (var)

versus instance variables, The difference between instance and local variables, The Stack and the Heap: where things live

locking, The Ryan and Monica example, Compare-and-swap with atomic variables

long count(), Streams are like recipes: nothing's going to happen until someone actually cooks them

long primitive type, "I'd like a double mocha, no, make it an int.", Back away from that keyword!

loop block, Looping and looping and...

loops, What can you say in the main method?, Looping and looping and...

for, Just the new stuff, Just the new stuff, More about for loops, Tell the computer WHAT you want

while, Looping and looping and..., Difference between for and while, Reading from a text file

M

main(), Anatomy of a class, What can you say in the main method?, Simple boolean tests, A Trip to Objectville: Classes and Objects

classes with, Writing a class with a main()

ducking exception, Ducking (by declaring) only delays the inevitable

in tester class, Making your first object

multithreading, What does it mean to have more than one call stack?, How NOT to run the Runnable

SimpleStartupGame class, Prep code for the SimpleStartupGame class Everything happens in main(), The game's main() method

StartupBust object, Who does what in the StartupBust game (and when)

uses of, Quick! Get out of main!

makeEvent(), Version One: using the new static makeEvent() method

Map interface, We've seen Lists and Sets, now we'll use a Map

and collections, Collecting results in different ways

Collection API, The Collection API (part of it)

key-value pairs, We need a Set instead of a List

lambda expressions, Why do you care?

map(), Stream, Introducing the Streams API

Map.of(), Convenience Factory Methods for Collections

Map.ofEntries(), Convenience Factory Methods for Collections

Math class, MATH methods: as close as you'll ever get to a global method, Math methods

Math.abs(), Math methods

Math.max(), Math methods

Math.min(), Math methods

Math.random(), random() and getUserInput(), Math methods

Math.round(), Math methods

Math.sqrt(), Math methods

Maven, Java project structure, To put your class in a package:

memory, What about reference variables?

garbage collection, What about reference variables?

stack and heap in object lifecycle, The Stack and the Heap: where things live

String immutability, #9 Immutability in Strings and Wrappers

Message, MIDIEvent, Making a MidiEvent (song data), An easier way to make messages/events

metadata, NIO.2 and the java.nio.file package

method reference, stream, Sometimes you don't even need a lambda expression

methods, Code structure in Java, Anatomy of a class, Laura delivered just moments ahead of Brad, When you design a class, think about the objects that will be created from that class type. Think about:

(see also local variables)

abstract, Abstract methods, Let's explore some design options for reusing some of our existing classes in a PetShop program, Interface to the rescue!, Spotting Functional Interfaces

and static variables, final isn't just for static variables...

and type Object's role in code, So what's in this ultra-super-megaclass Object?, Objects don't bark

Animal simulation program, Using inheritance to avoid duplicating code in subclasses

arguments (see arguments)

autoboxing, Autoboxing works almost everywhere

calling non-static from static, Static methods can’t use non-static methods, either!

declarations and implementations, Prep code for the real StartupBust class

declaring or ducking, When you don’t want to handle an exception...

descriptive naming best practice, #2 Local Variable Type Inference (var)

exception handling, What happens when a method you want to call (probably in a class you didn’t write) is risky?, Ducking (by declaring) only delays the inevitable

final, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, final isn’t just for static variables...

generic, Learning generics, Using generic METHODS, Using the method’s generic type parameter

in Stack, The Stack and the Heap: where things live, Methods are stacked

inheritability, Designing an Inheritance Tree

listener interface, Getting a user event

local variables declared inside, The difference between instance and local variables, The Stack and the Heap: where things live

making available to all code, Running the Guessing Game

matching variable and parameter types, You can send more than one thing to a method

Math class, Math methods

multiple parameters with, You can send more than one thing to a method

multiple return value declarations, Java is pass-by-value. That means pass-by-copy.

non-abstract methods with abstract classes, You MUST implement all abstract methods

overloading, Overloading a method

overriding (see overriding methods)

parameters (see parameters)

returning values from, You can get things back from a method

SimpleStartup class test code, Writing test code for the SimpleStartup class

static, MATH methods: as close as you'll ever get to a global method

subclasses, How do you know if you've got your inheritance right?

superclass, Invoking the superclass version of a method

test coding, Writing the method implementations

varargs, #7 Varargs

versus constructors, Initializing the state of a new Duck

working with inheritance, Which method is called?

MIDI Music Player, We'll start with the basics, Making actual sound

MIDIEvents, Making a MidiEvent (song data), Listening for a non-GUI event

mock Songs class, Your first job, sort the songs in alphabetical order

mocking, Tracking song popularity on your jukebox

MovieTestDrive class, Making and testing Movie objects

multiple inheritance problem, Let's explore some design options for reusing some of our existing classes in a PetShop program

multithreading, The really, really simple Chat Server, #4 Parallel Streams

(see also concurrency)

coordinating threads, Putting a thread to sleep

parallel streams, #4 Parallel Streams

Runnable interface, To create a new call stack you need a job to run

scheduling, The three states of a new thread

SimpleChatClient complete, New and improved SimpleChatClient

sleep(), Putting a thread to sleep

stack, Java has multiple threads but only one Thread class

thread pools, Making and starting two threads (or more!)

thread states, The three states of a new thread

music video, Code Kitchen

Mutators and Accessors (see Getters and Setters)

N

naming, Using the Library (the Java API)

classes and interfaces, Using the Library (the Java API)

variables, Declaring a variable, Back away from that keyword!, Control your Dog (with a reference variable)

natural ordering in Java (alphabetical), "Natural Ordering," what Java means by alphabetical

networking, Make a Connection: Networking and Threads

channels (see channels)

client-server relationship, Real-time BeatBox chat

simple Chat client app, Writing a Chat Client

simple Chat server app, The really, really simple Chat Server

nextInt(), random() and getUserInput()

NIO (non-blocking I/O), Quiz Card Builder (code outline)

NIO.2, Using a Socket

no-arg constructors, Be sure you have a no-arg constructor, Doesn't the compiler always make a no-arg constructor for you? No!

non short circuit operators (& , |), Super powerful Boolean expressions

non-public class, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

not equals (!equals and !), Super powerful Boolean expressions

null reference, Life and death on the heap, What about reference variables?

NumberFormatException, But wait! There's more! Wrappers have static utility methods too!

numbers, formatting, Number formatting

numeric primitive types, "I'd like a double mocha, no, make it an int."

O

Object class, What about non-Animals? Why not make a class generic enough to take anything?

object graph, But what exactly IS an object's state? What needs to be saved?, If you want your class to be serializable, implement Serializable, If you want your class to be serializable, implement Serializable

object references (see reference variables)

ObjectInputStream, Deserialization: restoring an object

ObjectOutputStream, Writing a serialized object to a file, Data moves in streams from one place to another

ObjectOutputStream.close(), Writing a serialized object to a file

ObjectOutputStream.writeObject(), Writing a serialized object to a file

objects, How it works

(see also arrays; Strings)

and collections, Building blocks of common operations

array elements as, Make an array of Dogs, How do objects in an array behave?

assignment, An object reference is just another variable value, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

behavior, Saving Objects (and Text): Serialization and File I/O

(see also classes)

creating, Making your first object, An object reference is just another variable value, The miracle of object creation

declaring, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

eligibility for garbage collection, What about reference variables?

equality, Comparing variables (primitives or references), What makes two objects equal?, How a HashSet checks for duplicates: hashCode() and equals()

immutable, Ryan and Monica, going atomic, CopyOnWriteArrayList

in heap, The Stack and the Heap: where things live

instance variables as living inside, If local variables live on the stack, where do instance variables live?

instantiating, Here's what we should test:

lambda expressions as, Lambda expressions are objects, and you run them by calling their Single Abstract Method

lifecycle of, The role of superclass constructors in an object's life, Now we know how an object is born, but how long does an object live?

locking, The Ryan and Monica example, Compare-and-swap with atomic variables

of type Object, So what's in this ultra-super-megaclass Object?

saving state, Saving Objects (and Text): Serialization and File I/O, Saving state

superclass constructors, Wait a minute...we never DID talk about superclasses and inheritance and how that all fits in with constructors

versus classes, A class is not an object (but it's used to construct them)

OO (object-oriented) development, Simple boolean tests, A Trip to Objectville: Classes and Objects

(see also classes; objects)

event handling, How do you get action events for two different buttons when each button needs to do something different?

inheritance, Chair Wars Revisited...

saving object state, Saving Objects (and Text): Serialization and File I/O

operators, Know Your Variables: Primitives and References

(see also primitive variables)

and autoboxing, Autoboxing works almost everywhere

comparison, Looping and looping and..., Comparing variables (primitives or references), Super powerful Boolean expressions, What makes two objects equal?

equals (==), Looping and looping and..., Comparing variables (primitives or references), What makes two objects equal?

increment/decrement (++ and --), Just the new stuff, Difference between for and while

non short circuit, Super powerful Boolean expressions

post-increment, Just the new stuff

short circuit, Super powerful Boolean expressions

'and' and 'or' operators, Super powerful Boolean expressions

optimistic locking, Compare-and-swap with atomic variables

Optional value, returning from collection query, But wait, there's more!

outer class, relationship to inner class, Inner class to the rescue!

OutputStream, There's more than one way to make a connection

overloaded constructors, Invoking one overloaded constructor from another

overloading methods, Overloading a method

overriding methods, What about the Amoeba rotate()?, What about the Amoeba rotate()?

hashCode() and equals(), The Song class with overridden hashCode() and equals()

Object class, So what's in this ultra-super-megaclass Object?

rules to keep contract, Keeping the contract: rules for overriding

superclass, What about the Amoeba rotate()?, Invoking the superclass version of a method

toString(), But now you need Song objects, not just simple Strings

P

packages, Java API, Using the Library (the Java API)

compiling and running, Compiling and running with packages

directory structure, To put your class in a package:

organizing code, To put your class in a package:

preventing class name conflicts, Packages prevent class name conflicts

putting classes in, To put your class in a package:

reverse domain package names, Packages prevent class name conflicts

panels, GUI, Layout Managers

parallel streams, #4 Parallel Streams

parallelStream, #4 Parallel Streams

parameterized types, Comparing ArrayList to a regular array

parameters, You can send things to a method

(see also arguments)

and local variables, The difference between instance and local variables

and methods, You can send things to a method, You can send more than one thing to a method

lambda expressions, Let’s Rock!

matching with instance variable types, You can send more than one thing to a method

type (see type parameters)

parse methods, But wait! There's more! Wrappers have static utility methods too!

pass-by-value/pass-by-copy, Java is pass-by-value. That means pass-by-copy.

Path interface, NIO.2 and the java.nio.file package

Paths class, NIO.2 and the java.nio.file package

percent sign (%) in format String, Formatting deconstructed...

PetShop program, What if you need to change the contract?

Phrase-O-Matic code, Monday morning at Bob's Java-enabled house

pipelines, stream (see stream pipeline)

polymorphism, Did we forget about something when we designed this?

abstract classes, Did we forget about something when we designed this?, Polymorphism in action

and exceptions, Exceptions are polymorphic

and List versus ArrayList, Great question! You spotted the diamond operator

arguments and return types, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

Graphics superclass, Behind every good Graphics reference is a Graphics2D object

interface implementation, Interface to the rescue!

methods, Abstract methods

Object class, What about non-Animals? Why not make a class generic enough to take anything?

reference and object types as different, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

with generic types, Learning generics, Finally, back to generics

post-increment operator, Just the new stuff

Predicate, Introducing the Streams API, Let's Rock!

prep code, Developing a Class

SimpleStartup class, The three things we'll write for each class:

StartupBust class, Prep code for the real StartupBust class

primitive variables, Know Your Variables: Primitives and References, "I'd like a double mocha, no, make it an int."

as reserved words, Back away from that keyword!

bit-size space, If local variables live on the stack, where do instance variables live?

comparing objects, Comparing variables (primitives or references)

declaring, Declaring a variable

in arrays, An array is like a tray of cups

ranges for variables, "I'd like a double mocha, no, make it an int."

saving objects, But what exactly IS an object's state? What needs to be saved?

wrapping, Wrapping a primitive

print versus println, Conditional branching

print(), 3. Send

printf(), Number formatting

println(), 3. Send

printStackTrace(), If it's your code that catches the exception, then whose code throws it?

PrintWriter, 3. Send, There's more than one way to make a connection, DailyAdviceServer code

private access modifier, Hide the data, #8 Access levels and access modifiers (who sees what)

private constructor, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, Nanoreview: four things to remember about constructors, What it means to have a class with static methods, Static variable: value is the same for ALL instances of the class

protected access level, #8 Access levels and access modifiers (who sees what), #8 Access levels and access modifiers (who sees what)

protected access modifier, #8 Access levels and access modifiers (who sees what)

pseudocode (see prep code)

public access modifier, Hide the data, #8 Access levels and access modifiers (who sees what)

puzzles, The case of the pilfered references

Five-Minute Mystery, The case of the pilfered references, Pool Puzzle, Popular Objects, The Unexpected Coffee, Near-miss at the airlock

GUI-Cross, GUI-Cross

Heap o' Trouble, A Heap o' Trouble

JavaCross, JavaCross, JavaCross, JavaCross, JavaCross, GUI-Cross

Mixed Messages, Mixed Messages, Mixed Messages

Pool Puzzle, Pool Puzzle, Pool Puzzle, Pool Puzzle, BE the Compiler, Pool Puzzle, Pool Puzzle, Pool Puzzle

Q

queries, But wait, there's more!

returning Optional value, But wait, there's more!

stream pipelines as queries on collection, Building blocks can be stacked and combined, Correct! Stream operations don't change the original collection.

terminal operation options, But wait, there's more!

QuizCardBuilder, Text file example: e-Flashcards

QuizCardPlayer, Reading from a text file

R

race conditions, Closing time at the thread pool, The dreaded "Lost Update" problem

Random class, random() and getUserInput()

random number generators, How it works, random() and getUserInput()

random(), random() and getUserInput()

Read Eval Print Loop (see REPL)

Reader, 2. Receive

Ready-Bake Code, Ready-Bake Code

GameHelper class, Ready-Bake Code

simple Chat server, The really, really simple Chat Server

Songs class, Lou's back!

records, Why do you care?

reference variables, Know Your Variables: Primitives and References

accessing in arrays, How do objects in an array behave?

and objects of type Object, Using polymorphic references of type Object has a price..., Polymorphism means "many forms."

assignment, What about reference variables?

avoiding dot operator exposure of, Do it or risk humiliation and ridicule.

calling methods by, Objects don't bark

casting, Casting an object reference back to its real type.

comparing, Comparing variables (primitives or references)

equality, What makes two objects equal?

garbage-collection heap, Life on the garbage-collectible heap

HeadFirst interview, An object reference is just another variable value

in arrays, Control your Dog (with a reference variable)

life and scope of, Now we know how an object is born, but how long does an object live?

memory space allotted for, If local variables live on the stack, where do instance variables live?

null reference, Life and death on the heap

nulling, What about reference variables?

on heap, What about local variables that are objects?

polymorphism, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

size of, An object reference is just another variable value

regions, BorderLayout, The Big Three layout managers: border, flow, and box

remote interface (see RMI)

repainting objects, GUI, Using an inner class for animation

REPL (Read Eval Print Loop), Why do you care?

replaceAll, Update the value only if it already exists

reserved words, Back away from that keyword!, In generics, “extends” means “extends or implements”

return keyword, lambda expression, The shape of lambda expressions

return types, You can get things back from a method

ignoring value of, Java is pass-by-value. That means pass-by-copy.

overloaded methods, Overloading a method

polymorphic, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*, Keeping the contract: rules for overriding

return values, autoboxing with, Autoboxing works almost everywhere

reverse domain package names, Packages prevent class name conflicts

RMI (Remote Method Invocation), What happens during deserialization?

run(), To create a new call stack you need a job to run, How NOT to run the Runnable

Runnable interface, To create a new call stack you need a job to run

runnable thread state, The three states of a new thread

runtime versus checked exceptions, If it's your code that catches the exception, then whose code throws it?

RuntimeExceptions, If it's your code that catches the exception, then whose code throws it?

Ryan and Monica concurrency scenario, What could possibly go wrong?, We need to check the balance and spend the money as one atomic thing, You don't always have to use synchronized

S

SAM (Single Abstract Method), Where did all that code go?, Lambda expressions are objects, and you run them by calling their Single Abstract Method, How can I tell if a method takes a lambda?

scope, variable, Now we know how an object is born, but how long does an object live?

scrolling (JScrollPane), Playing with Swing components, Playing with Swing components

security, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

> and final classes, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*
>
> from package organization in Java library, You have to know the full name* of the class you want to use in your code.

semicolon (;), What can you say in the main method?

Sequence, Making actual sound

Sequencer class, First we need a Sequencer, Getting back to our music code..., Making actual sound

Serializable interface, If you want your class to be serializable, implement Serializable

serialization, Capture the beat, Saving state

    game characters example, Saving and restoring the game characters

    process, What really happens to an object when it's serialized?

    versioning, Version ID: A big serialization gotcha

    writing object to file with stream, Writing a serialized object to a file

serialVersionUID, Using the serialVersionUID

server application, networking, Writing a simple server application

server, socket, Writing a simple server application

server-client relationship, Real-time BeatBox chat

ServerSocketChannel, Writing a simple server application

Set interface, We need a Set instead of a List, How a HashSet checks for duplicates: hashCode() and equals()

Set.of(), Convenience Factory Methods for Collections

setLayout(null), The Big Three layout managers: border, flow, and box

setLocationCells(), Writing test code for the SimpleStartup class

setter methods, Do it or risk humiliation and ridicule.

Setters (see Getters and Setters)

short circuit operators (&& ,||), Super powerful Boolean expressions

short primitive type, “I’d like a double mocha, no, make it an int.”, Back away from that keyword!

ShortMessage instance, MIDI message: the heart of a MidiEvent

ShortMessage.setMessage(), MIDI message: the heart of a MidiEvent, An easier way to make messages/events

shutdown(), Closing time at the thread pool

Simple Startup Game, The “Simple Startup Game” a gentler introduction

SimpleStartupGame class, Prep code for the SimpleStartupGame class Everything happens in main(), How it’s supposed to look

SimpleStartupTestDrive class, Here’s what we should test:

Single Abstract Method (see SAM)

Sink a Startup game, Let’s build a Battleship-style game: “Sink a Startup”, Let’s build the REAL game: “Sink a Startup”

skip(), Stream, Introducing the Streams API

sleep(), Putting a thread to sleep

Socket, There’s more than one way to make a connection

SocketAddress, 2. Receive, 3. Send

SocketChannel, 1. Connect, 2. Receive, 3. Send, Writing a simple server application

Song class, But now you need Song objects, not just simple Strings

Song object, But now you need Song objects, not just simple Strings

sort(), It won’t compile!, Here’s where it gets weird...

sorted(), Introducing the Streams API, Customizing the building blocks, The shape of lambda expressions

sorting, Here's where it gets weird...

Comparable interface, Here's where it gets weird...

List, Your first job, sort the songs in alphabetical order

TreeSet, If we want the set to stay sorted, we've got TreeSet

with Comparator, We can sort the list, but...

source files, structure of, Code structure in Java

source, event, Getting a user event

spillage, variable values, You really don't want to spill that...

split(), Parsing with String split()

stack, The Stack and the Heap: where things live

calling methods from, Methods are stacked

superclass constructor, Making a Hippo means making the Animal and Object parts too...

threads, Java has multiple threads but only one Thread class

variable declarations, The Stack and the Heap: where things live

stack frame, Methods are stacked

stack variables (see local variables)

Startup class, Let's fix the Startup code, What needs to change?, Super powerful Boolean expressions

Startup objects, Who does what in the StartupBust game (and when)

StartupBust class, What needs to change?

state of an object (see instance variables)

statements, What can you say in the main method?

static final variables, Numbers Matter: Numbers and Statics, static final variables are constants, #3 Enumerations (also called enumerated types or enums)

static helper method, Sometimes you don't even need a lambda expression

static imports, Just one more thing...static imports

static initializer, static final variables are constants

static methods, Spotting Functional Interfaces

    and object locking, It's important to lock the correct object

    and wrappers, But wait! There's more! Wrappers have static utility methods too!

    event handling, An easier way to make messages/events

static variables, Initializing a static variable

    and non-static methods, final isn't just for static variables...

    and serialization, What happens during deserialization?

    initializing, Initializing a static variable

    versus instance variables, Fireside Chats

stream pipeline, Stream operations are building blocks

    creating, Stream operations are building blocks

    map operation, Mapping from one type to another

streams (I/O)

    in serialization of object, Writing a serialized object to a file

    reading text files, Reading from a text file

    receiving messages, 2. Receive

socket connections, There's more than one way to make a connection

streams (Streams API), Lambdas and Streams: What, Not How: Lambdas and Streams, Small errors in common code can be hard to spot, Introducing the Streams API

building blocks, Stream operations are building blocks

collecting results, Collecting results in different ways

filtering, Lou's Challenge #1: Find all the "rock" songs

getting results from, Getting a result from a Stream

inability to reuse, Guidelines for working with streams

lambda expressions, Hello Lambda, my (not so) old friend

parallel streams, #4 Parallel Streams

stream(), Getting started with Streams, Guidelines for working with streams

String arrays, How it works

String class, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

String.format() method, Number formatting

StringBuilder, #9 Immutability in Strings and Wrappers

Strings, A Dog example

immutability, #9 Immutability in Strings and Wrappers

percent sign (%) in, Formatting deconstructed...

reusing, #9 Immutability in Strings and Wrappers

saving data to text file, Writing a String to a Text File

sorting in mock Songs class, Your first job, sort the songs in alphabetical order

split(), Parsing with String split()

wrapping and unwrapping, But wait! There's more! Wrappers have static utility methods too!

subclasses, So, Brad the OO guy got the chair and desk, right?, Chair Wars Revisited...

and polymorphism, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

and superclass constructors, Can the child exist before the parents?

as extensions of superclass, Using IS-A and HAS-A

as instantiators under abstract classes, The compiler won't let you instantiate an abstract class

conditions for making, Making and implementing the Pet interface

depth of, best practices, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

limitations on, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

method implementation designs for, Do all animals eat the same way?, Looking for more inheritance opportunities

relationship to superclass, How do you know if you've got your inheritance right?

super keyword, How do you know if you've got your inheritance right?

super(), Can the child exist before the parents?, Invoking one overloaded constructor from another

superclass, So, Brad the OO guy got the chair and desk, right?, Chair Wars Revisited...

and multiple inheritance, Let's explore some design options for reusing some of our existing classes in a PetShop program

and no reverse inheritance, How do you know if you've got your inheritance right?

contract rules, Keeping the contract: rules for overriding

Graphics, Behind every good Graphics reference is a Graphics2D object

in exception declaration and catch, Exceptions are polymorphic

invoking superclass version of method, Invoking the superclass version of a method

overriding methods from, Keeping the contract: rules for overriding

reference type as, Inheritance lets you guarantee that all classes grouped under a certain supertype have all the methods that the supertype has*

relationship to subclasses, Using IS-A and HAS-A, So what does all this inheritance really buy you?

superclass constructor, Wait a minute...we never DID talk about superclasses and inheritance and how that all fits in with constructors

Swing, It all starts with a window, But nothing happens when I click it..., Work on Your Swing: Using Swing

components, Swing components, Playing with Swing components

GUI for Beatbox, Code Kitchen

layout managers, Layout Managers

switch statement, The old way to fake an “enum”:

synchronization for concurrency in accessing objects, We need to check the balance and spend the money as one atomic thing

synchronized block or methods, threads, Using an object’s lock

synchronized keyword, We need to check the balance and spend the money as one atomic thing

syntax, What can you say in the main method?, Simple boolean tests

System.out.print(), Conditional branching

System.out.println(), Conditional branching

T

TDD (Test-Driven Development), Writing the method implementations

temporarily not-runnable, thread as, The three states of a new thread

terminal operations, Streams are like recipes: nothing’s going to happen until someone actually cooks them

as eager, Yes, because Streams are lazy

collection query options, But wait, there’s more!

in stream operations, Stream operations are building blocks

stacking, Building blocks can be stacked and combined

test code, Developing a Class, Prep code for the real StartupBust class

Test-Driven Development (see TDD)

tester class, Making your first object

testing code, annotations in, Why do you care?

text area (JTextArea), Playing with Swing components

text field (JTextField), Playing with Swing components

text file, Reading from a text file

reading from, Reading from a text file

saving data to, Capture the beat

writing data to, Saving state, Writing a String to a Text File

this(), Invoking one overloaded constructor from another

Thread class, The really, really simple Chat Server

Thread constructor, How we used to launch a new thread

thread of execution, The really, really simple Chat Server

thread pools, Making and starting two threads (or more!)

thread scheduler, The three states of a new thread

thread-safe data structure, Use a thread-safe data structure

threads (see multithreading)

throw clause, exceptions, Methods in Java use exceptions to tell the calling code, “Something Bad Happened. I failed.”, If it’s your code that catches the exception, then whose code throws it?, Exceptions are polymorphic

toString(), But now you need Song objects, not just simple Strings

Track, Making actual sound

transient keyword, If you want your class to be serializable, implement Serializable

transient variables, If you want your class to be serializable, implement Serializable, What happens during deserialization?

TreeSet, If we want the set to stay sorted, we've got TreeSet

try/catch blocks, The compiler needs to know that YOU know you're calling a risky method

as polymorphic, Exceptions are polymorphic

catching multiple exceptions, Did we mention that a method can throw more than one exception?, Multiple catch blocks must be ordered from smallest to biggest

exception handling role, Ducking (by declaring) only delays the inevitable

flow control, Flow control in try/catch blocks

order of multiple, Exceptions are polymorphic

wrapping call in, Getting back to our music code...

TWR (try-with-resources) statement, The try-with-resources (TWR), statement

type inference, Great question! You spotted the diamond operator, #2 Local Variable Type Inference (var)

type modifiers, number formats, The only required specifier is for TYPE

type parameters, Using type parameters with ArrayList

ArrayList, Using type parameters with ArrayList

generic methods, Using generic METHODS, Using the method's generic type parameter

not defined in class declaration, Using generic METHODS

String in angle brackets as, Comparing ArrayList to a regular array

types, How can I tell if a method takes a lambda?

for lambda expression, How can I tell if a method takes a lambda?

parameters and methods, Java is pass-by-value. That means pass-by-copy.

variables, Declaring a variable

U

underscores for large numbers, formatting, Number formatting

unwrapping a value, Wrapping a primitive

V

values, variable, An object reference is just another variable value

object reference as, An object reference is just another variable value

passing when calling a method, You can send things to a method

static variables, Initializing a static variable

wrapping and unwrapping, Wrapping a primitive

varargs (variable argument lists), What happens if I have more than one argument?, #7 Varargs

variables, An array is like a tray of cups

assigning values to, You really don’t want to spill that...

comparing types, Comparing variables (primitives or references)

concrete type with var, #2 Local Variable Type Inference (var)

declaring, Controlling your Dog object, Declaring and initializing instance variables, The difference between instance and local variables, The enhanced for loop, Prep code for the real StartupBust class

descriptive naming best practice, #2 Local Variable Type Inference (var)

final, Numbers Matter: Numbers and Statics, static final variables are constants

in arrays, An array is like a tray of cups

instance (see instance variables)

local (see local variables)

naming, Declaring a variable, Control your Dog (with a reference variable)

of generic types, Learning generics

primitive (see primitive variables)

reference (see reference variables)

static (see static variables)

syntax, What can you say in the main method?

types, Running the Guessing Game

var for local, #2 Local Variable Type Inference (var)

version ID, serialization, Version ID: A big serialization gotcha

vertical scrollbar, Playing with Swing components

virtual method invocation, Which method is called?

W

while loops, Looping and looping and..., Difference between for and while, Reading from a text file

widgets, Getting back to graphics...

drawing 2D graphics, Getting back to graphics...
images on, Fun things to do in paintComponent()
wrapper constructor, Wrapping a primitive
wrappers, #9 Immutability in Strings and Wrappers
for primitive types, Wrapping a primitive
immutability, #9 Immutability in Strings and Wrappers
Optional as, But wait, there's more!
writeObject(), Data moves in streams from one place to another
Writer, 3. Send

Authors of *Head First Java* and Creators of the Head First series

Kathy has been interested in learning theory since her days as a game designer for Virgin, MGM, and Amblin', and a teacher of New Media Authoring at UCLA. She was a master Java trainer for Sun Microsystems, and she founded JavaRanch.com (now CodeRanch.com), which won Jolt Cola Productivity awards in 2003 and 2004.

In 2015, she won the Electronic Frontier Foundation's Pioneer Award for her work creating skillful users and building sustainable communities.

Kathy's recent focus has been on cutting-edge, movement science and skill acquisition coaching, known as ecological dynamics or "Eco-D." Her work using Eco-D for training horses is ushering in a far, far more humane approach to horsemanship, causing delight for some (and sadly, consternation for others). Those fortunate (autonomous!) horses whose owners are using

Kathy's approach are happier, healthier, and more athletic than their fellows who are traditionally trained.

You can follow Kathy on Instagram:

@pantherflows.

Before **Bert** was an author, he was a developer, specializing in old-school AI (mostly expert systems), real-time OSs, and complex scheduling systems.

In 2003, Bert and Kathy wrote *Head First Java* and launched the Head First series. Since then, he's written more Java books and consulted with Sun Microsystems and Oracle on many of their Java certifications. These days, he works with coaches, teachers, professors, authors, and editors, helping them create more bad-ass training for their students.

Bert's a Go player, and in 2016 he watched in horror and fascination as AlphaGo trounced Lee Sedol. Recently he's been using Eco-D (ecological dynamics) to improve his golf game and to train his parrotlet Bokeh.

Bert has been privileged to know Trisha Gee for more than eight years now, and the Head First series is extremely fortunate to count Trisha as one of its authors.

You can email Bert at bertbates.hf@gmail.com.

Co-author of *Head First Java*, 3rd Edition

Trisha has been working with Java since 1997, when her university was forward-looking enough to adopt this "shiny new" language to teach computer science. Since then, she's worked as a developer and consultant, creating Java applications in a range of industries including banking, manufacturing, nonprofit, and low-latency financial trading.

Trisha is super passionate about sharing all the stuff she learned the hard way during those years as a developer, so she became a Developer Advocate to give her an excuse to write blog posts, speak at conferences, and create videos to pass on some of her knowledge. She spent five years as a Java Developer Advocate at JetBrains, and another two years leading the JetBrains Java Advocacy team. During this time she learned a lot about the kinds of problems real Java developers face.

Trisha has been talking to Bert (on and off) about updating *Head First Java* for the last eight years! She remembers those weekly phone calls with Bert

with great affection; regular contact with a knowledgable and warm human being like Bert helped keep her sane. Bert and Kathy's approach to encouraging learning has formed the core of what she's been trying to do for nearly 10 years.

You can follow Trisha on Twitter: @trisha_gee.